


— AREA FLOORS

New
Generation
Flooring

SPC FLOORING
COLLECTION



a touch of mother nature

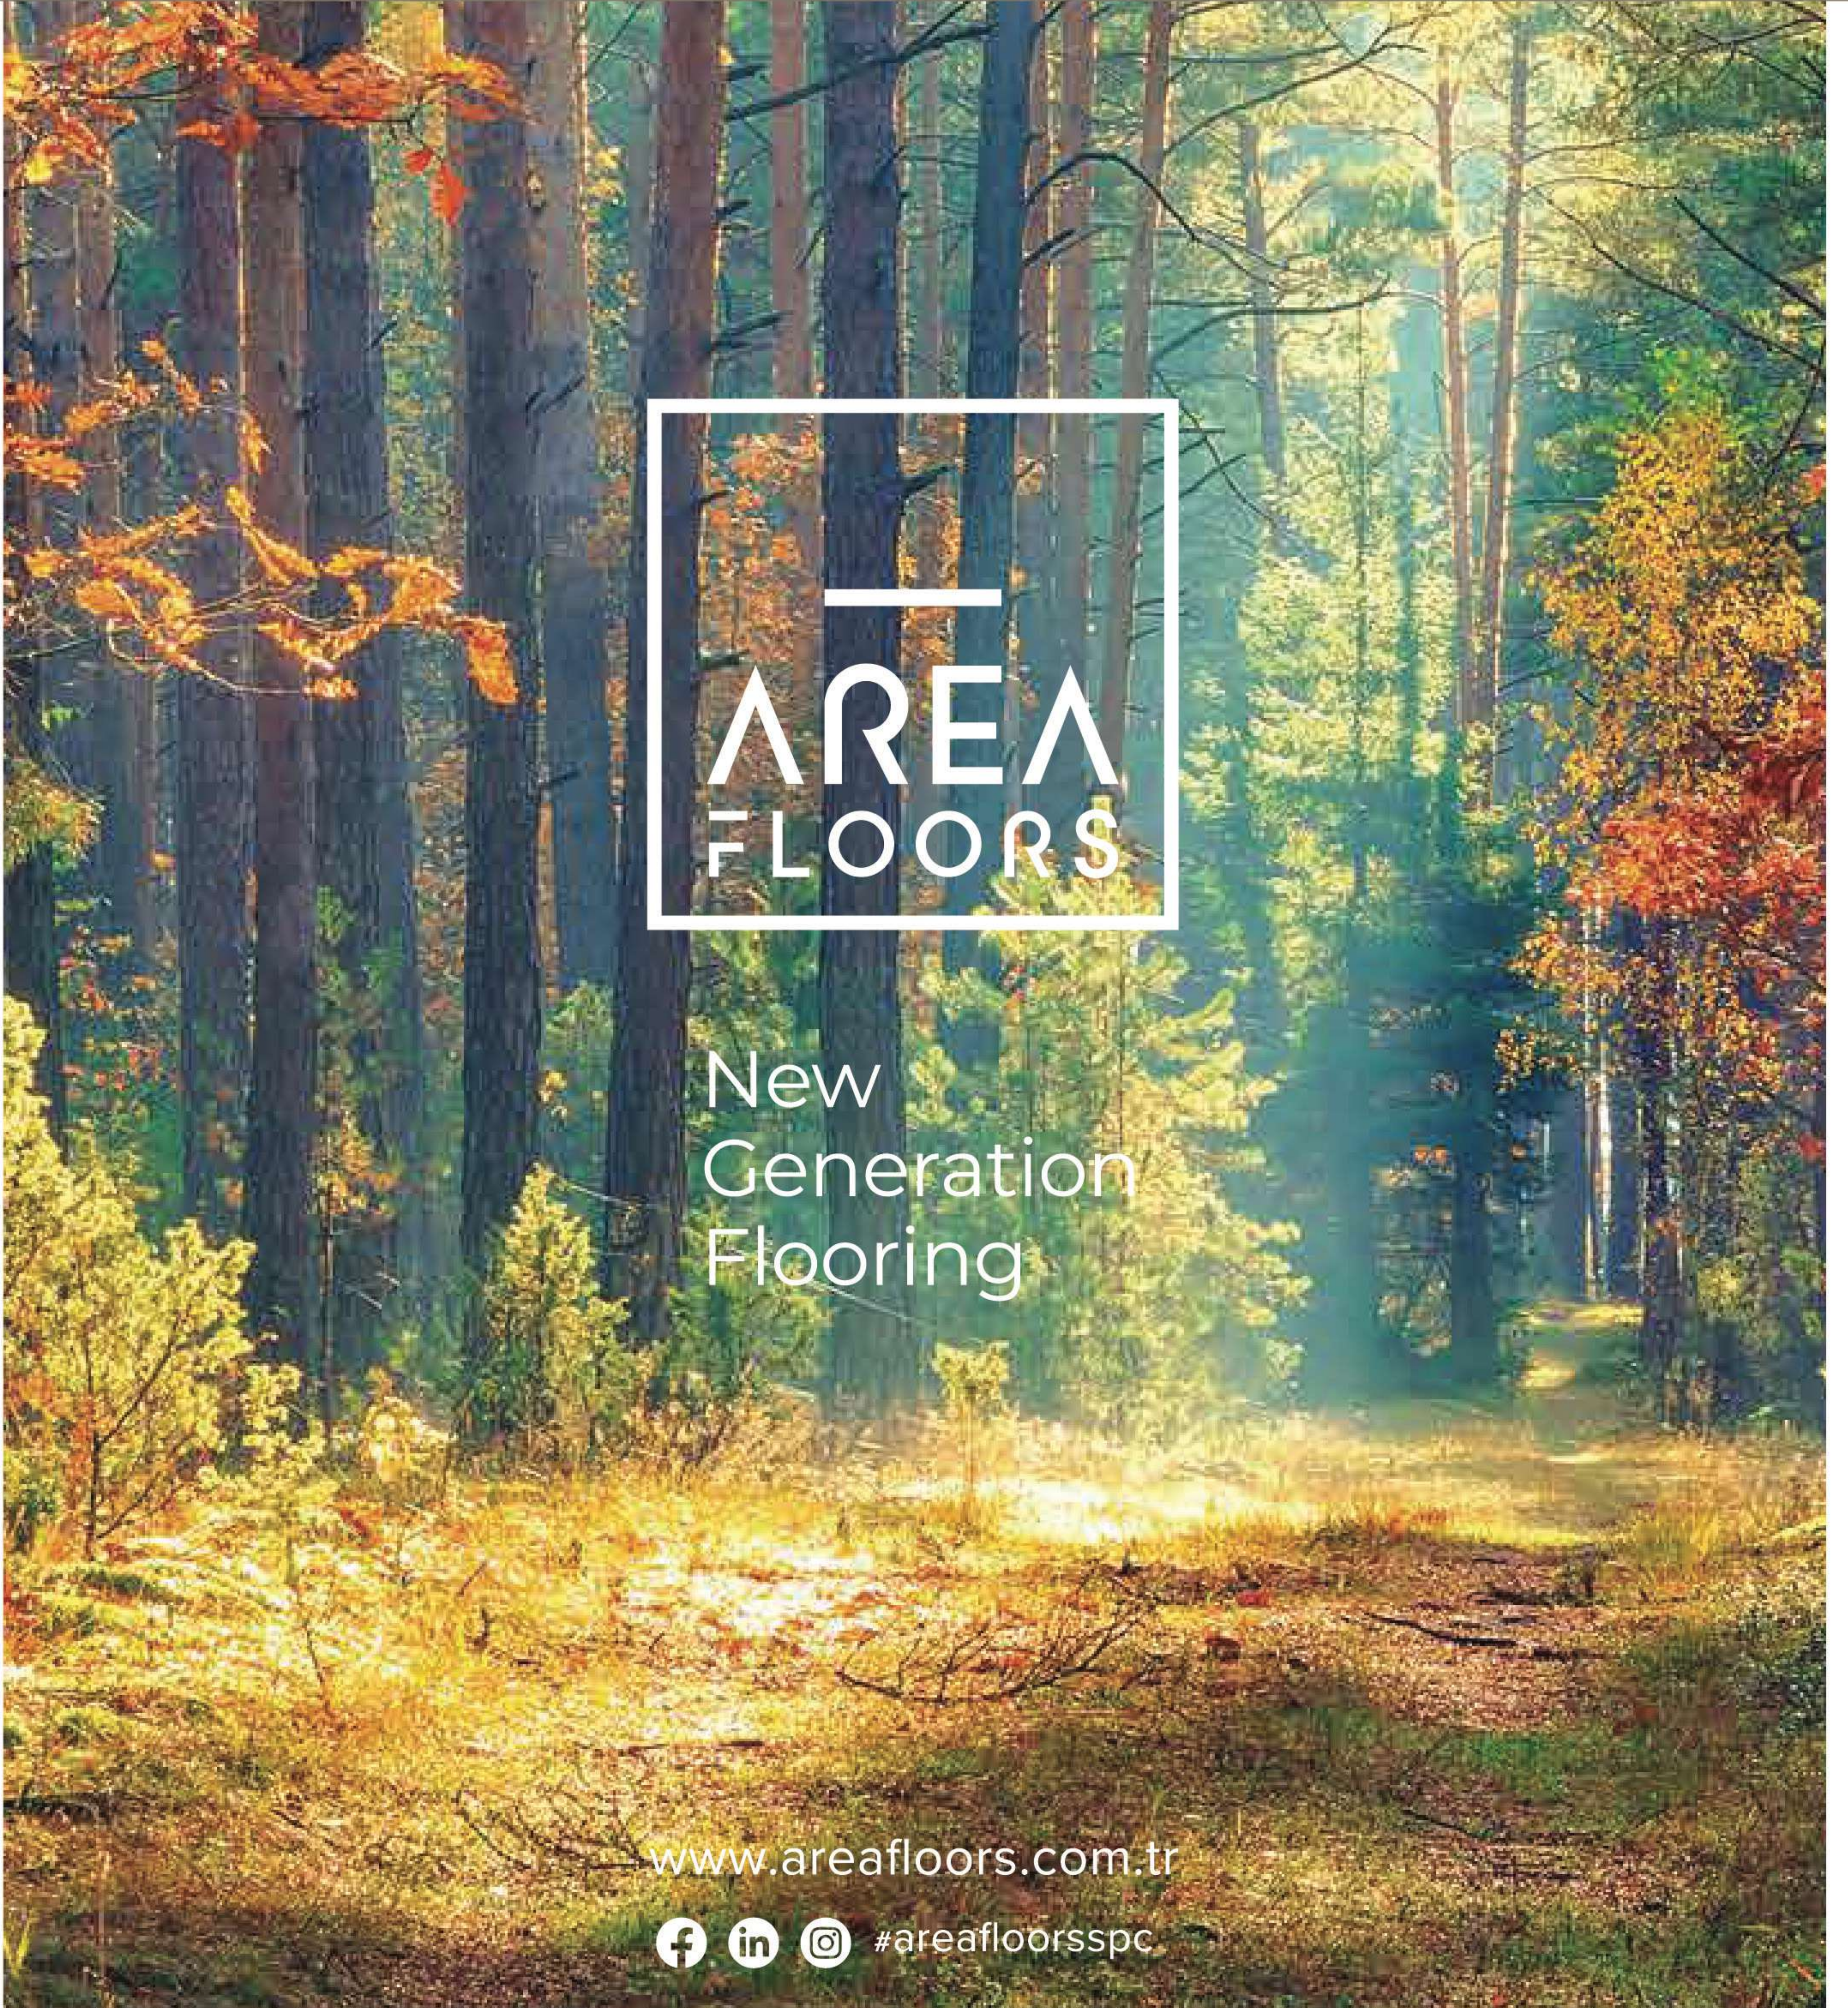

WE AS THE 'AREA FLOORS' FAMILY, ARE READY TO SERVE YOU AND REFLECT OUR PASSION TO YOUR DAILY LIVES BY 'YOUR QUALITY OF LIFE'.

Shared passion, *shared reality*

It is a 'dream coming true'. Exclusive product designs that reflects our common core values; Quality, durability and innovation.

We make our passion a reality by marshalling our strenghts and start a lifetime collaboration that goes beyond an usual business partnership.

We are a big family with passion to 'improve quality of life' while taking care over all our stakeholders and environment to live comfortable in a durable world.

Our vision is reflected in all our businesses; trust and commitment to our customers are our first priority.

Two business partners with mutual core values and same passion to make it happen.. That was the strong start for Area Floors where quality, innovation and continuous improvement become a key goal for all products of this company. The main reason to start the collaboration in 2010 was bringing all experience and expertise together to create the best possible products that is suitable for Business-to-Business as for Business-to-Consumer markets.

Our products are produced with the European quality standards which is a proof for its durability. Another advantage is the fast delivery times because it is produced in the European timezone and a supply chain process where efficiency is key.

Next to delivering the best quality products which is suitable for everybody, we focused ourselves on a special designed technology where even consumers can buy, install and use the products in one day.

It is important to take care of our environment by producing without pollution of our natural resources and use ecological friendly materials.

Our entire product range is produced with a special technology to contribute to a durable life. All products are 100% recyclable and ecological friendly.

Area Floors

Create your world with your style

Area Floors provide a wide selection that adjusts to every style and time period. You are unique and your style needs to reflect your uniqueness.

We offer you not only a product but the feeling of 'coming home, switching-off from all hectic and start enjoying by wandering off in your own created world that reflects yourself. You can feel our core production value under your feet; 'Quality'. And see where our persistency lays; 'Innovation.' A Cutting-edge technology, using the latest features of micro-beveled edges, **Embossed in Register spotlessly**, which generate the most alluring designs.

4

Dare to live as the real world

Our floors contain all qualifications to stay resistant to all challenges of daily lives. Our floors are designed to withstand the challenges of everyday life. The entire product range is 100% waterproof and flame-retardant.

The Waterproof core, flexible vinyl and protective wear layer allows you to use them safely in all areas where there is a risk to come in touch with water and fire. There is no chance for warp or buckle. Our SPC floorings will keep it's original appearance throughout guaranteed life time. Our SPC floorings will maintain their original appearance throughout their guaranteed lifetime. All Area Floors are covered by a lifetime warranty on structural and joint integrity.

Cutting-edge technology that provides simplicity

can be applied flawlessly.

With a cutting-edge technology, we make it possible to easily install, maintain and use the floors with joy. With our advanced Unilin patented click systems, floorings

Effortful installation methods such as gluing or nailing will no longer annoy you, besides there is no need for additional underlayment over outdated floorings. Leave out old-fashioned maintenance concerns and unhealthy adhesive scent. Our flooring planks demand no care all over their service life whatsoever.





New
Generation
Flooring

7 reasons to start your journey
with Area Floors and make our
passion yours;
'improve your quality of life'

5

Our floors:

- ✓ Resistant to all challenges of daily life
- ✓ Resistant to deformation in all circumstances
- ✓ Waterproof
- ✓ UV resistance
- ✓ Easy to install on suitable subfloors without additional costs.
- ✓ Suitable for heating and cooling
- ✓ Eco friendly
- ✓ 100 % Recyclable




Inseparable combination





100% Waterproof

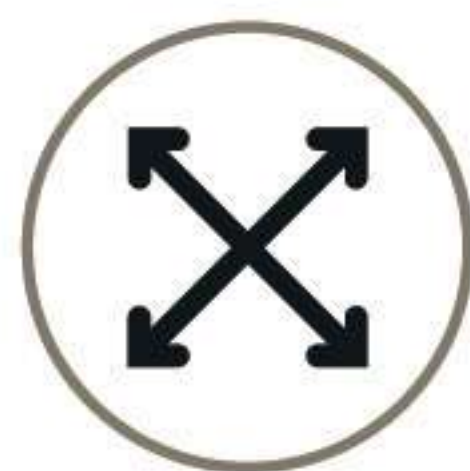

Extremely Stable



Easy Installation



Reduces Noise



Wear Resistant




Pet Friendly



Electrostatic Performance



Ideal for Underfloor Heating & Cooling

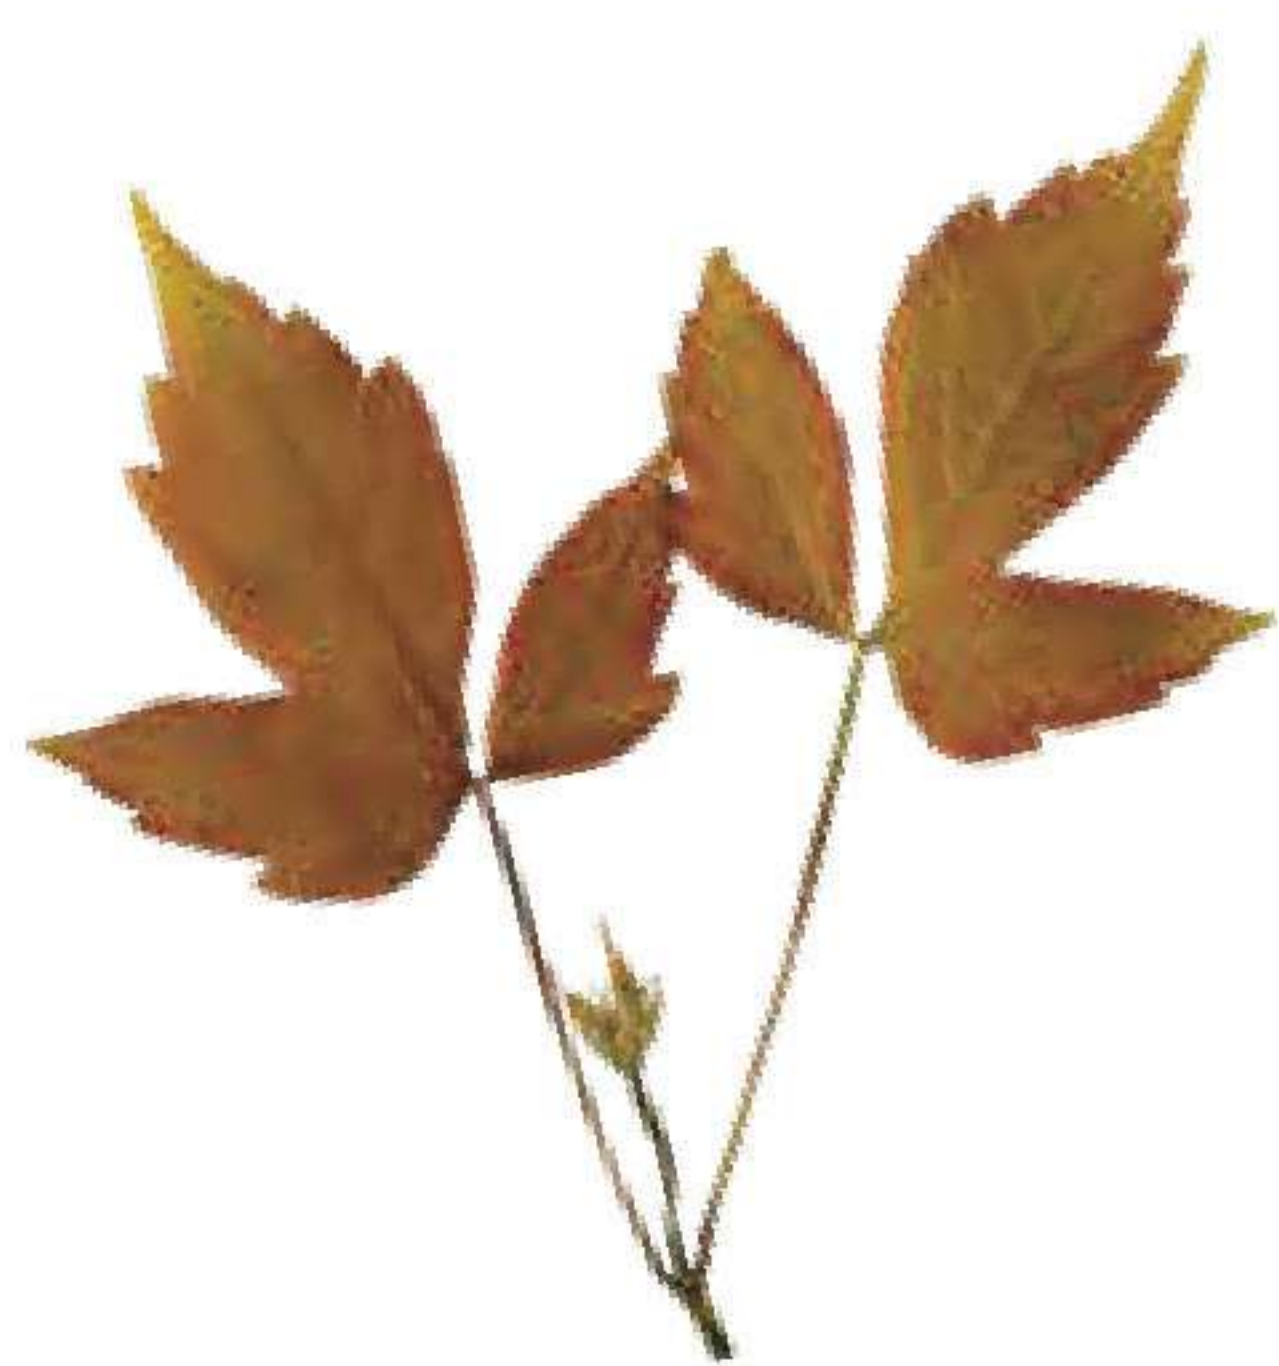

Enjoy the synergy of

Perfection of color synergy in the nature inspires us to create floors that brings your home alive.

With Area Floors you create the perfect synergy with the nature outside and your own style in house.

No matter your color preference, the captivating and wide range of 'AREA FLOORS' Spc flooring colors ideally fit any space, interior, and style at your place.

"Let your character speak with Area Floors."

8



colors from mother nature




9




AREA FLOORS




AUTHENTIC COLLECTION

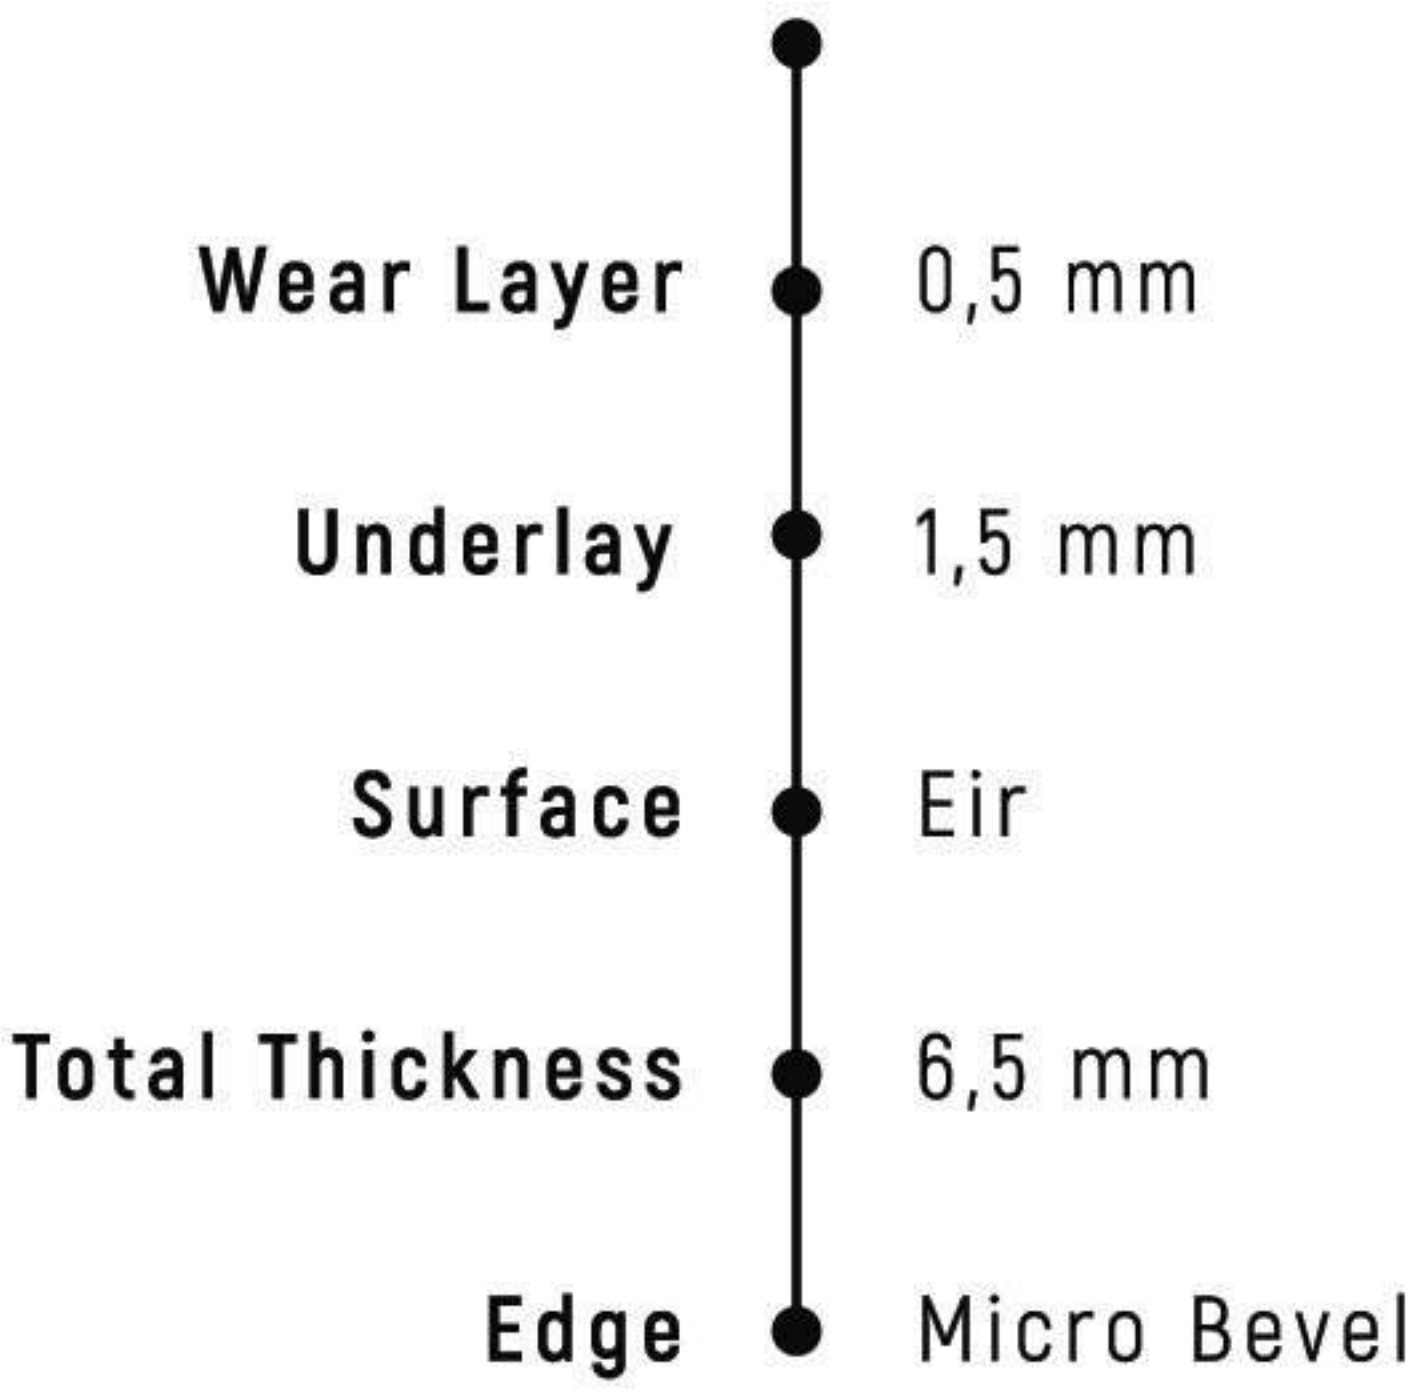


DIAMONDS COLLECTION

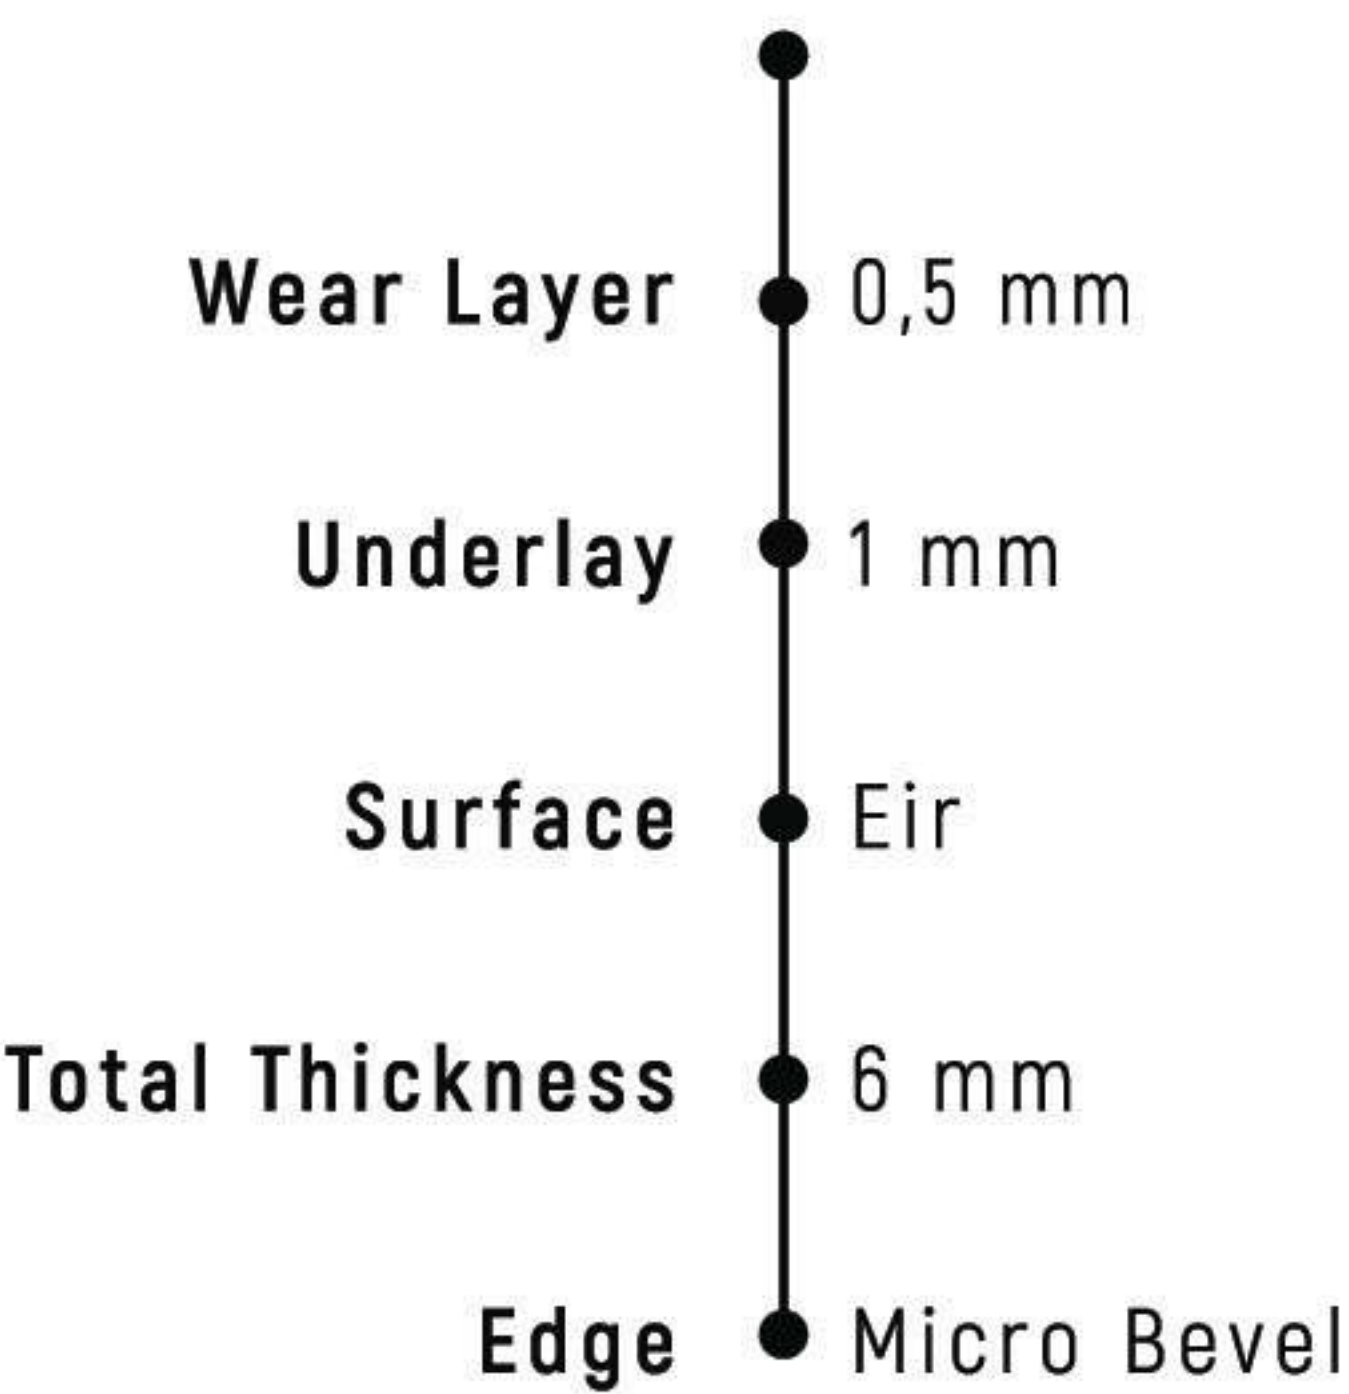

ORIGINALS COLLECTION

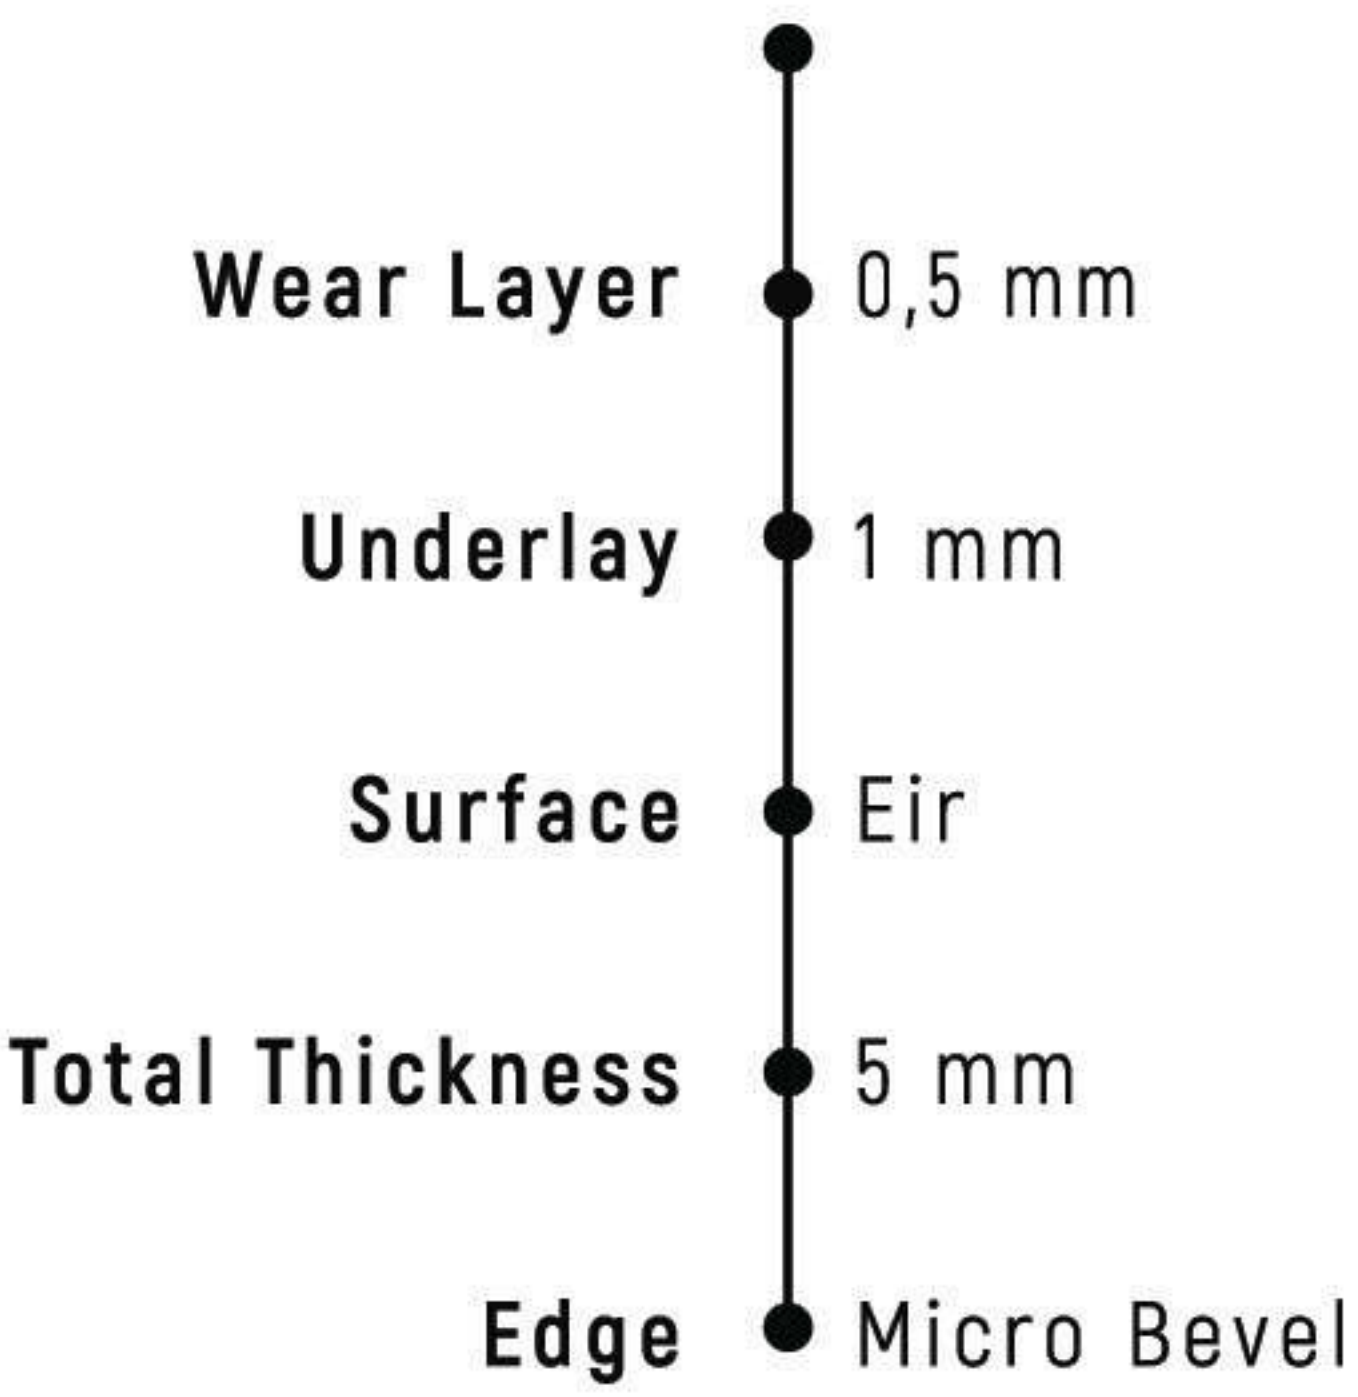


WOOD COLLECTION

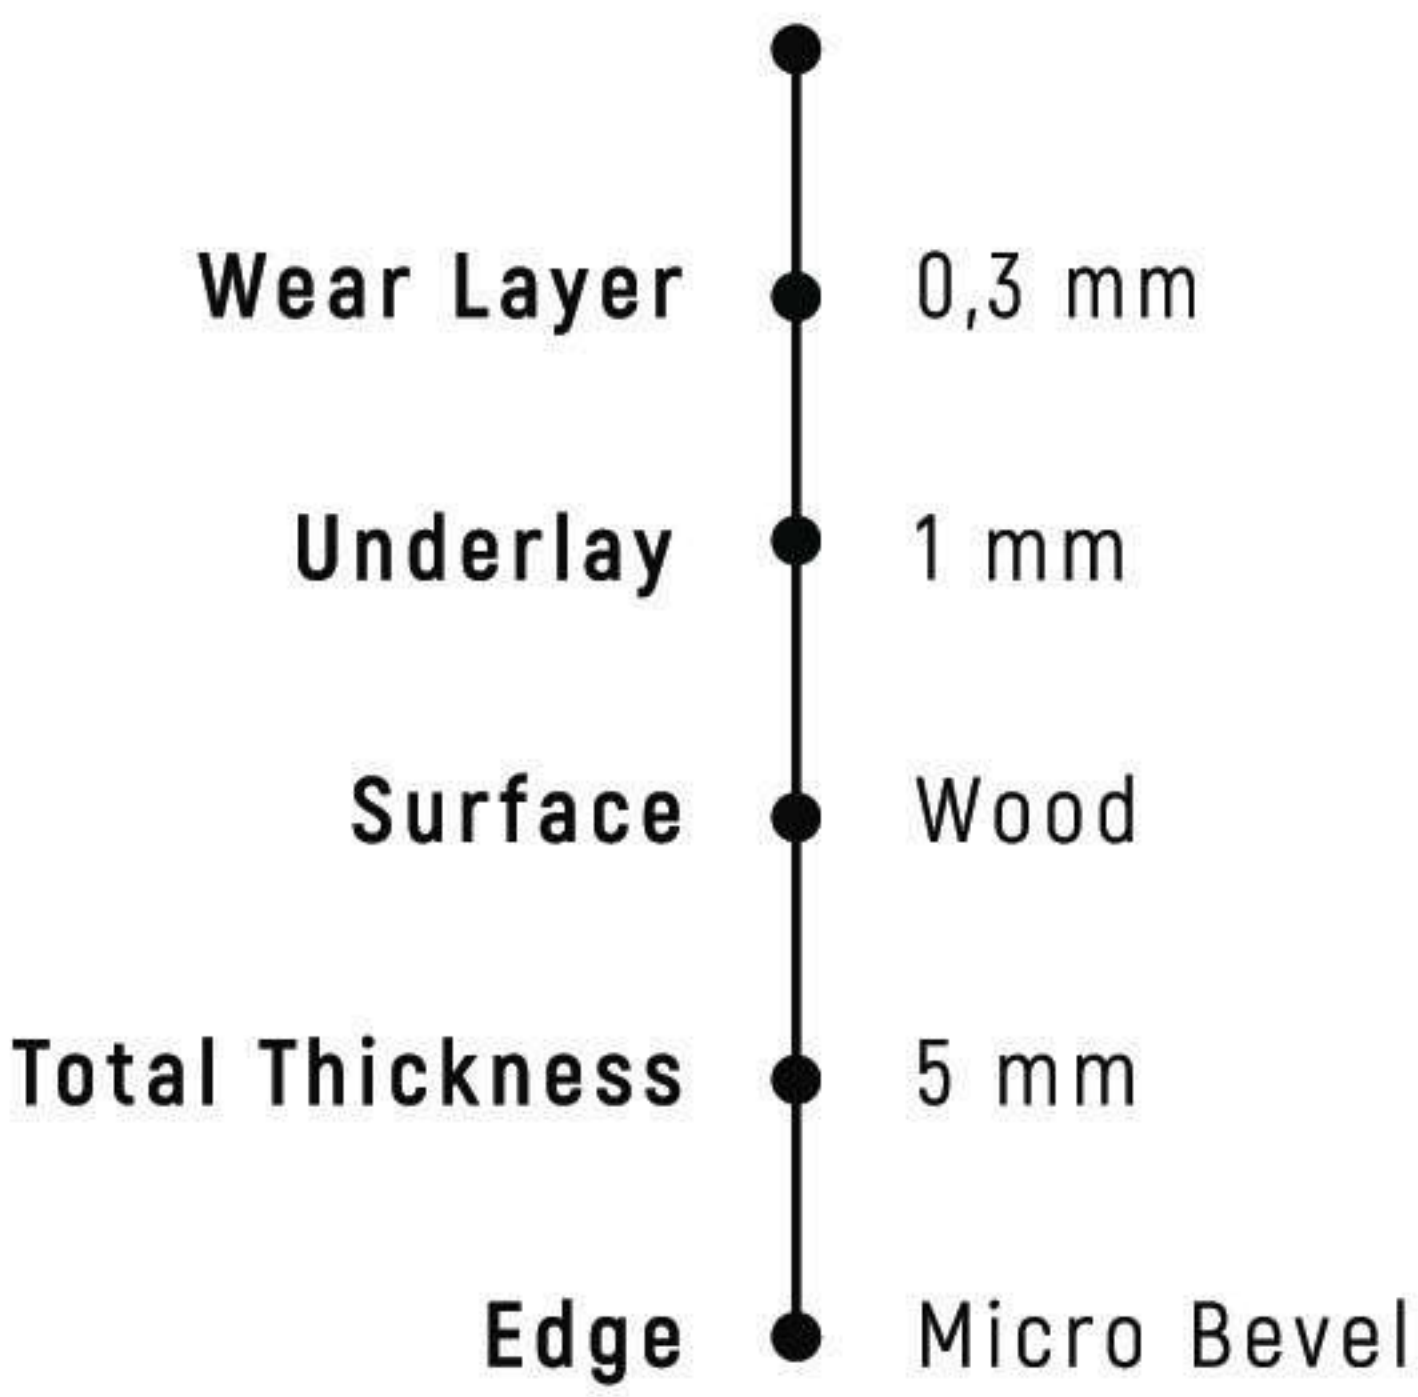


COLLECTIONS




ELEGANT COLLECTION

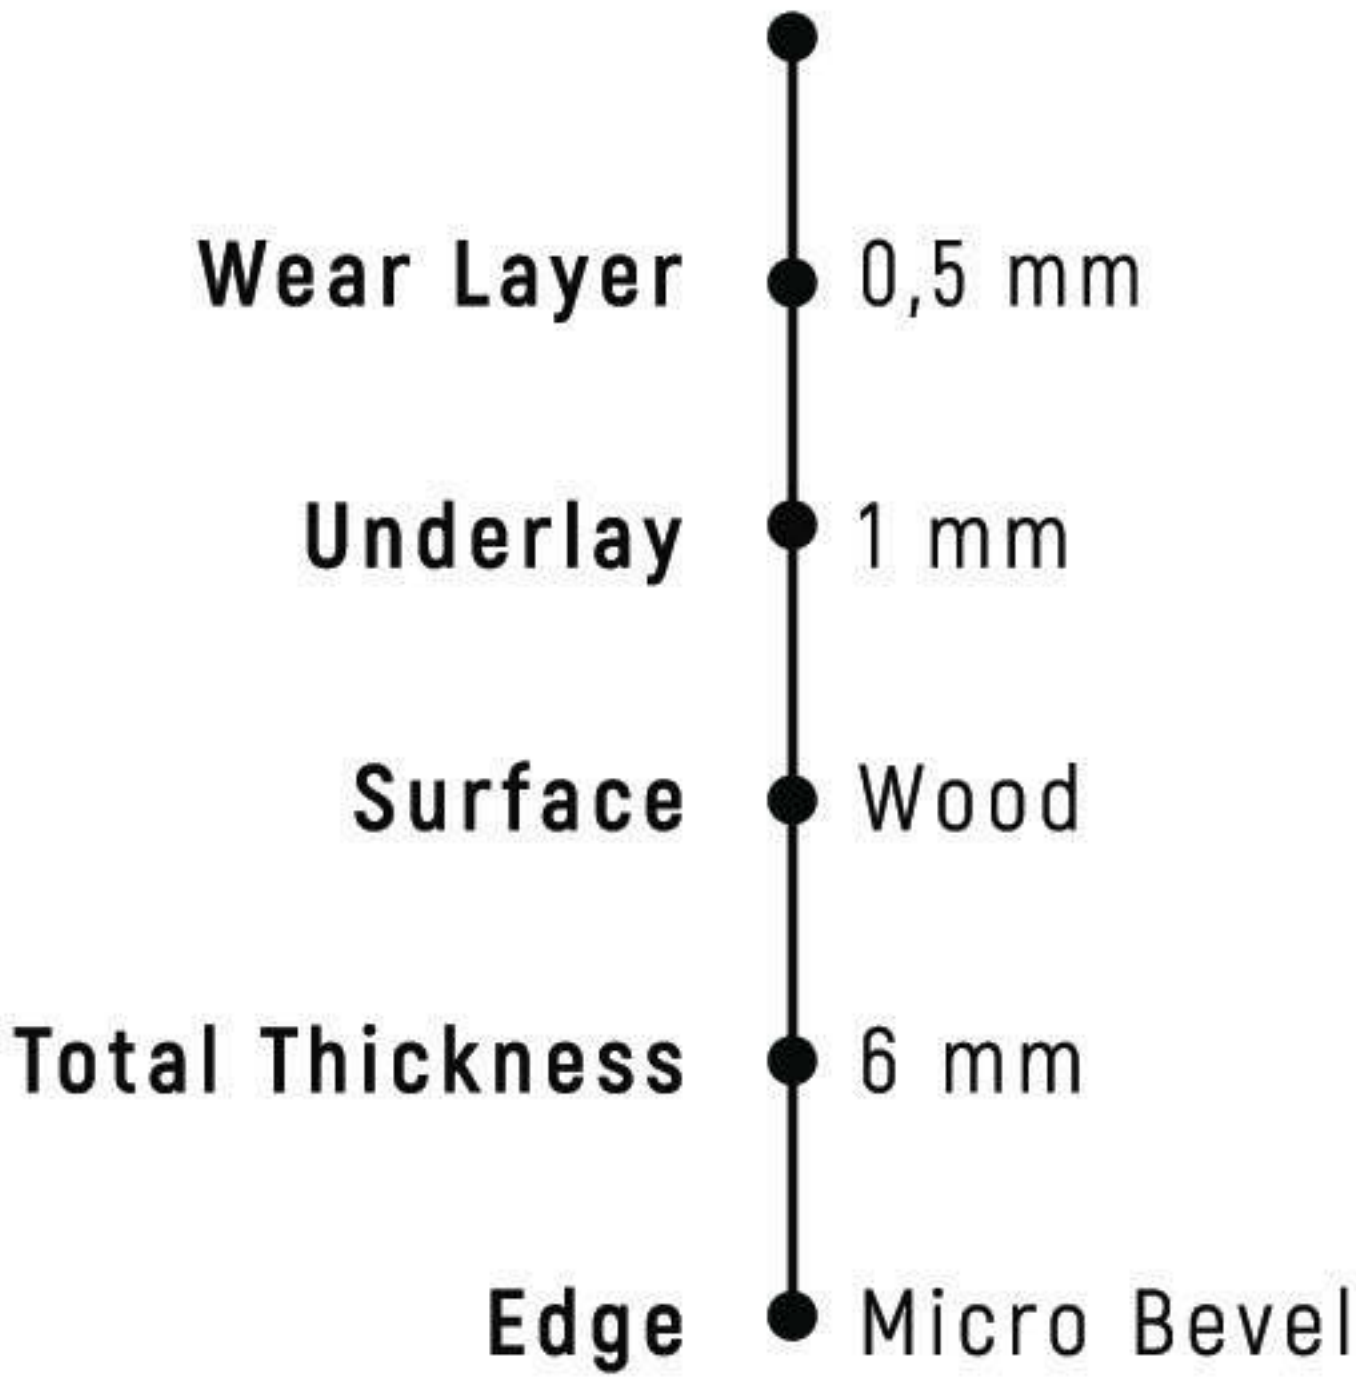


WALL PANEL XL COLLECTION

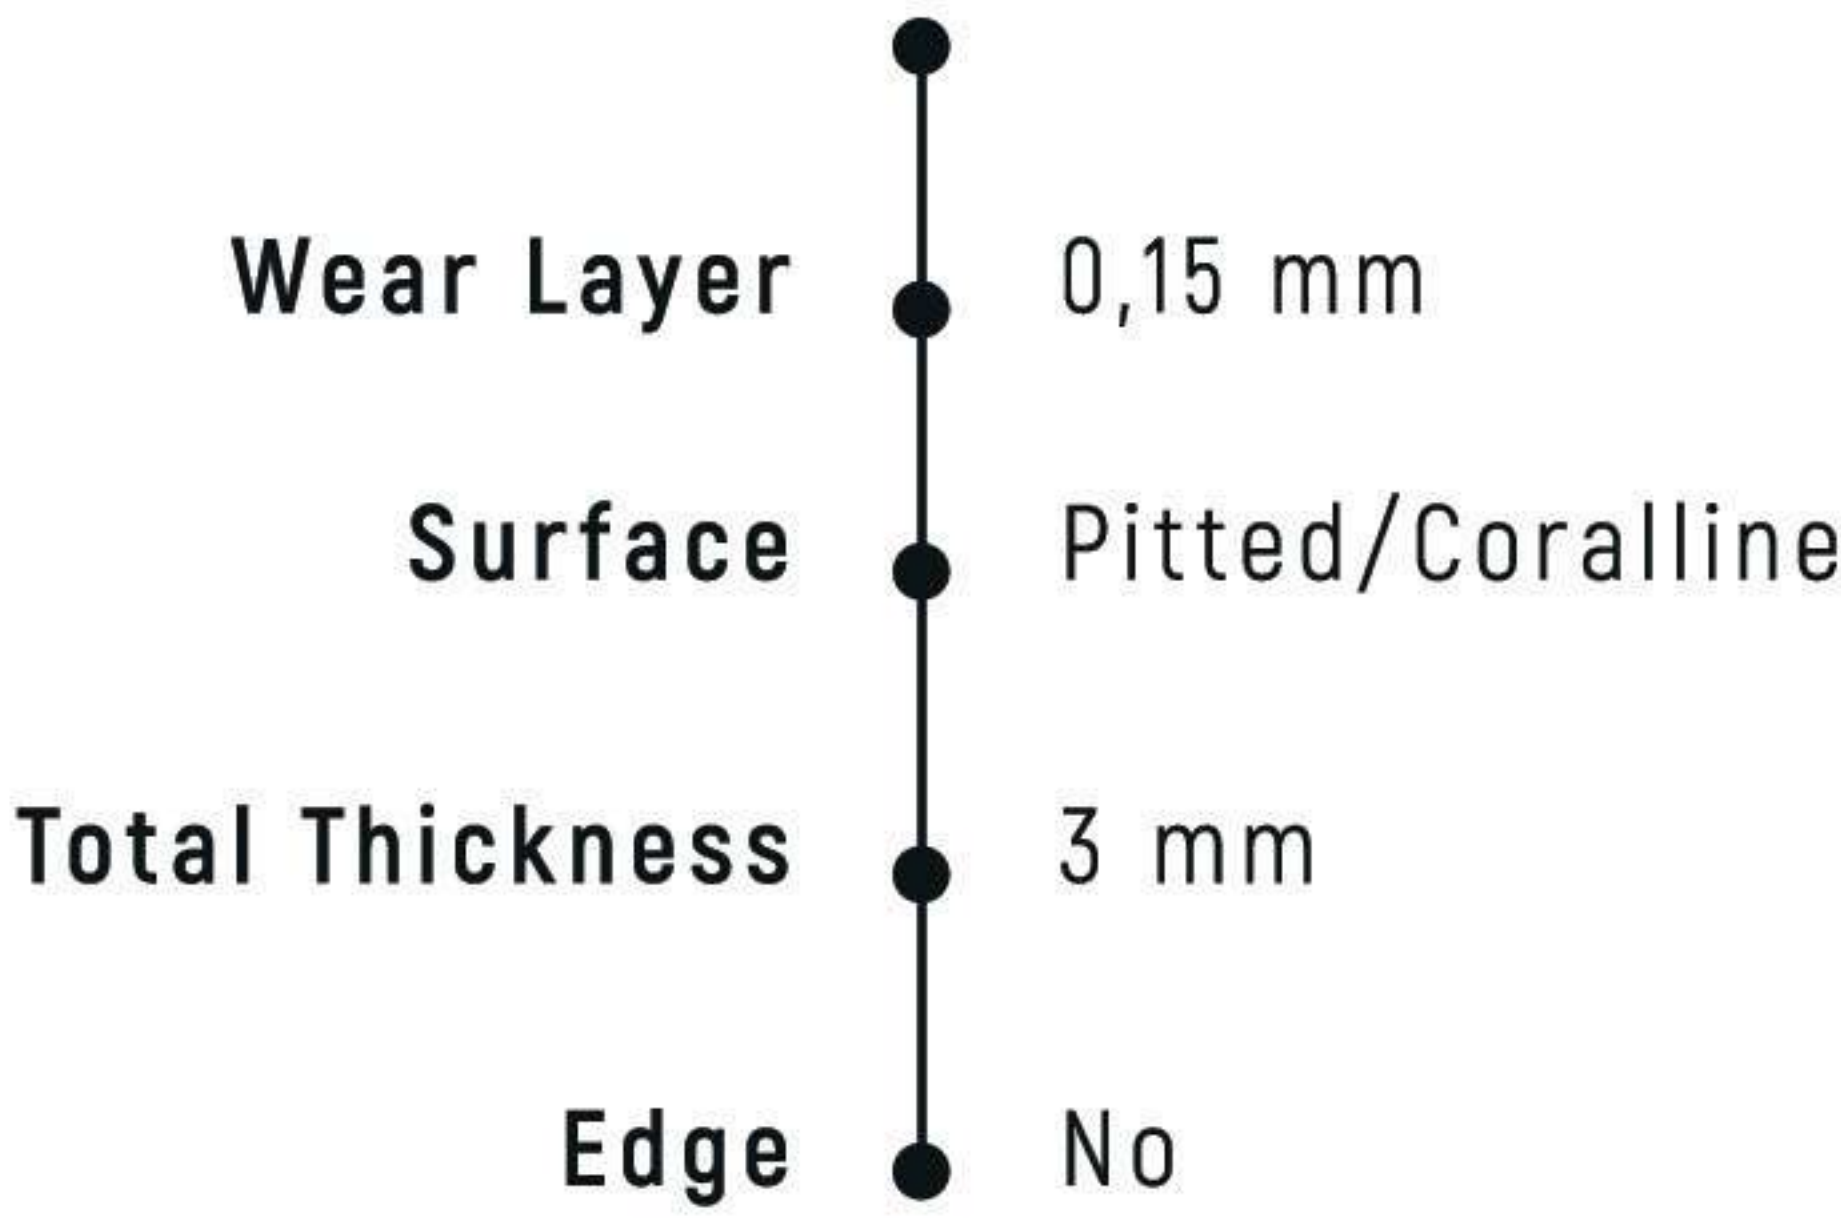


GRANDE COLLECTION

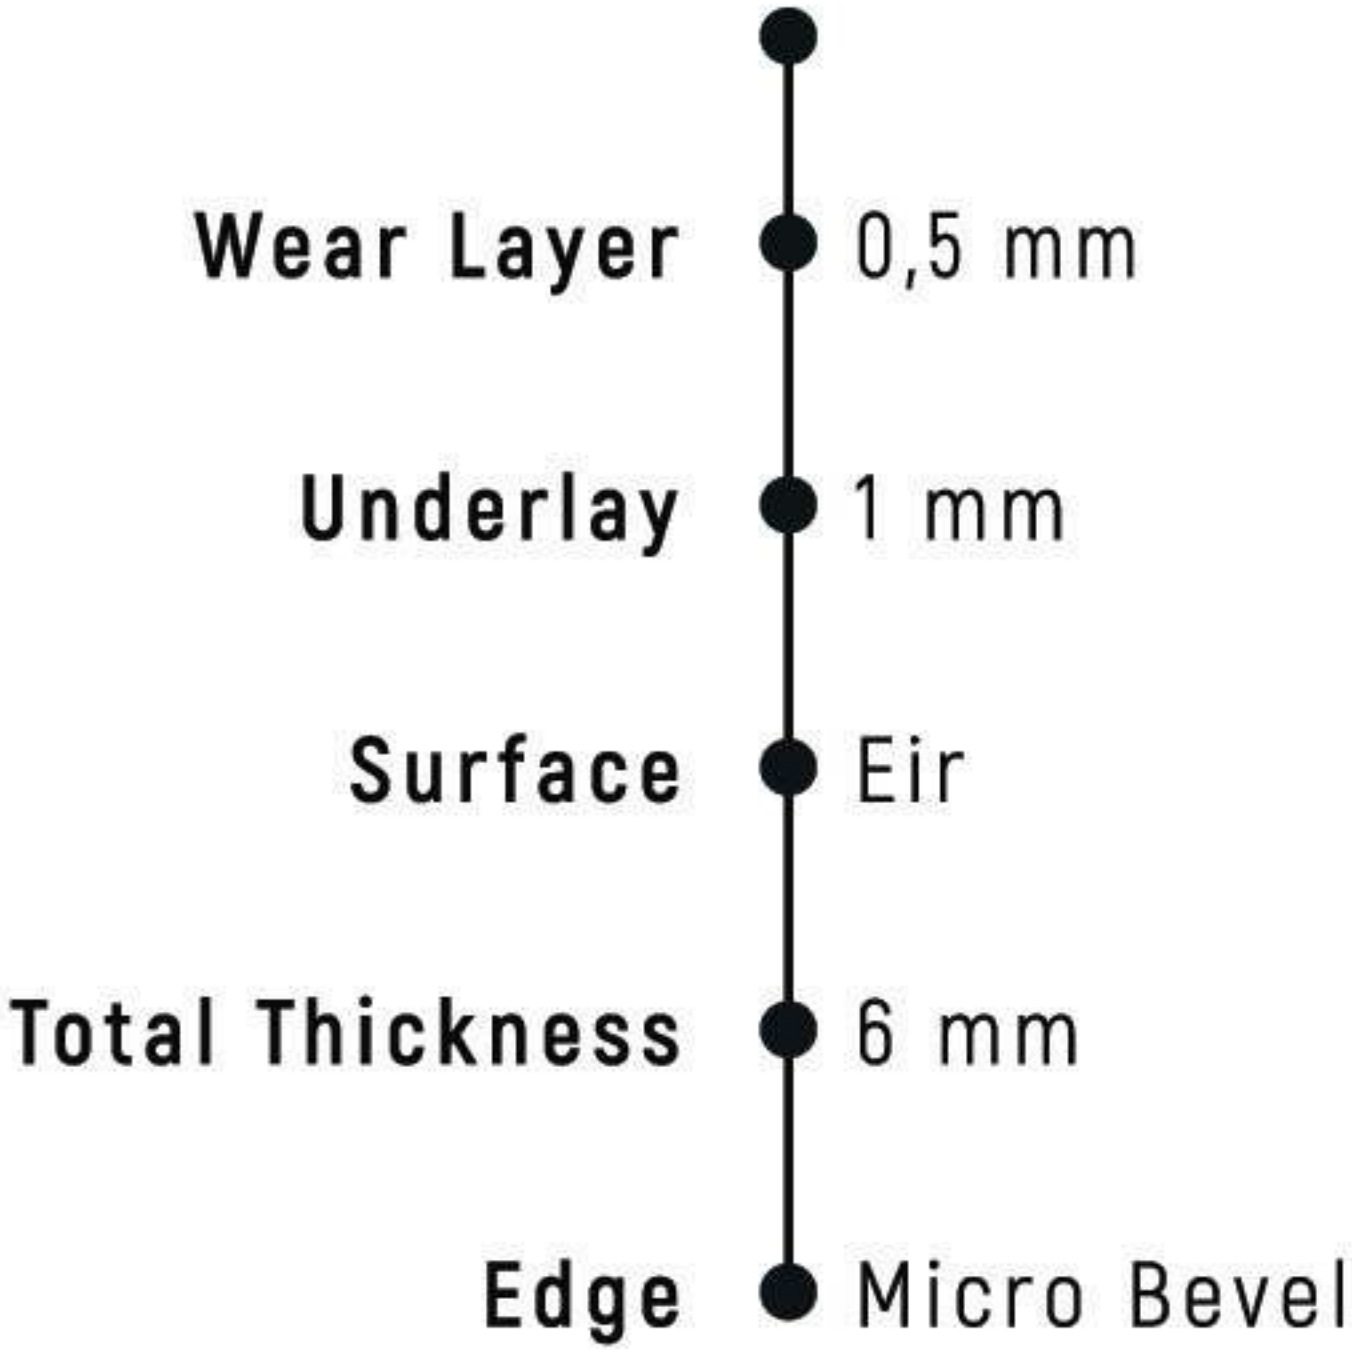

STONE COLLECTION

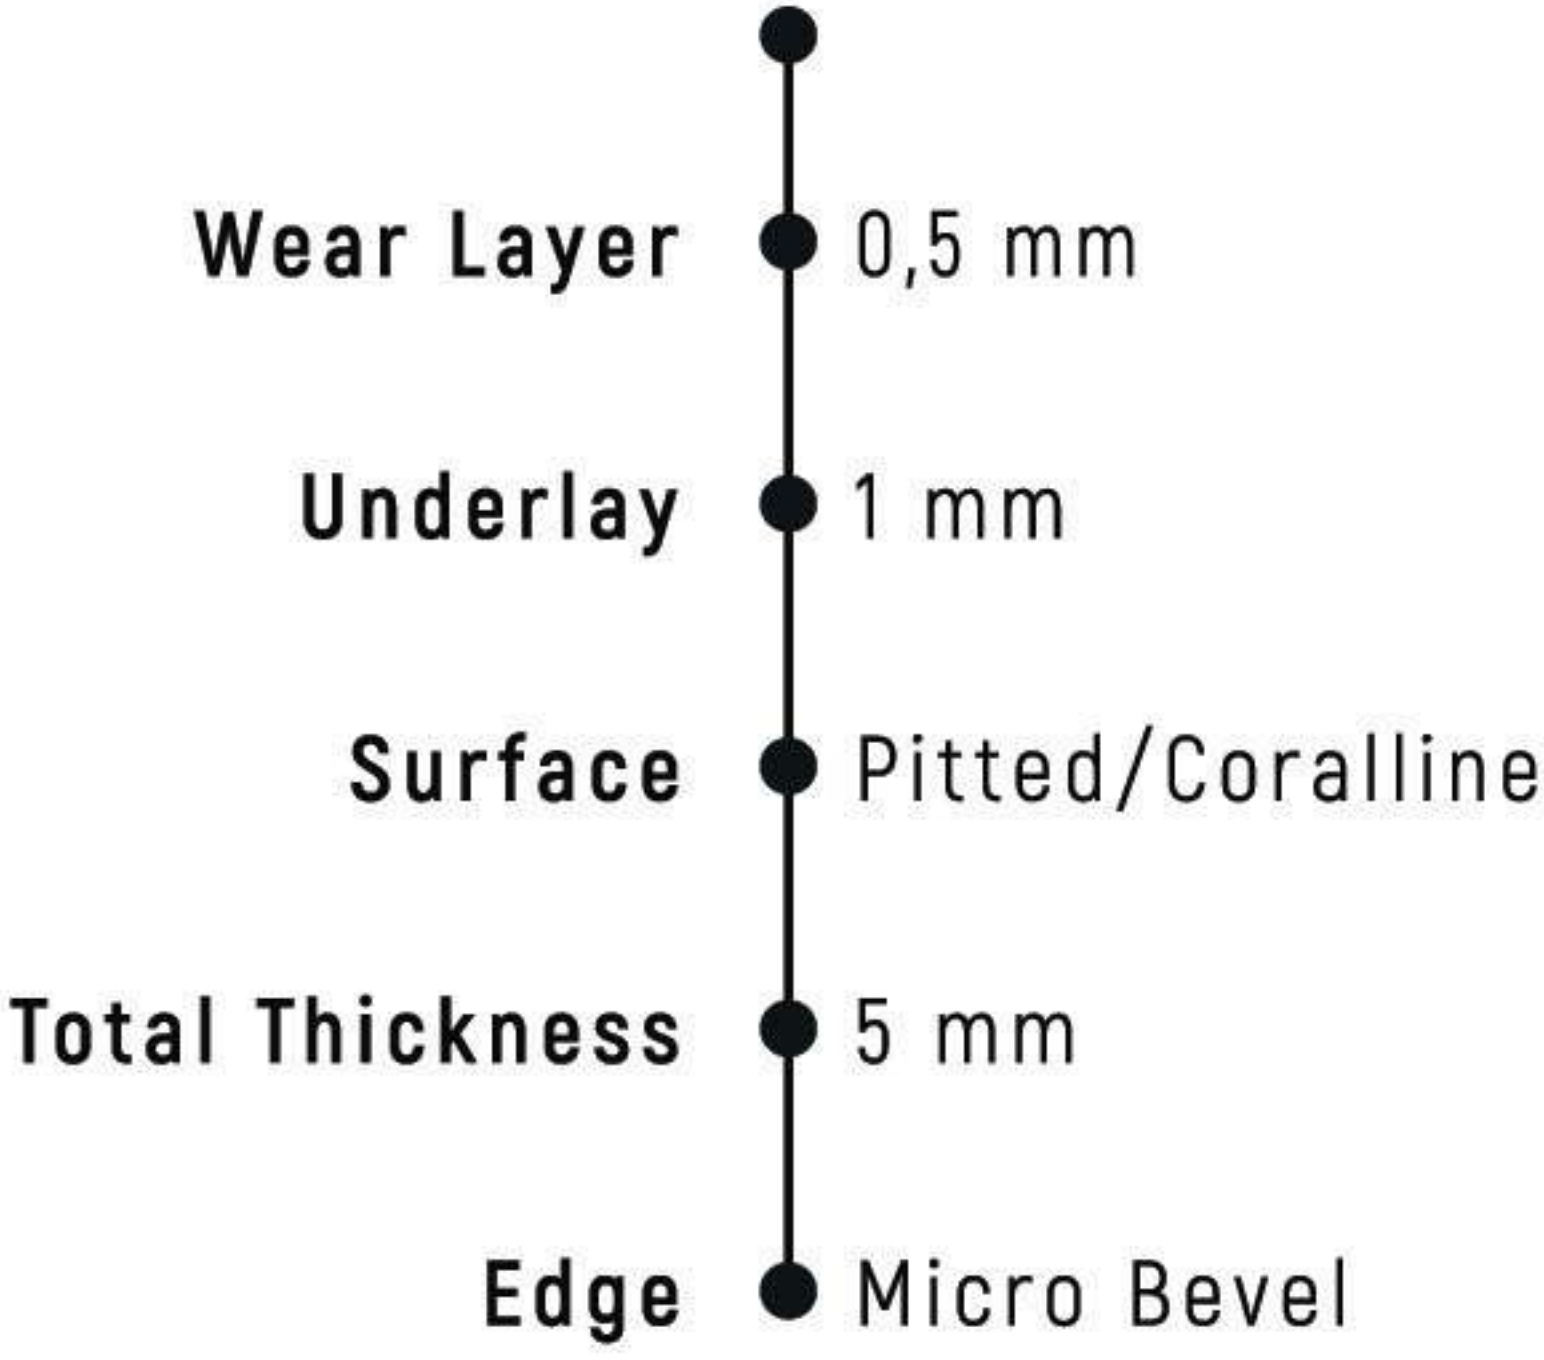

WALL TILES COLLECTION


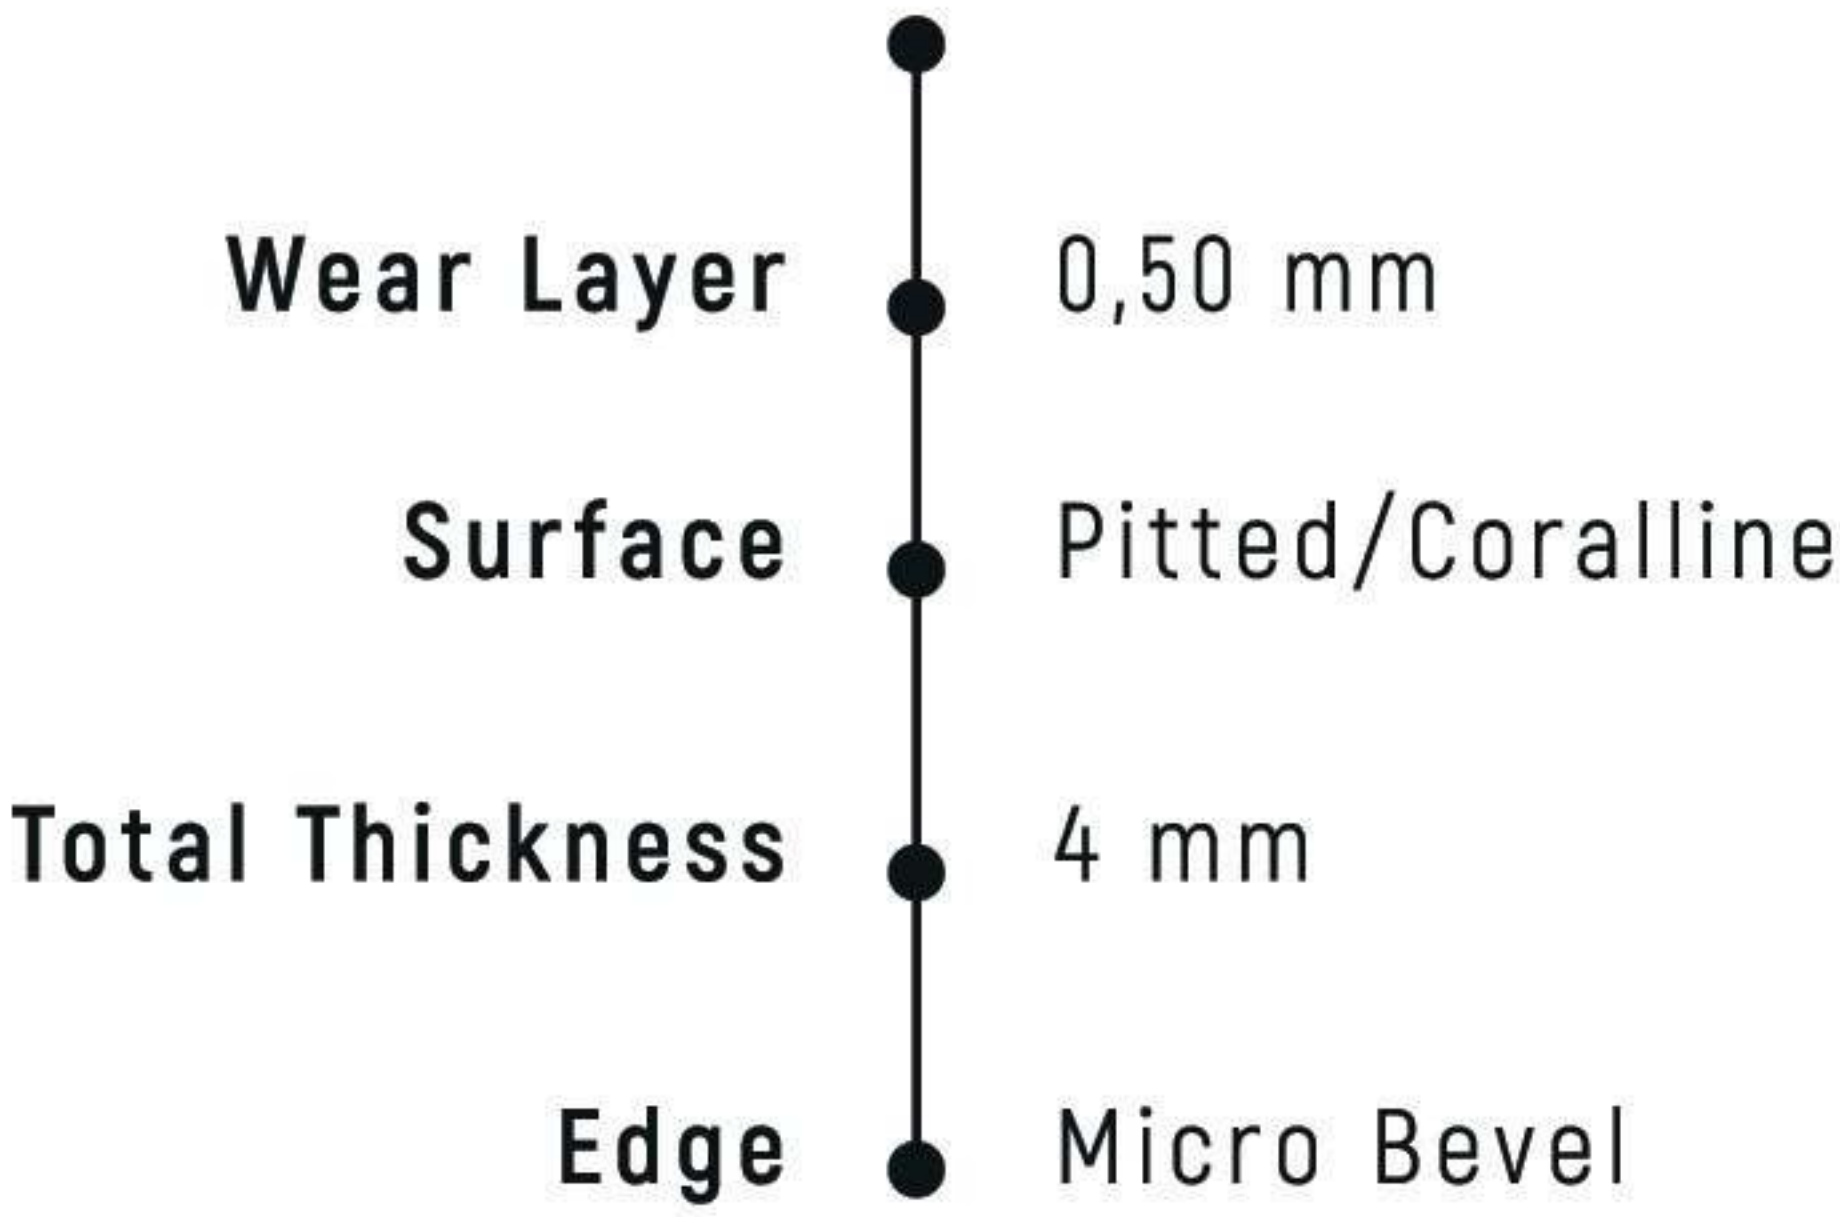


Click System

Area Floors products utilize Unilin locking systems, UniClic and UniDrop, which are groundbreaking, unique locking systems for SPC flooring. Thanks to their easy installation features, they enable everyone to change their flooring quickly and effortlessly.

UniClic requires no additional tools or professional assistance during the assembly of its parts. It offers a fast and reliable way to install the floor.

UniDrop, on the other hand, is a one-piece, downward-folding technology that provides superior locking performance without the need for plastic parts and ensures easy installation for the short edges of the panel. This glueless locking profile is an enhanced version of the Unipush technology.

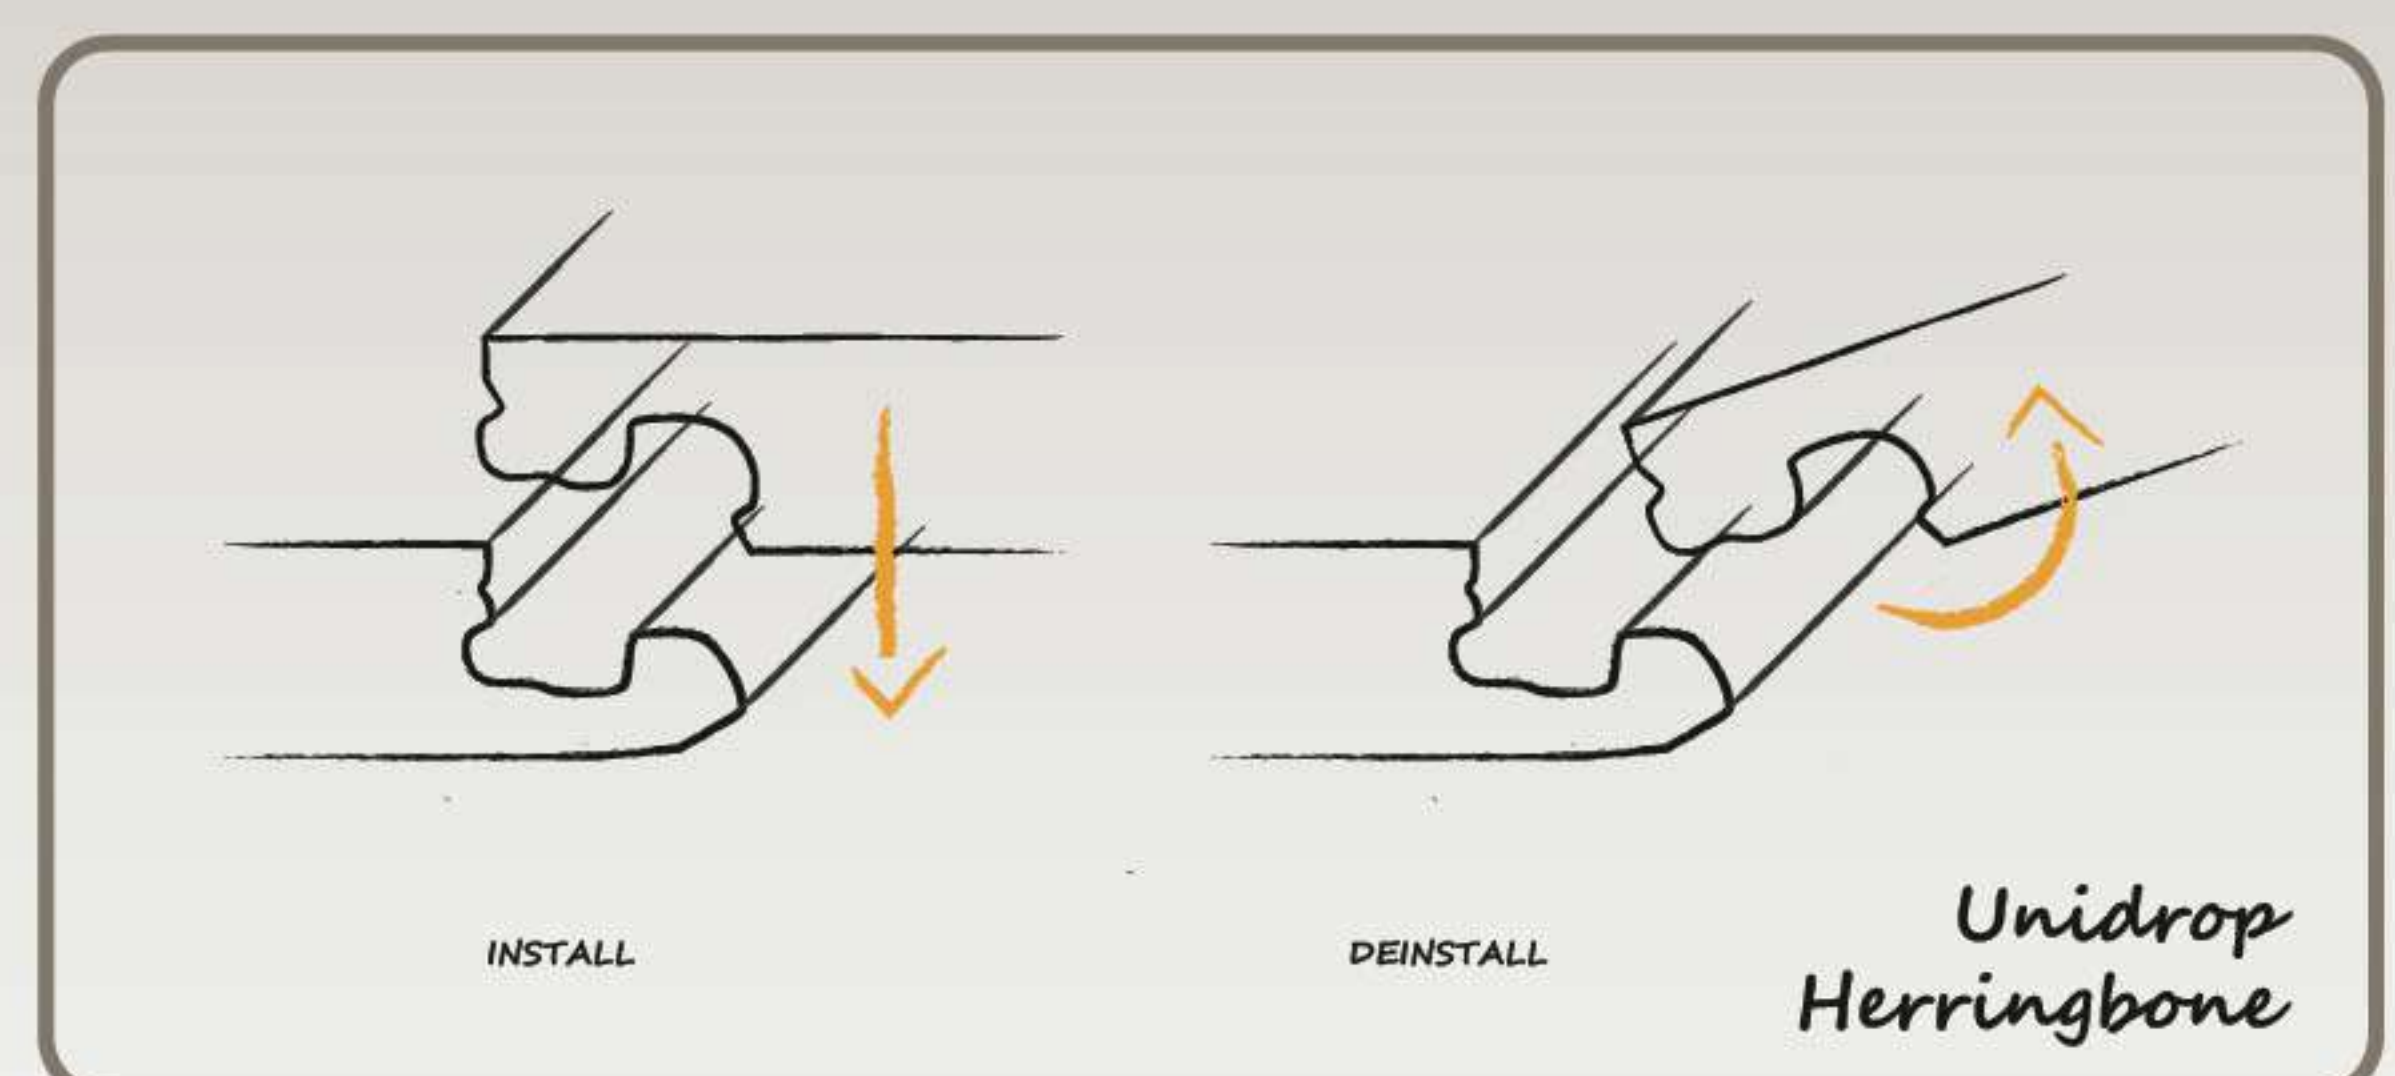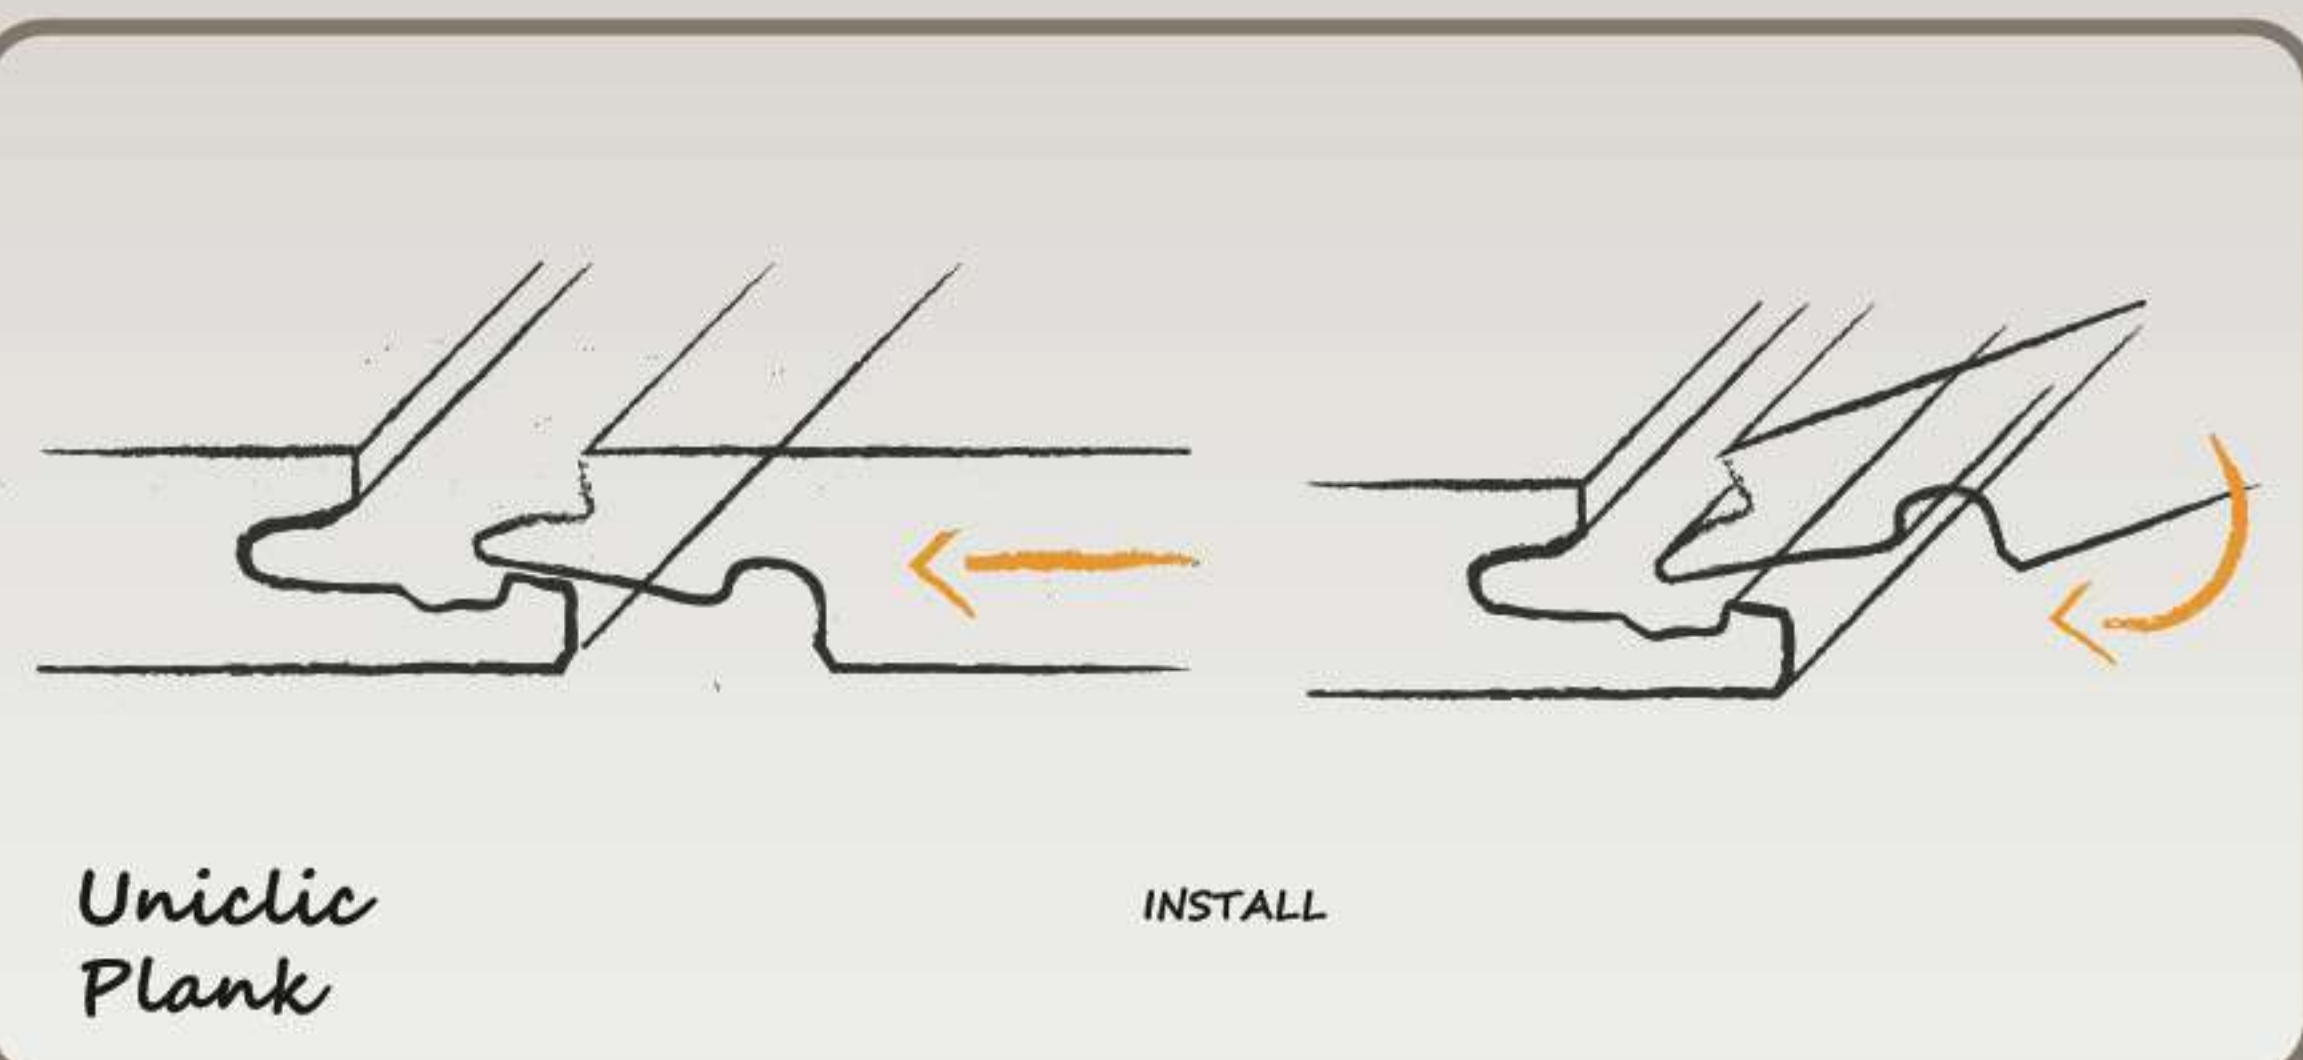

Composition of SPC Flooring


UV Coating Layer: The top layer that protects the flooring from sunlight, scratches, and stains.

Wear Layer: A transparent layer that enhances durability and provides resistance against wear and tear.

Decor Film Layer: A decorative layer that gives the flooring a natural wood or stone appearance.

SPC Rigid Core: The main body made of stone-plastic composite, providing strength and waterproofing.

IXPE Underlayment: A base layer that enhances sound insulation and comfort.


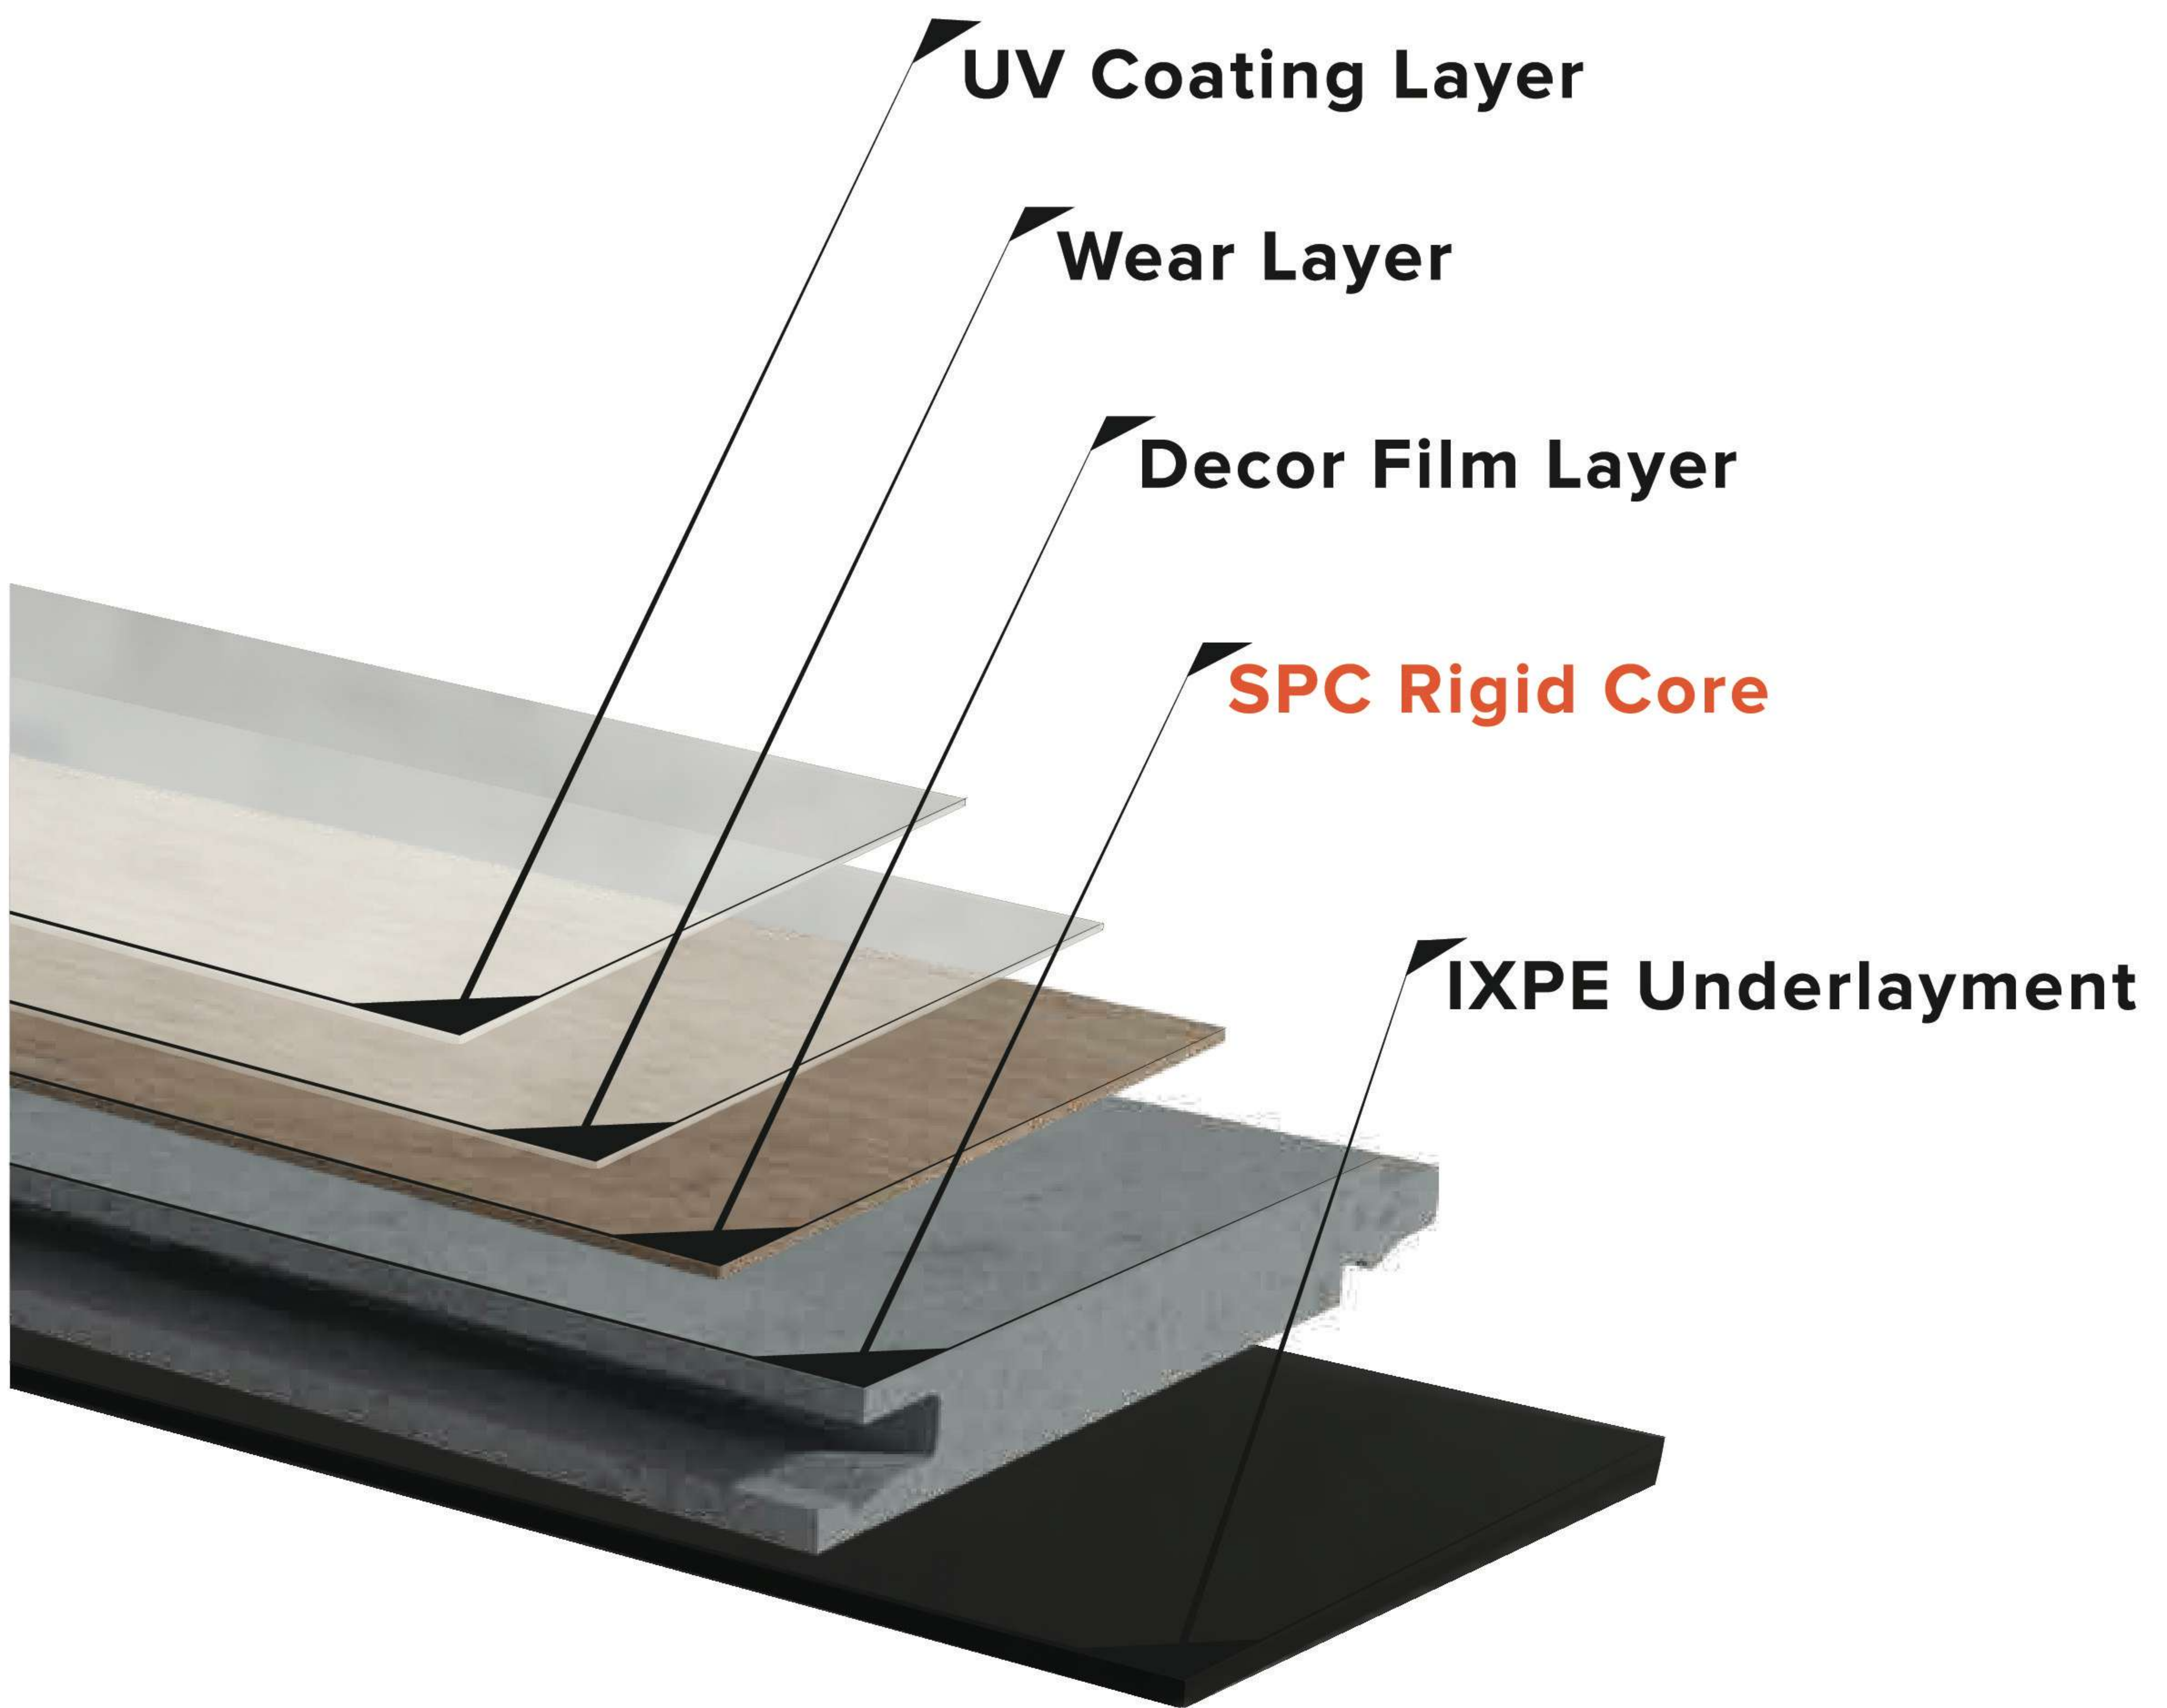


COLLECTION SIZE

14



	AUTHENTIC		DIAMONDS		ORIGINALS		WOOD	
	6.5 mm		6 mm		5 mm		5 mm	
	0.5 mm		0.5 mm		0.5 mm		0.3 mm	
	Plank	Herringbone	Plank	Herringbone	Plank	Herringbone	Plank	Herringbone
	7 pcs	14 pcs	7 pcs	14 pcs	9 pcs	16 pcs	9 pcs	16 pcs
	1.947 m ²	1.575 m ²	1.947 m ²	1.575 m ²	2.503 m ²	1.800 m ²	2.503 m ²	1.800 m ²
	20,250 kg	16.380 kg	20,250 kg	16.380 kg	21,029 kg	15,120 kg	21,029 kg	15,120 kg

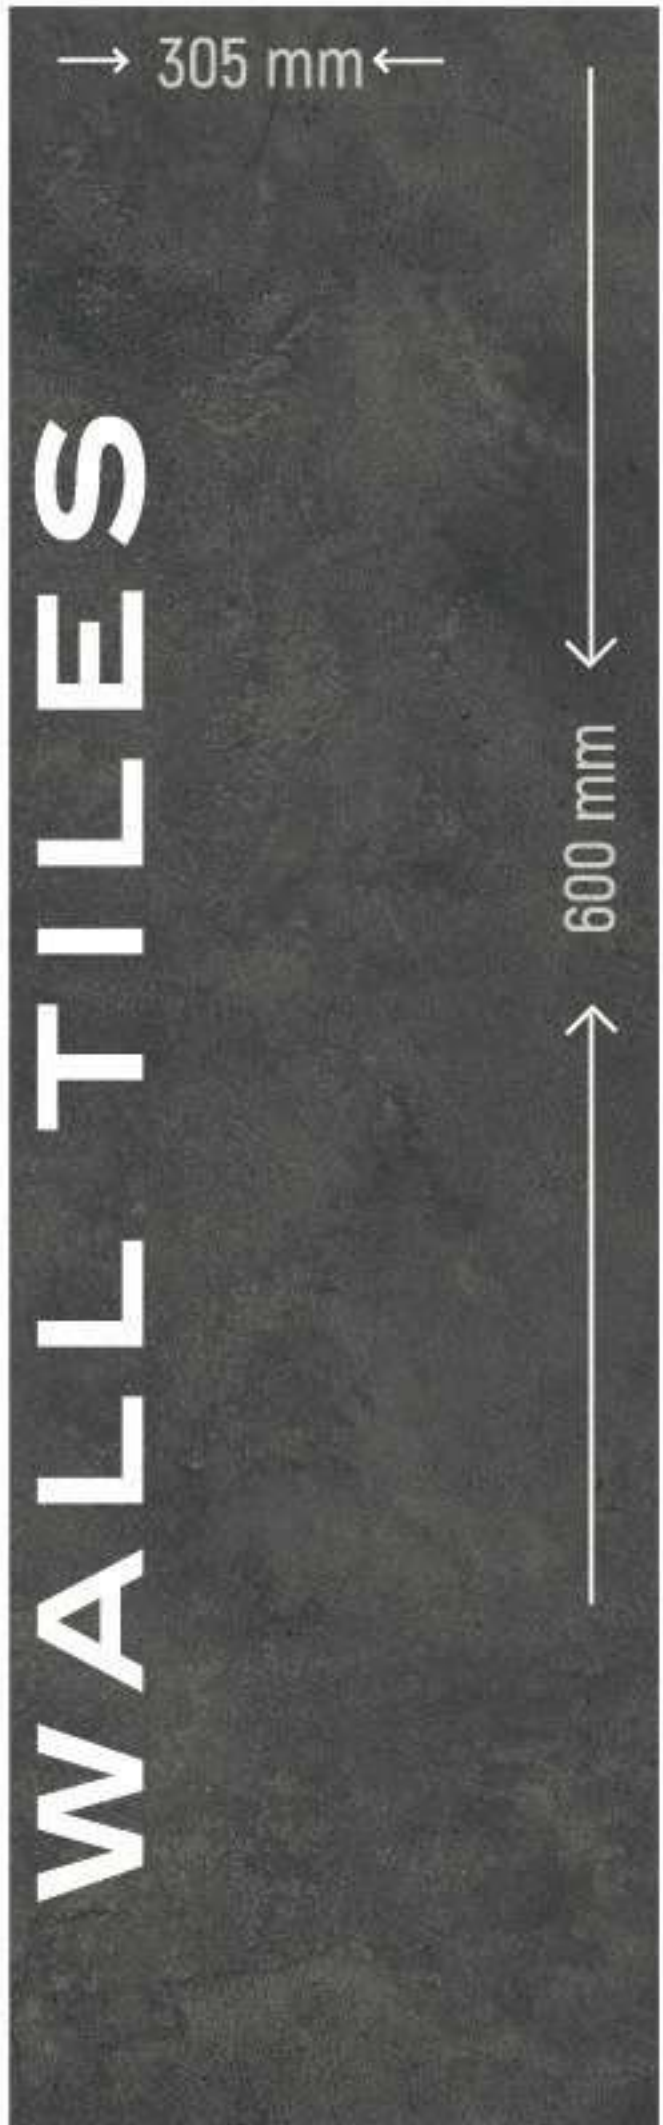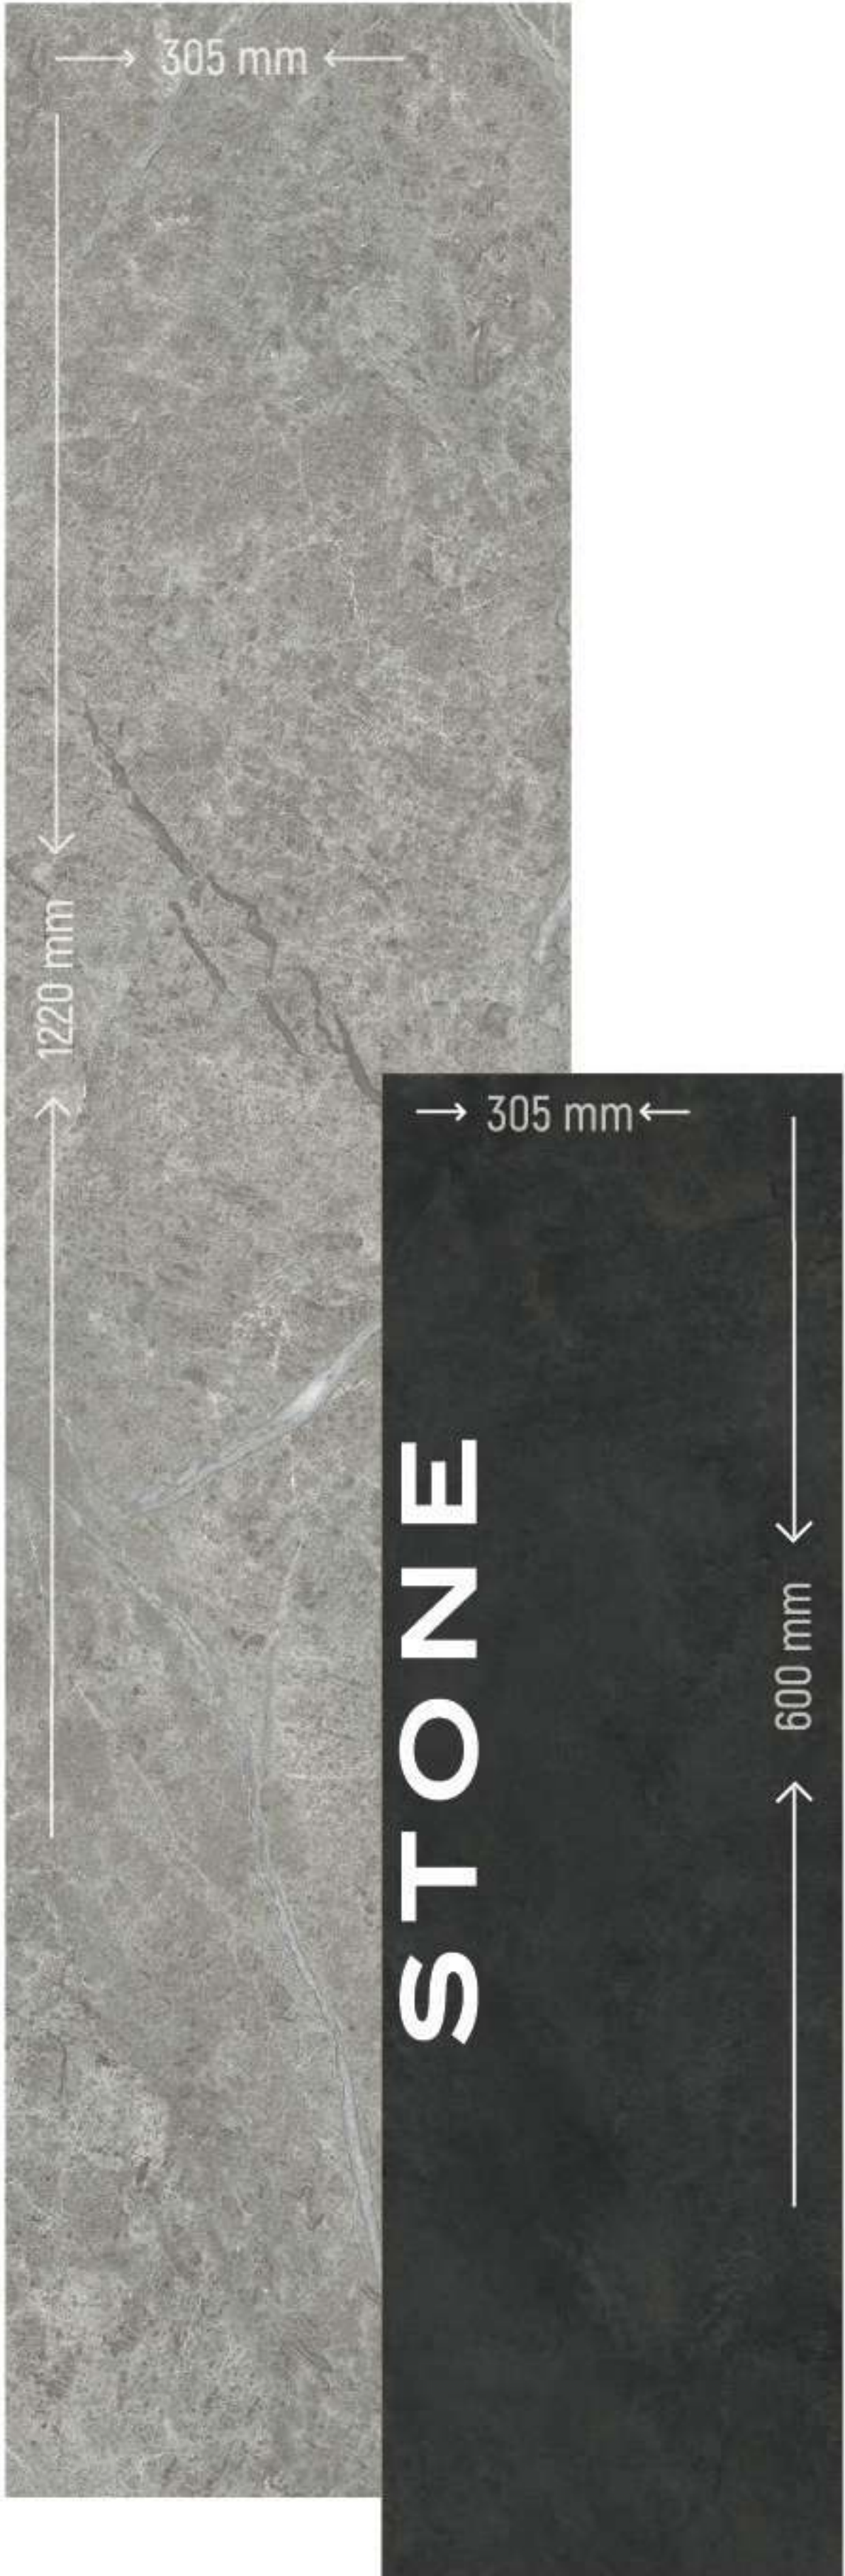

GRANDE		ELEGANT		STONE		WALL PANEL XL	WALL TILES
6 mm		6 mm		5 mm		3 mm	4 mm
0.5 mm		0.5 mm		0.5 mm		0.15 mm	0.15 mm
Stone		Long		Stone	Stone XL	Long	Stone
7 pcs 2,432 m ² 25,296 kg		7 pcs 1,942 m ² 20,192 kg		9 pcs 1.647 m ² 13,835 kg	6 pcs 2.233 m ² 18,754 kg	1 pcs 2.702 m ² 17,293 kg	11 pcs 2.013 m ² 16,909 kg



AUTHENTIC

New Generation Flooring
www.areafloors.com.tr

Exuding the Elegance of Real Wood

AUTHENTIC

Home is a reflection of our freedom and identity. It's a place where we can comfortably walk barefoot after a long day. It's where our children grow up, sharing sweet moments together. Our cat accompanies us every step of the way, leaving behind joyful memories.

Your home expresses who you truly are. It's authentic. That's precisely why we introduce the Authentics Collection. This collection meticulously mirrors real wood, infusing your space with authenticity and sophistication. With its unparalleled 3D structure, it offers an exceptionally natural appearance. And, above all, this collection stands out with its undeniable durability.

We've designed it for real homes and real people. Personalize your space with the Authentics Collection and let your true self shine. Experience every moment in your home with natural beauty and superior durability. Feel the authenticity at every step with the Authentics Collection."



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface



Moisture Resistance




High Density Underlay



Suitable for Underfloor Heating

Crafting
Perfection at
Every Step,
Just for You.

Wear Layer	0,5 mm
Underlay	1,5 mm
Surface	Eir
Total Thickness	6,5 mm
Edge	Micro Bevel

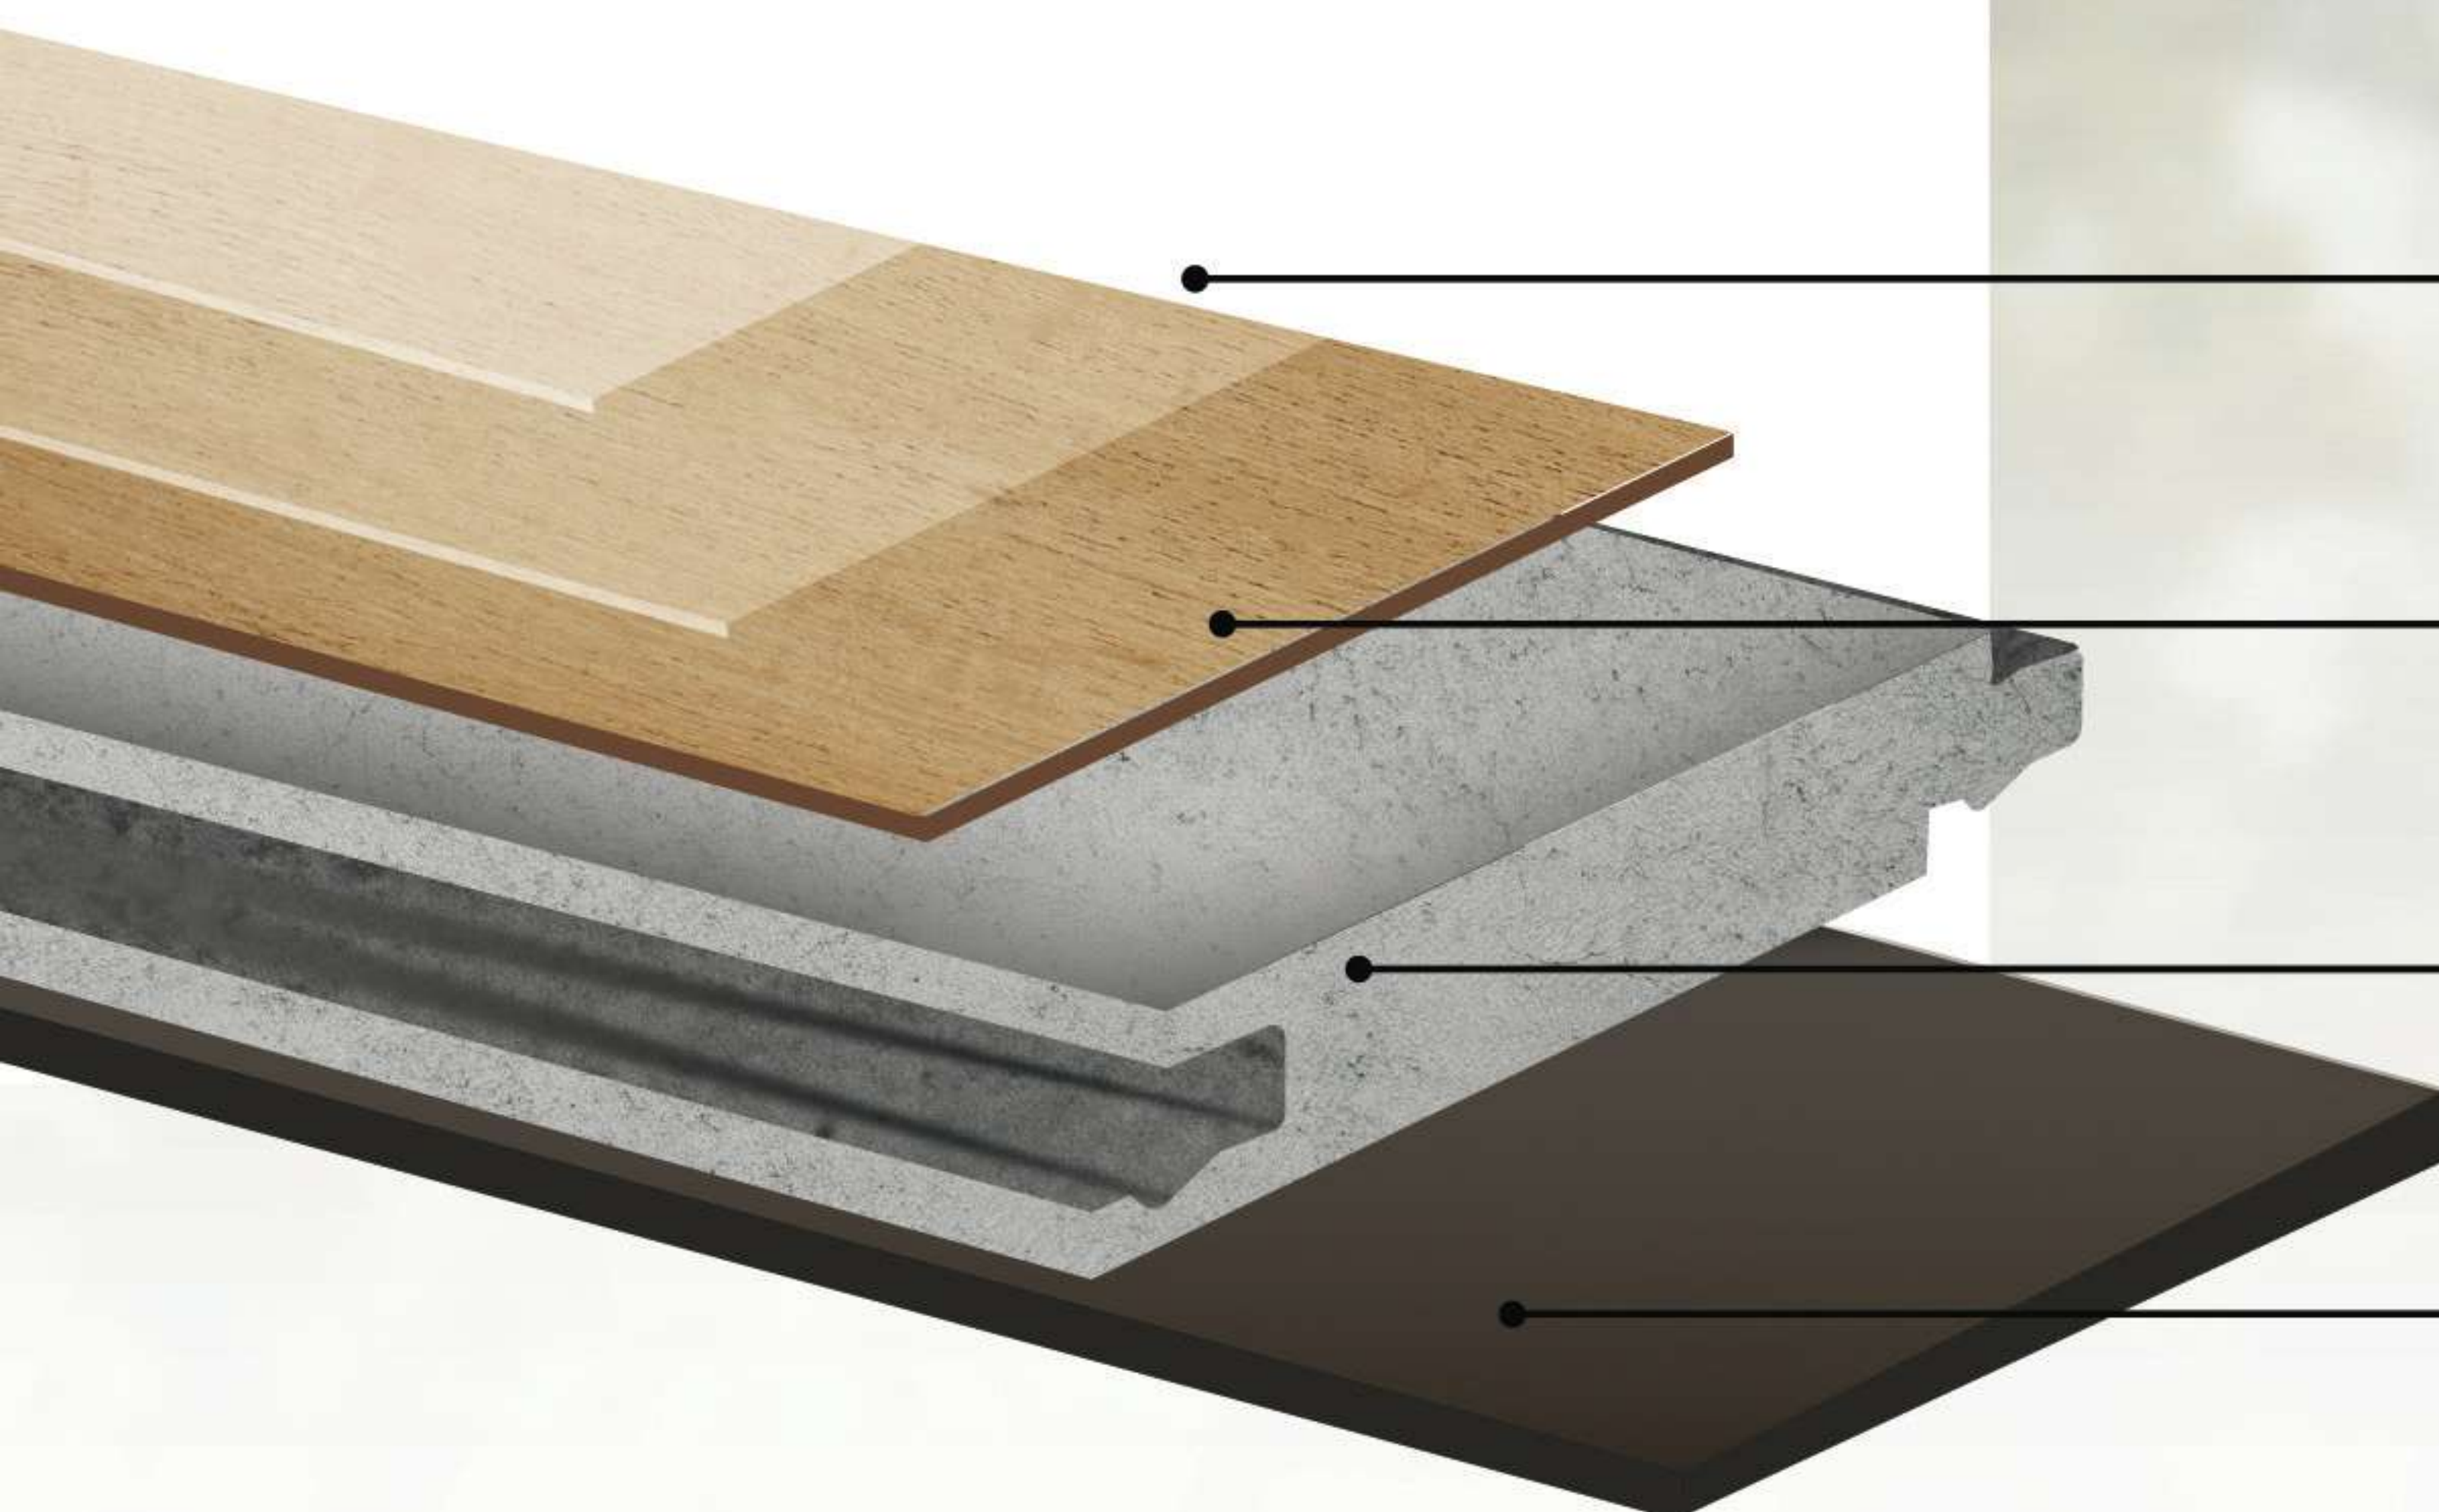

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Film Layer


SPC Rigid Core

High Density
Underlayment

1220 mm
228mm



150 mm
750 mm

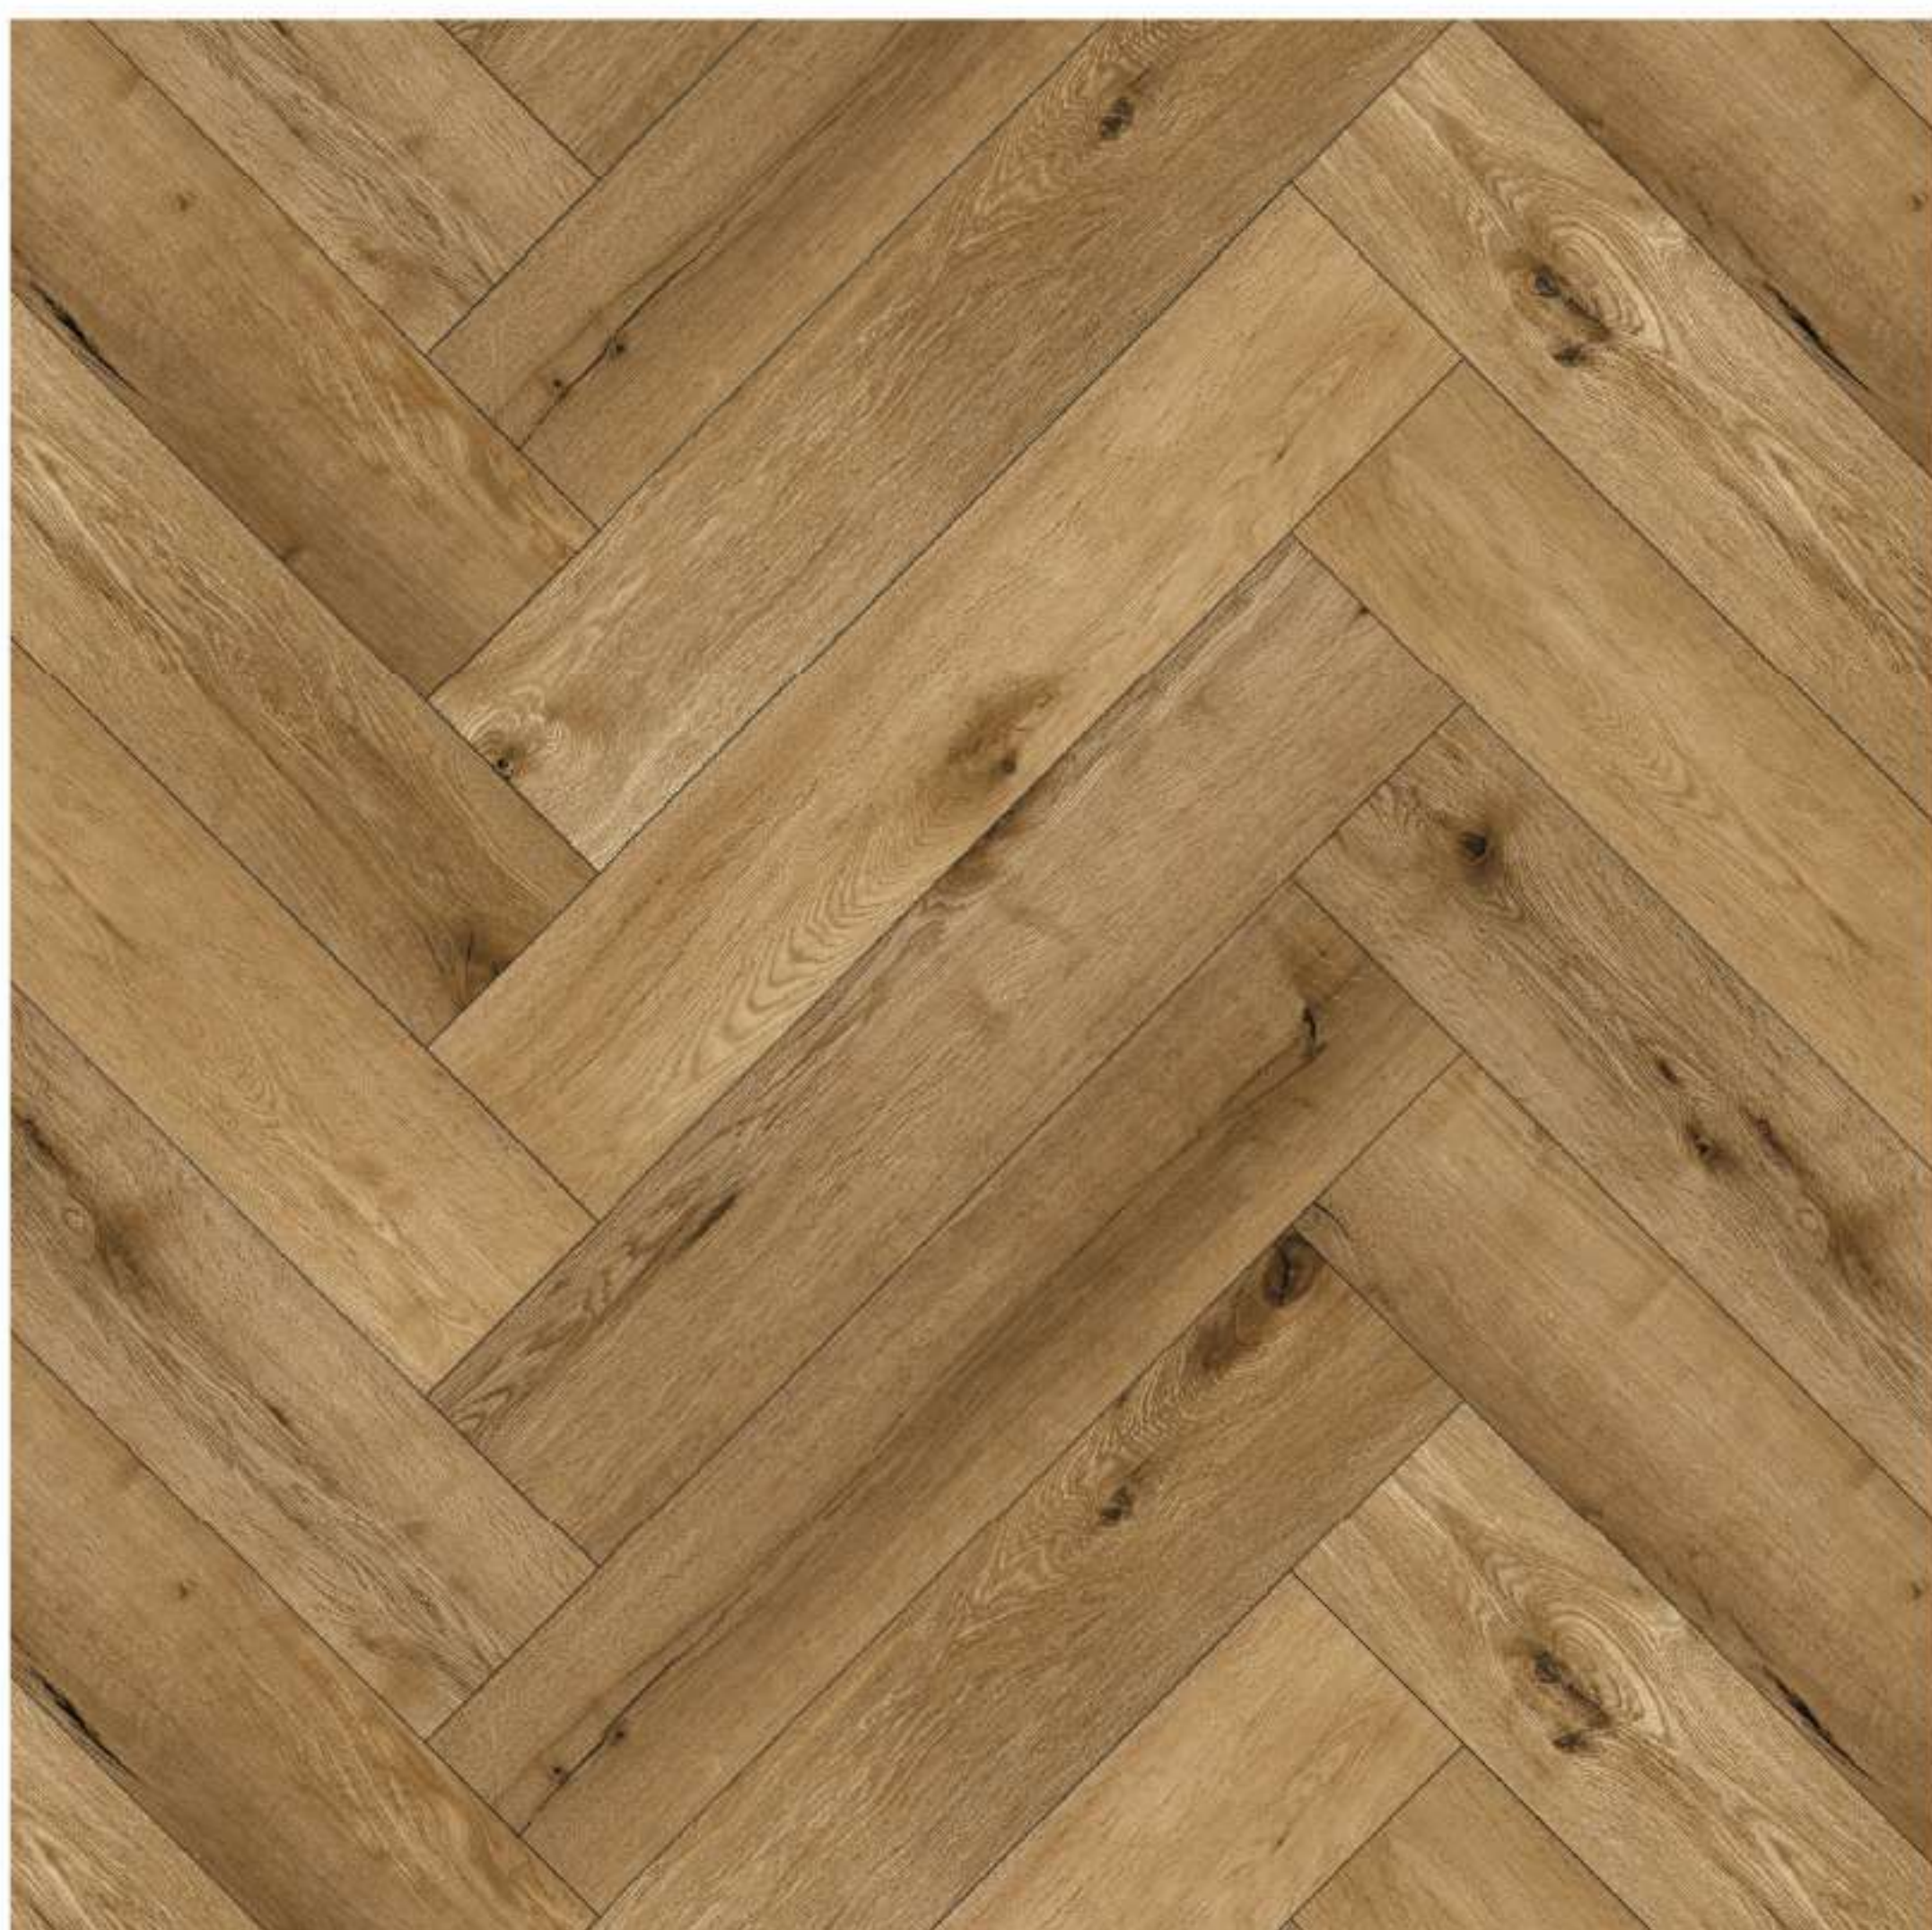

501 GOLD OAK



AC-501-PL | PLANK
228 X 1220 X 6.5 mm



AC-501-HB | HERRINGBONE
150 X 750 X 6.5 mm




502 NATURAL OAK



AC-502-PL | PLANK
228 X 1220 X 6.5 mm



AC-502-HB | HERRINGBONE
150 X 750 X 6.5 mm

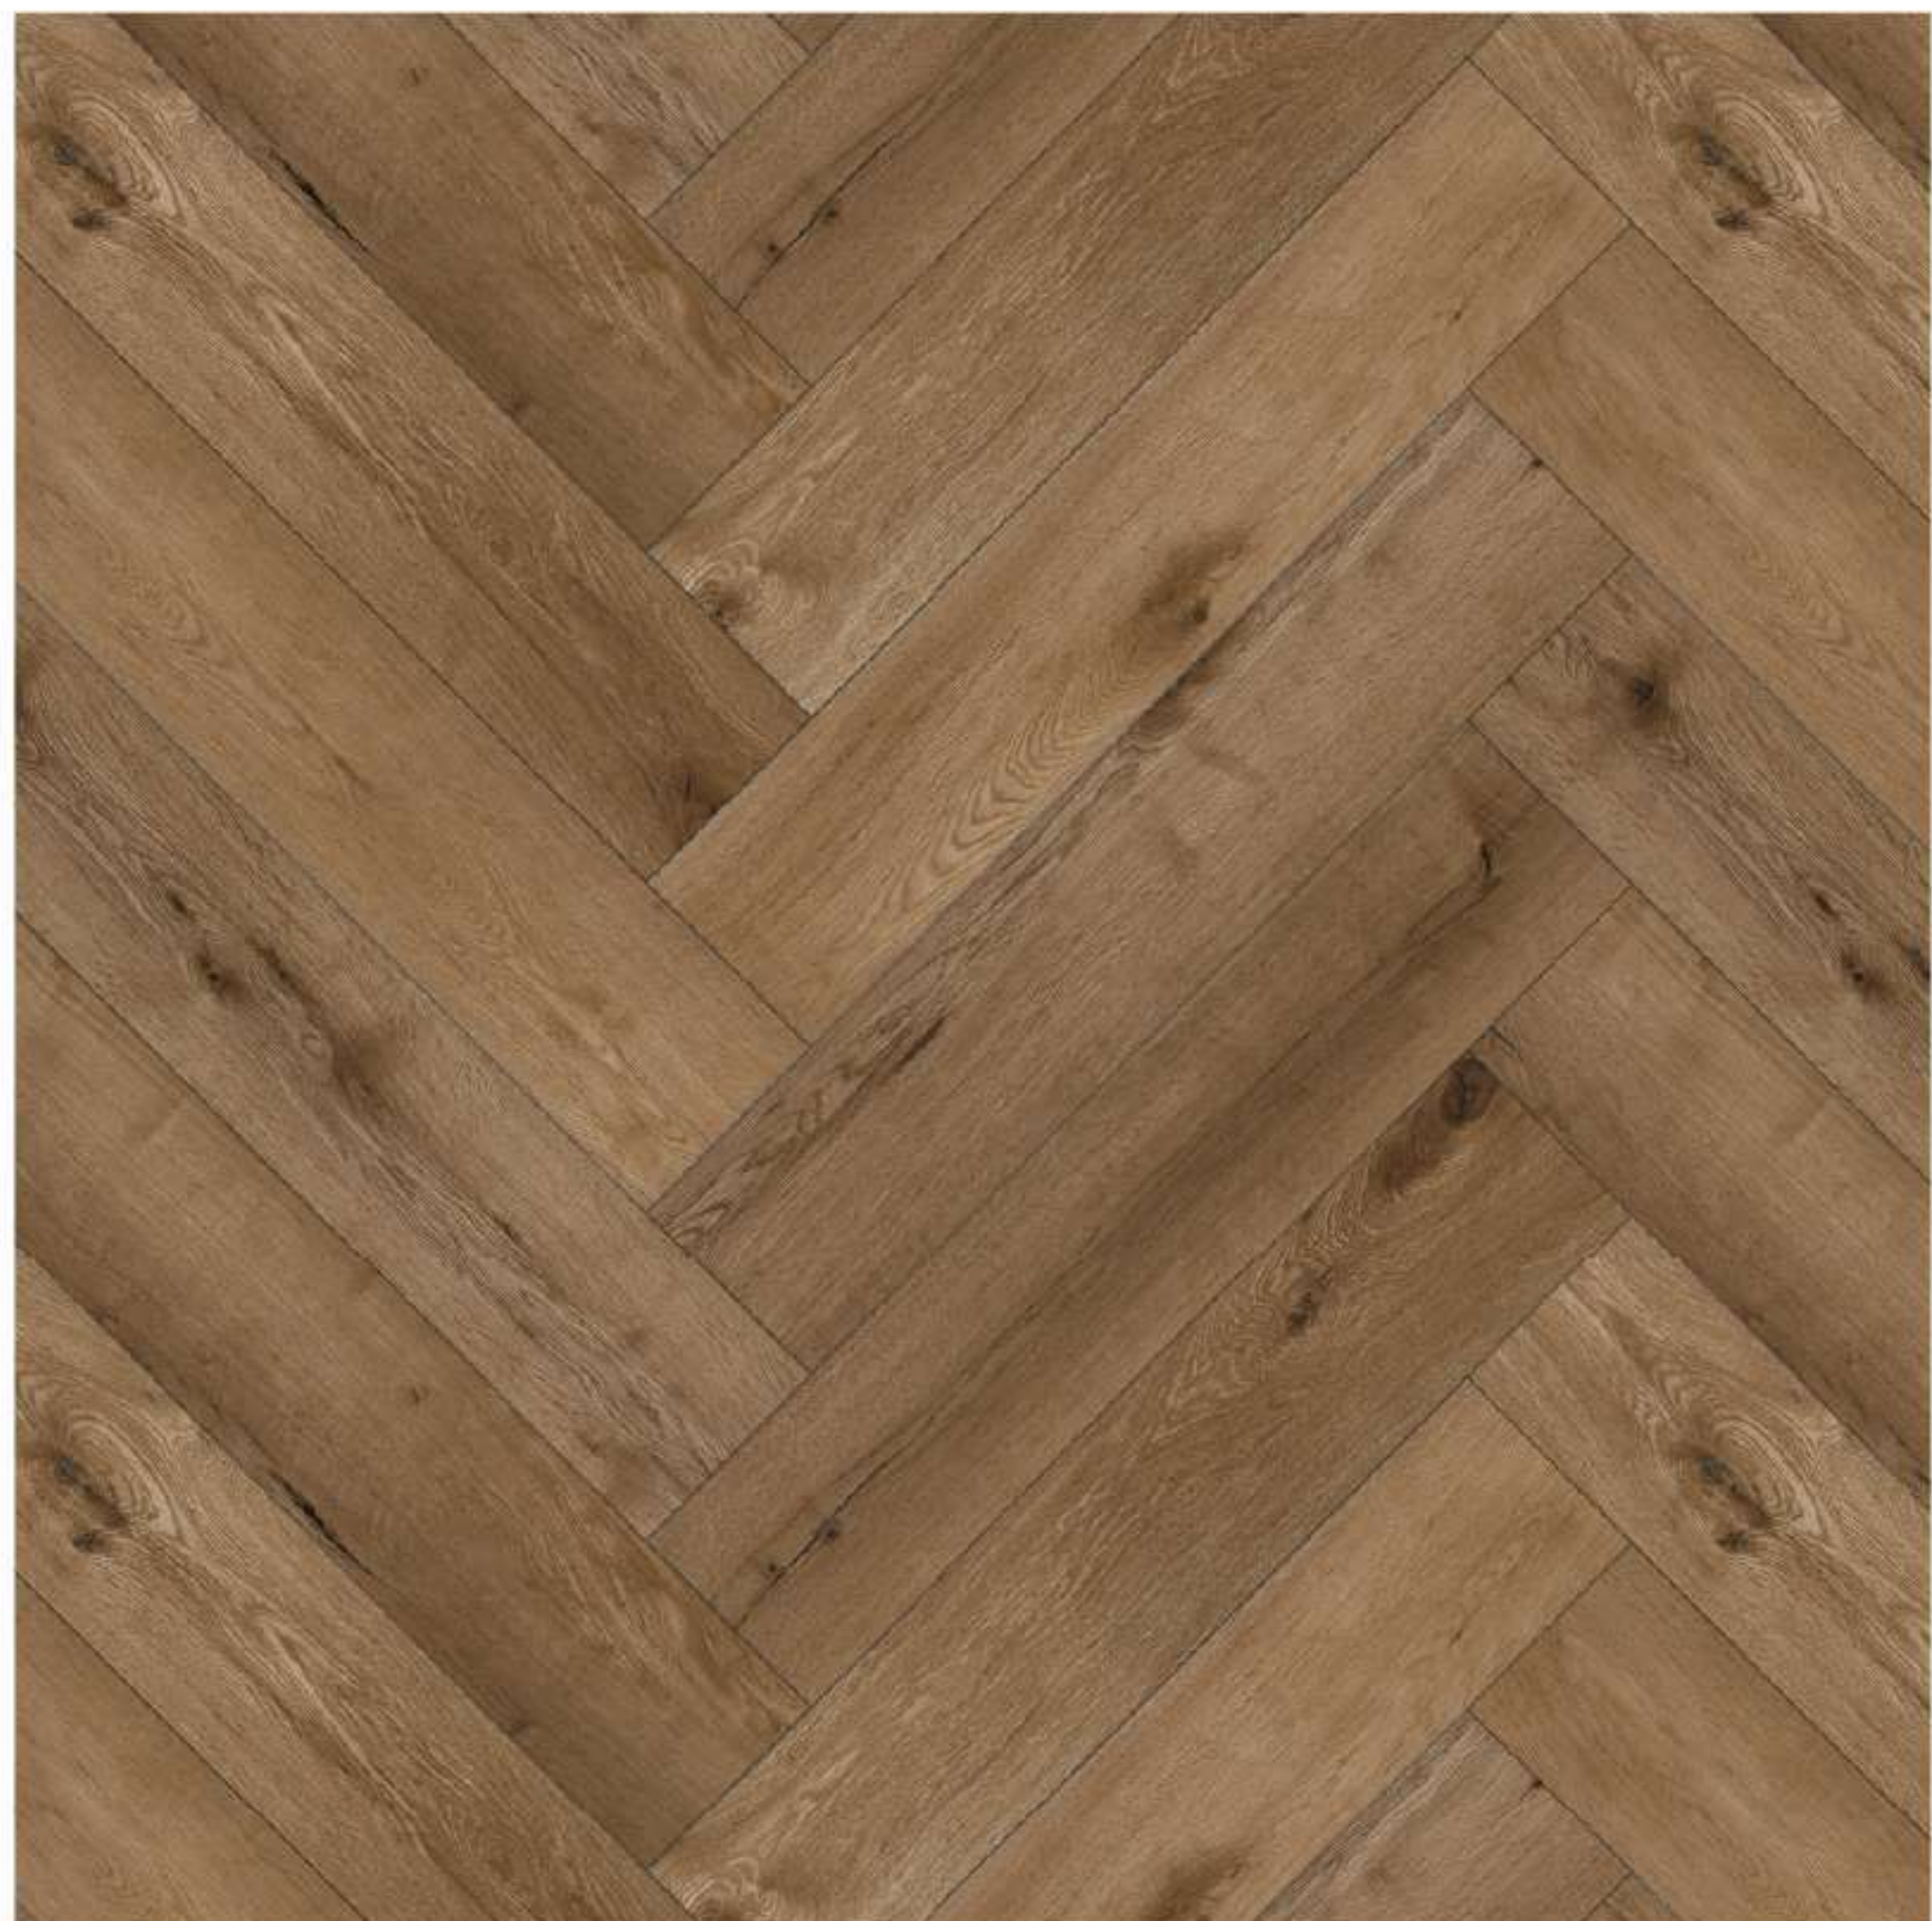

503 AMBER OAK




AC-503-PL | PLANK
228 X 1220 X 6.5 mm



AC-503-HB | HERRINGBONE
150 X 750 X 6.5 mm

503

AMBER OAK

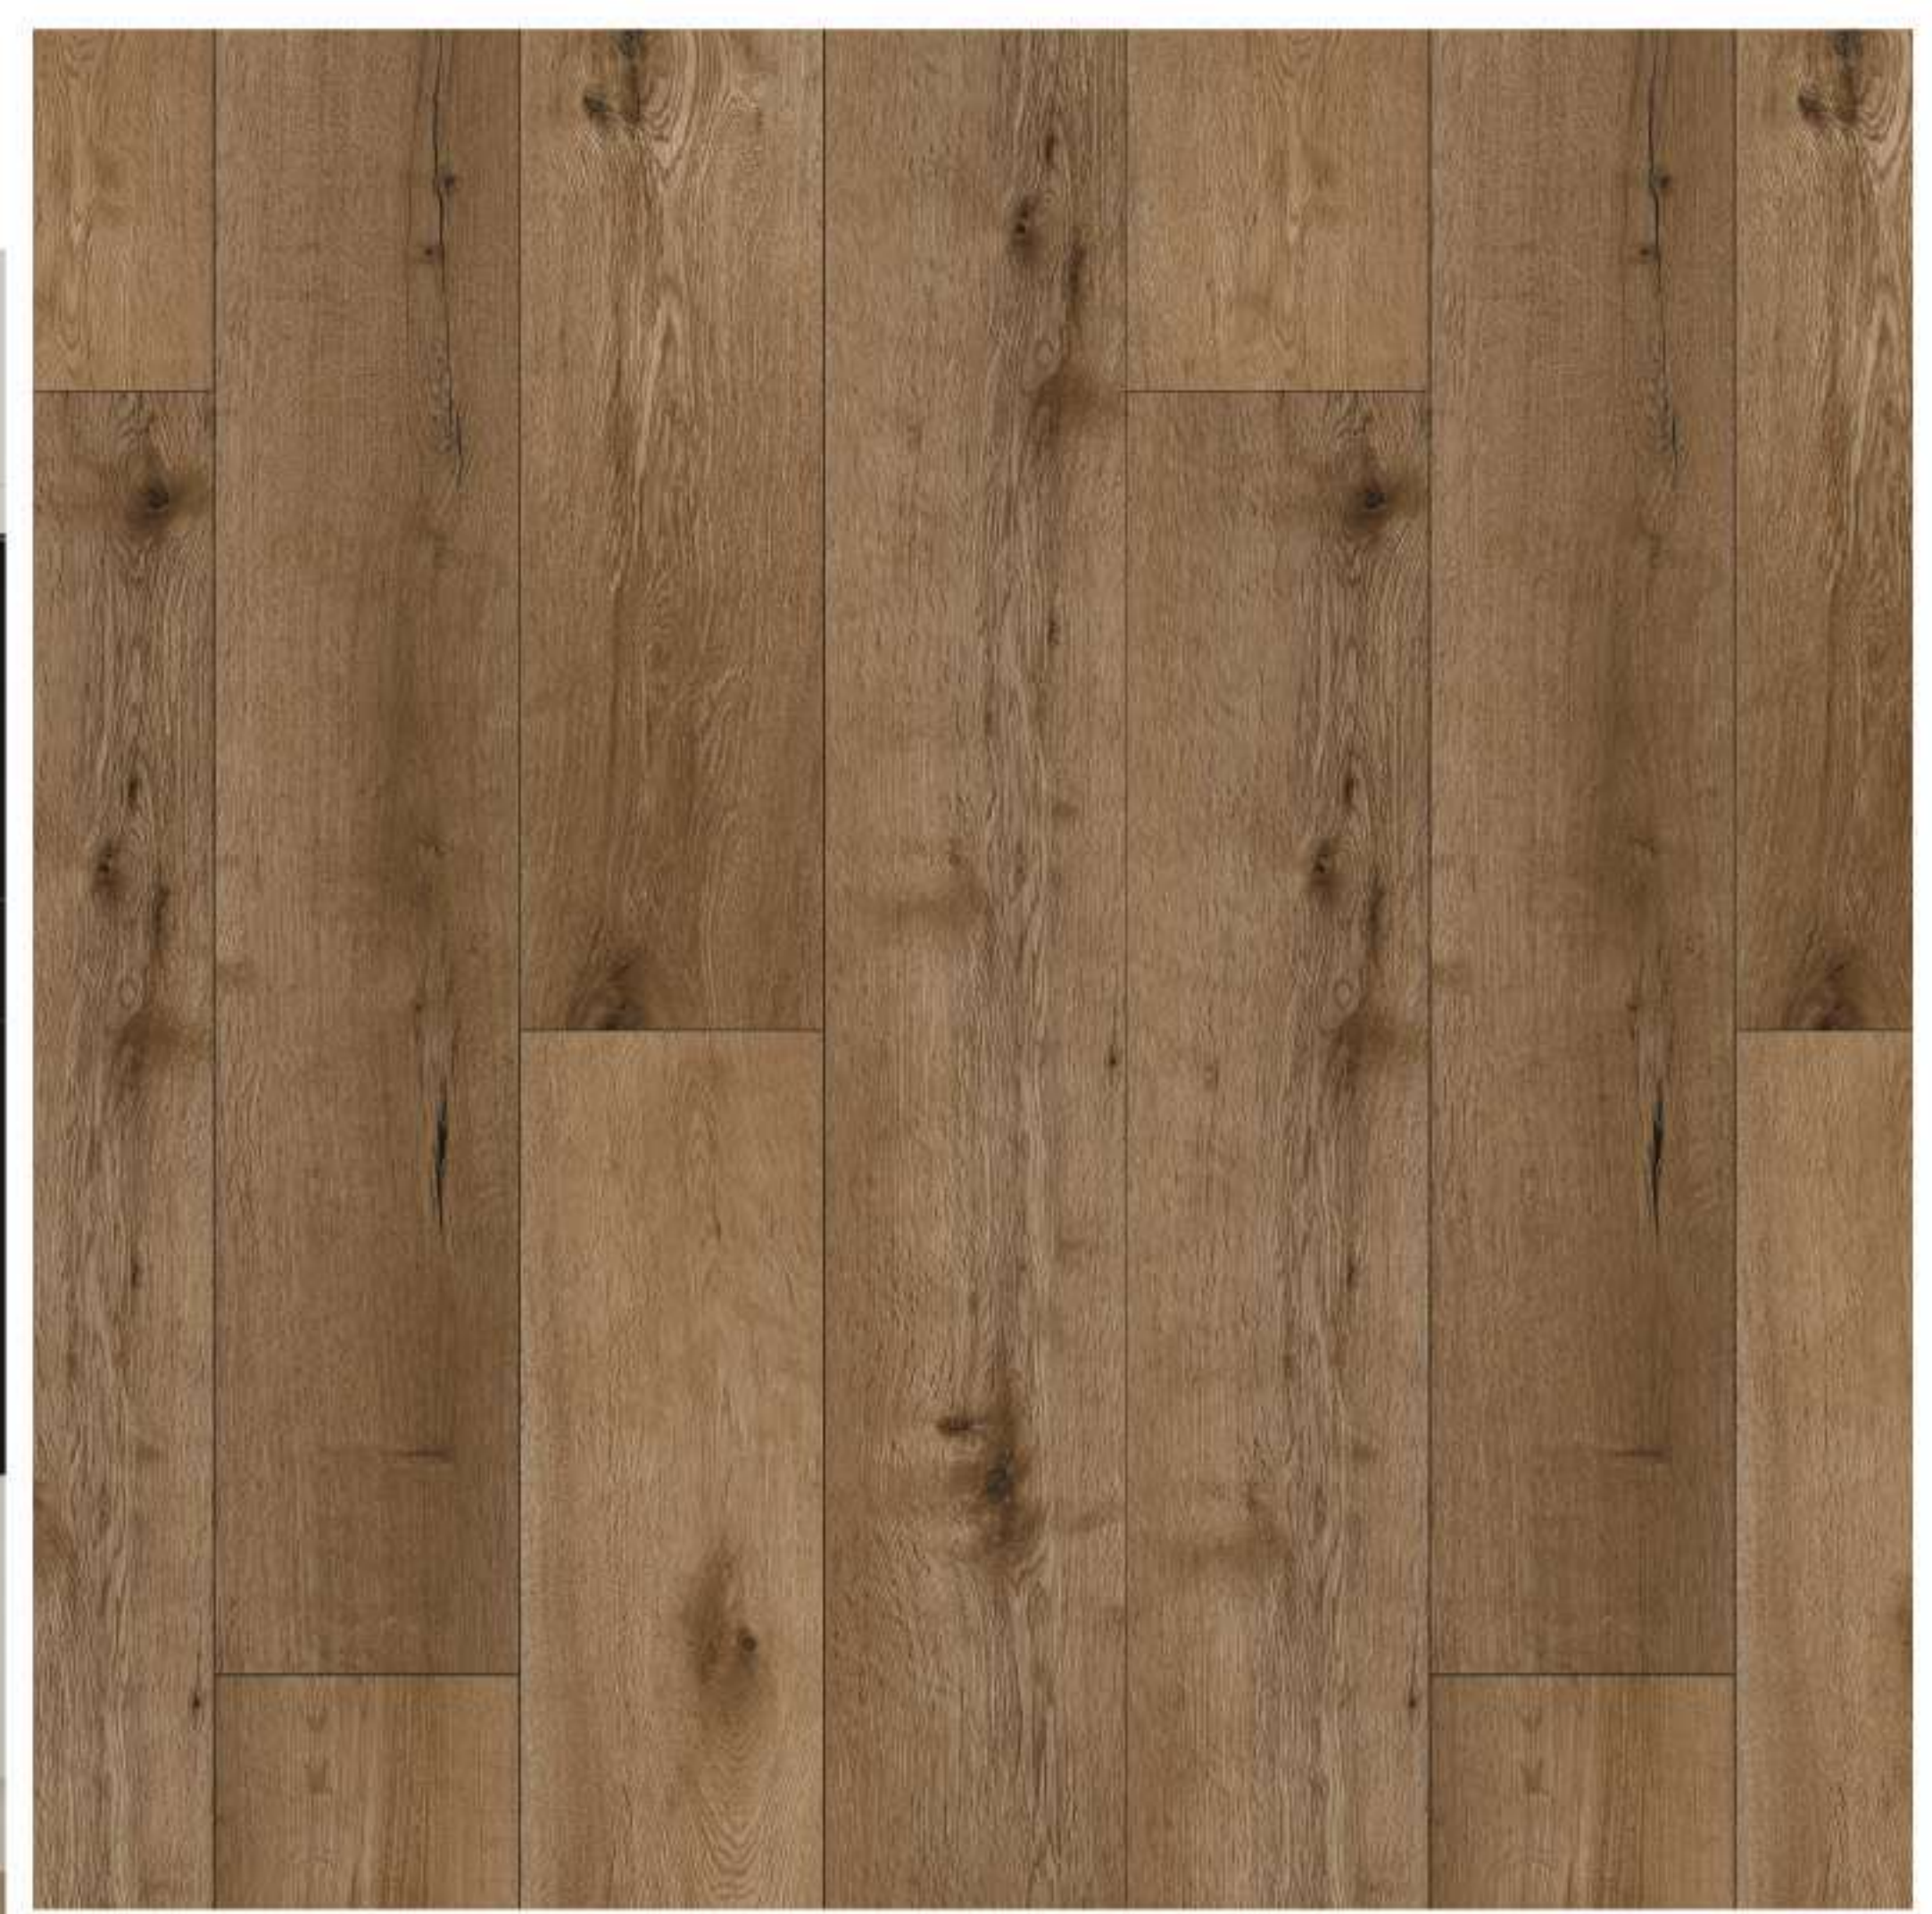

21

AUTHENTIC COLLECTION





504 MELANGE OAK





AC-504-PL | PLANK
228 X 1220 X 6.5 mm



AC-504-HB | HERRINGBONE
150 X 750 X 6.5 mm

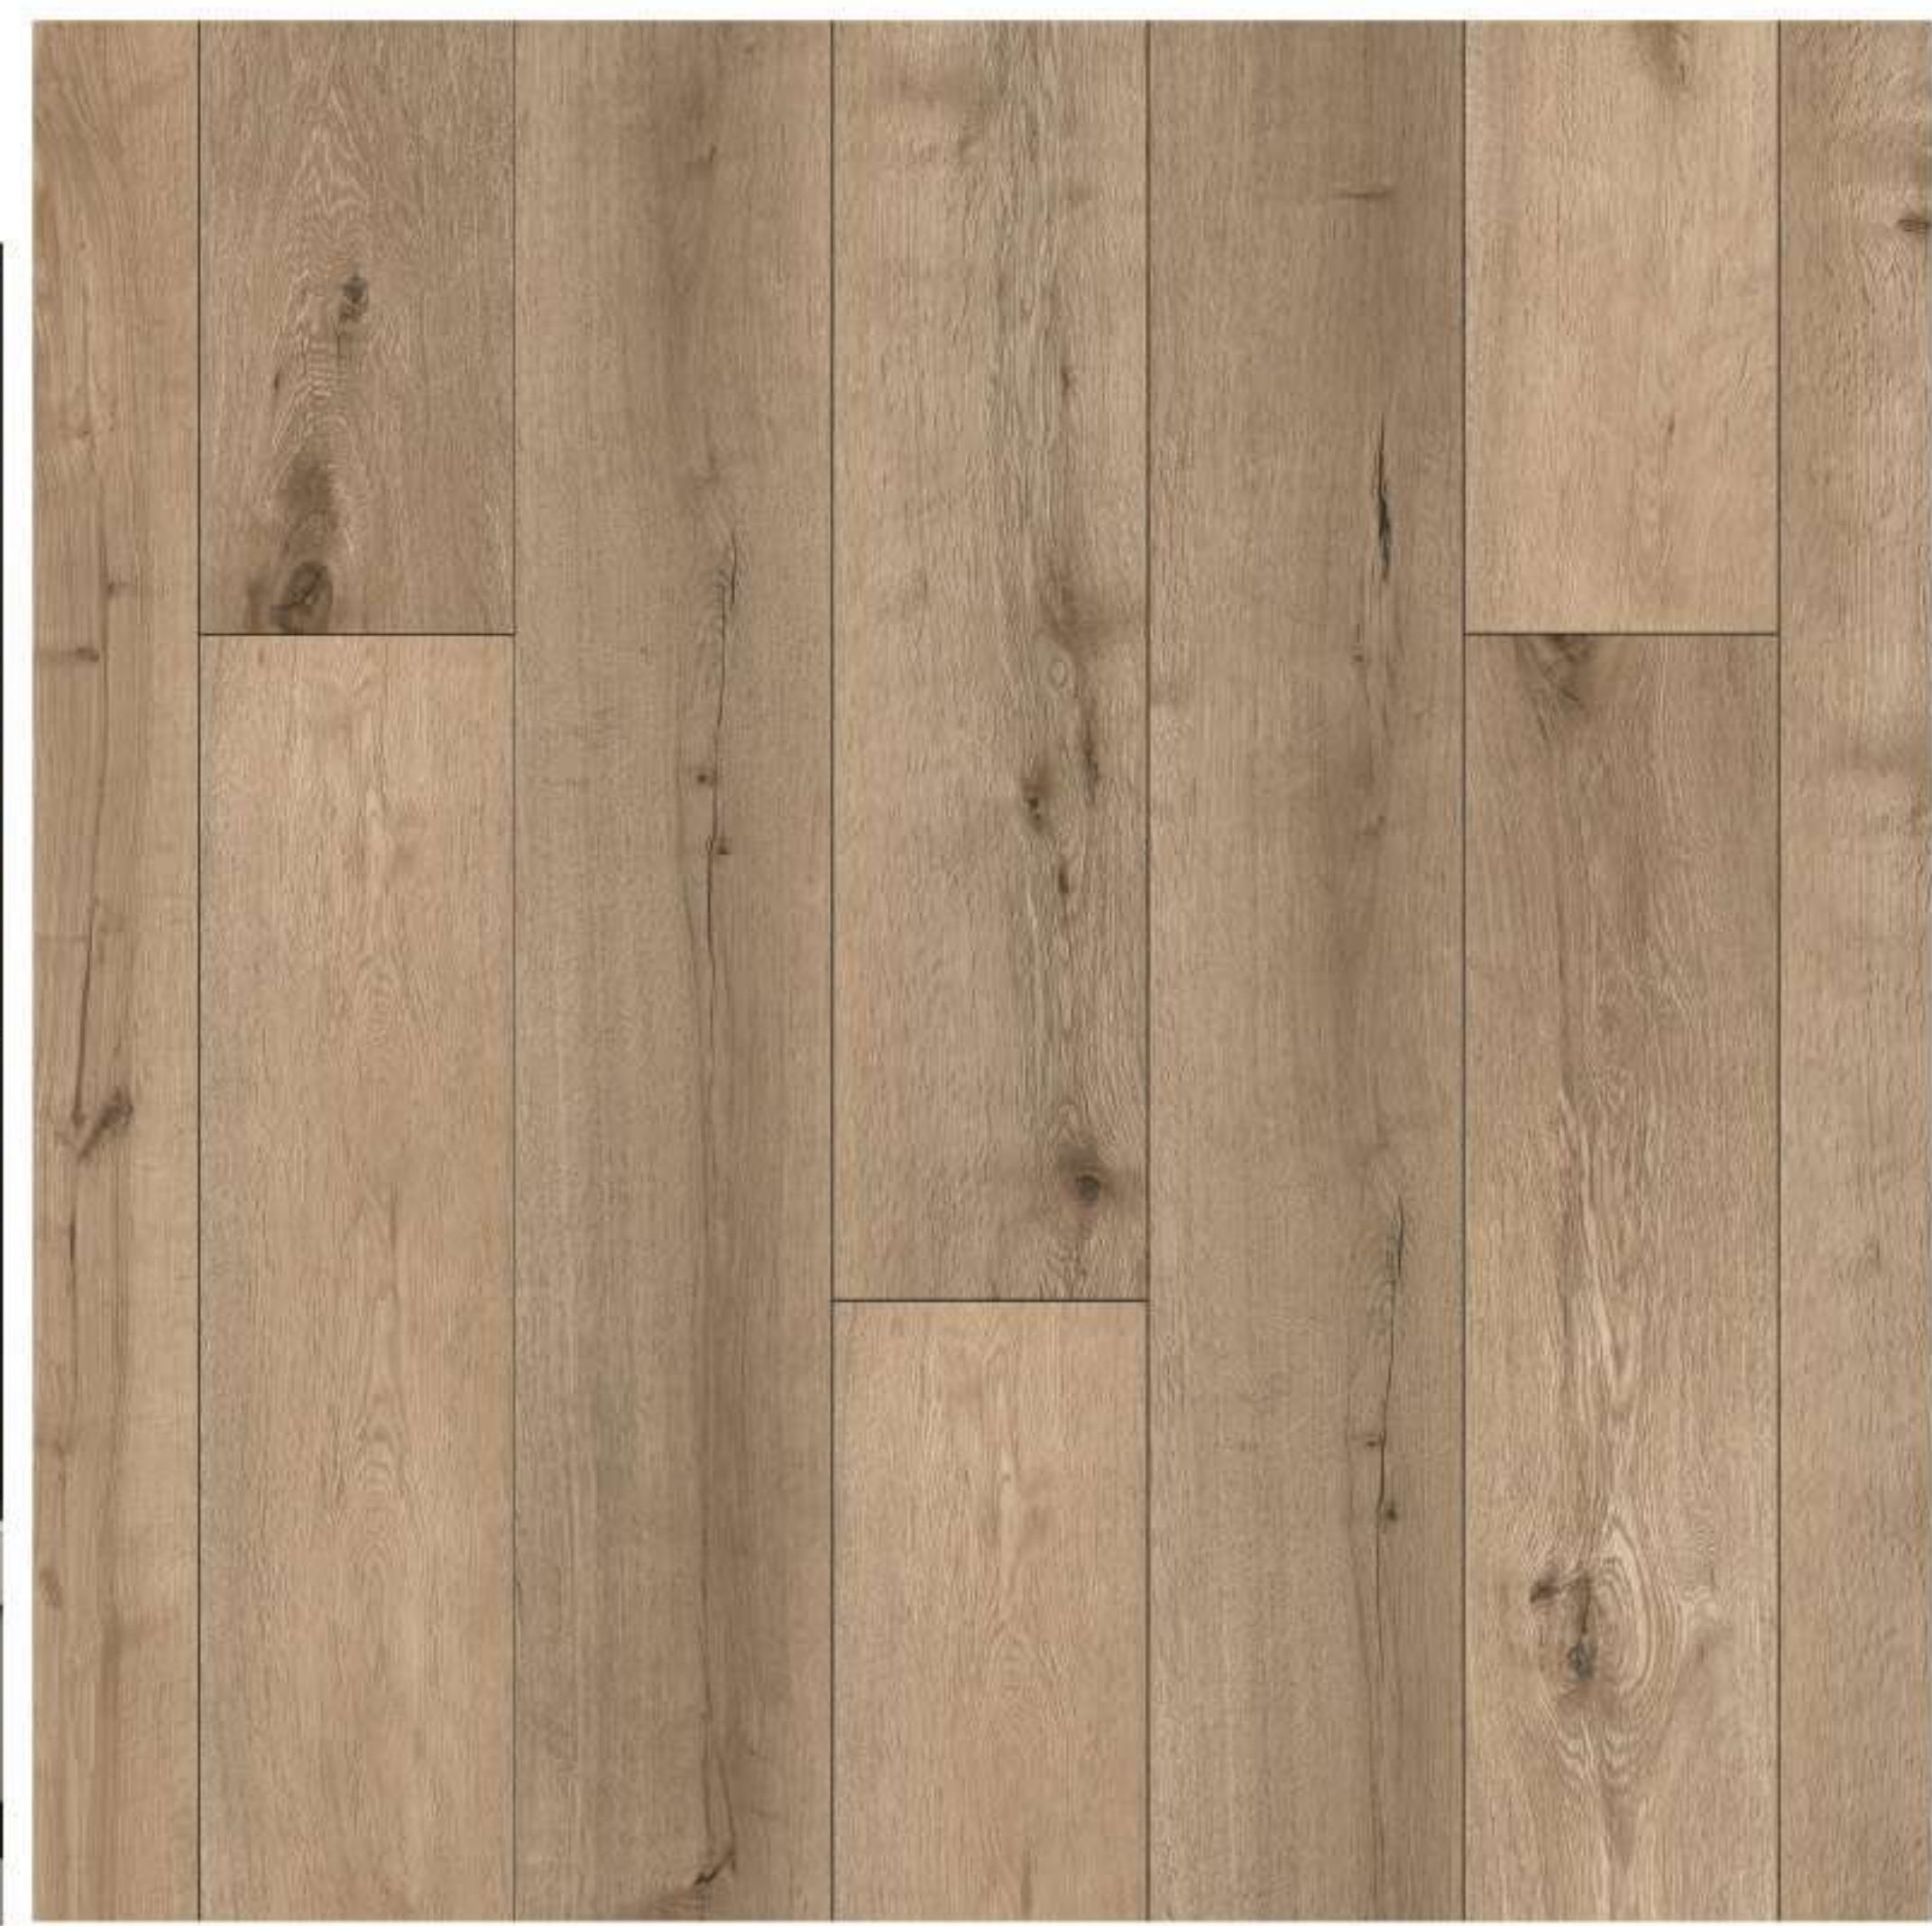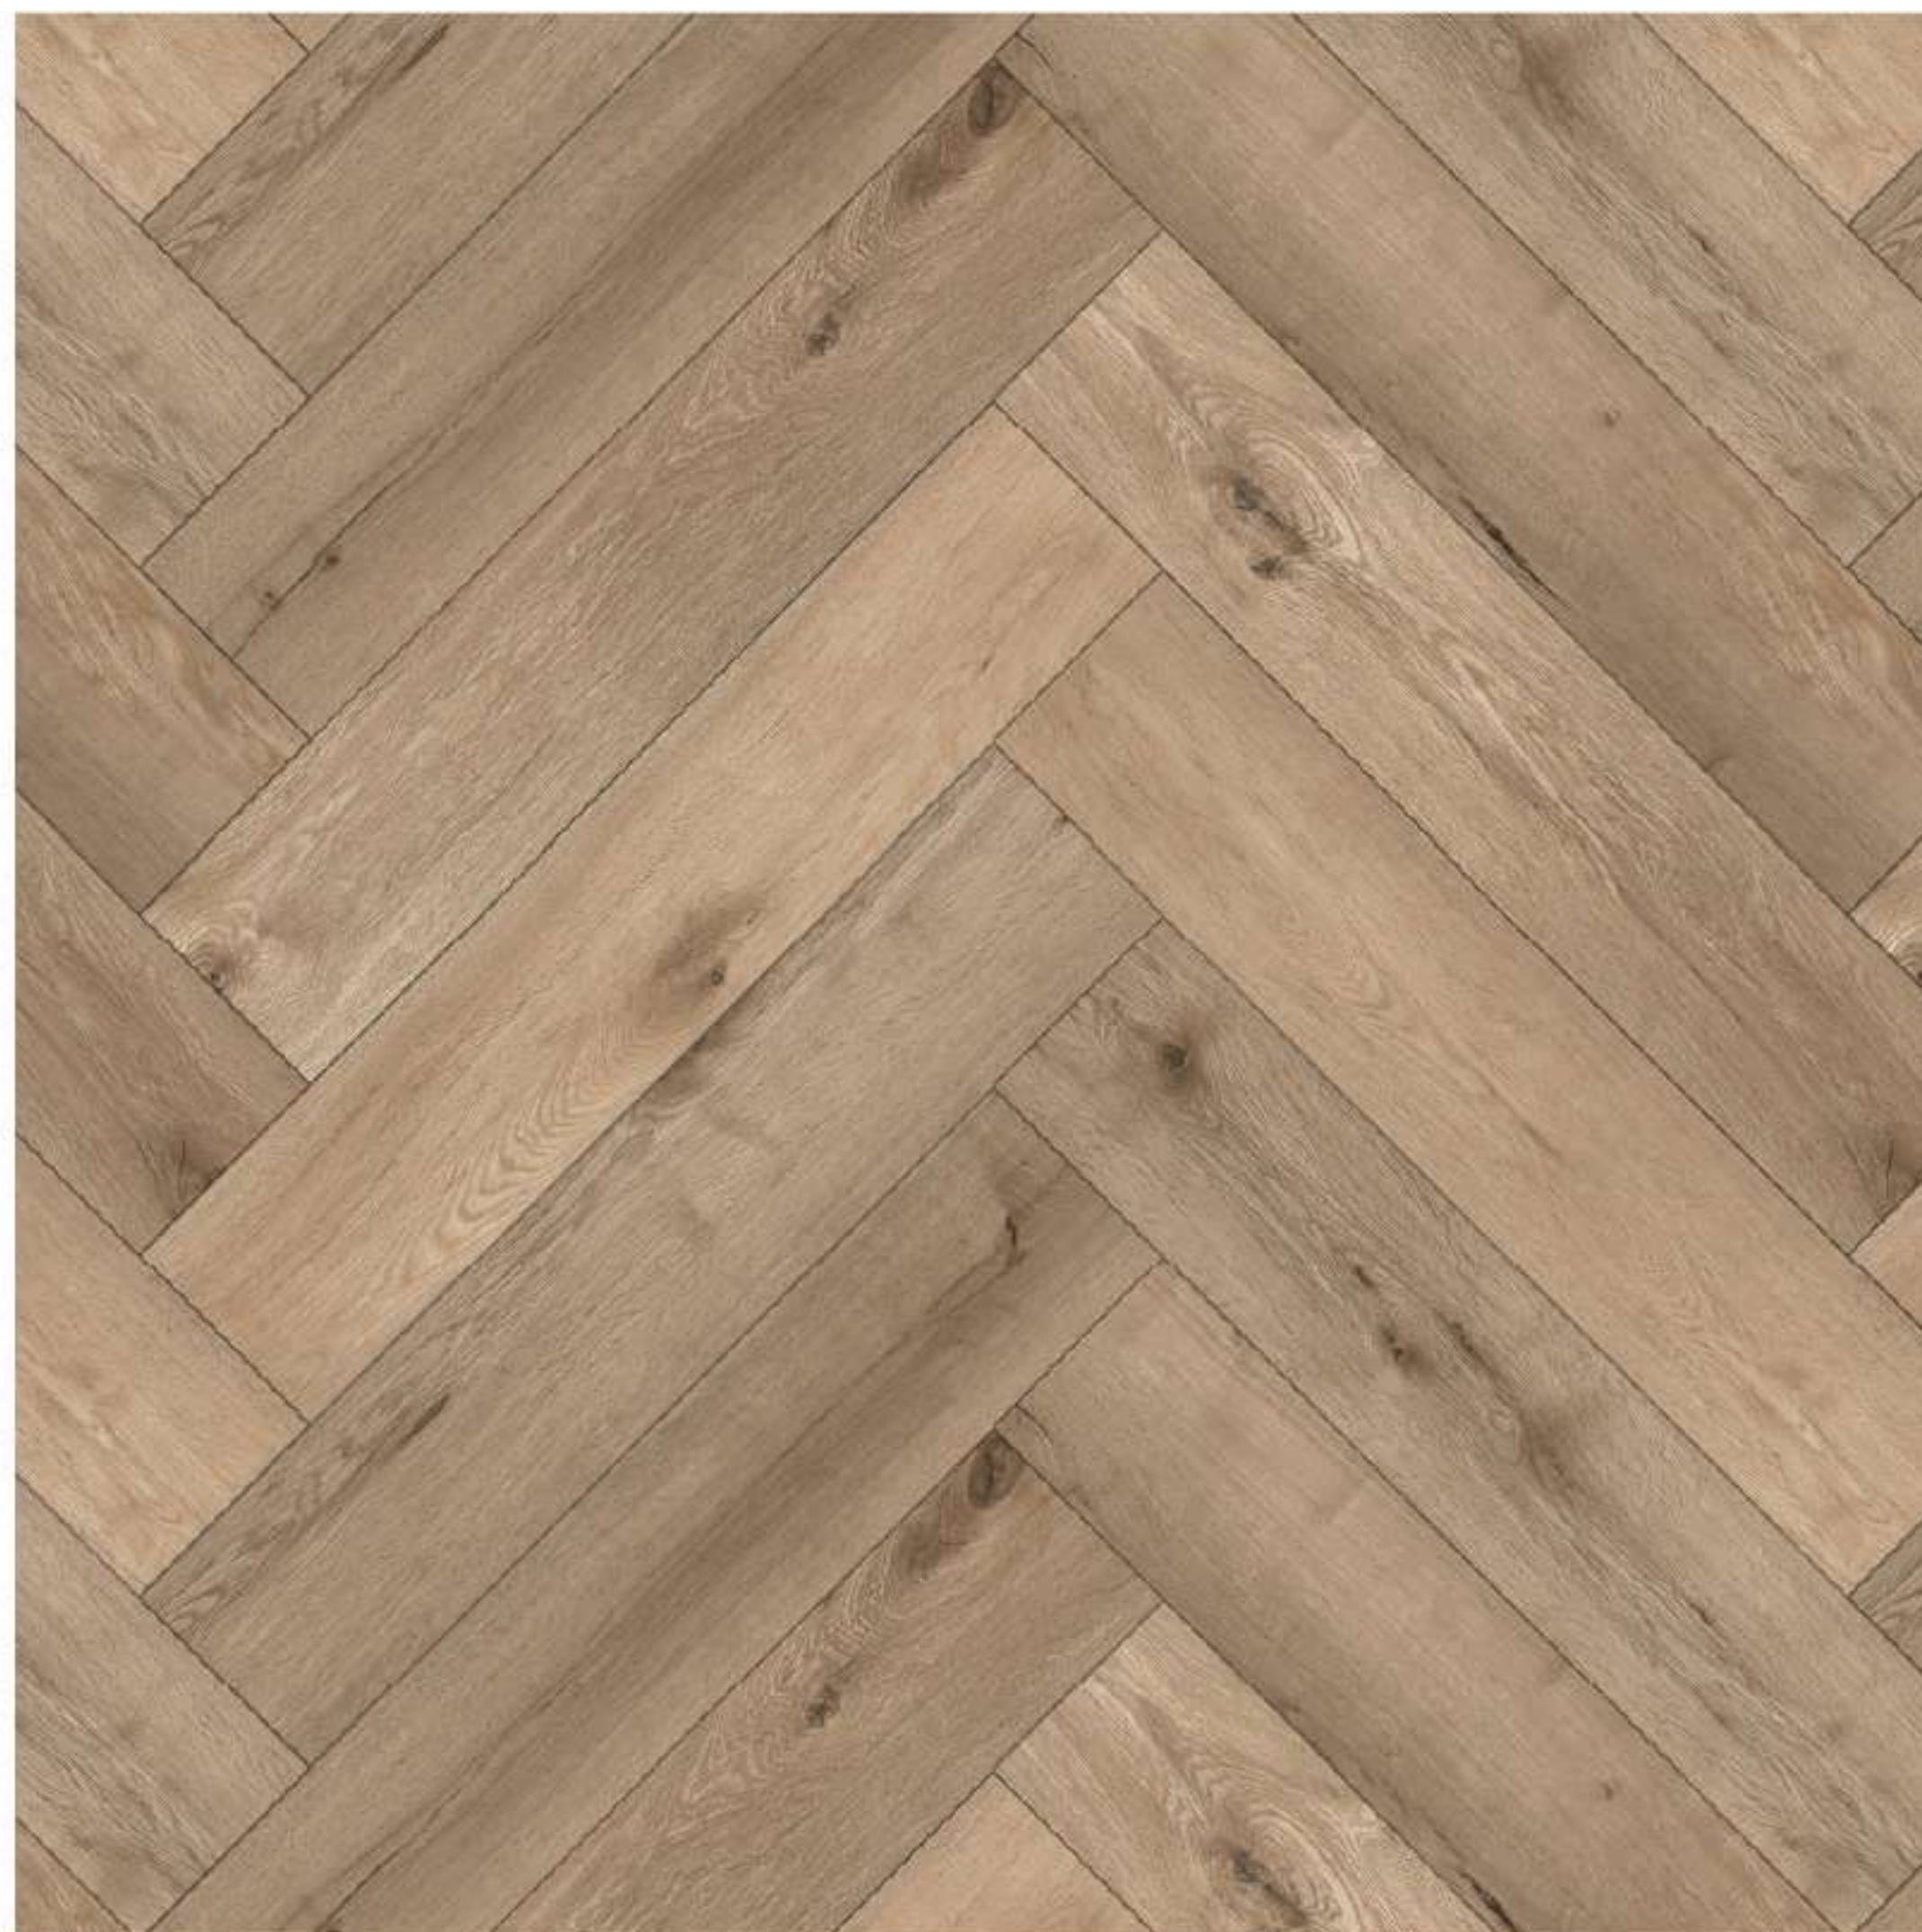

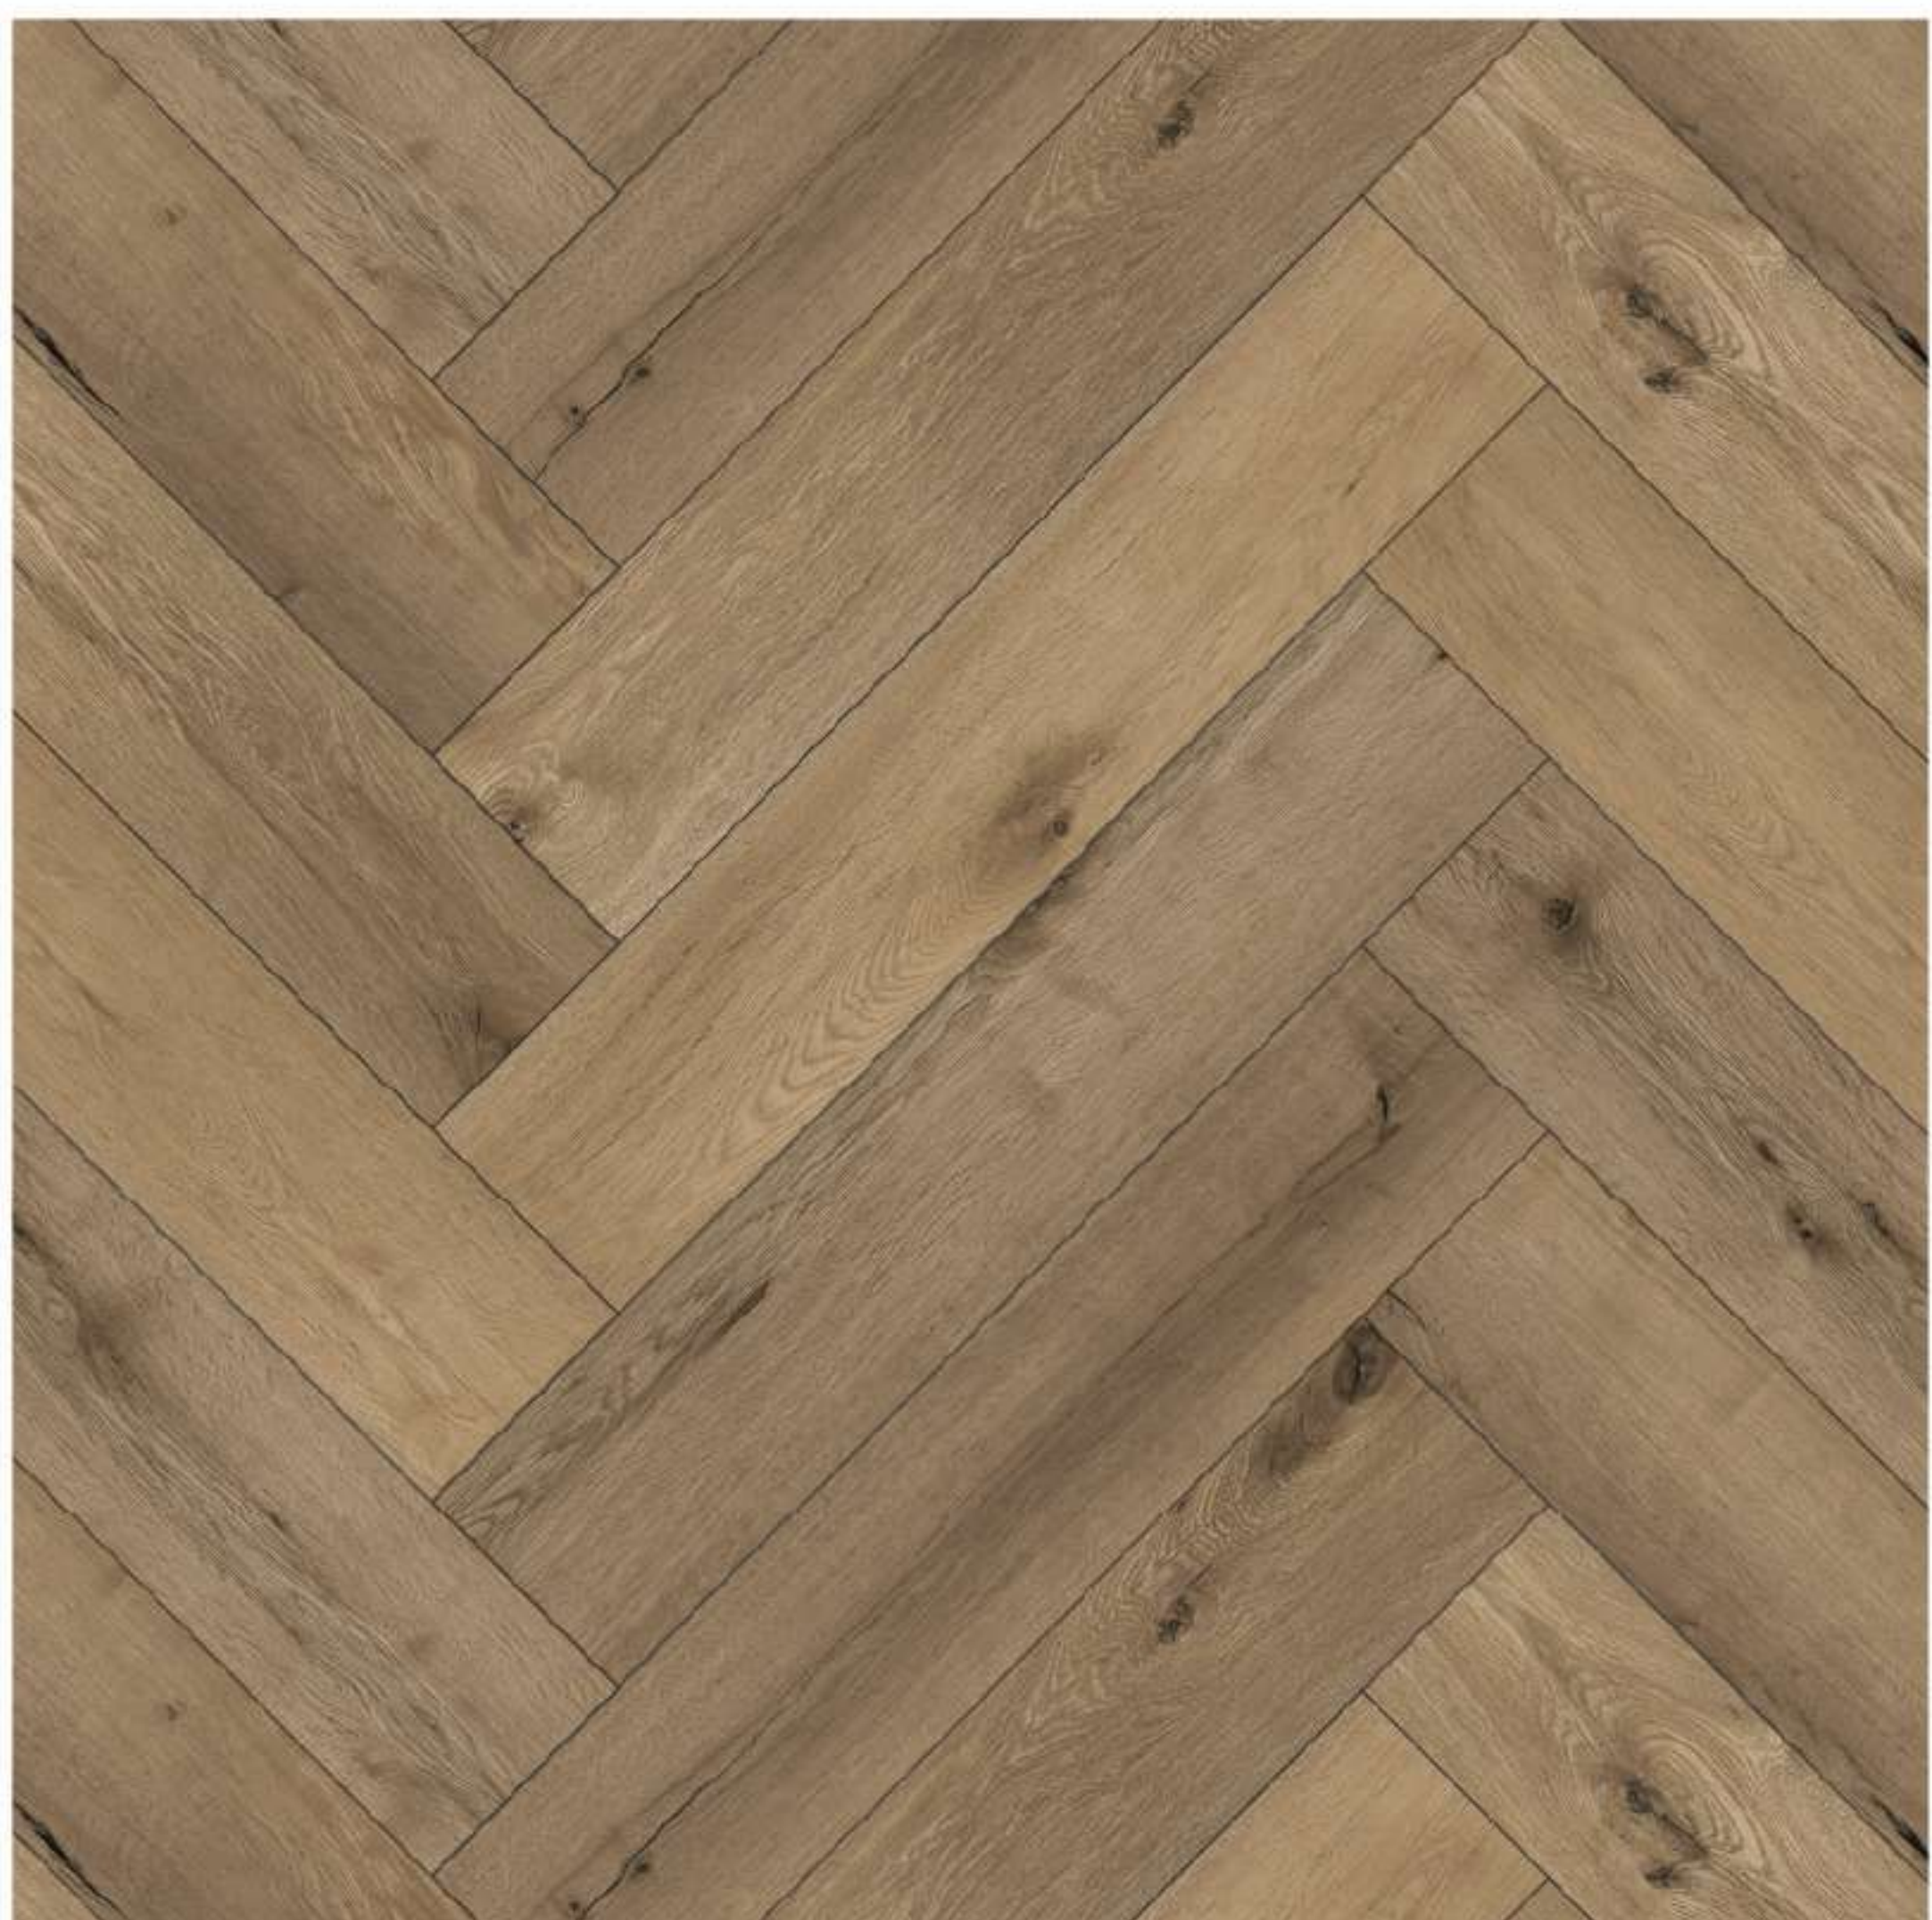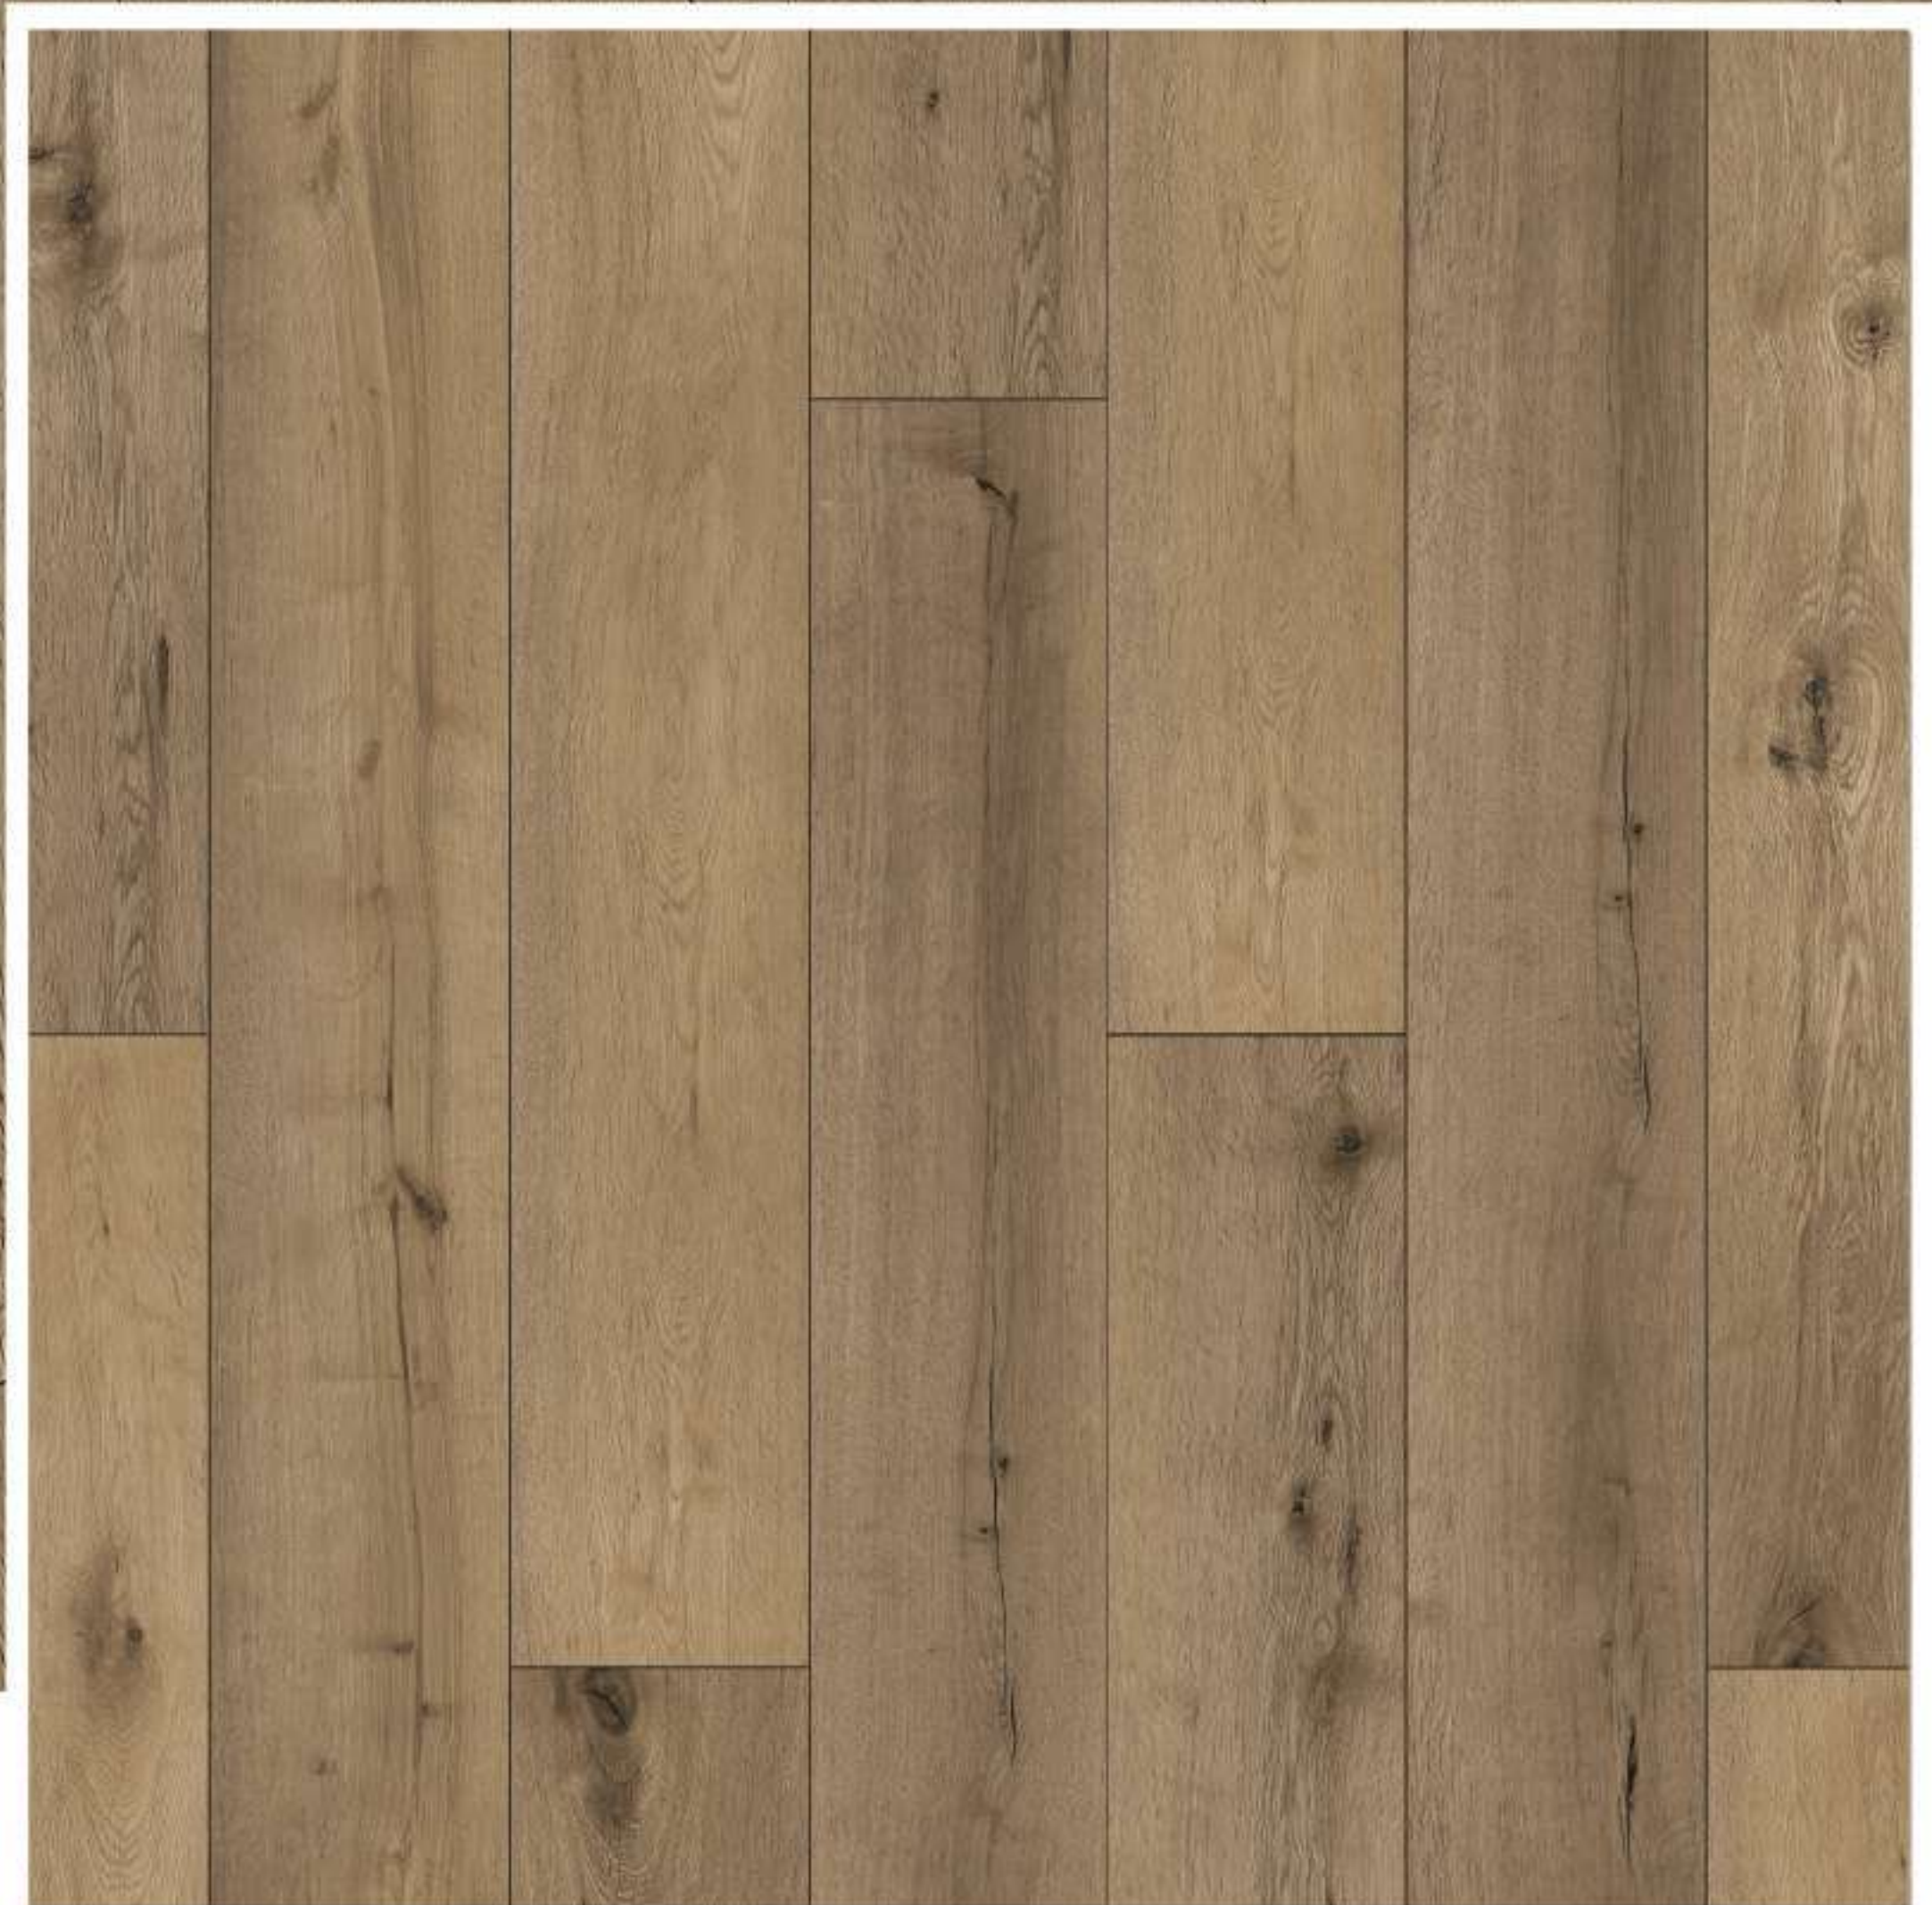

505 KASCHMIR OAK



AC-505-PL | PLANK
228 X 1220 X 6.5 mm



AC-505-HB | HERRINGBONE
150 X 750 X 6.5 mm




506 COGNAC OAK



AC-506-PL | PLANK
228 X 1220 X 6.5 mm



AC-506-HB | HERRINGBONE
150 X 750 X 6.5 mm

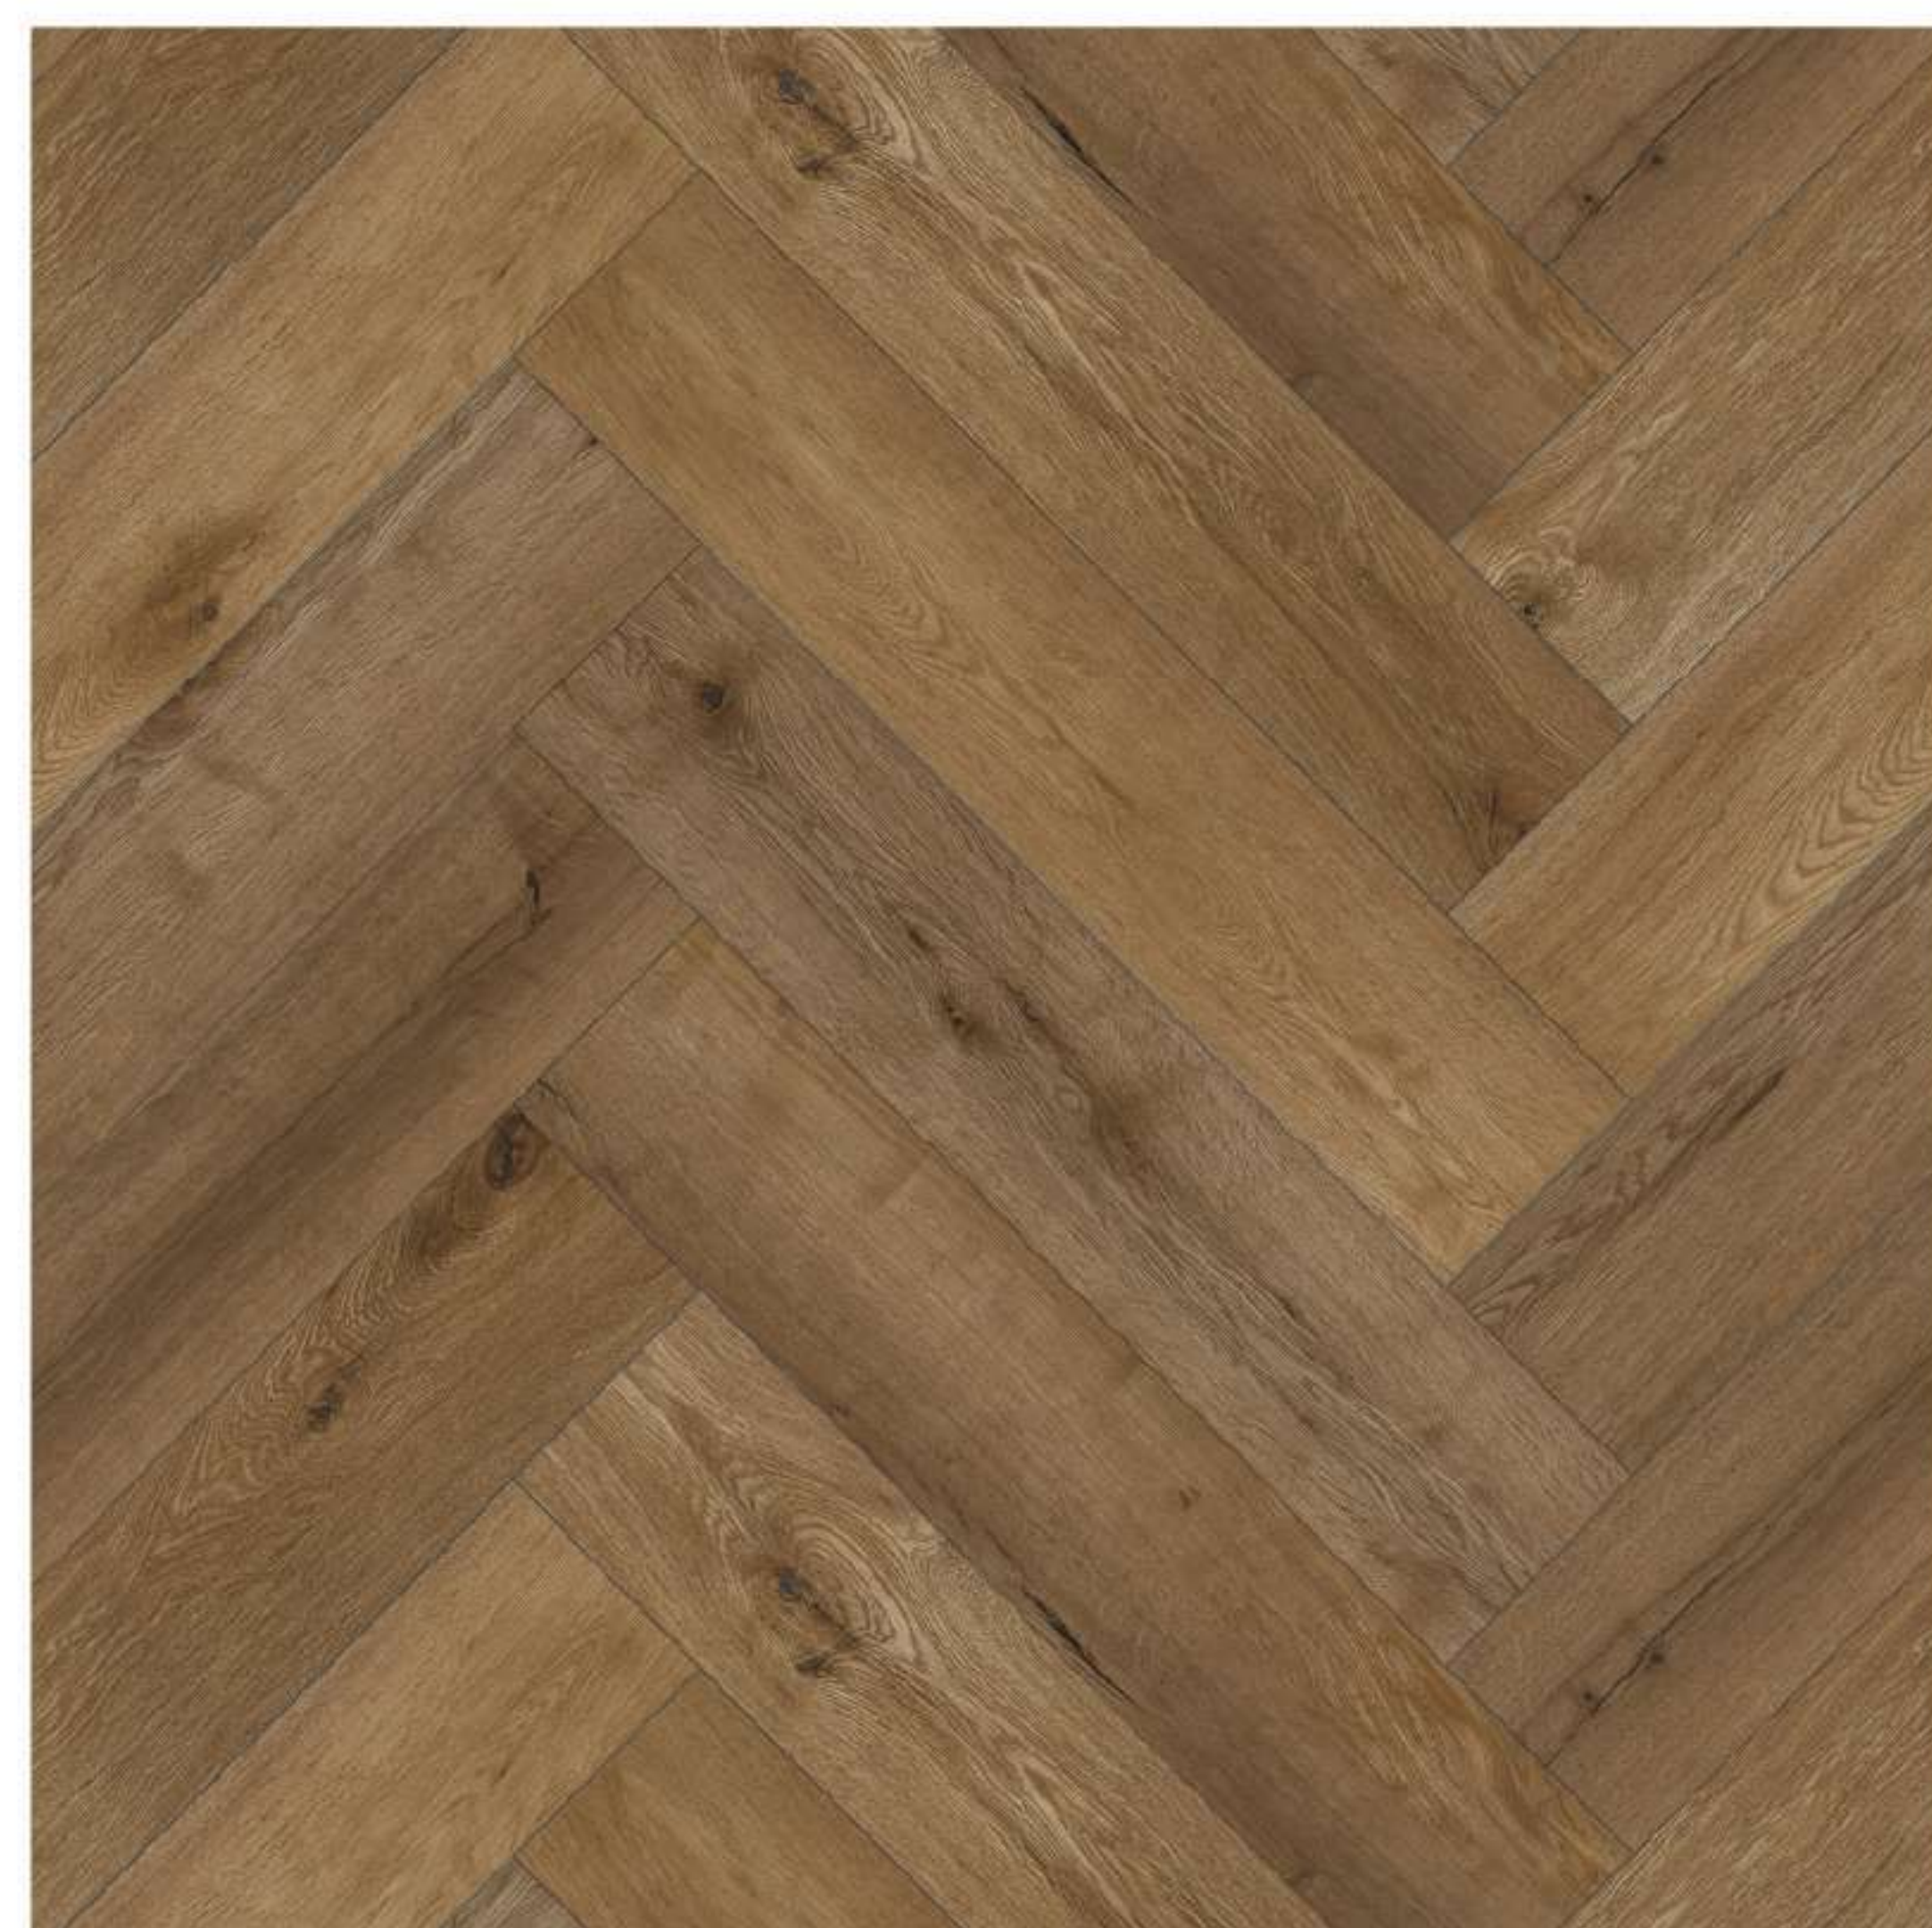



507 BITTER OAK



AC-507-PL | PLANK
228 X 1220 X 6.5 mm



AC-507-HB | HERRINGBONE
150 X 750 X 6.5 mm

507

BITTER OAK



25

AUTHENTIC COLLECTION

508 CROCAN OAK




AC-508-PL | PLANK
228 X 1220 X 6.5 mm



AC-508-HB | HERRINGBONE
150 X 750 X 6.5 mm



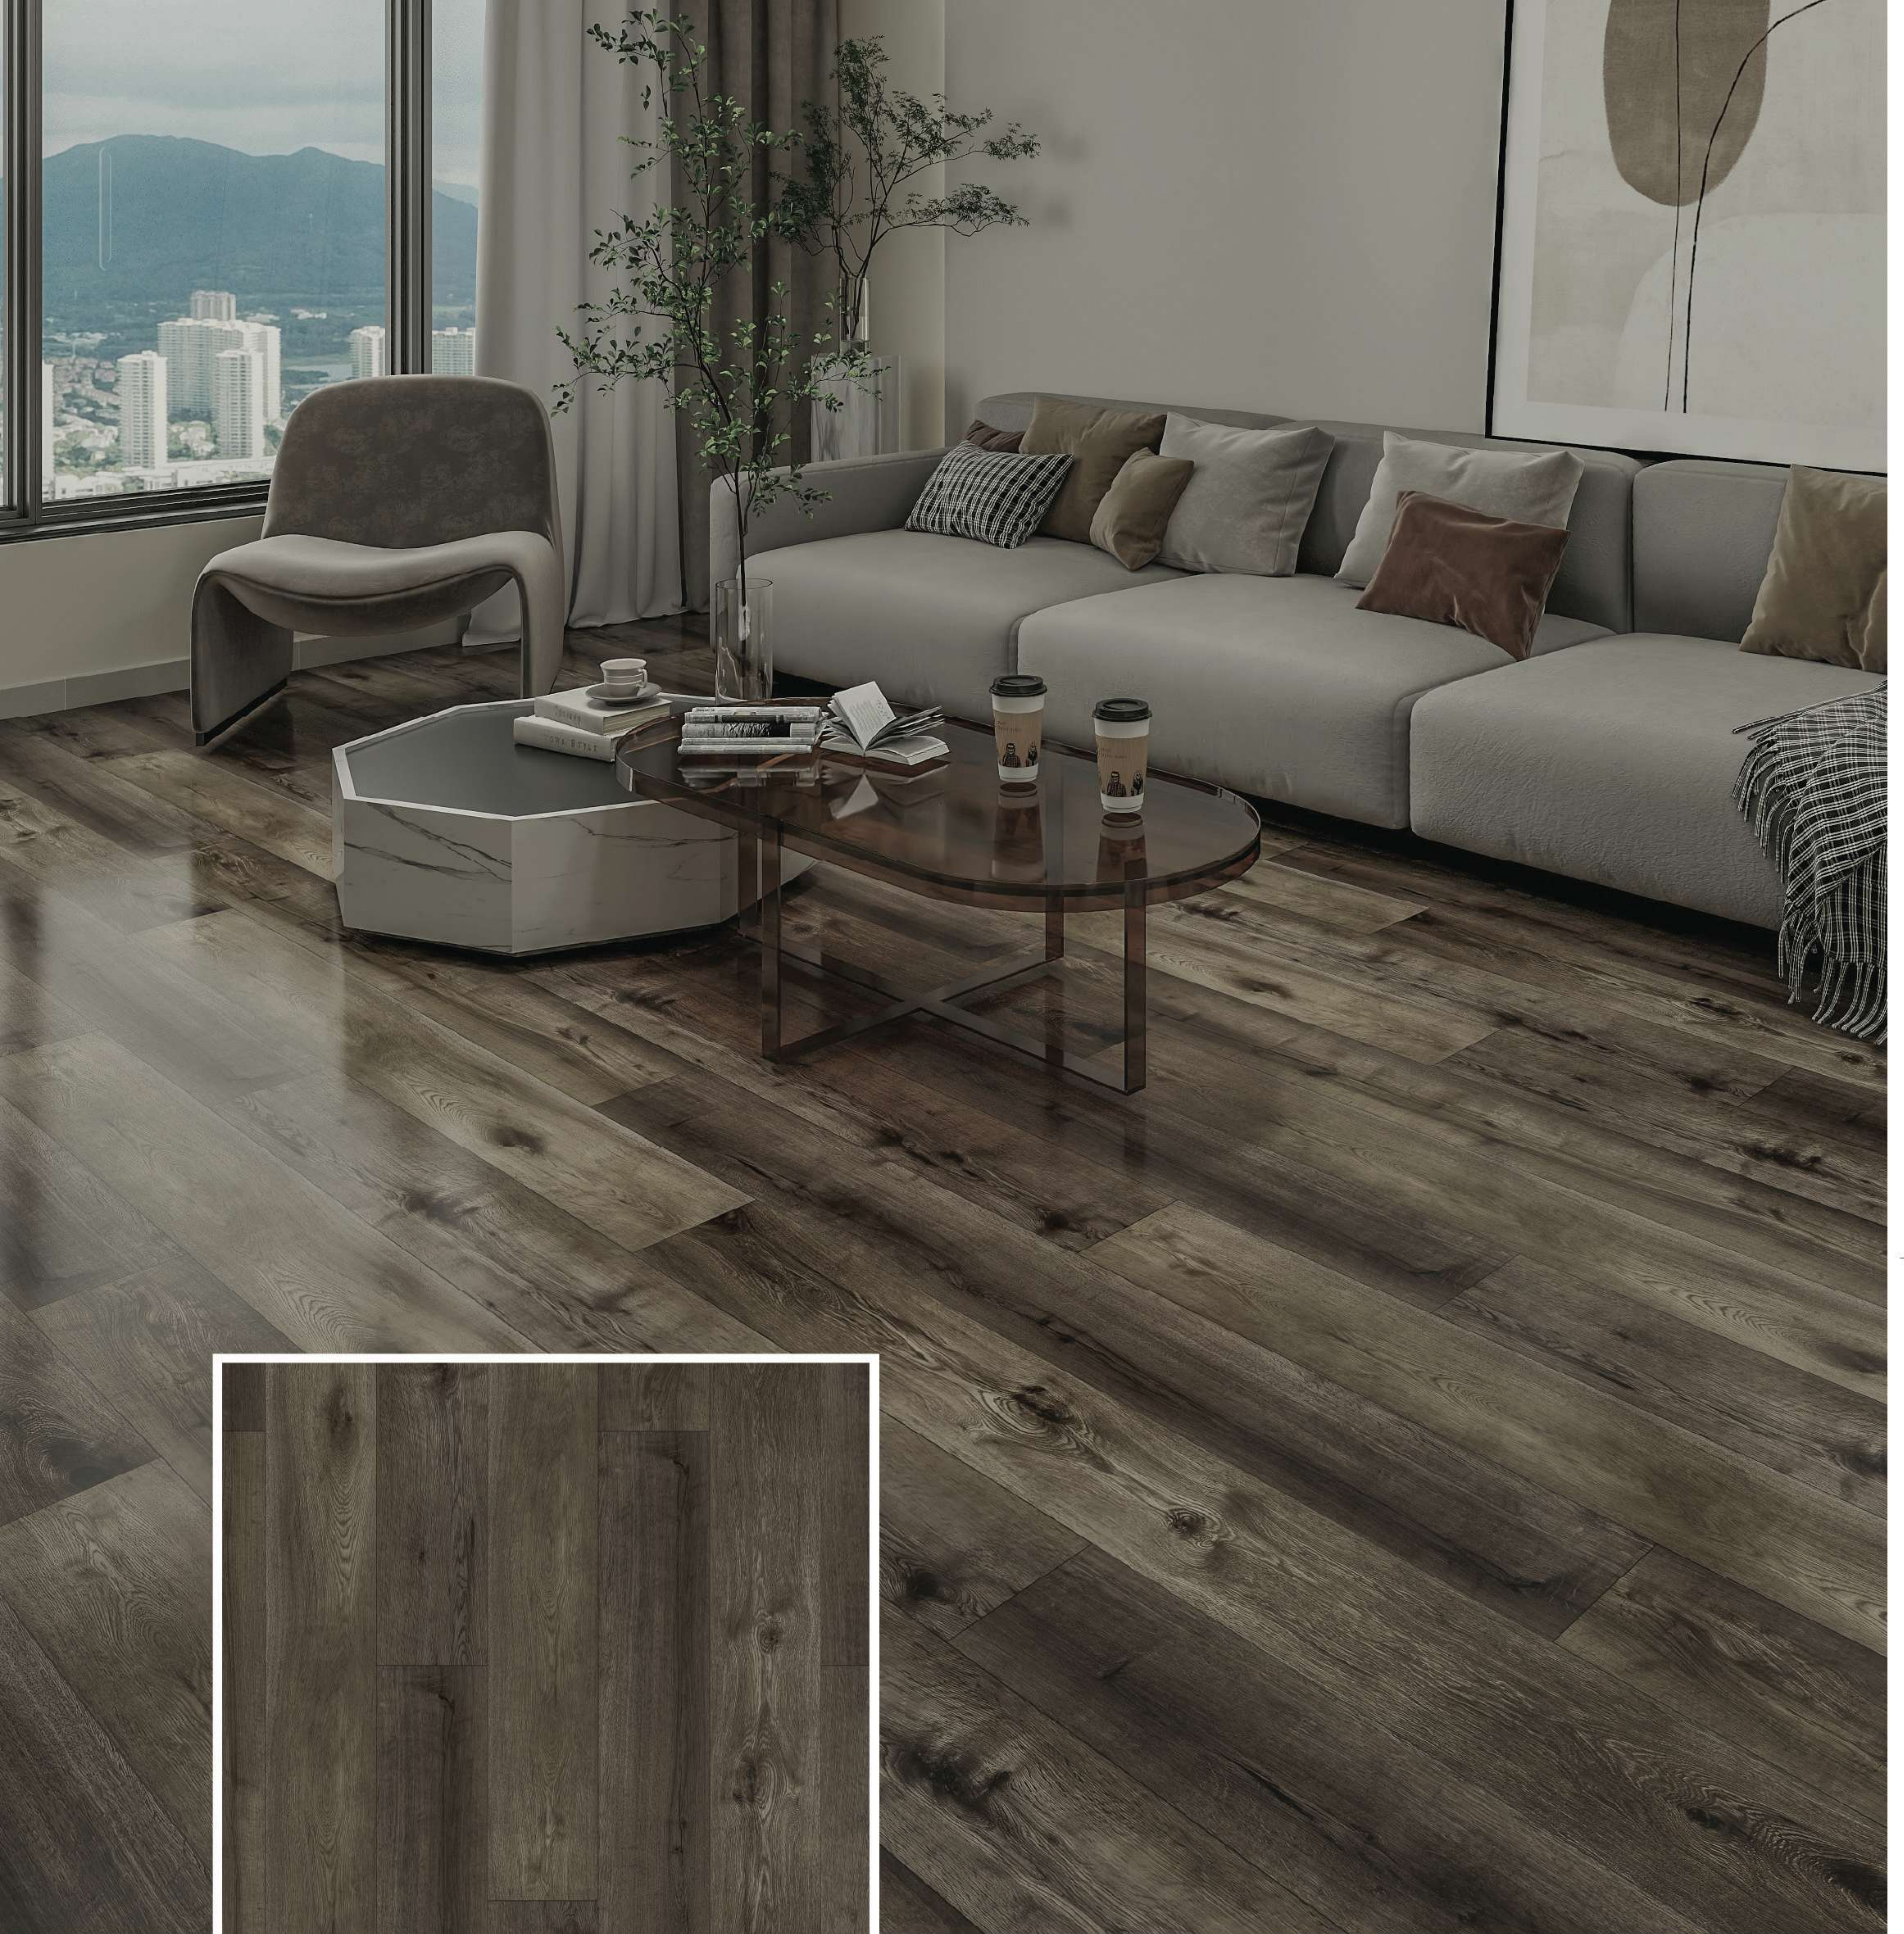


509

SMOKED OAK

27

AUTHENTIC COLLECTION

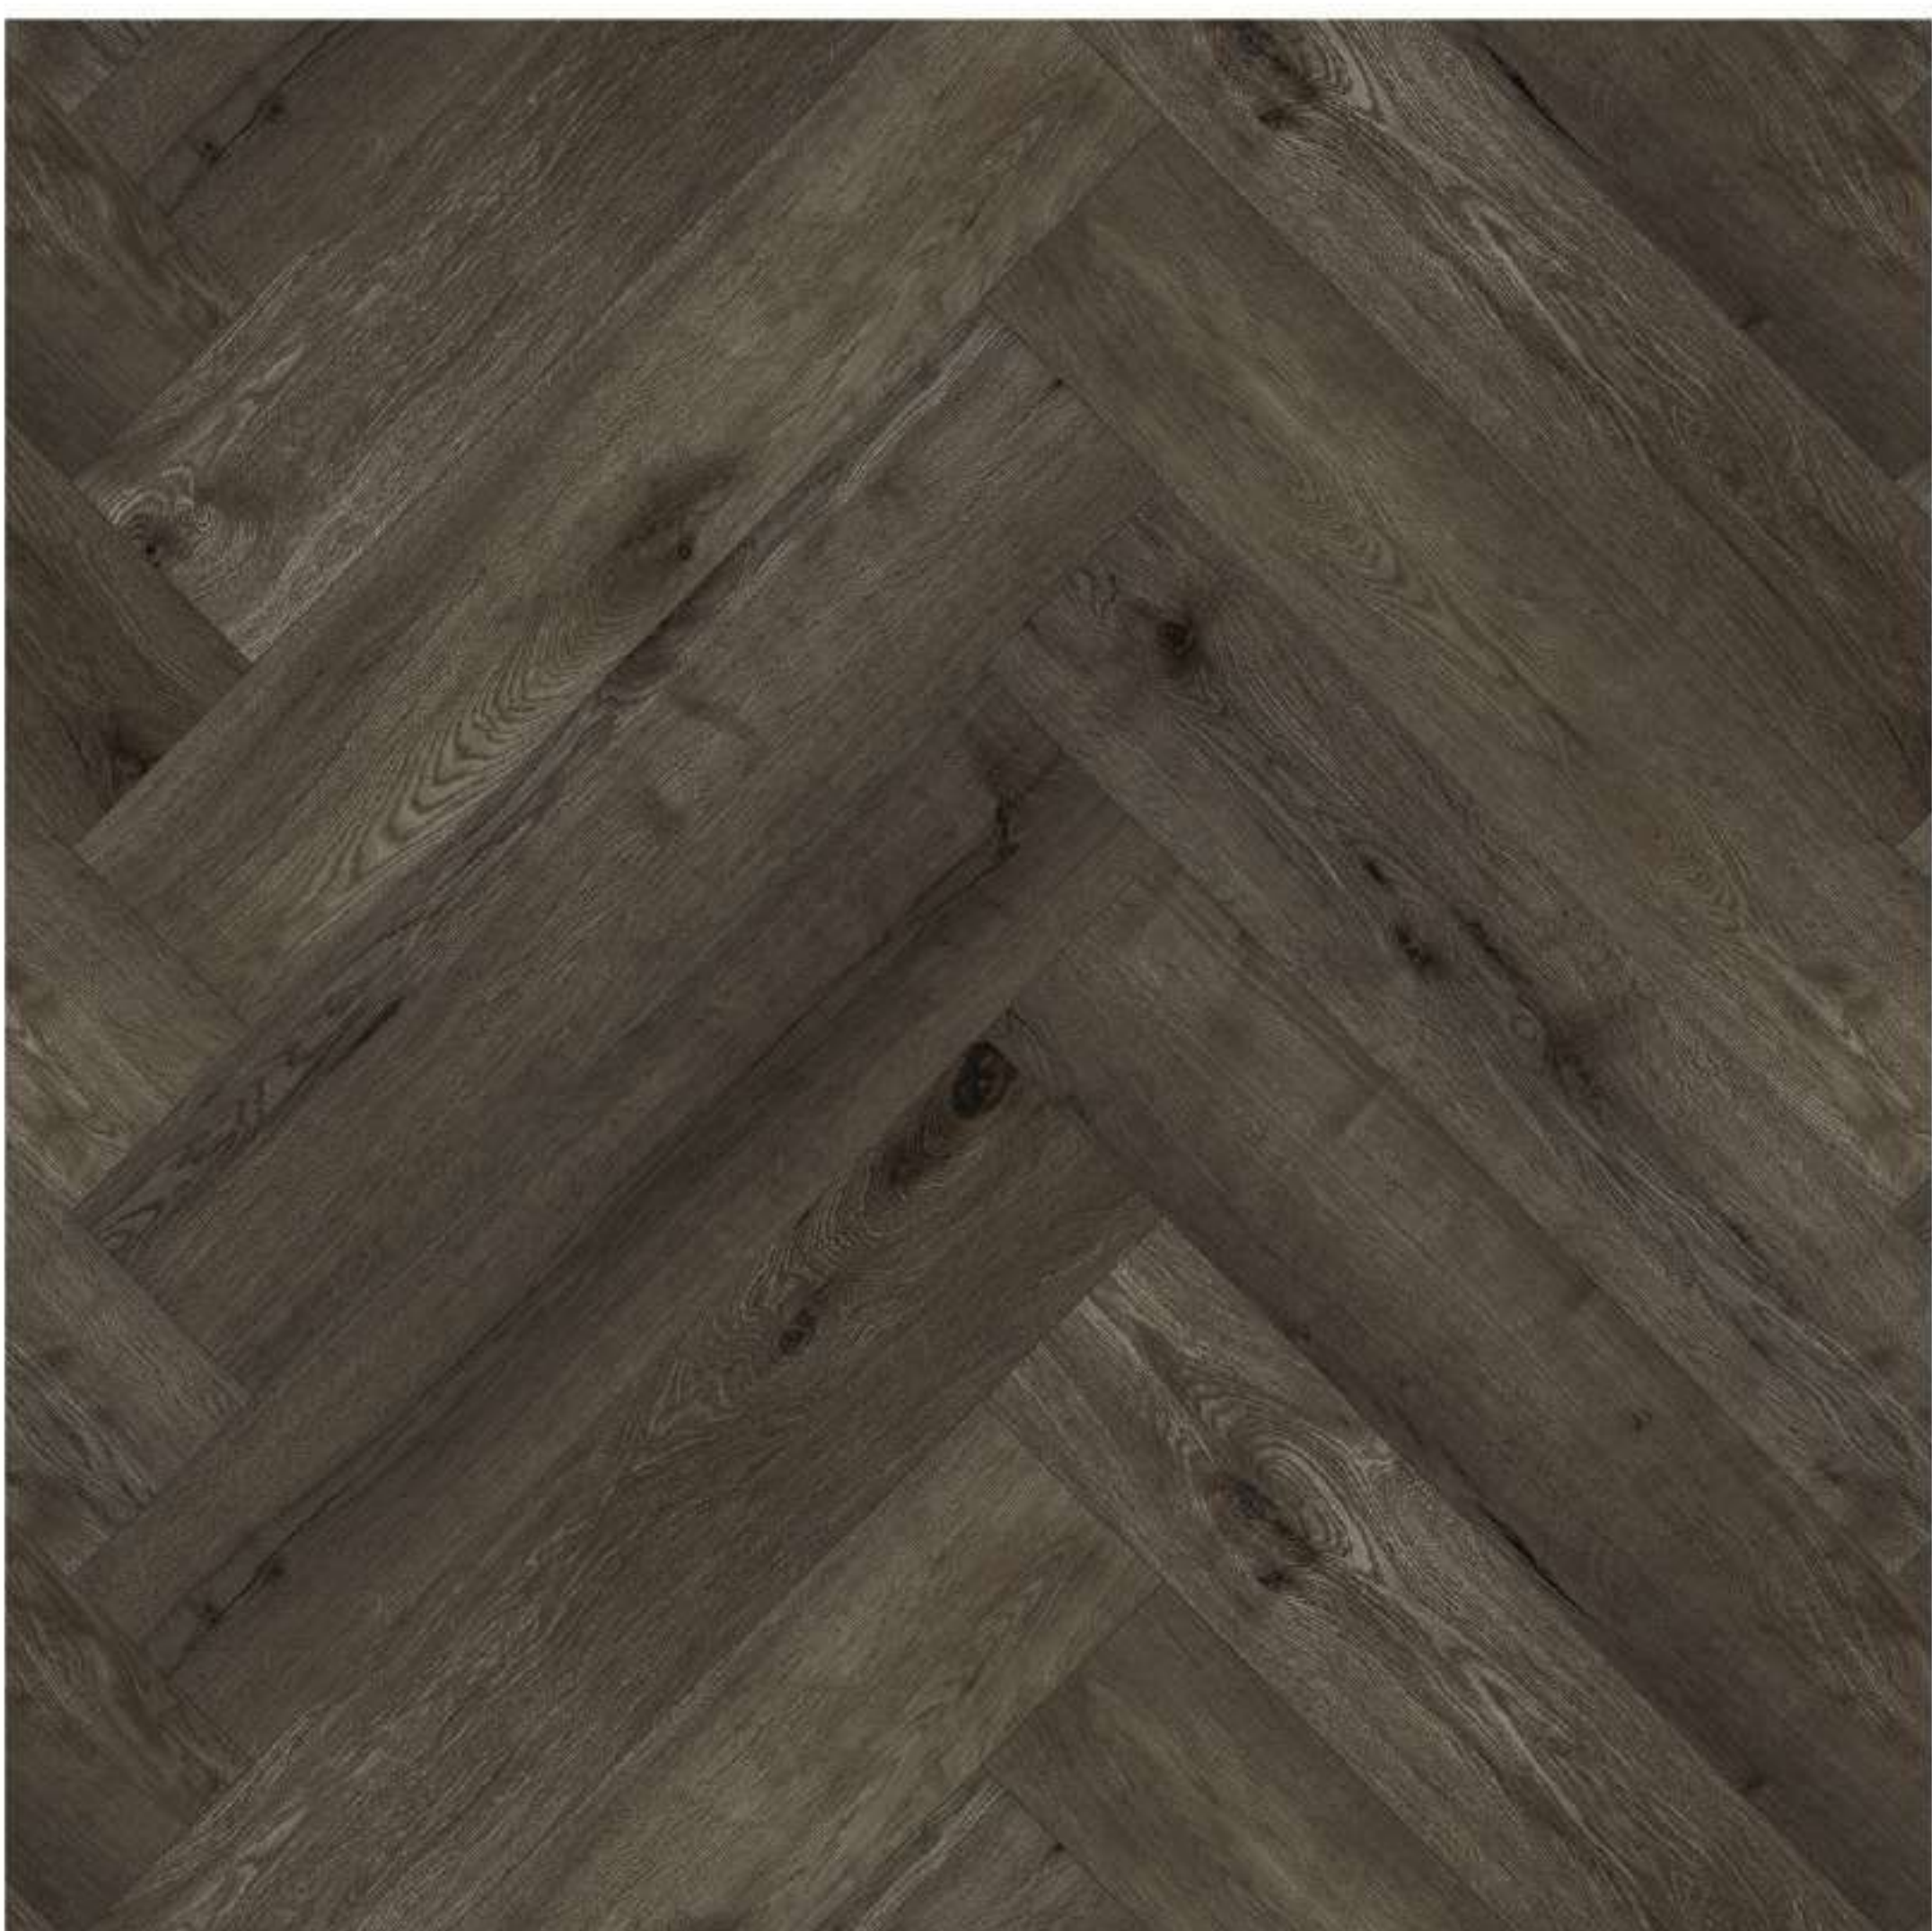

509 SMOKED OAK



AC-509-PL | PLANK
228 X 1220 X 6.5 mm



AC-509-HB | HERRINGBONE
150 X 750 X 6.5 mm




510 COFFEE OAK



AC-510-PL | PLANK
228 X 1220 X 6.5 mm



AC-510-HB | HERRINGBONE
150 X 750 X 6.5 mm

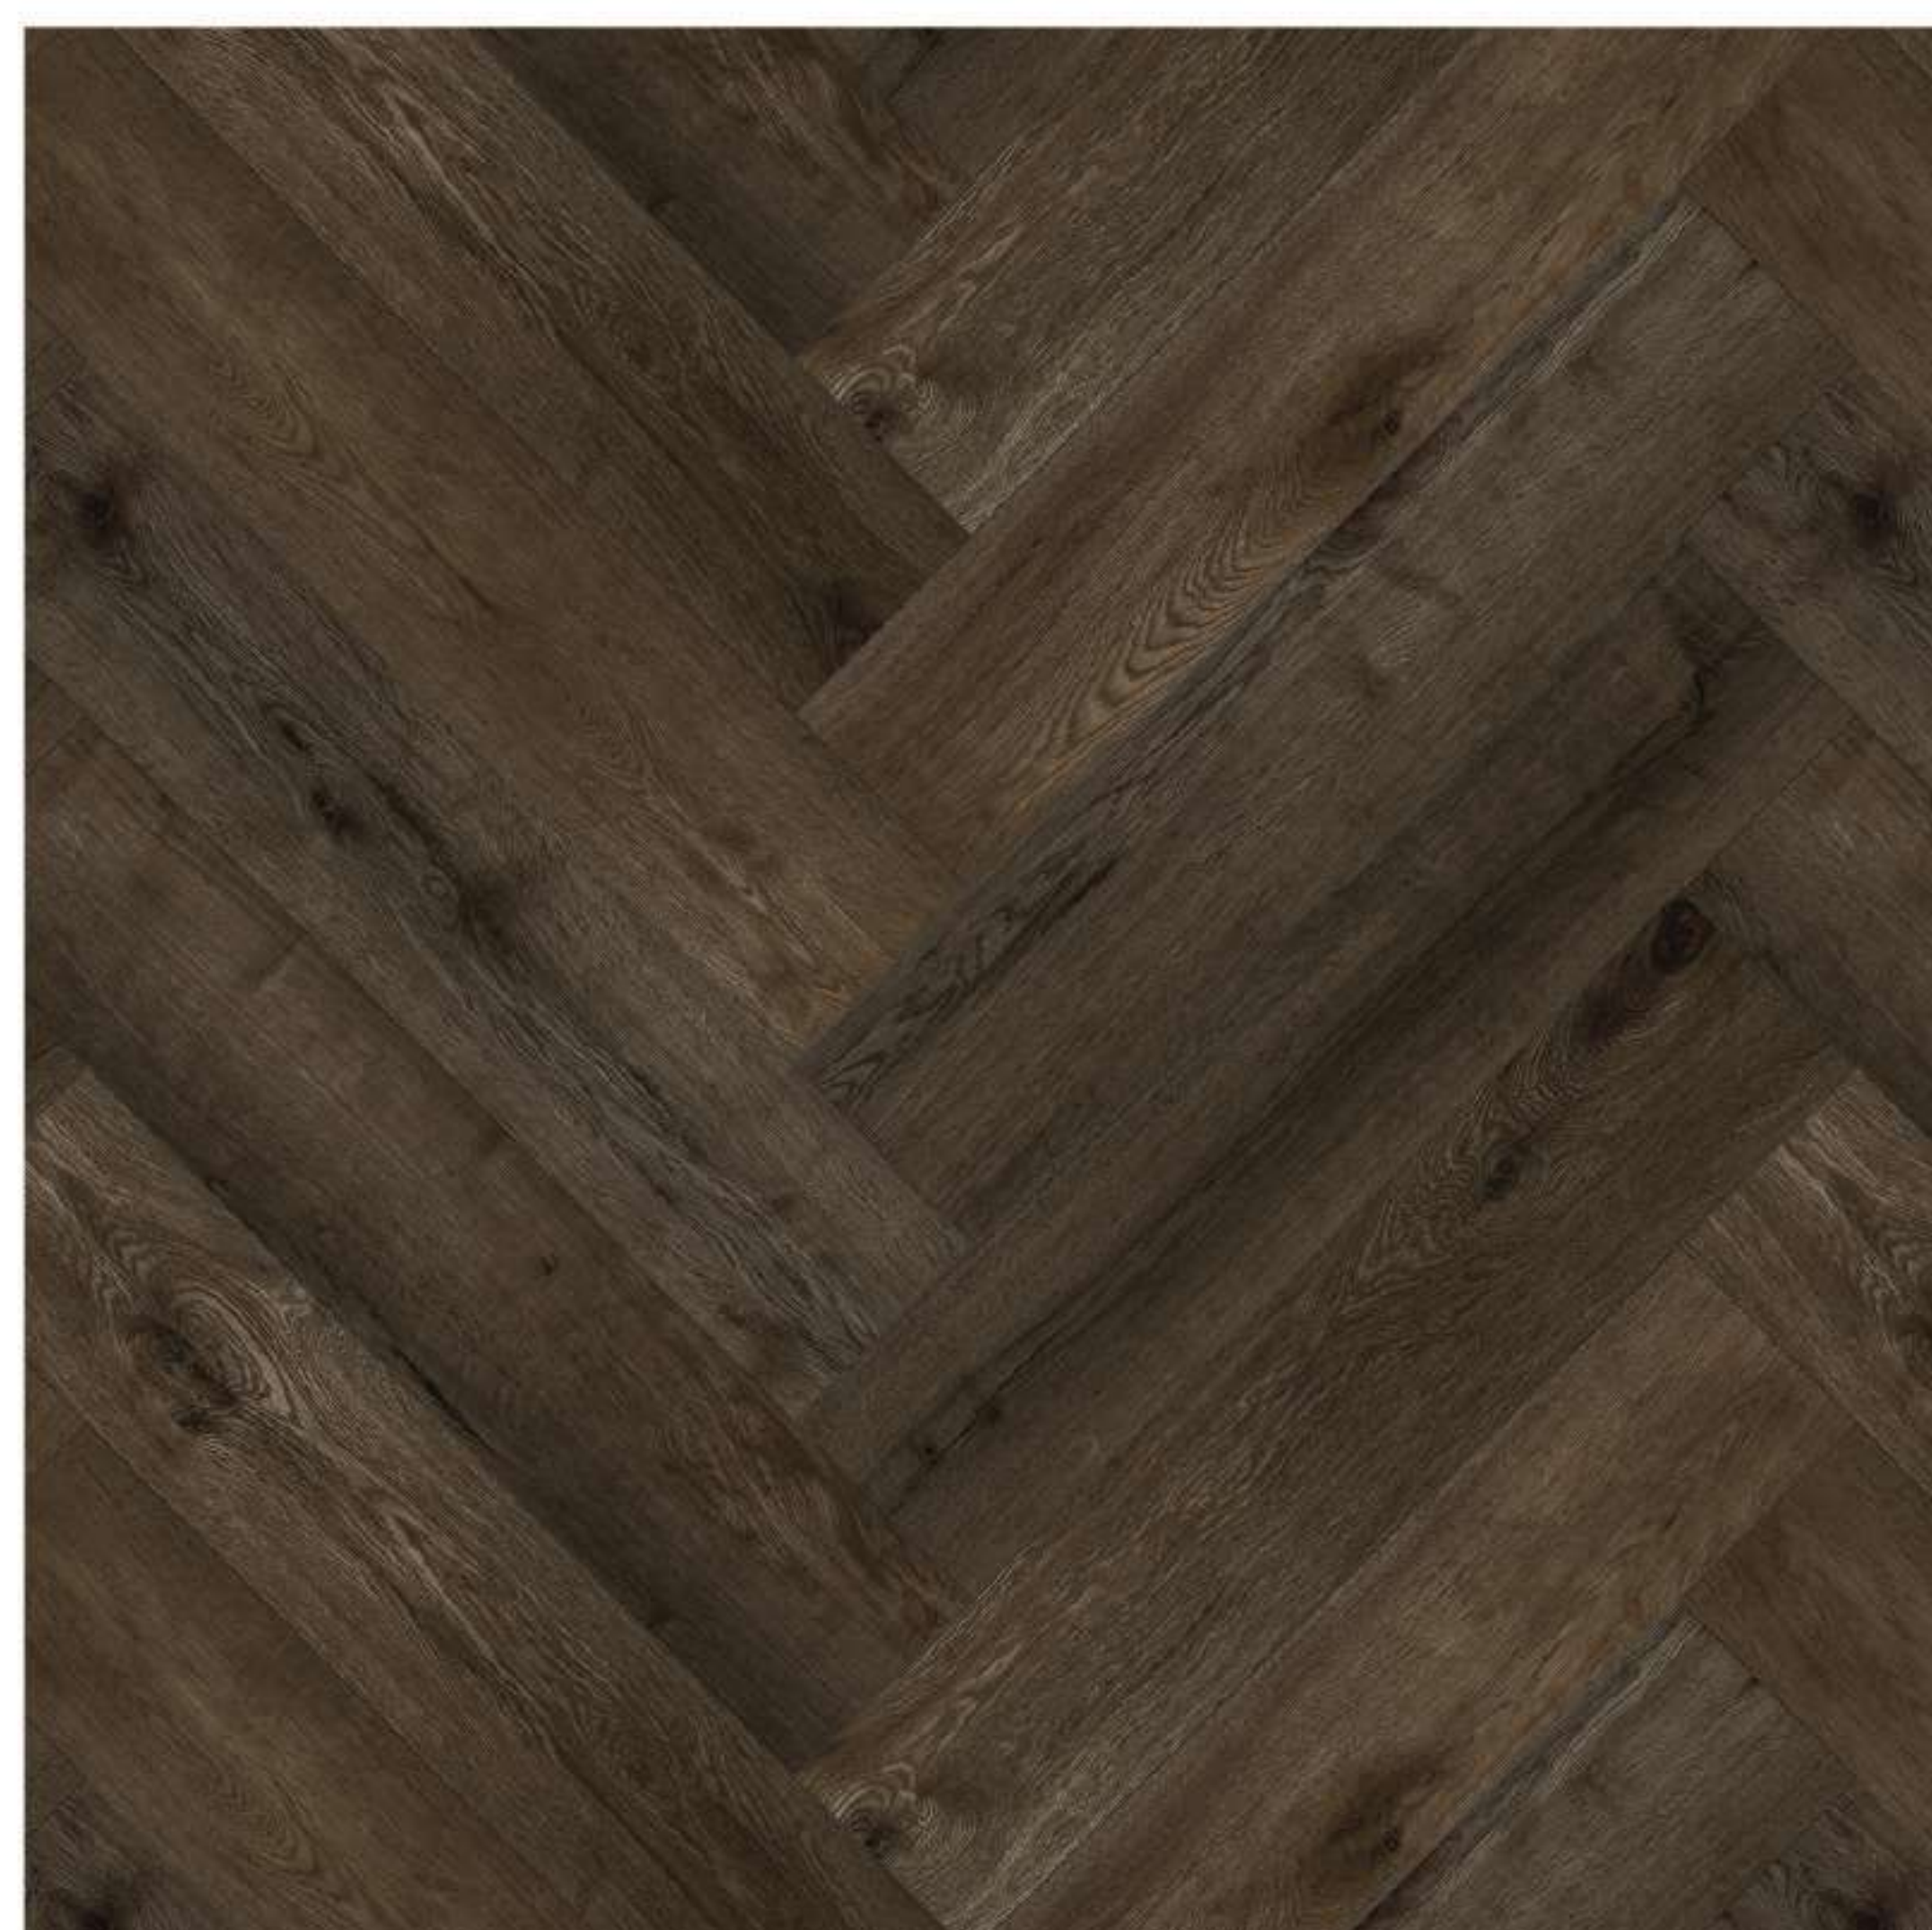

DECOR

DIMENSIONS

EDGE

SURFACE

CLICK

228 X 1220

MICRO BEVEL


EIR

UNICLIC PLANK



PLANK

Package(m²)

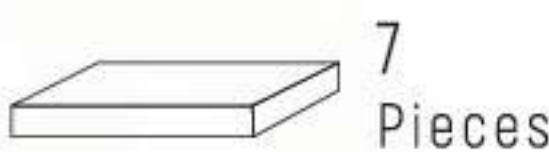

= 1.947 m²

= 20,250 kg

Palette (m²)



= 85,673 m²

= 911,002 kg

Warranty(Year)

Residential
20

Commercial
7

DECOR

DIMENSIONS

EDGE

SURFACE

CLICK

150 X 750

MICRO BEVEL


EIR

UNIDROP HERRINGBONE



HERRINGBONE

Package(m²)

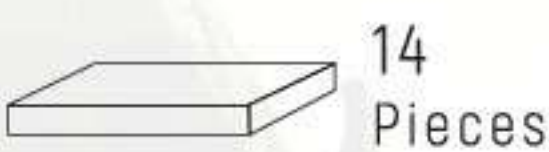

= 1.575 m²

= 16,380 kg

Palette (m²)



= 88,200 m²

= 937,280 kg

Warranty(Year)

Residential
20

Commercial
7

DIAMONDS

New Generation Flooring
www.areafloors.com.tr

DIAMONDS

by

AREA FLOORS

Elevate Your Home Experience


Diamonds transforms your homes with SPC Flooring products that seamlessly blend luxury and quality. Specifically designed for homes, families and lifestyles, these floors combine aesthetics and durability brilliantly.

Diamonds SPC Flooring not only helps beautify your homes but also prioritizes your family's health. With its hygienic and easy-to-clean surfaces, it enables a more comfortable and healthy living environment.


Our quality ensures each panel is meticulously manufactured, guaranteeing years of durability. When you redesign your home with Diamonds SPC Flooring, you'll find elegance and aesthetics right under your feet. These products not only enhance your homes but also make the time you spend with your family more special.

Change your home's flooring with Diamond SPC Flooring and indulge in the luxury, quality and warmth it brings.

Durability & Luxury Beyond Imagination

-  Antislip
-  Pet Friendly
-  Antibacterial
-  Sound Absorbent
-  Wear Resistance
-  Ultra Matte Surface
-  Moisture Resistance
-  High Density Underlay
-  Suitable for Underfloor Heating

- Wear Layer** ● 0,5 mm
- Underlay** ● 1 mm
- Surface** ● Eir
- Total Thickness** ● 6 mm
- Edge** ● Micro Bevel

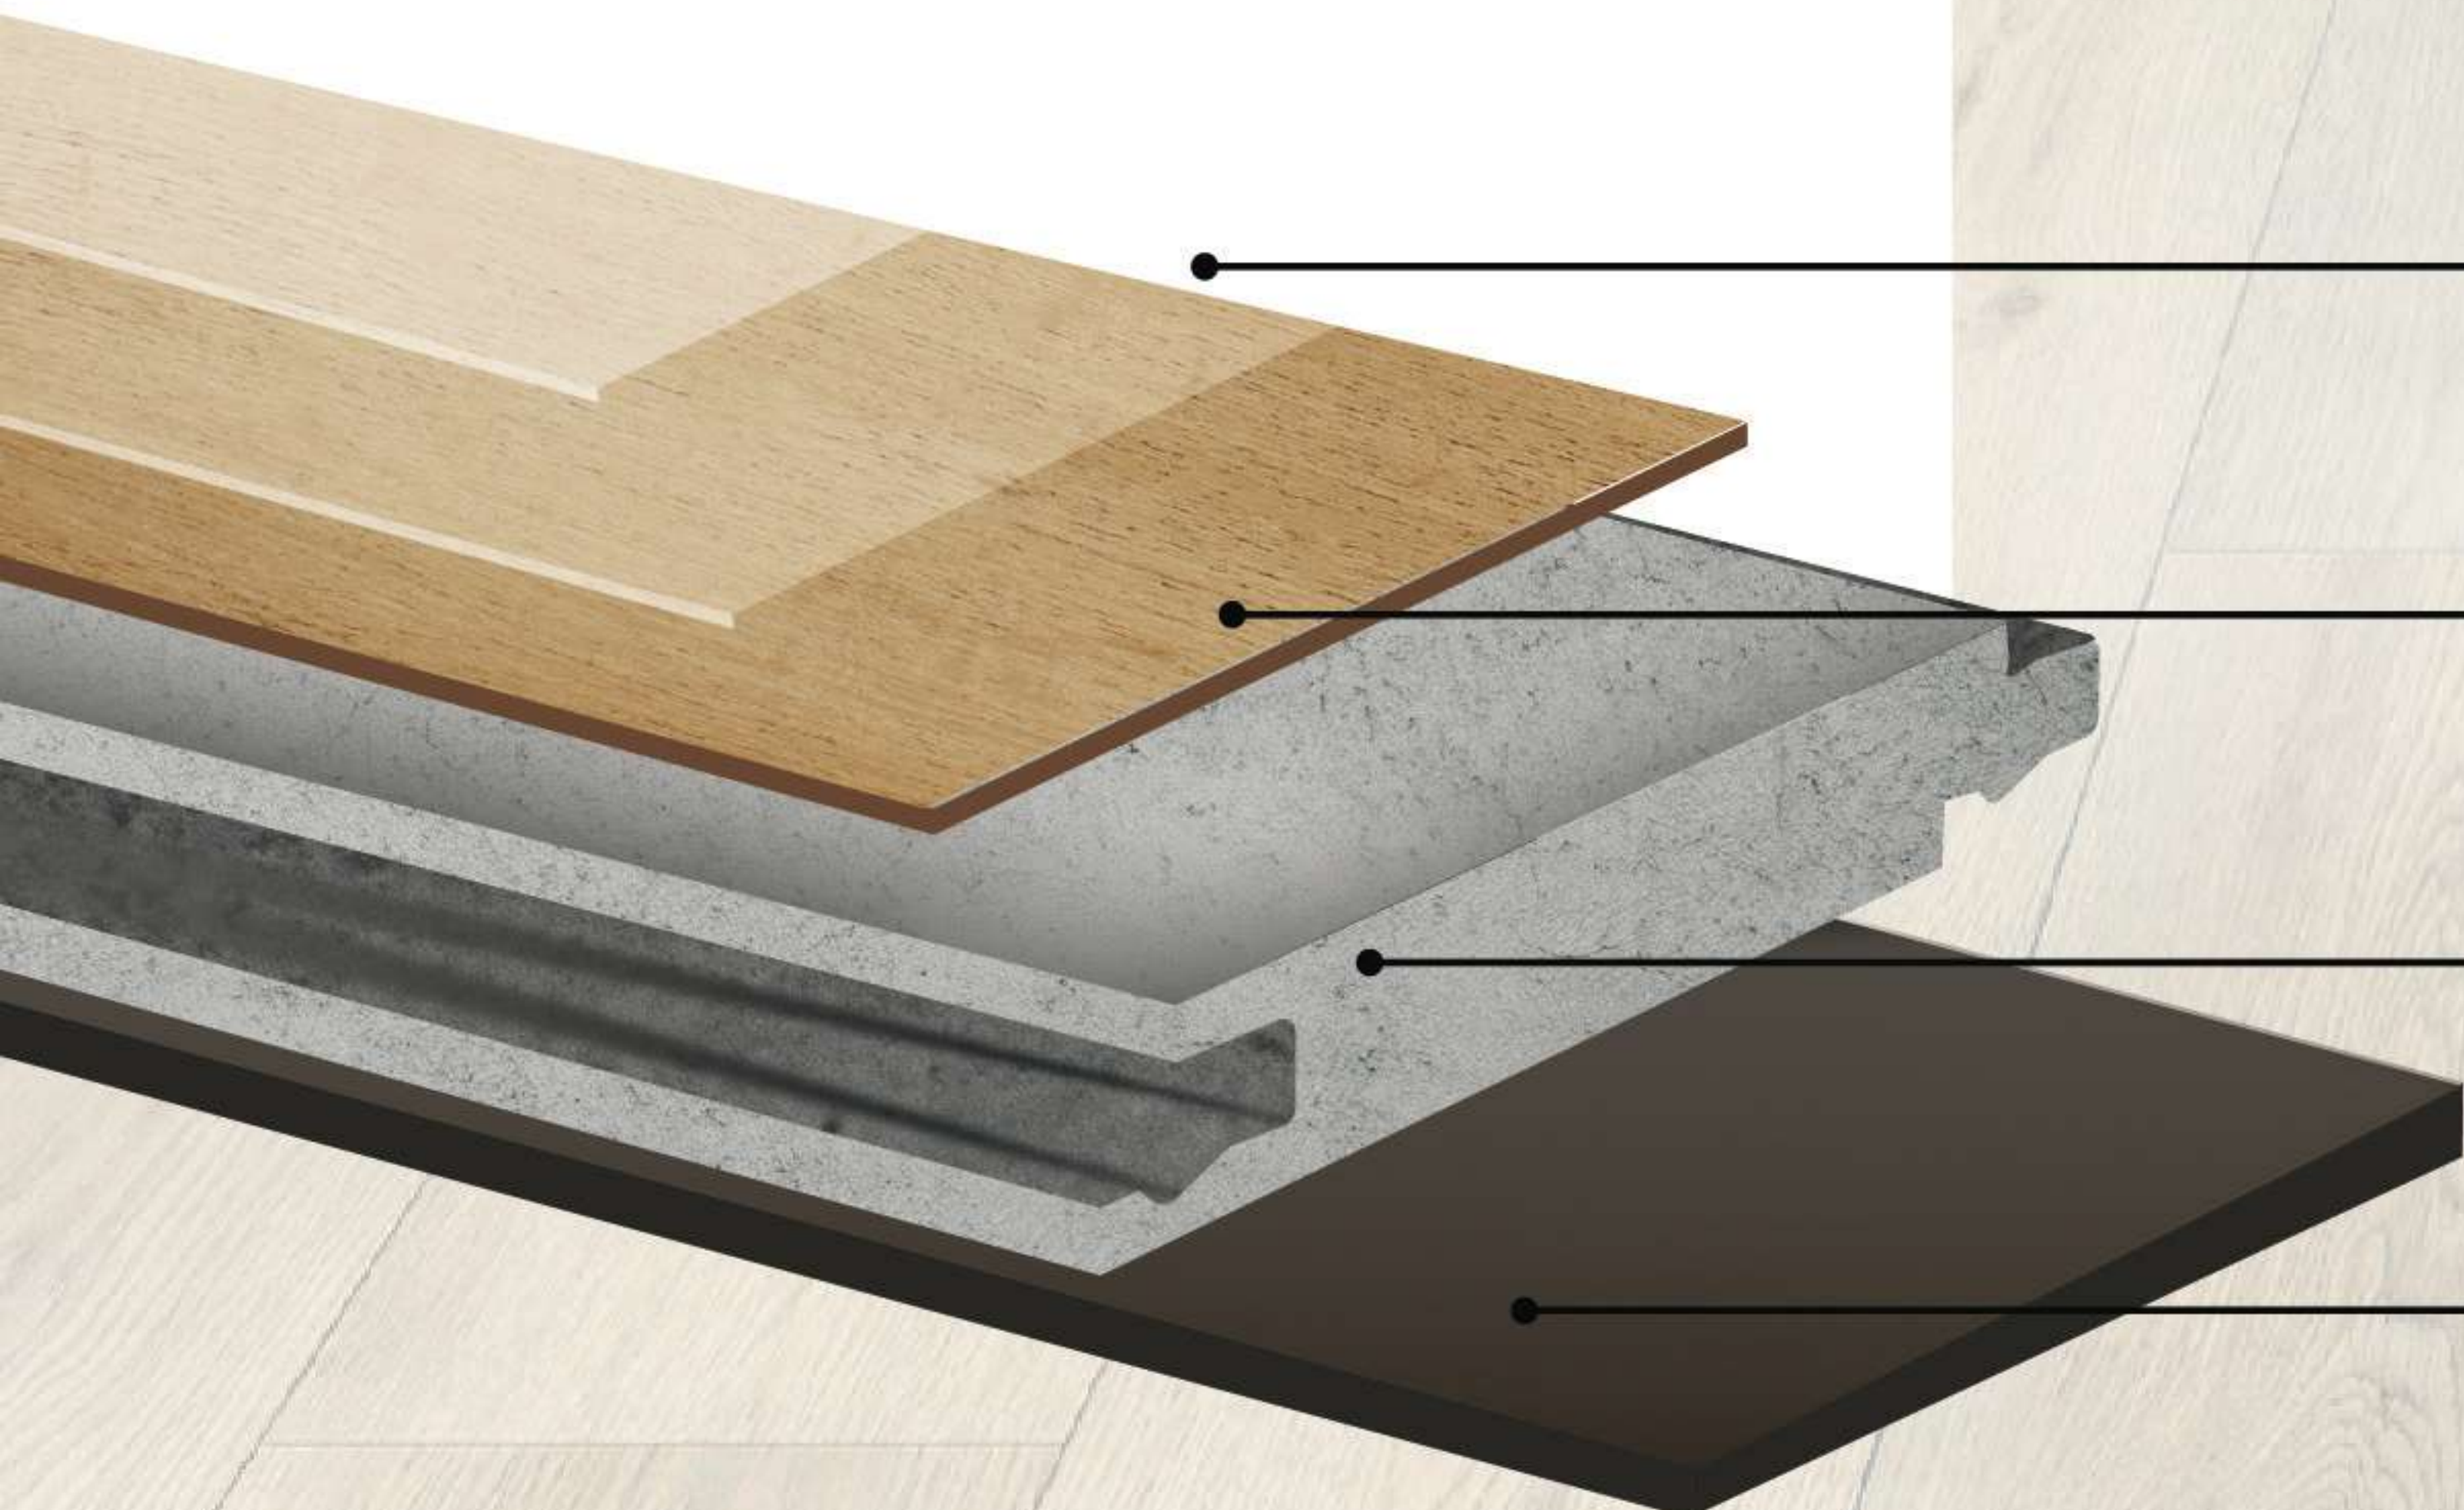

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core


High Density
Underlayment



228mm
1220 mm



150 mm
750 mm

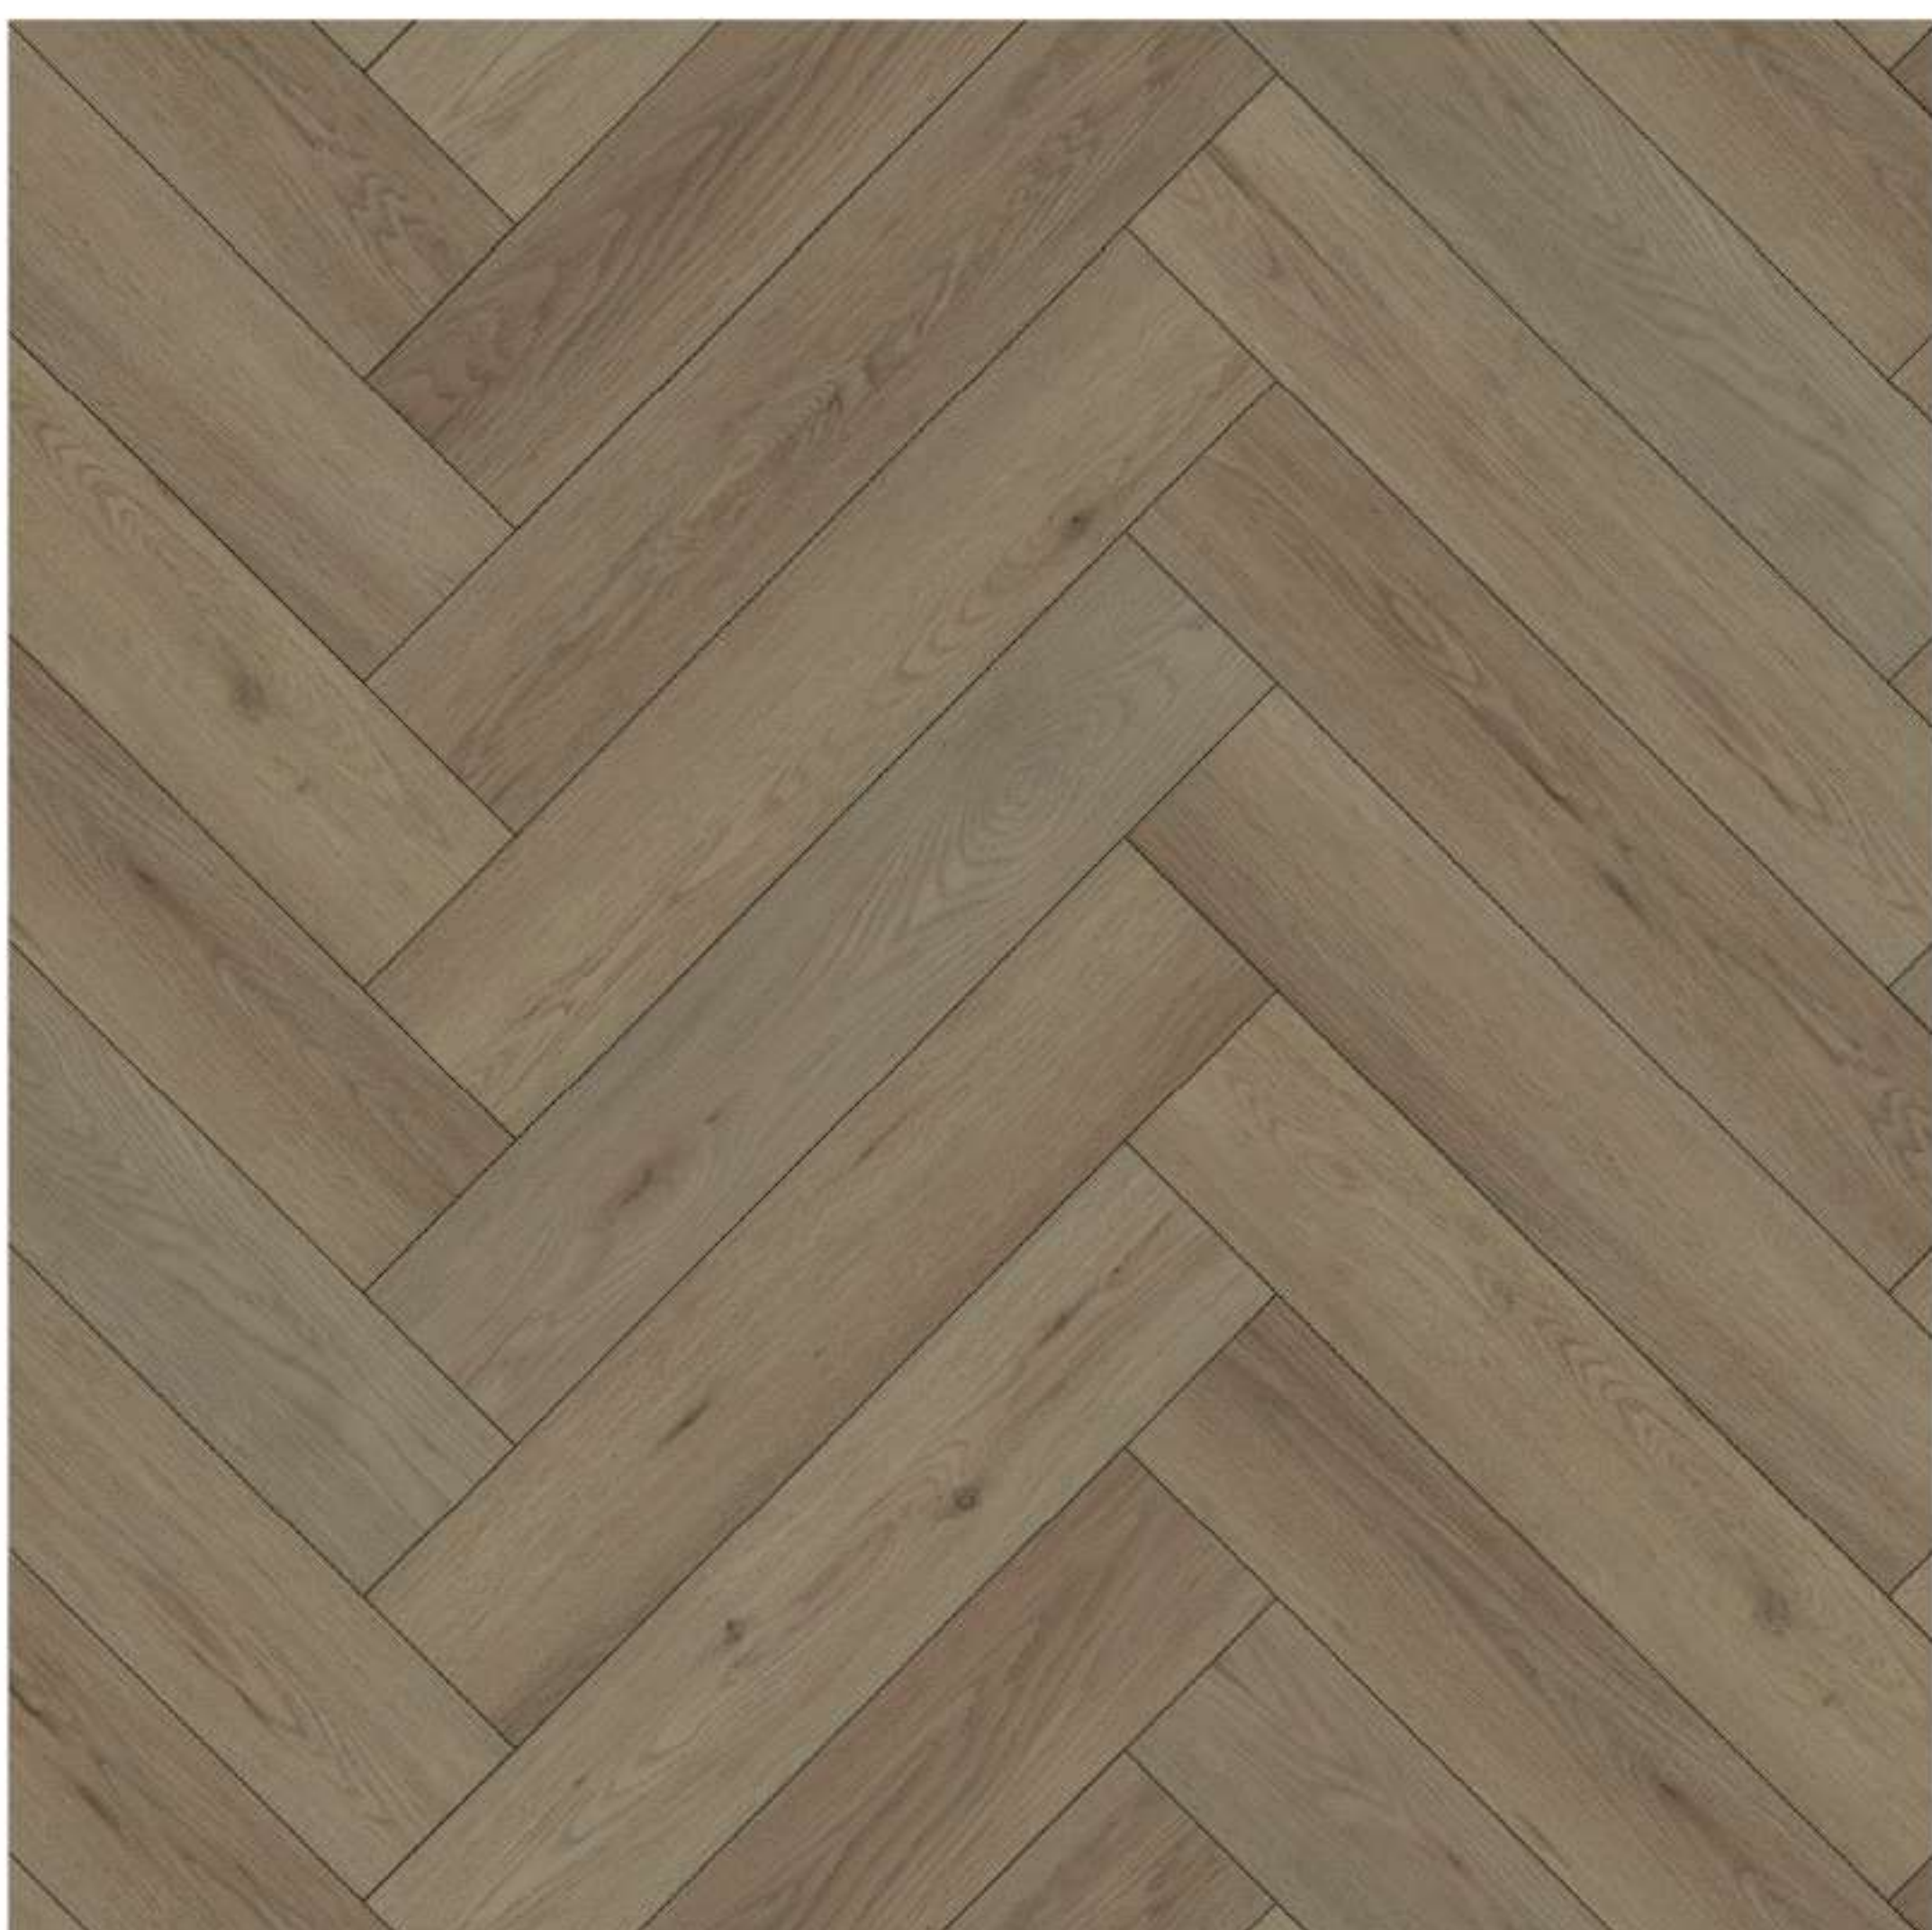

301 RUBY



DM-301-PL | PLANK
228 X 1220 X 6 mm



DM-301-HB | HERRINGBONE
150 X 750 X 6 mm




302LESEDI



DM-302-PL | PLANK
228 X 1220 X 6 mm



DM-302-HB | HERRINGBONE
150 X 750 X 6 mm

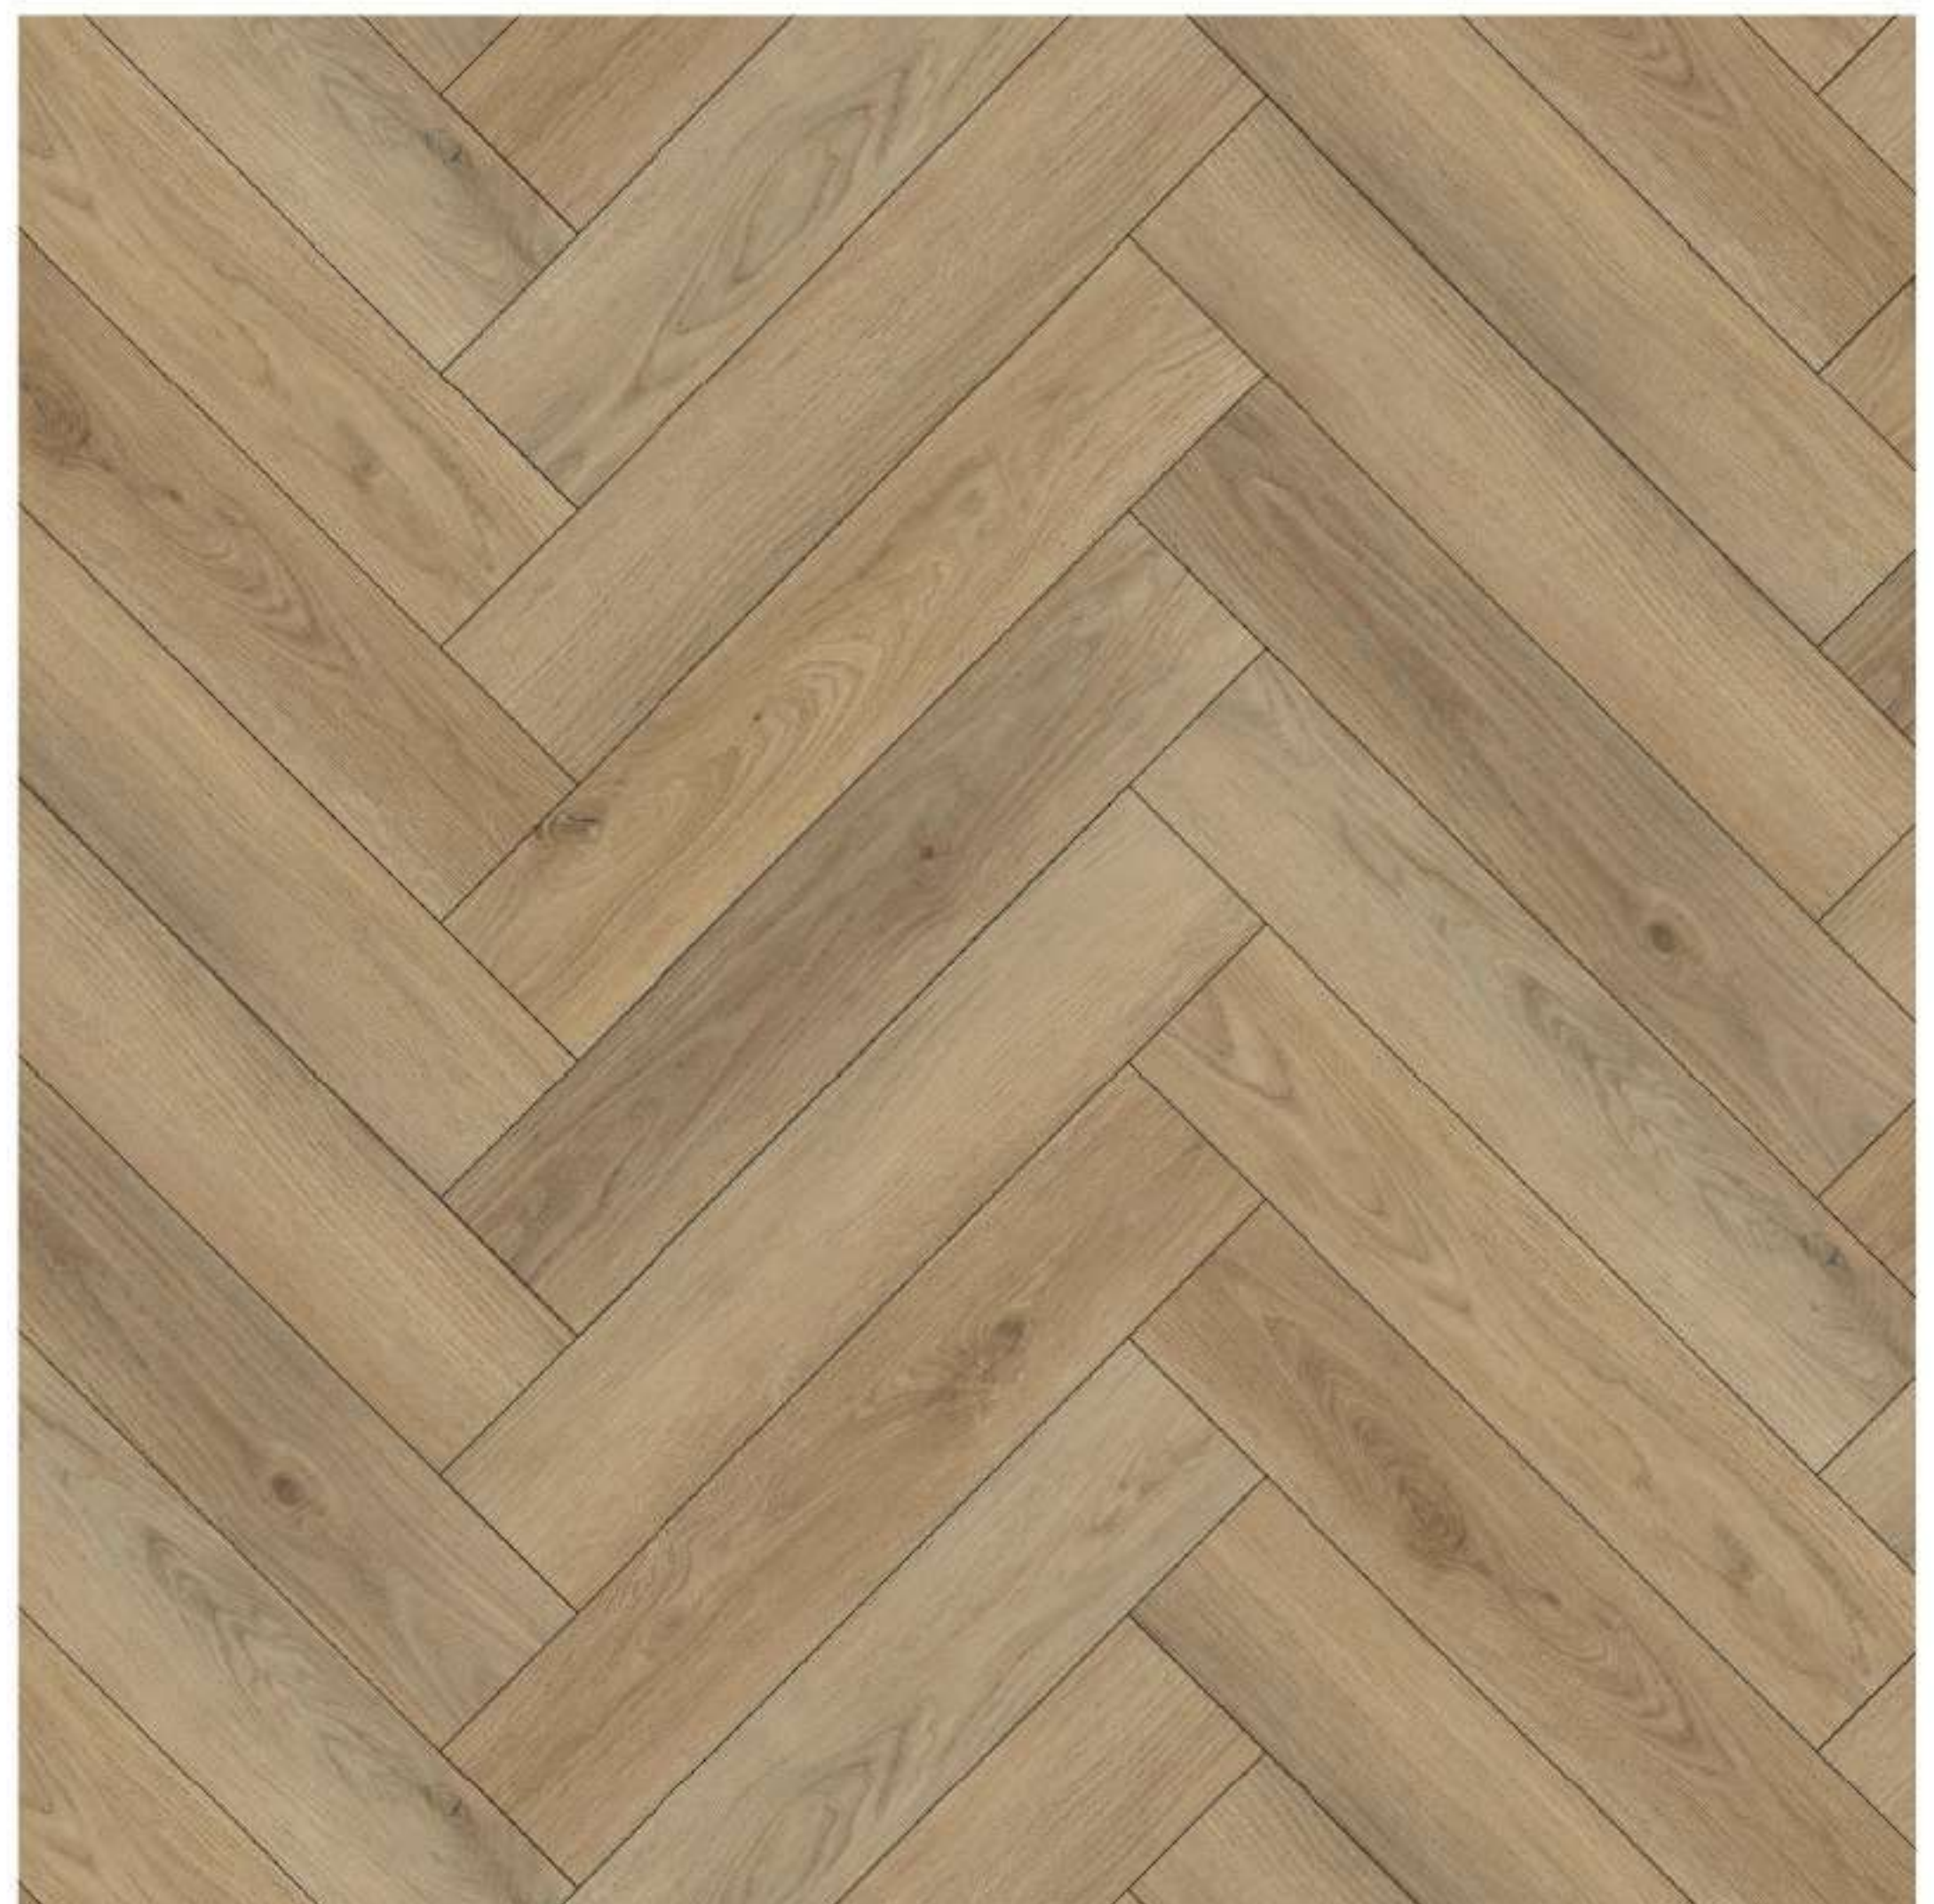



303 EXCELSIOR



DM-303-PL | PLANK
228 X 1220 X 6 mm



DM-303-HB | HERRINGBONE
150 X 750 X 6 mm

EXCELSIOR 303



35

DIAMOND COLLECTION



304 ETERNITY



DM-304-PL | PLANK
228 X 1220 X 6 mm



DM-304-HB | HERRINGBONE
150 X 750 X 6 mm

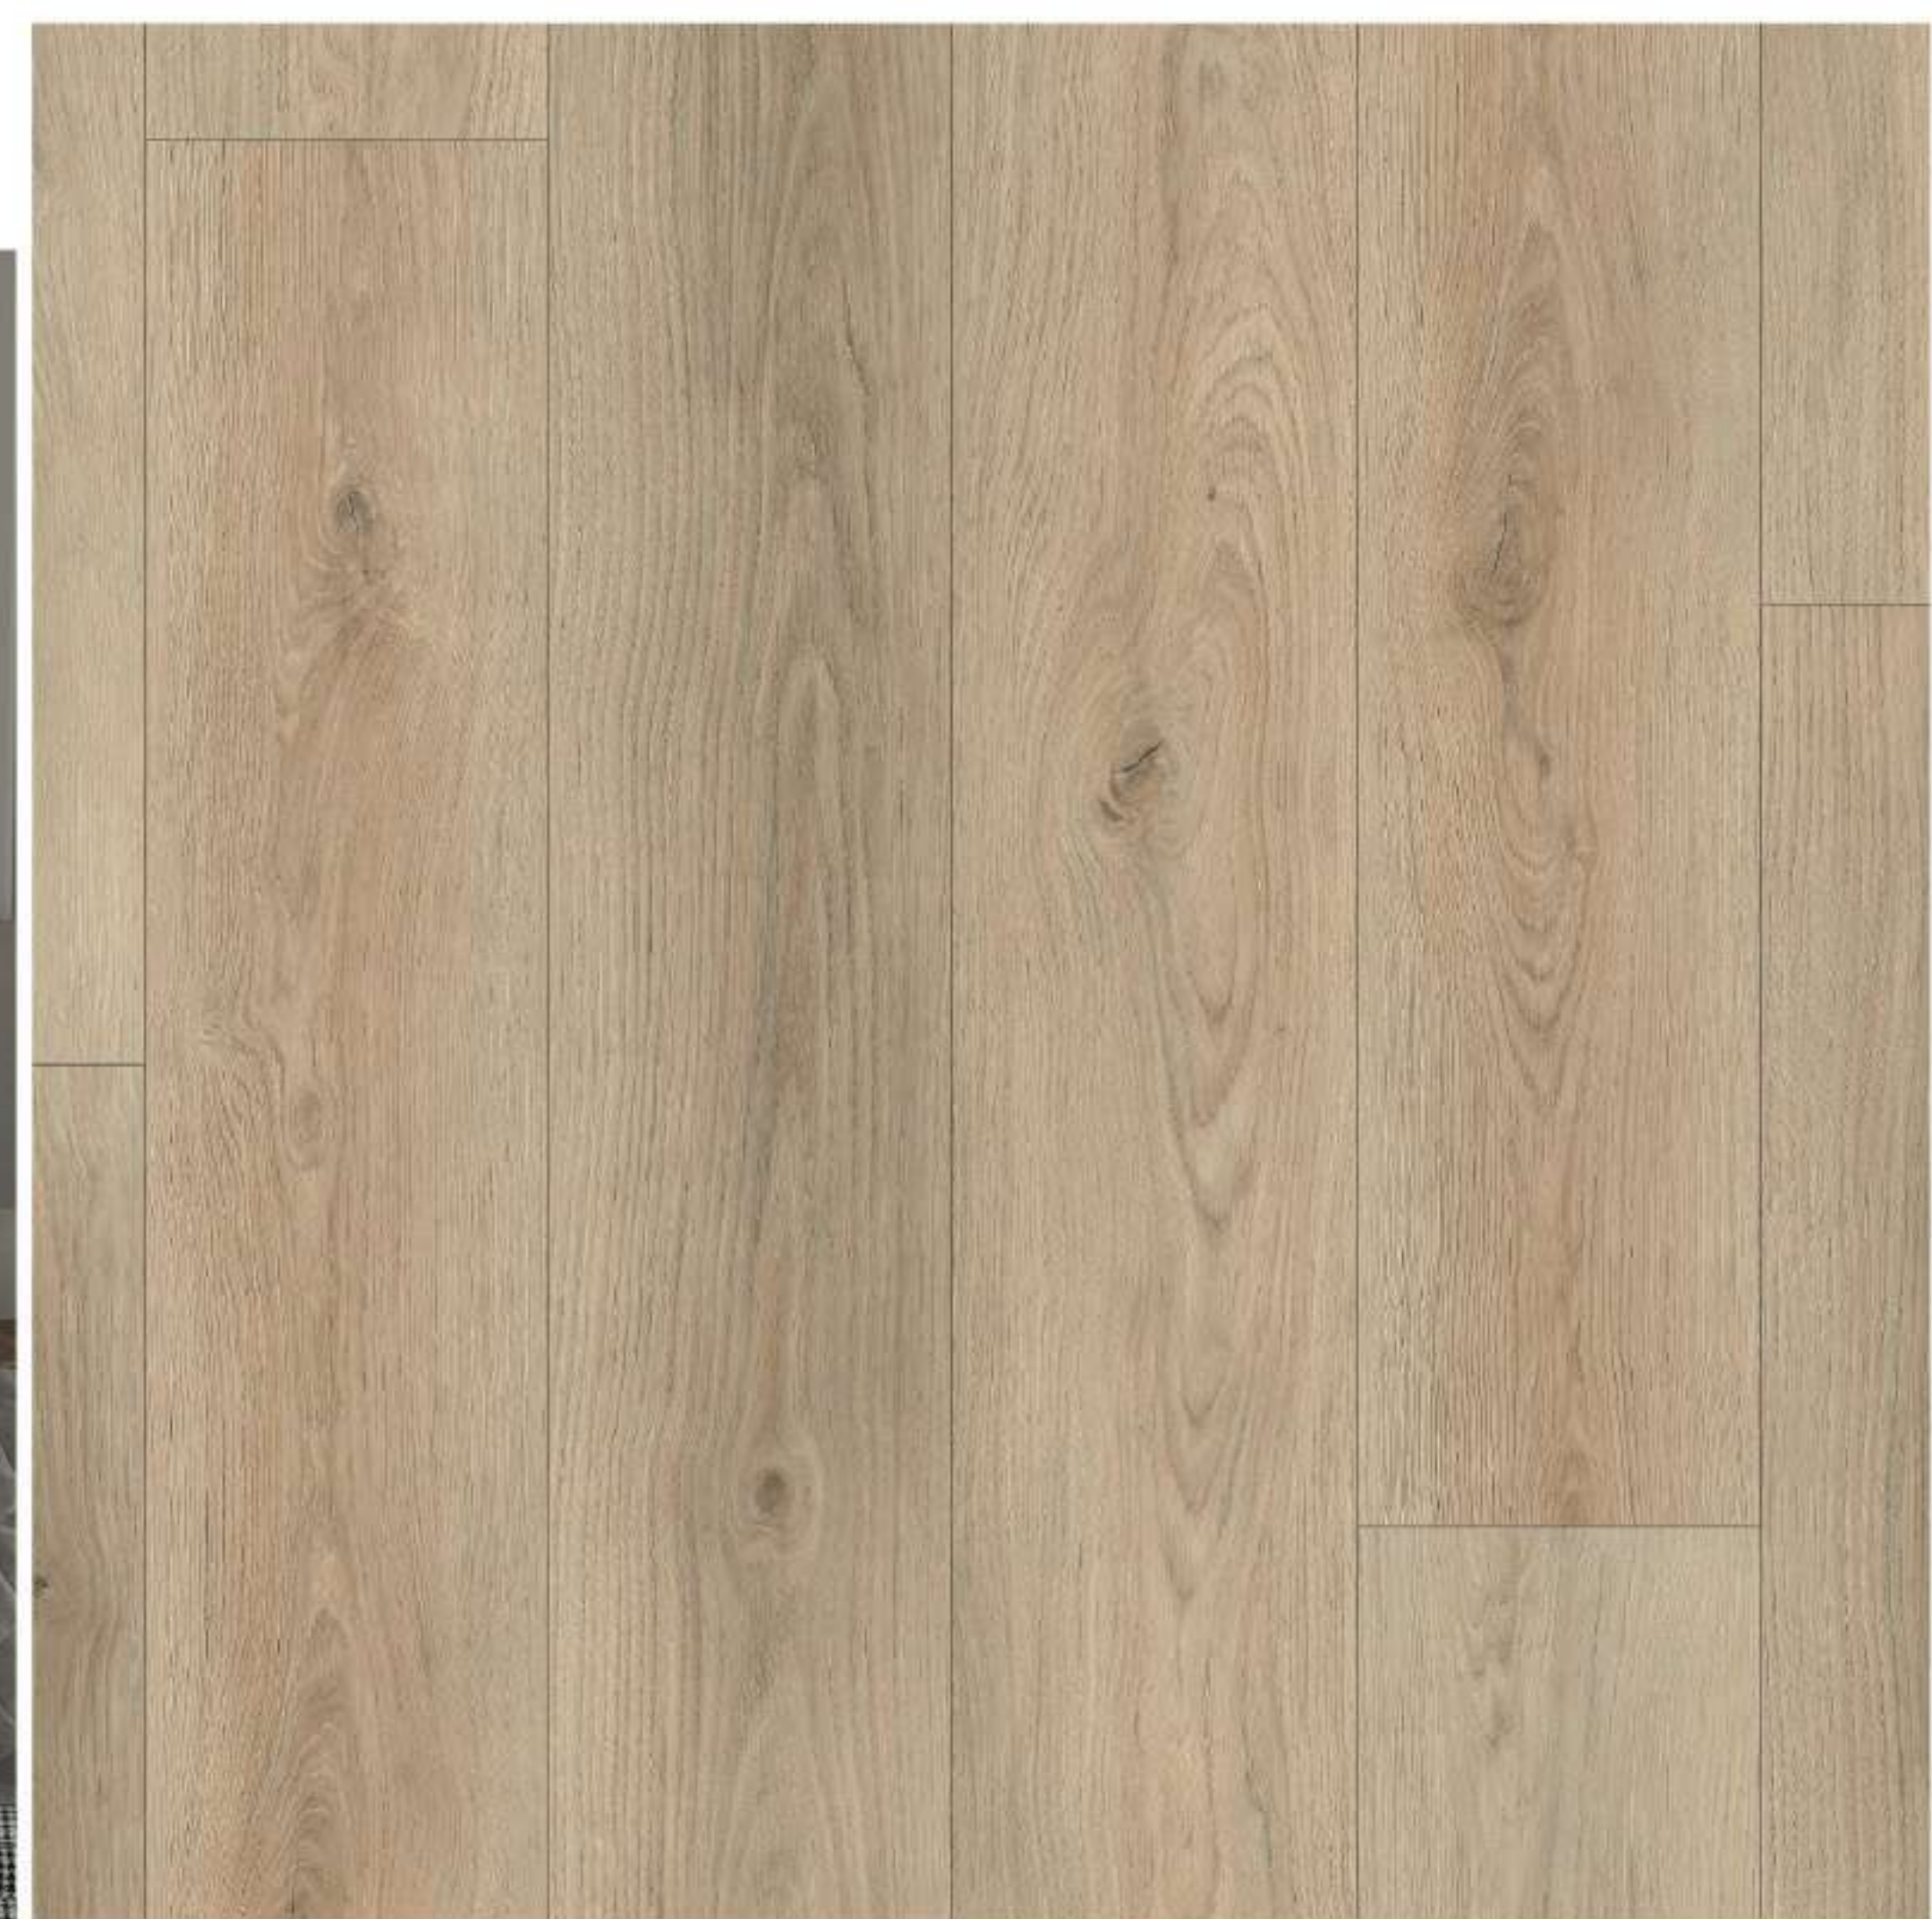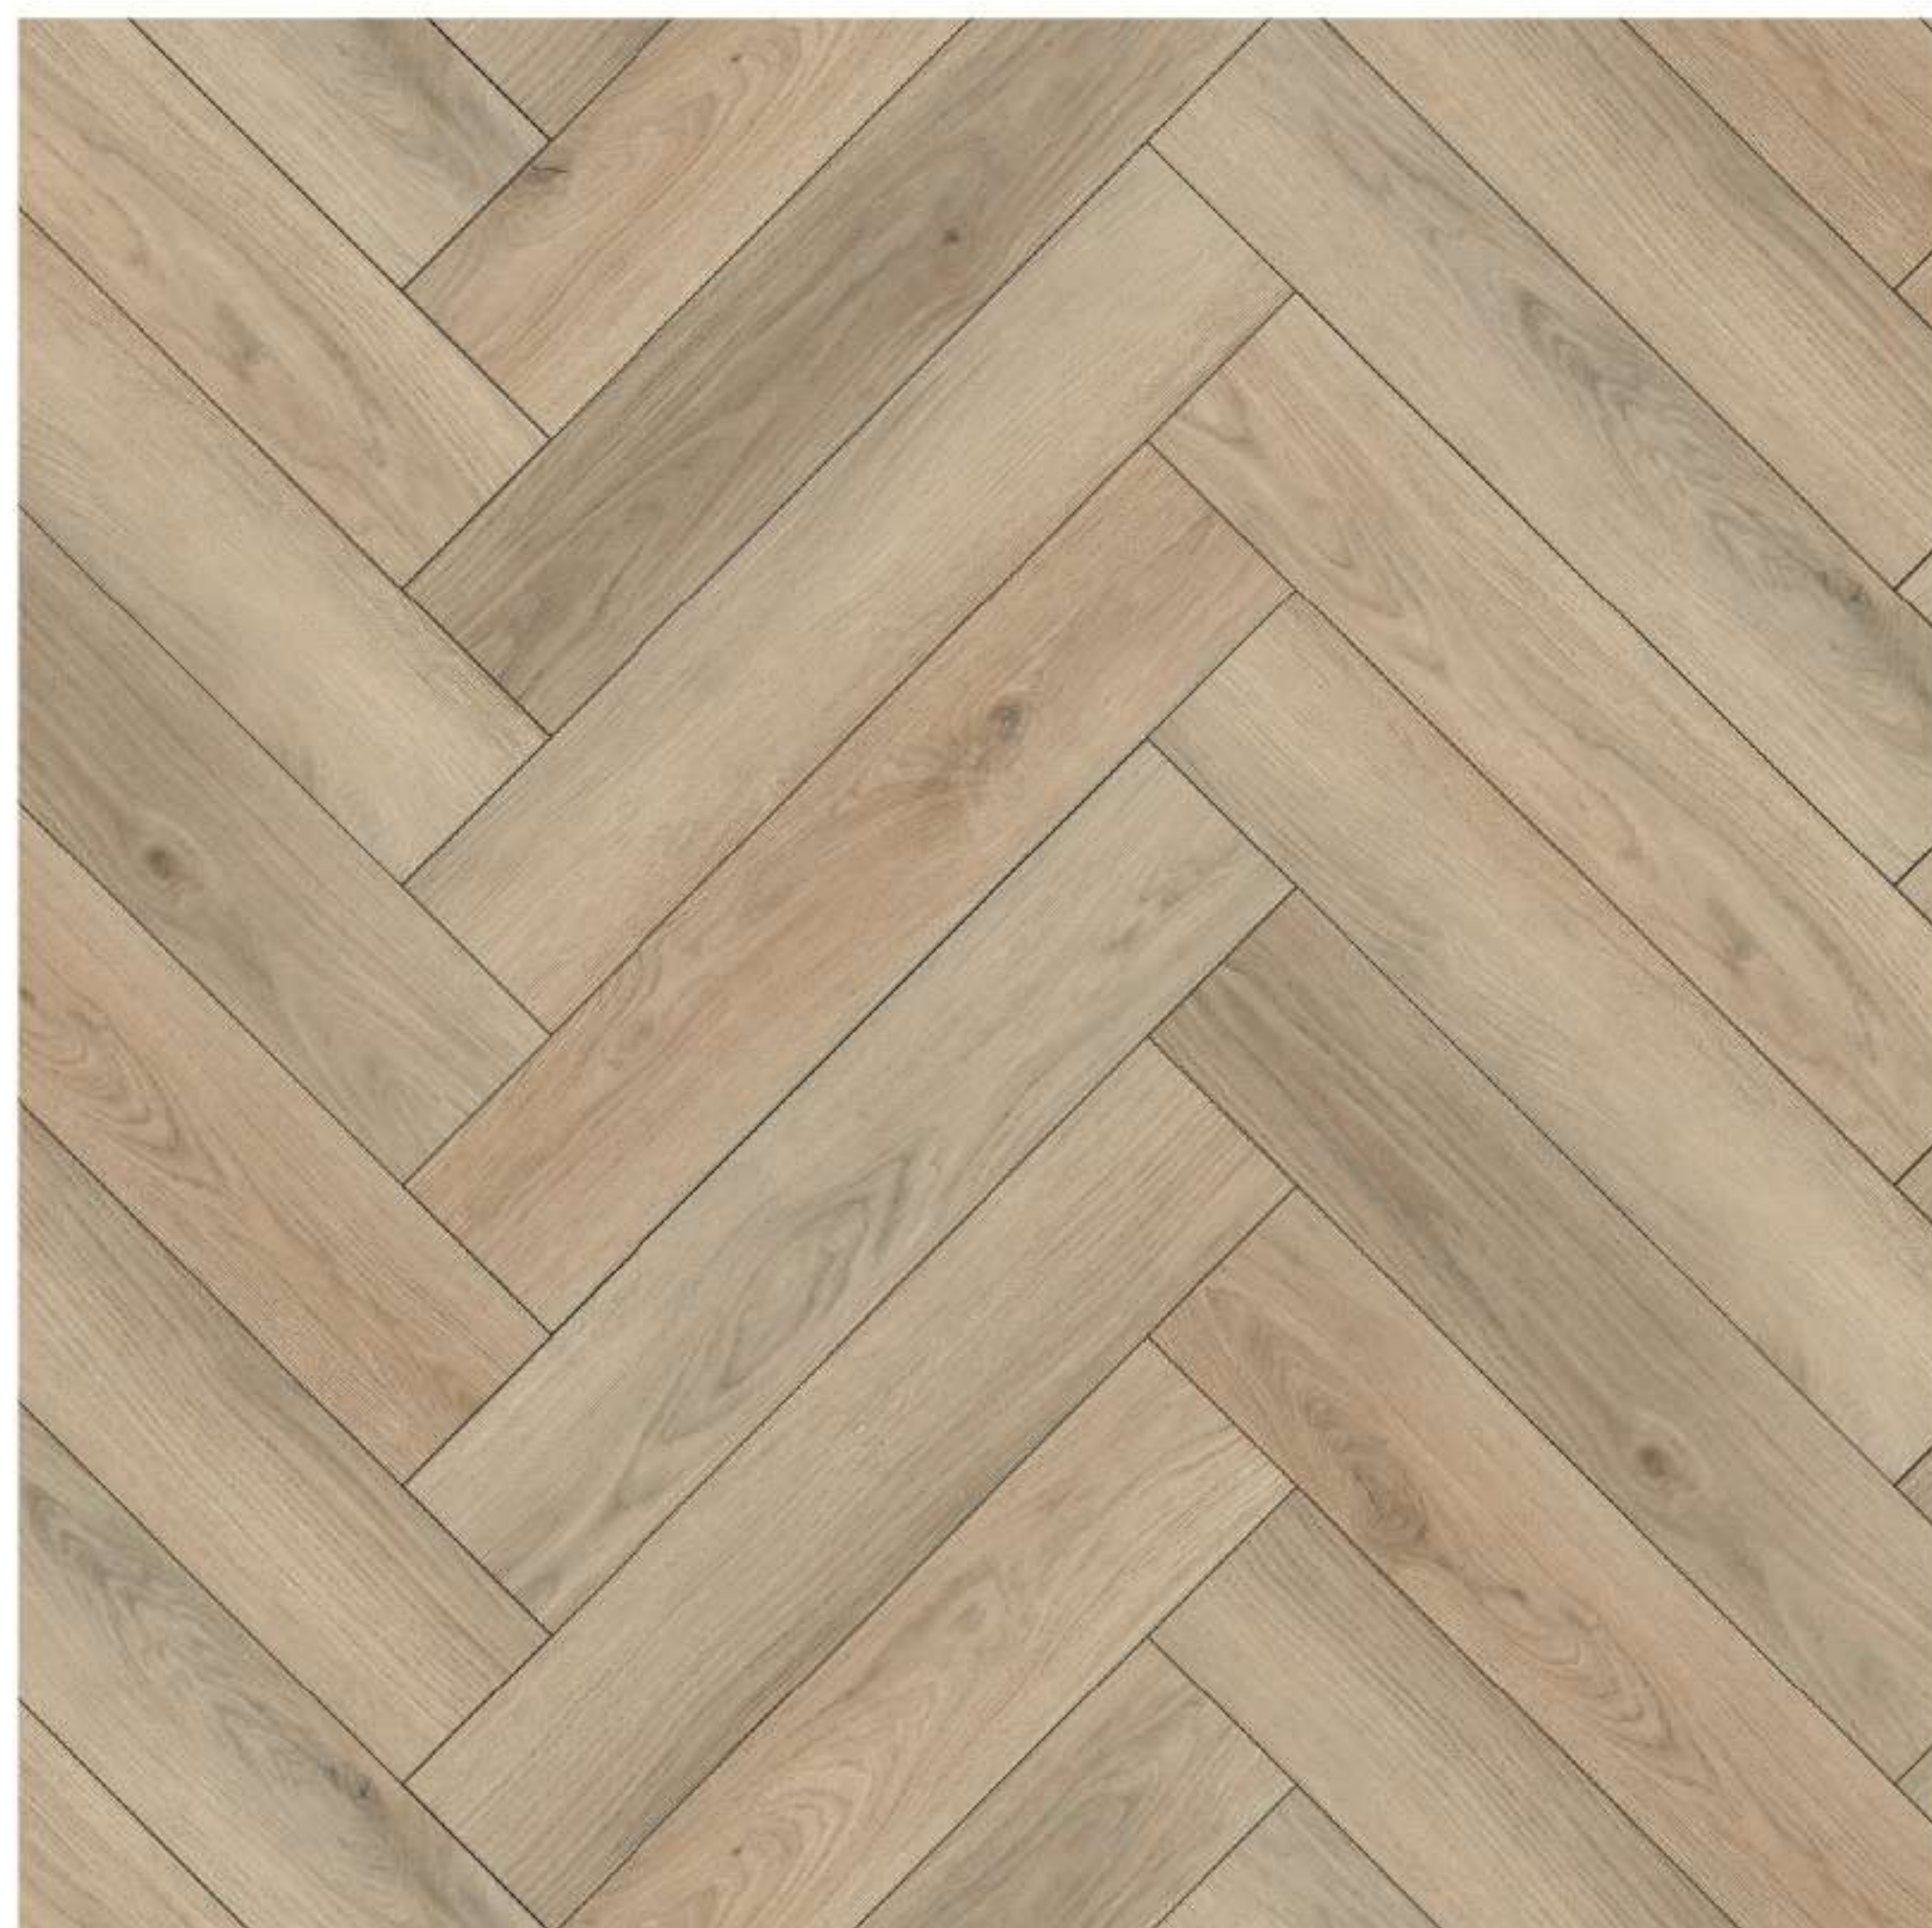





305

LESATHO

37

DIAMOND COLLECTION

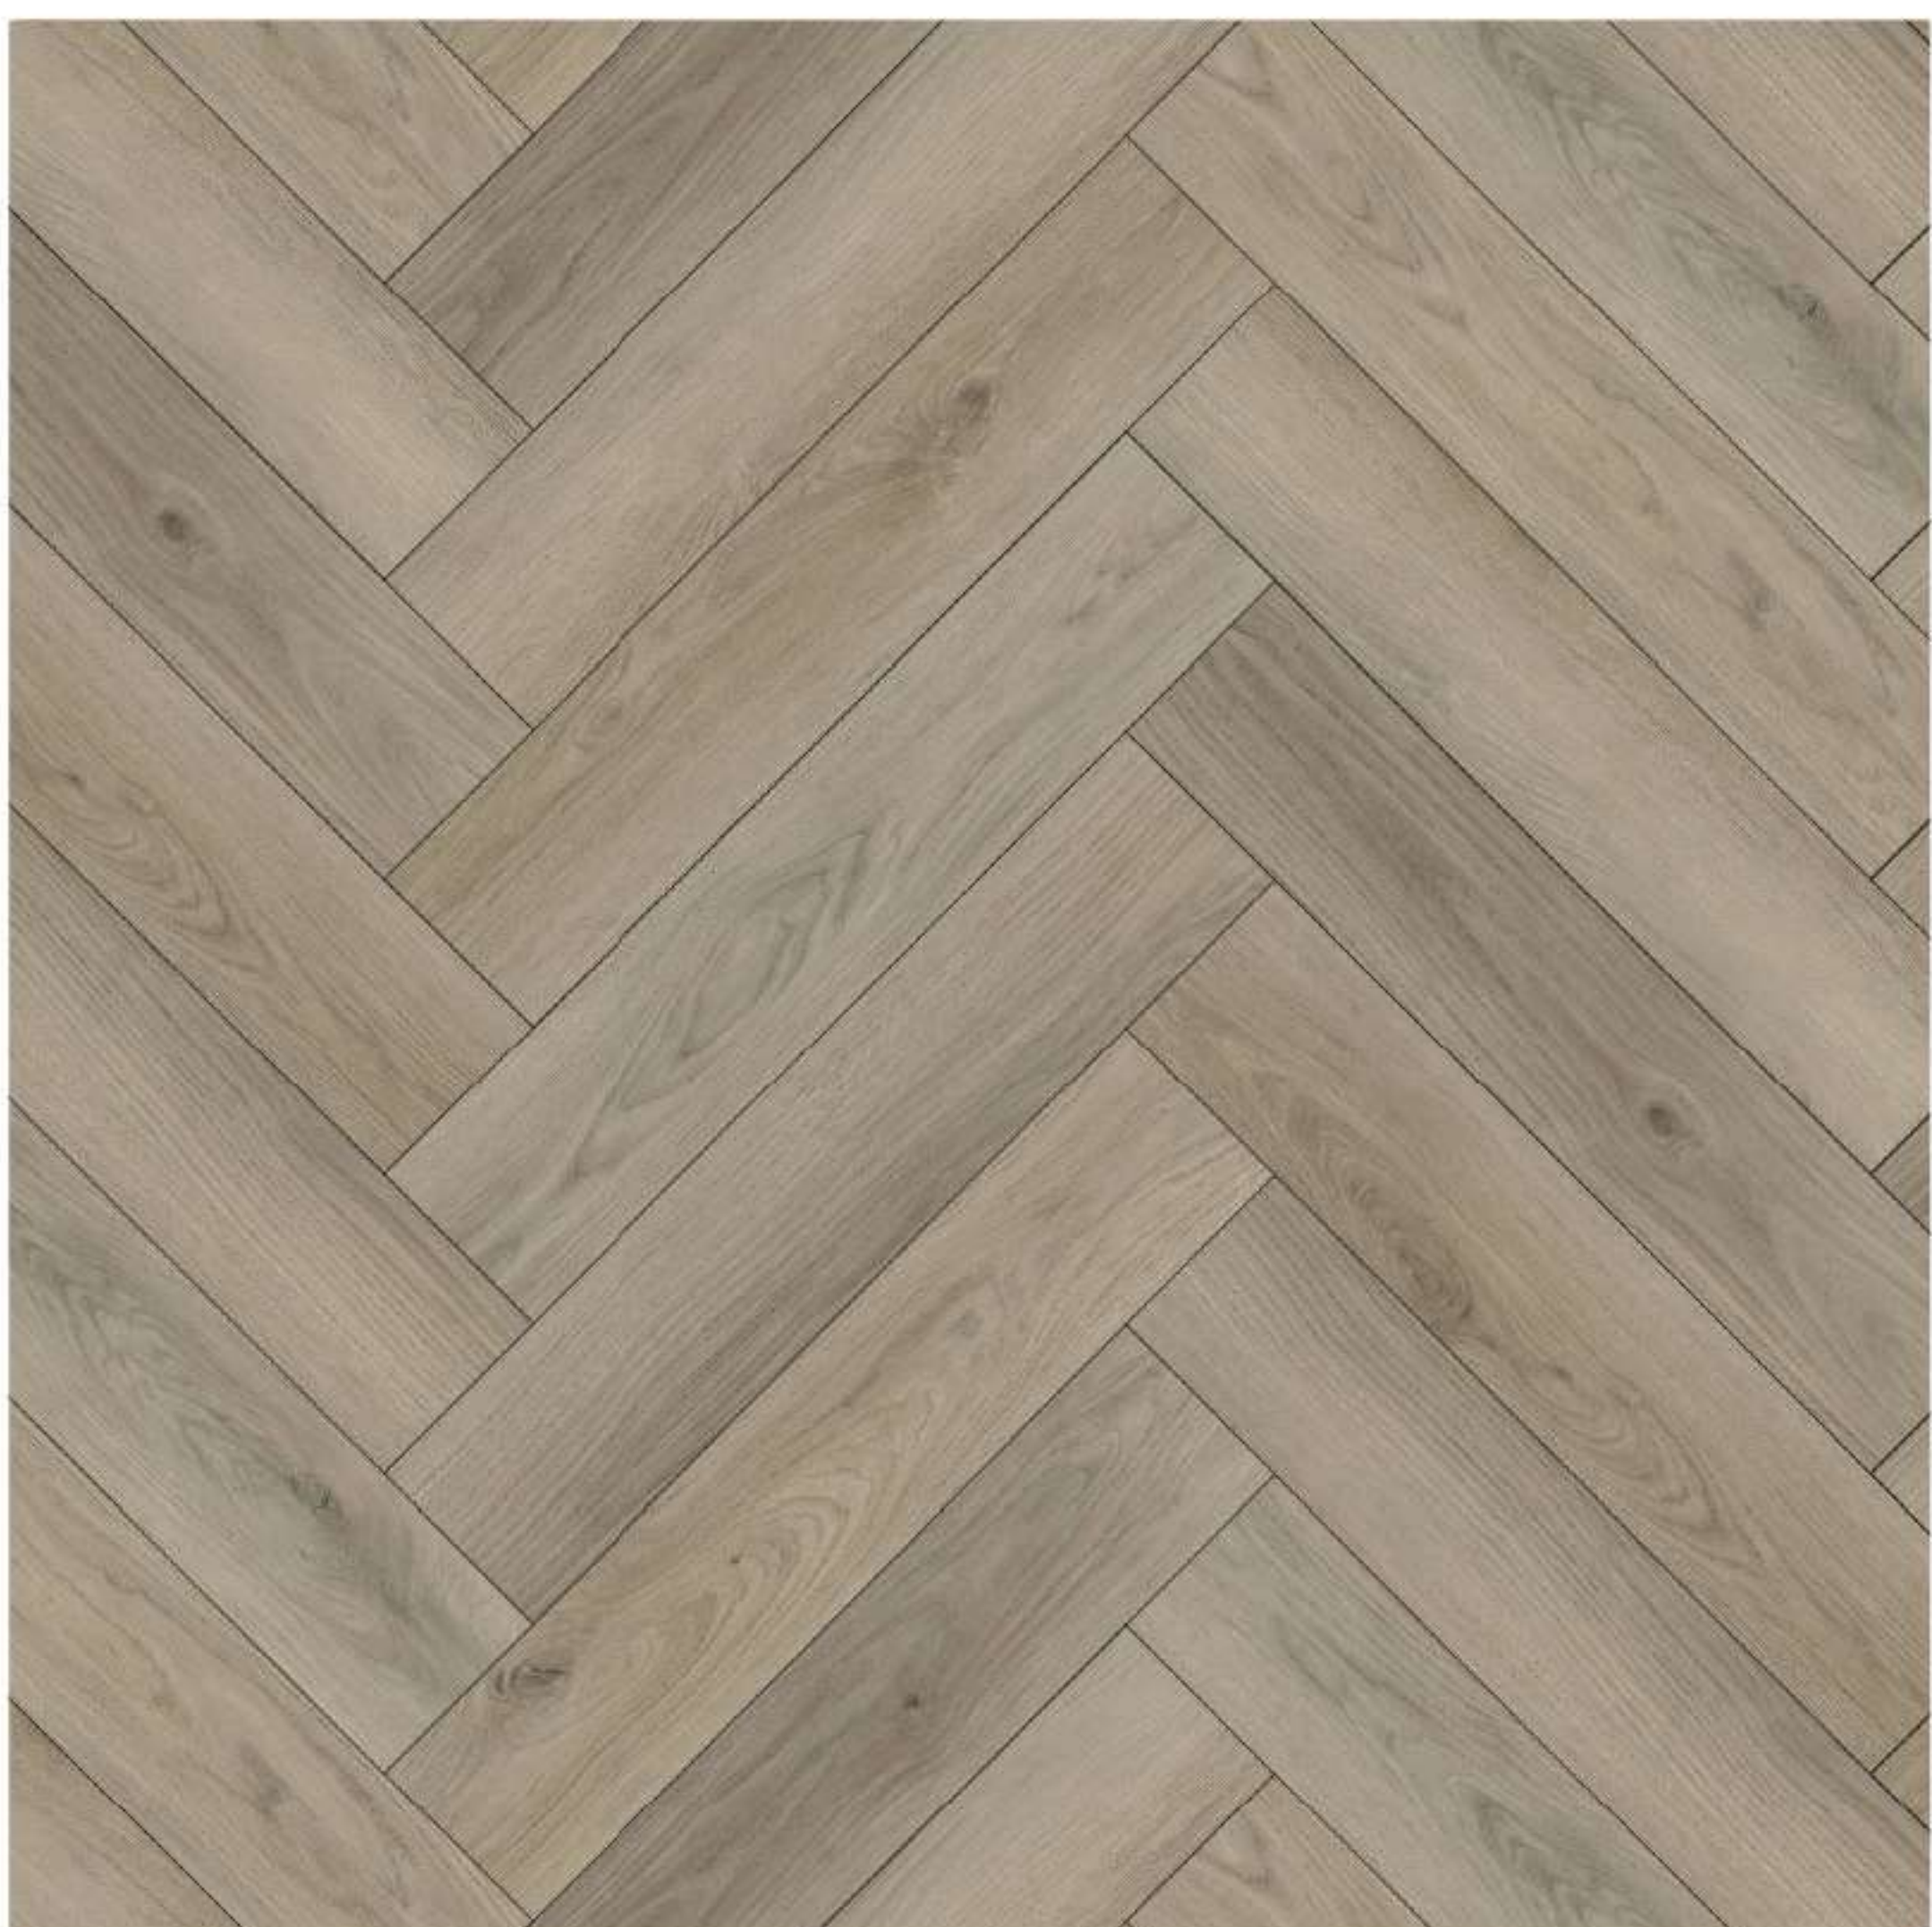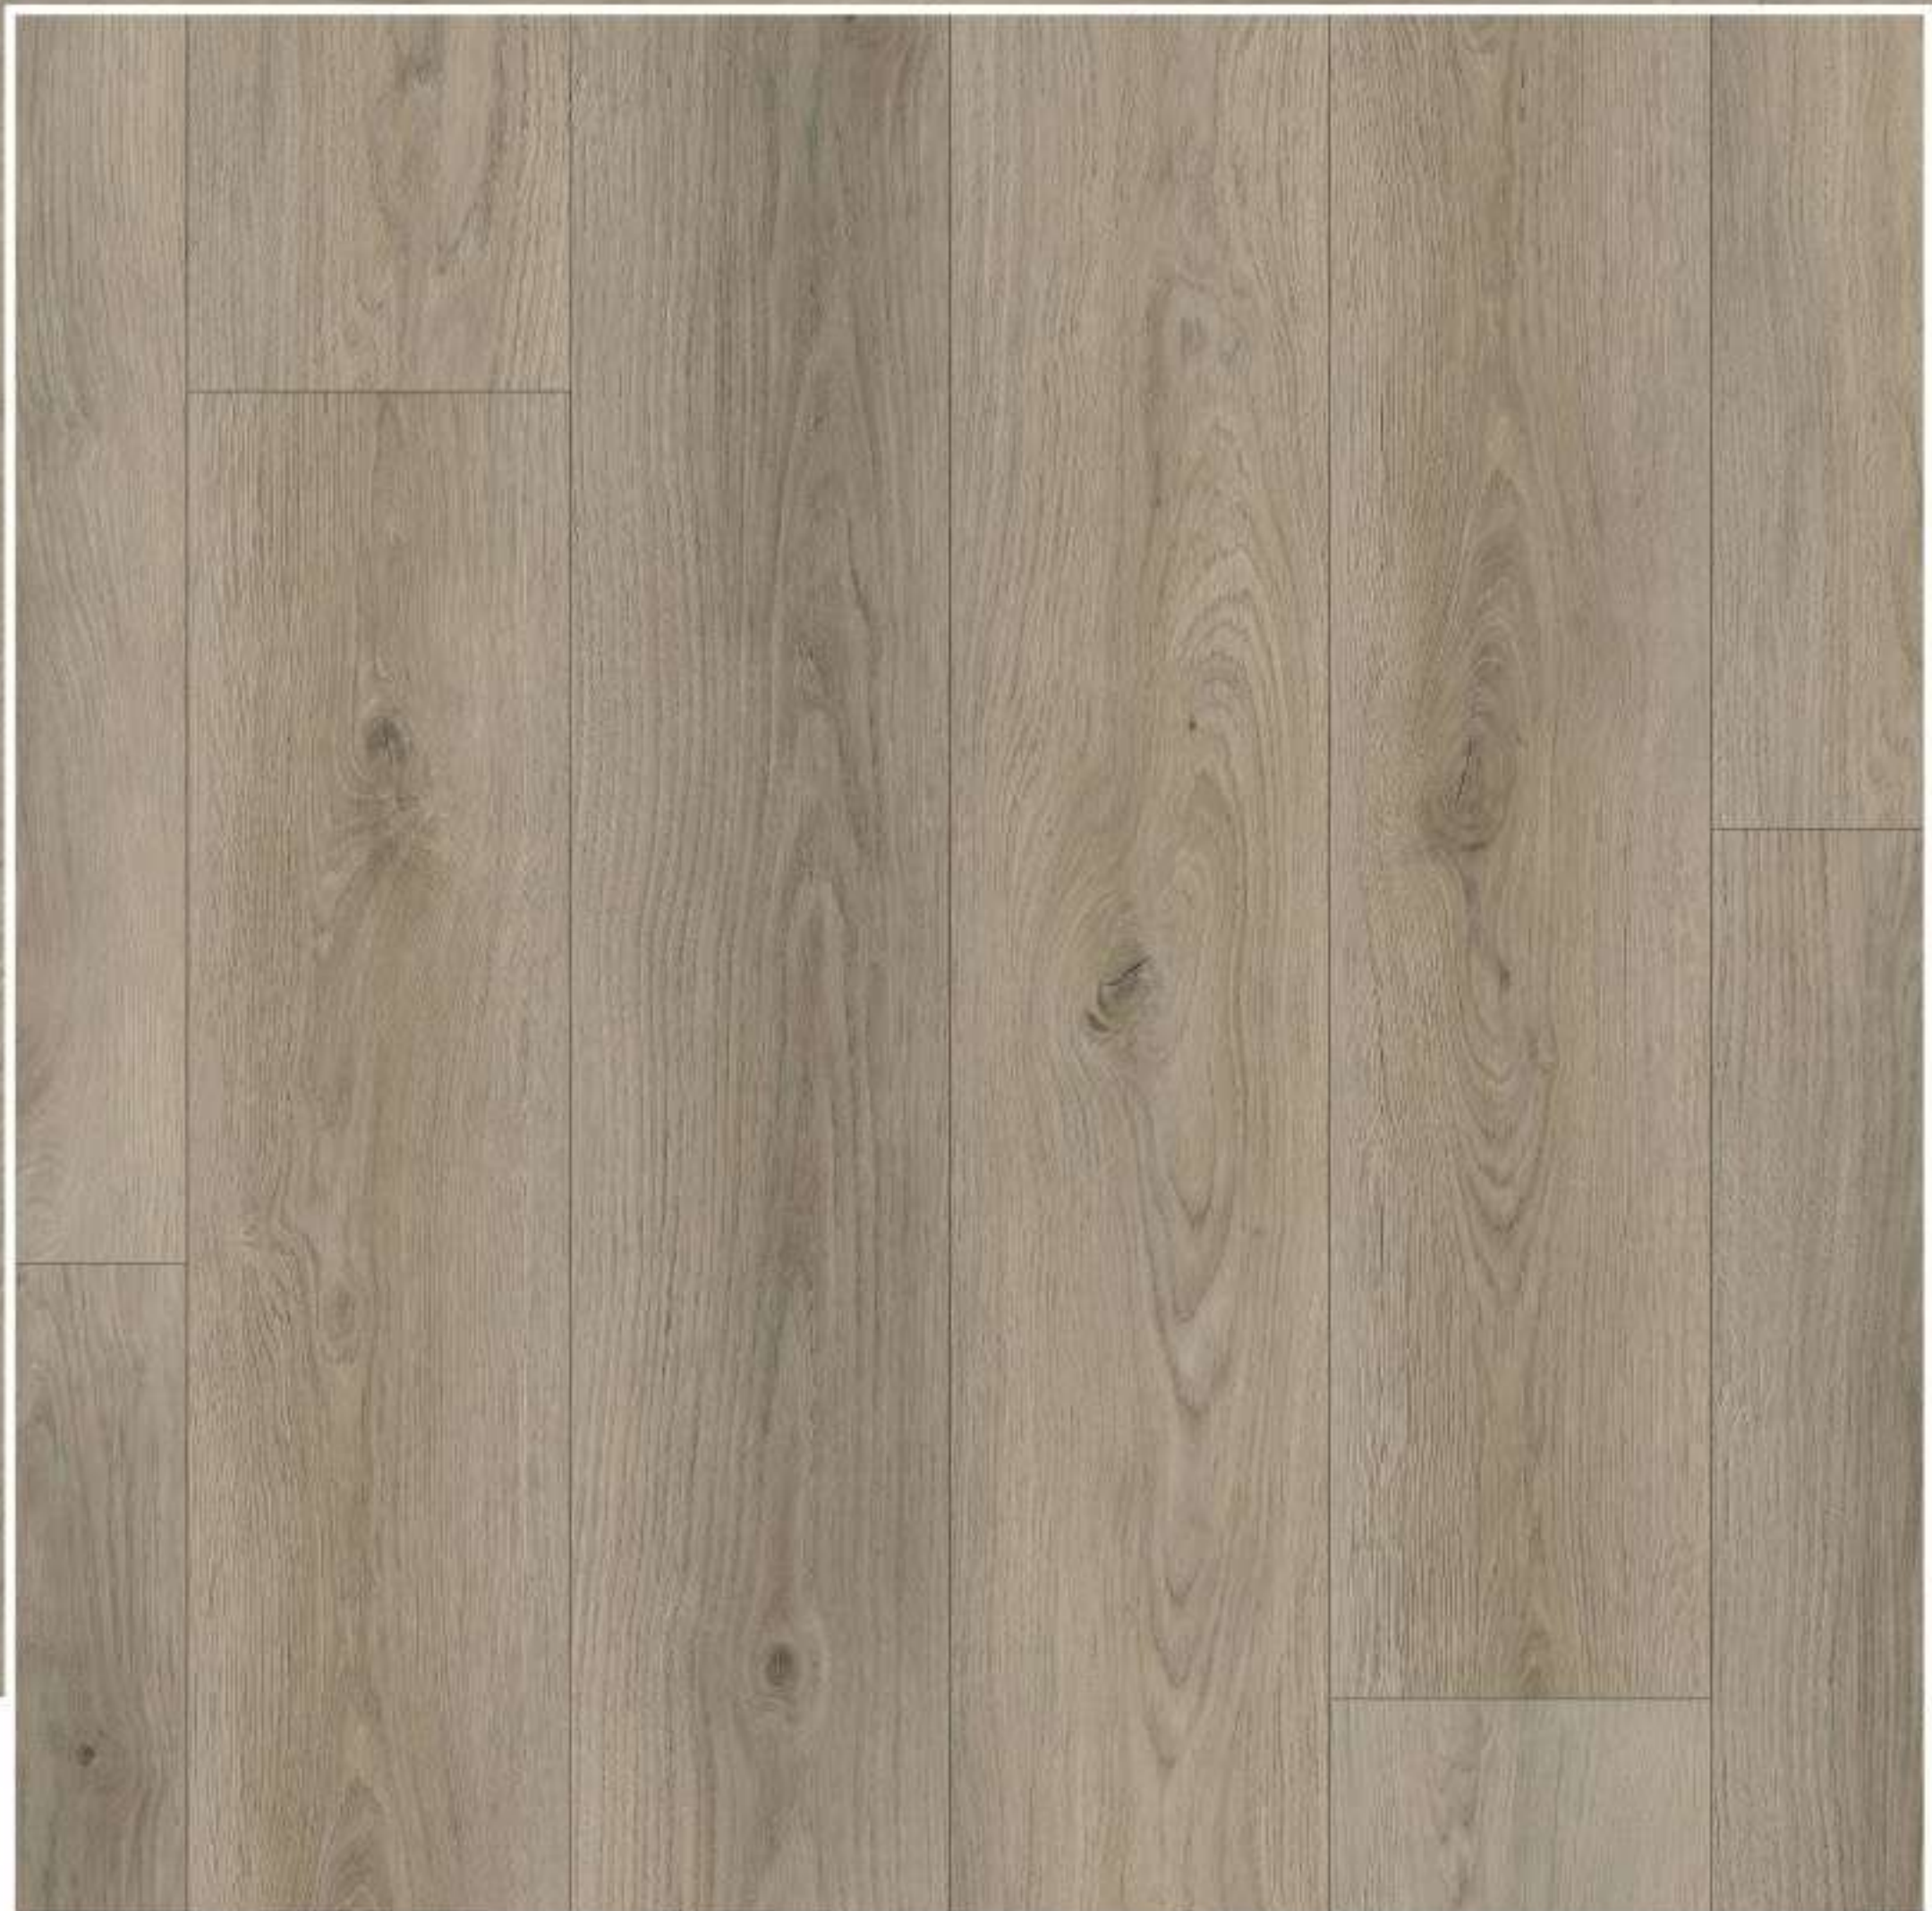


305 LESATHO



DM-305-PL | PLANK
228 X 1220 X 6 mm



DM-305-HB | HERRINGBONE
150 X 750 X 6 mm

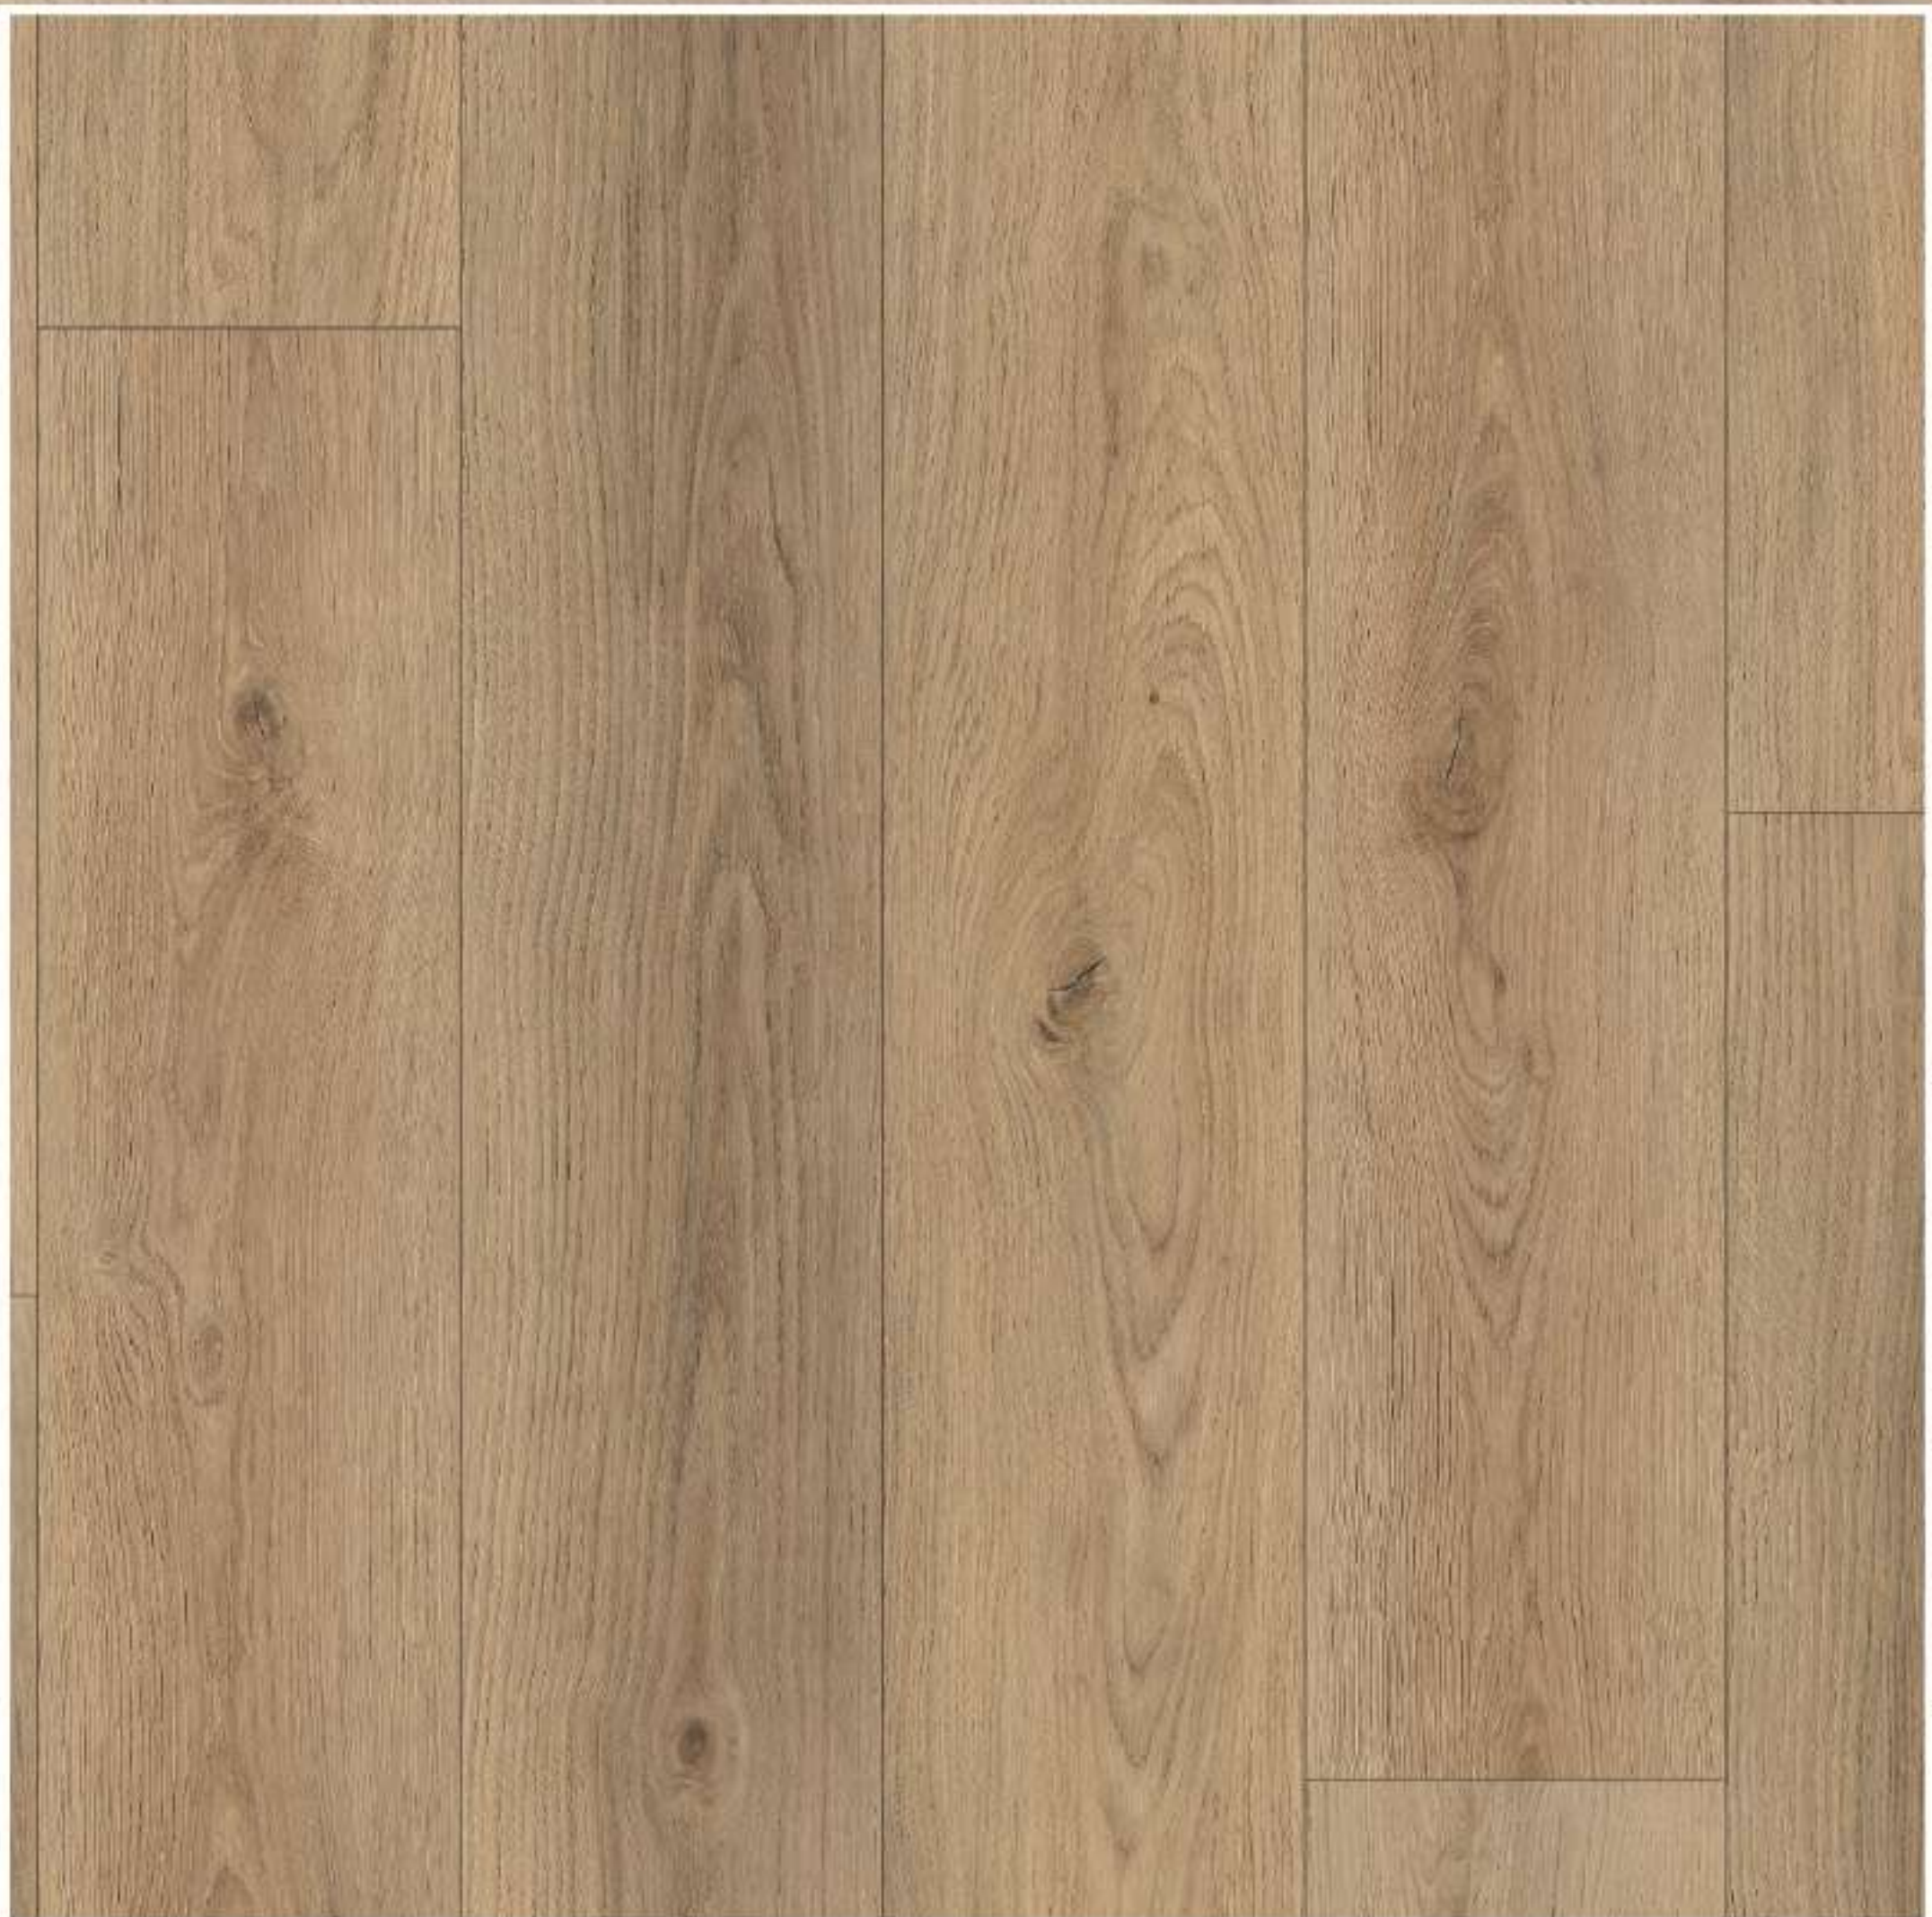


306 HOPE



DM-306-PL | PLANK
228 X 1220 X 6 mm



DM-306-HB | HERRINGBONE
150 X 750 X 6 mm

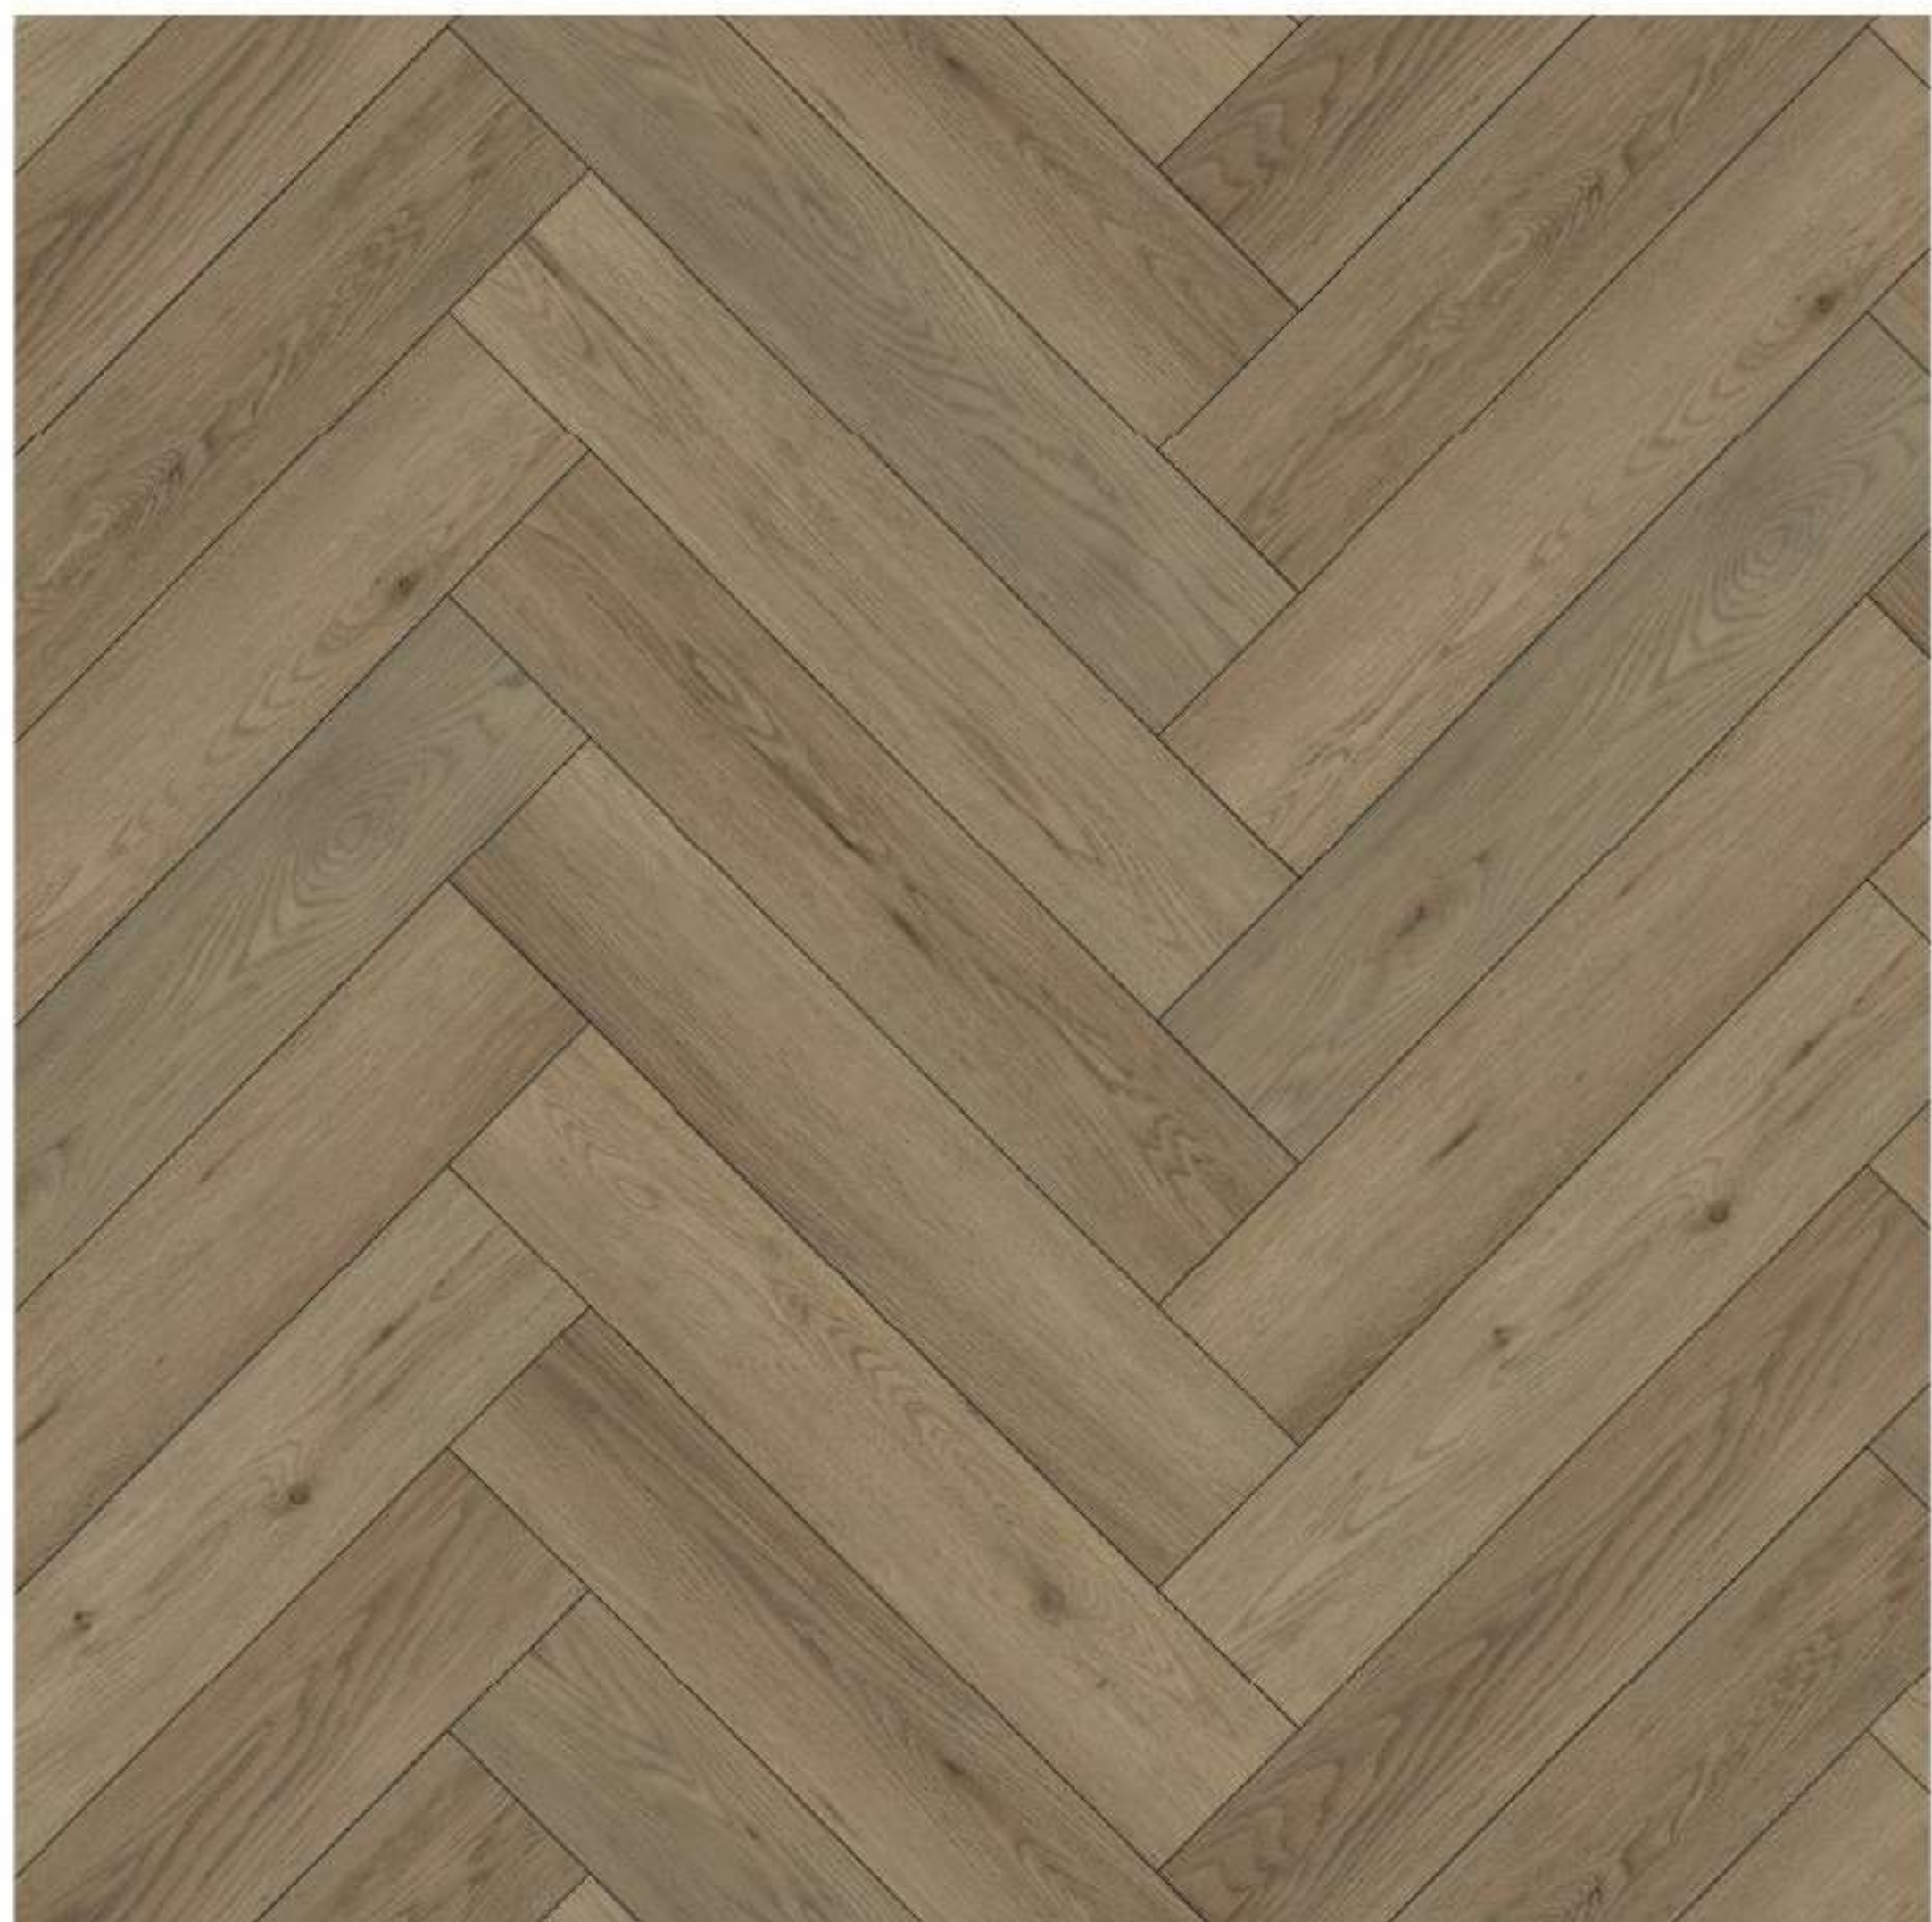

307 LUCIANO



DM-307-PL | PLANK
228 X 1220 X 6 mm



DM-307-HB | HERRINGBONE
150 X 750 X 6 mm





308SIERRA




DM-308-PL | PLANK
228 X 1220 X 6 mm



DM-308-HB | HERRINGBONE
150 X 750 X 6 mm

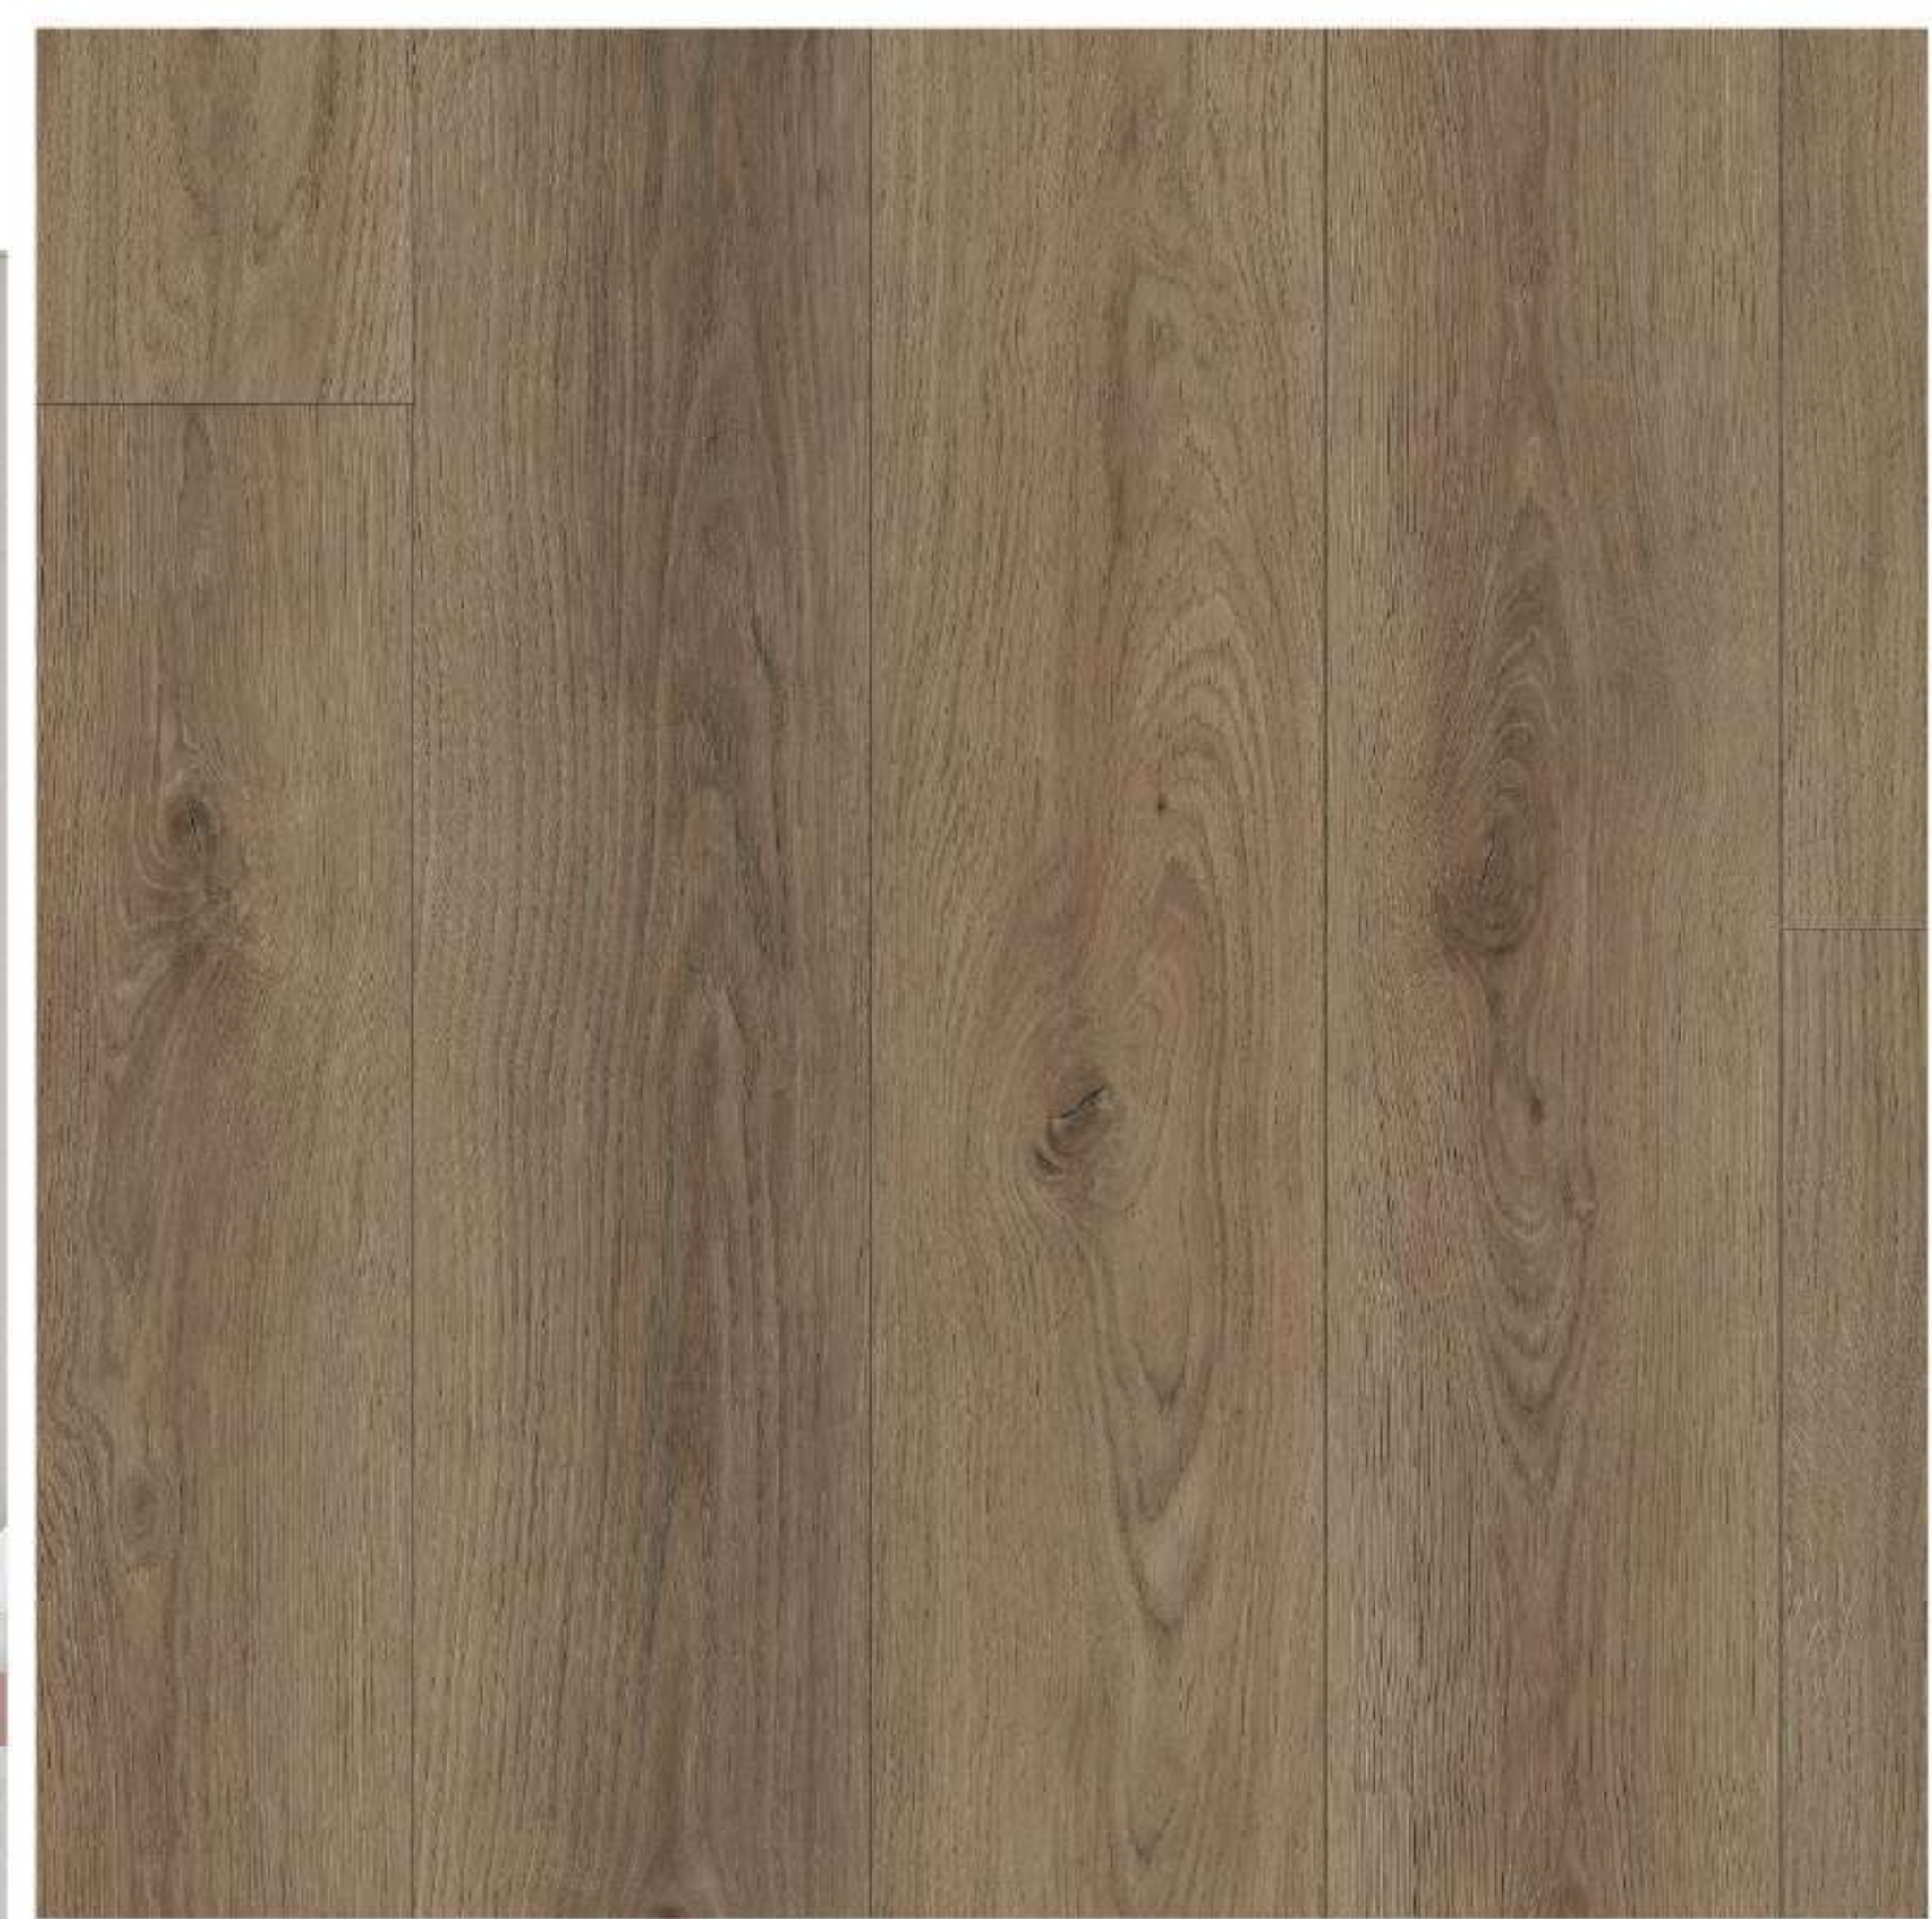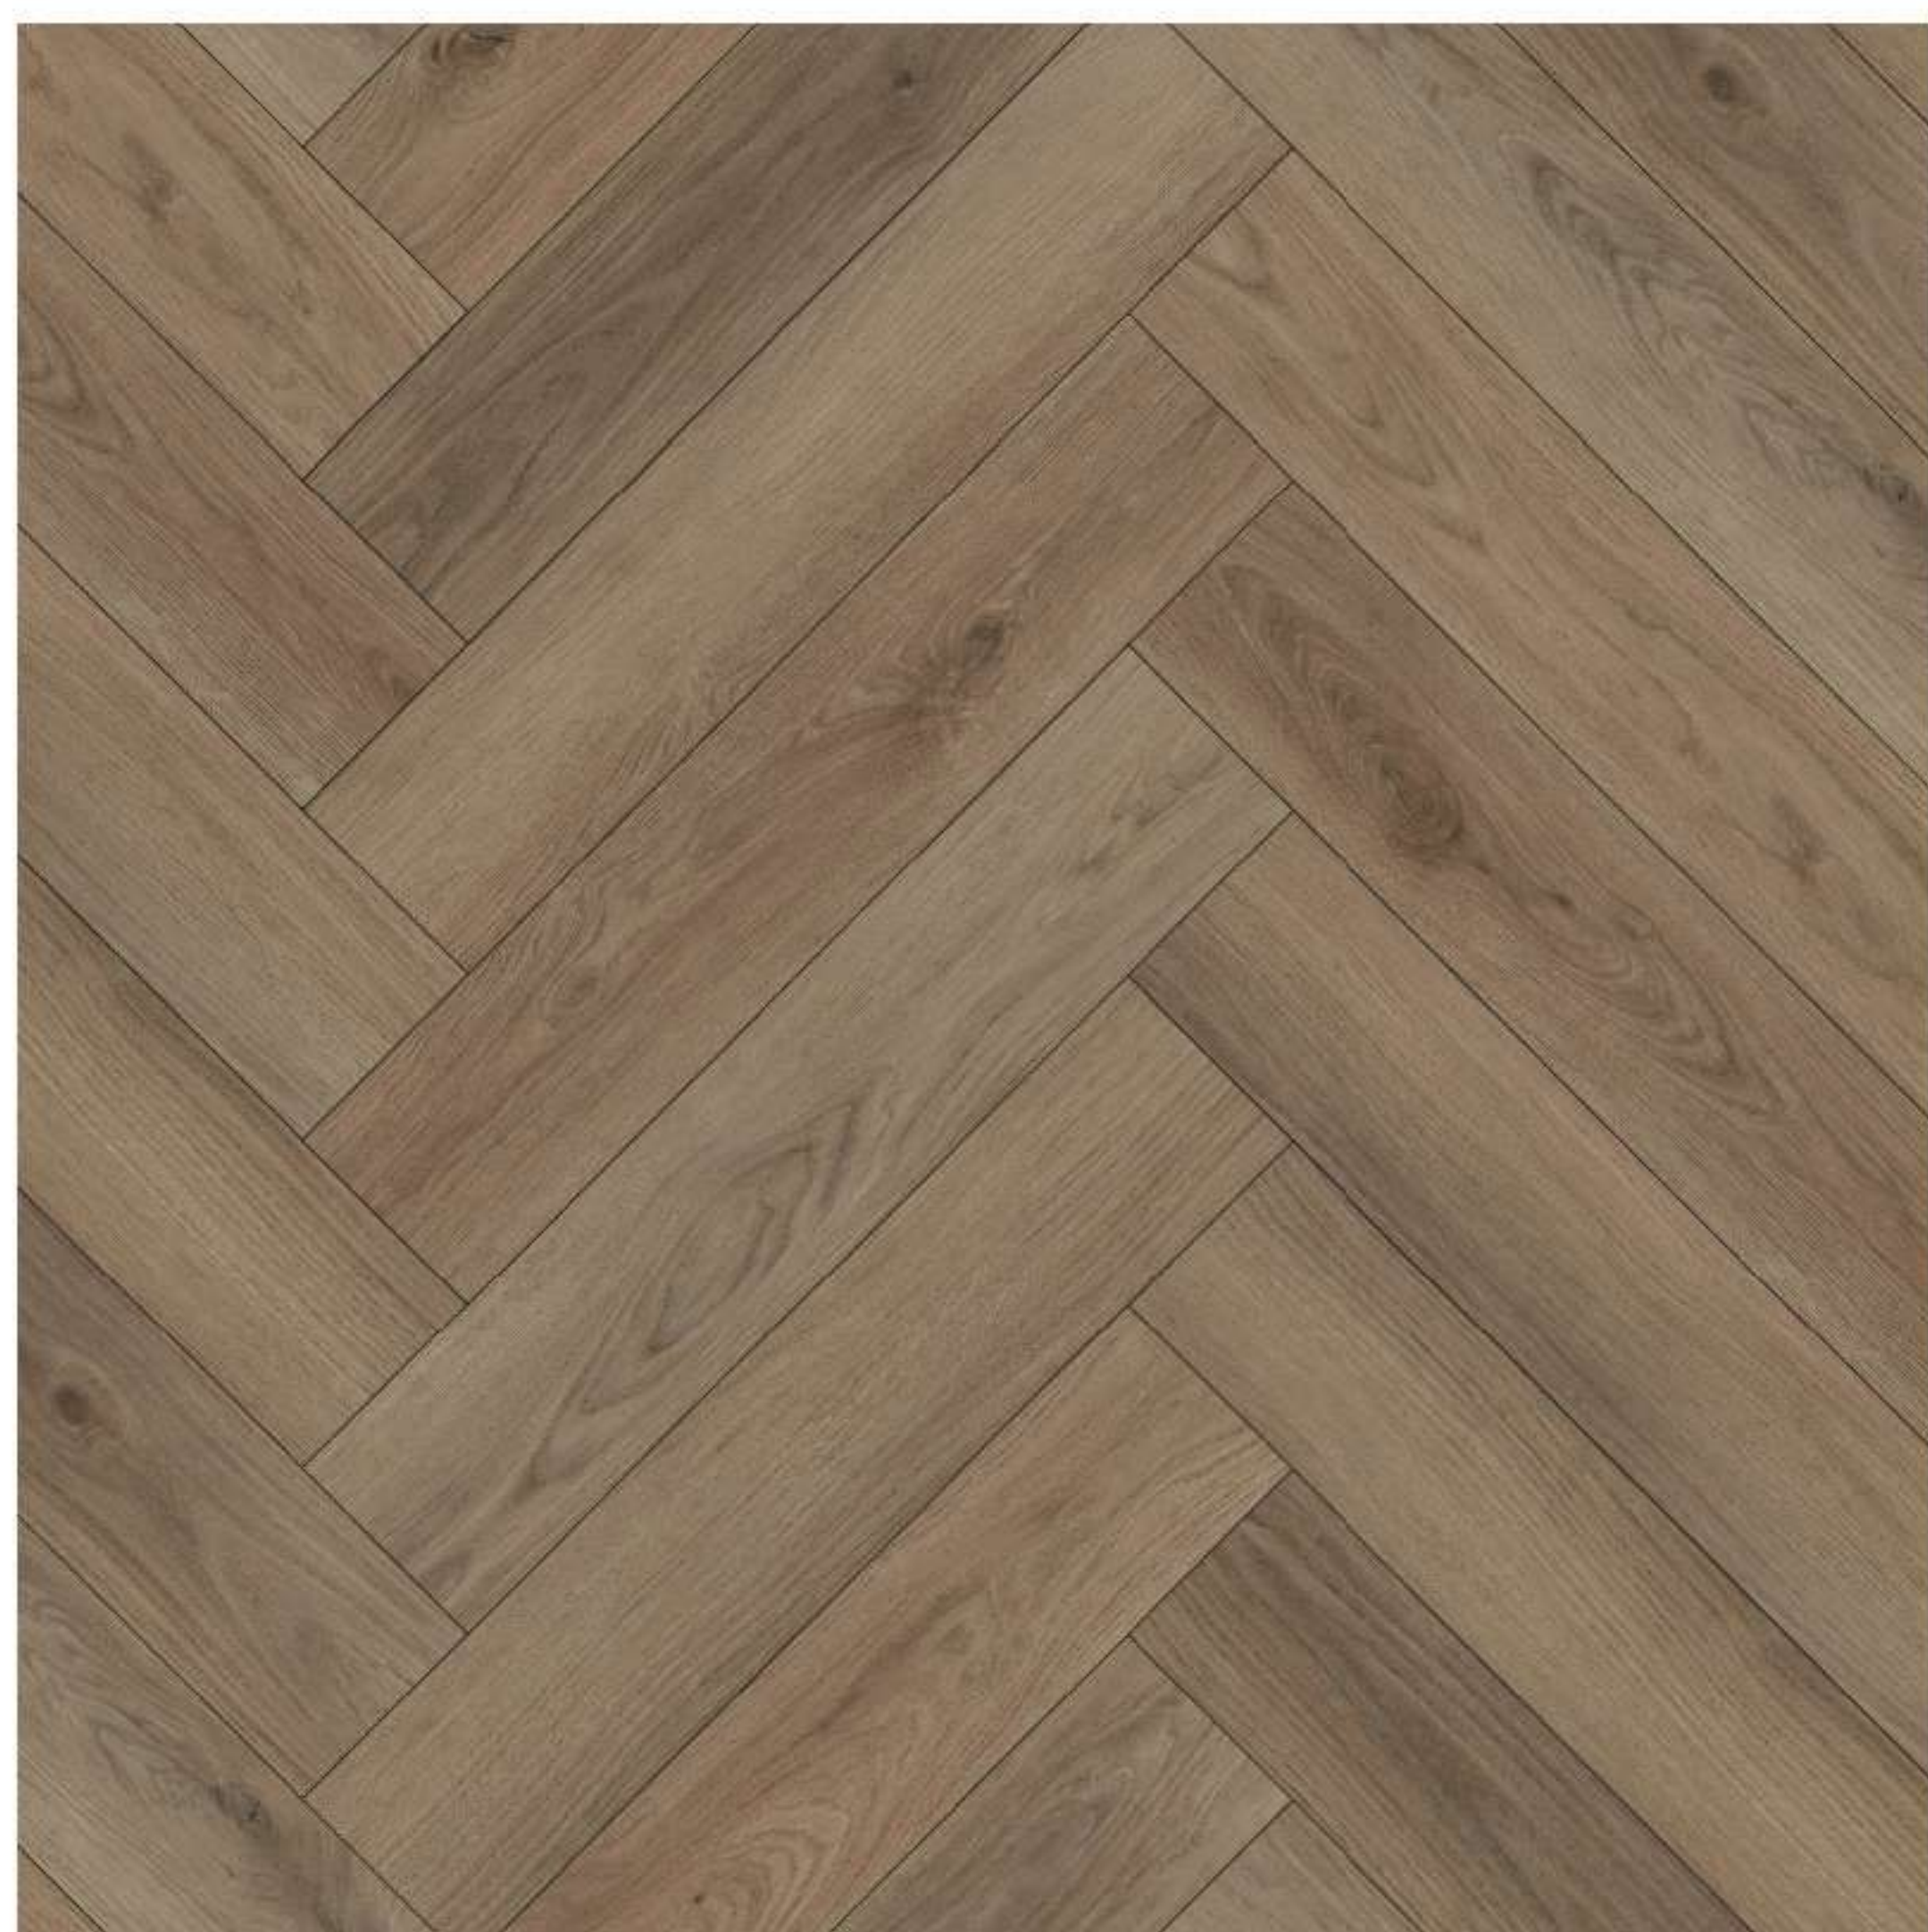

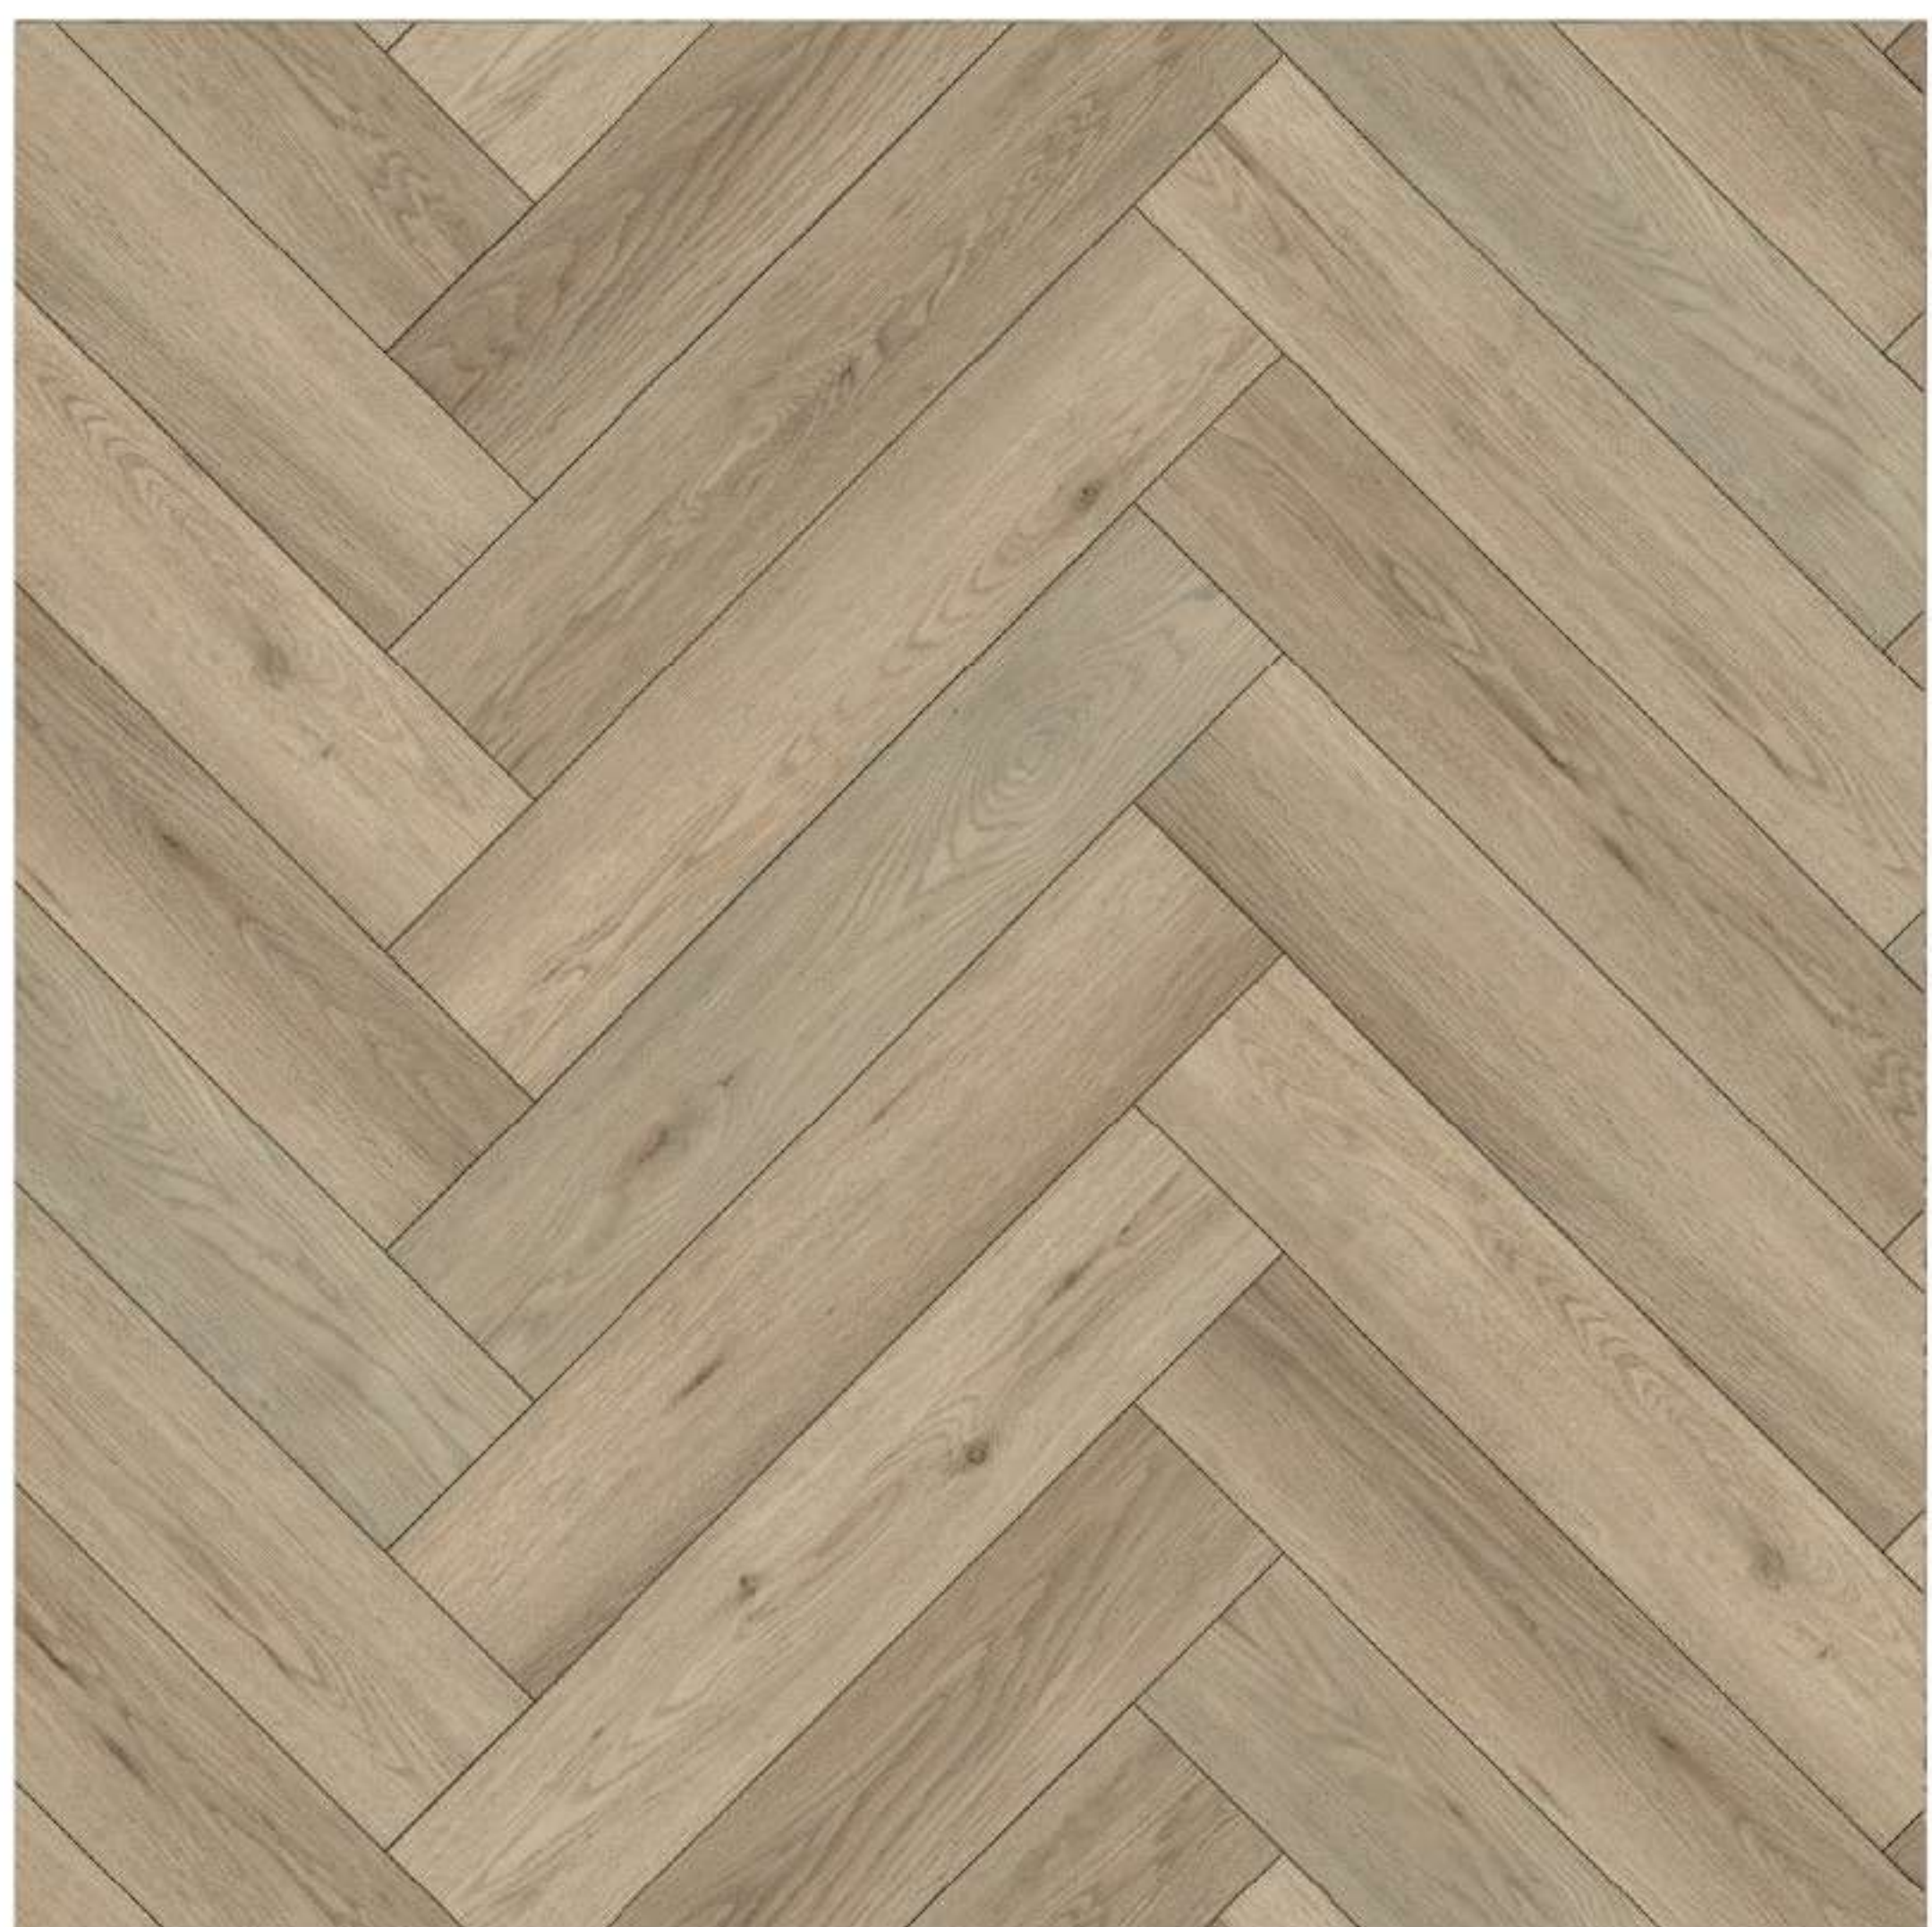

309 CULLINAN



DM-309-PL | PLANK
228 X 1220 X 6 mm



DM-309-HB | HERRINGBONE
150 X 750 X 6 mm



310 SANCY



DM-310-PL | PLANK
228 X 1220 X 6 mm



DM-310-HB | HERRINGBONE
150 X 750 X 6 mm

DIAMONDS

New Generation Flooring

WEARLAYER : 0,5 mm
UNDERLAY(IXPE) : 1 mm
TOTAL THICKNESS: 6 mm

DECOR

DIMENSIONS

EDGE

SURFACE


CLICK



PLANK

228 X 1220

Package(m²)

 7 Pieces
= 1.947 m²
= 20,250 kg

MICRO BEVEL

Palette (m²)

 44 Package
= 85,673 m²
= 911,002 kg

EIR

Residential
20

UNICLIC PLANK

Warranty[Year]

Commercial
7

DECOR

DIMENSIONS

EDGE

SURFACE


CLICK



HERRINGBONE

150 X 750

Package(m²)

 14 Pieces
= 1.575 m²
= 16,380 kg

MICRO BEVEL

Palette (m²)

 56 Package
= 88,200 m²
= 937,280 kg

EIR

Residential
20

UNIDROP HERRINGBONE

Warranty[Year]

Commercial
7





ORIGINALS

New Generation Flooring
www.areafloors.com.tr

ORIGINALS



ORS

Originals
Flooring stands as
a beacon of
excellence, uniting unique
durability, exceptional
originality, and superior quality
within its SPC Flooring collection to
infuse elegance into any space.

Renowned for its robust structure, it
stands strong against heavy usage and
effortlessly conquers the rigors of everyday life.

Originals' distinctive designs present an expansive
color palette that caters to a wide spectrum of tastes
and styles. With each step, you'll encounter an
unmistakable fusion of quality and aesthetics. When it comes
to redesigning your spaces, Originals Flooring provides the
perfect blend of durability, originality, and aesthetics.

We take pride in offering you a personalized flooring experience,
allowing you to transform your environment into a testament to
enduring craftsmanship and timeless beauty. Trust Originals
Flooring to elevate your space to new heights of elegance and
sophistication. Discover, experience, and immerse yourself in the
difference we bring to your world.



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface



Moisture Resistance





High Density Underlay



Suitable for Underfloor Heating

Experience Better Flooring

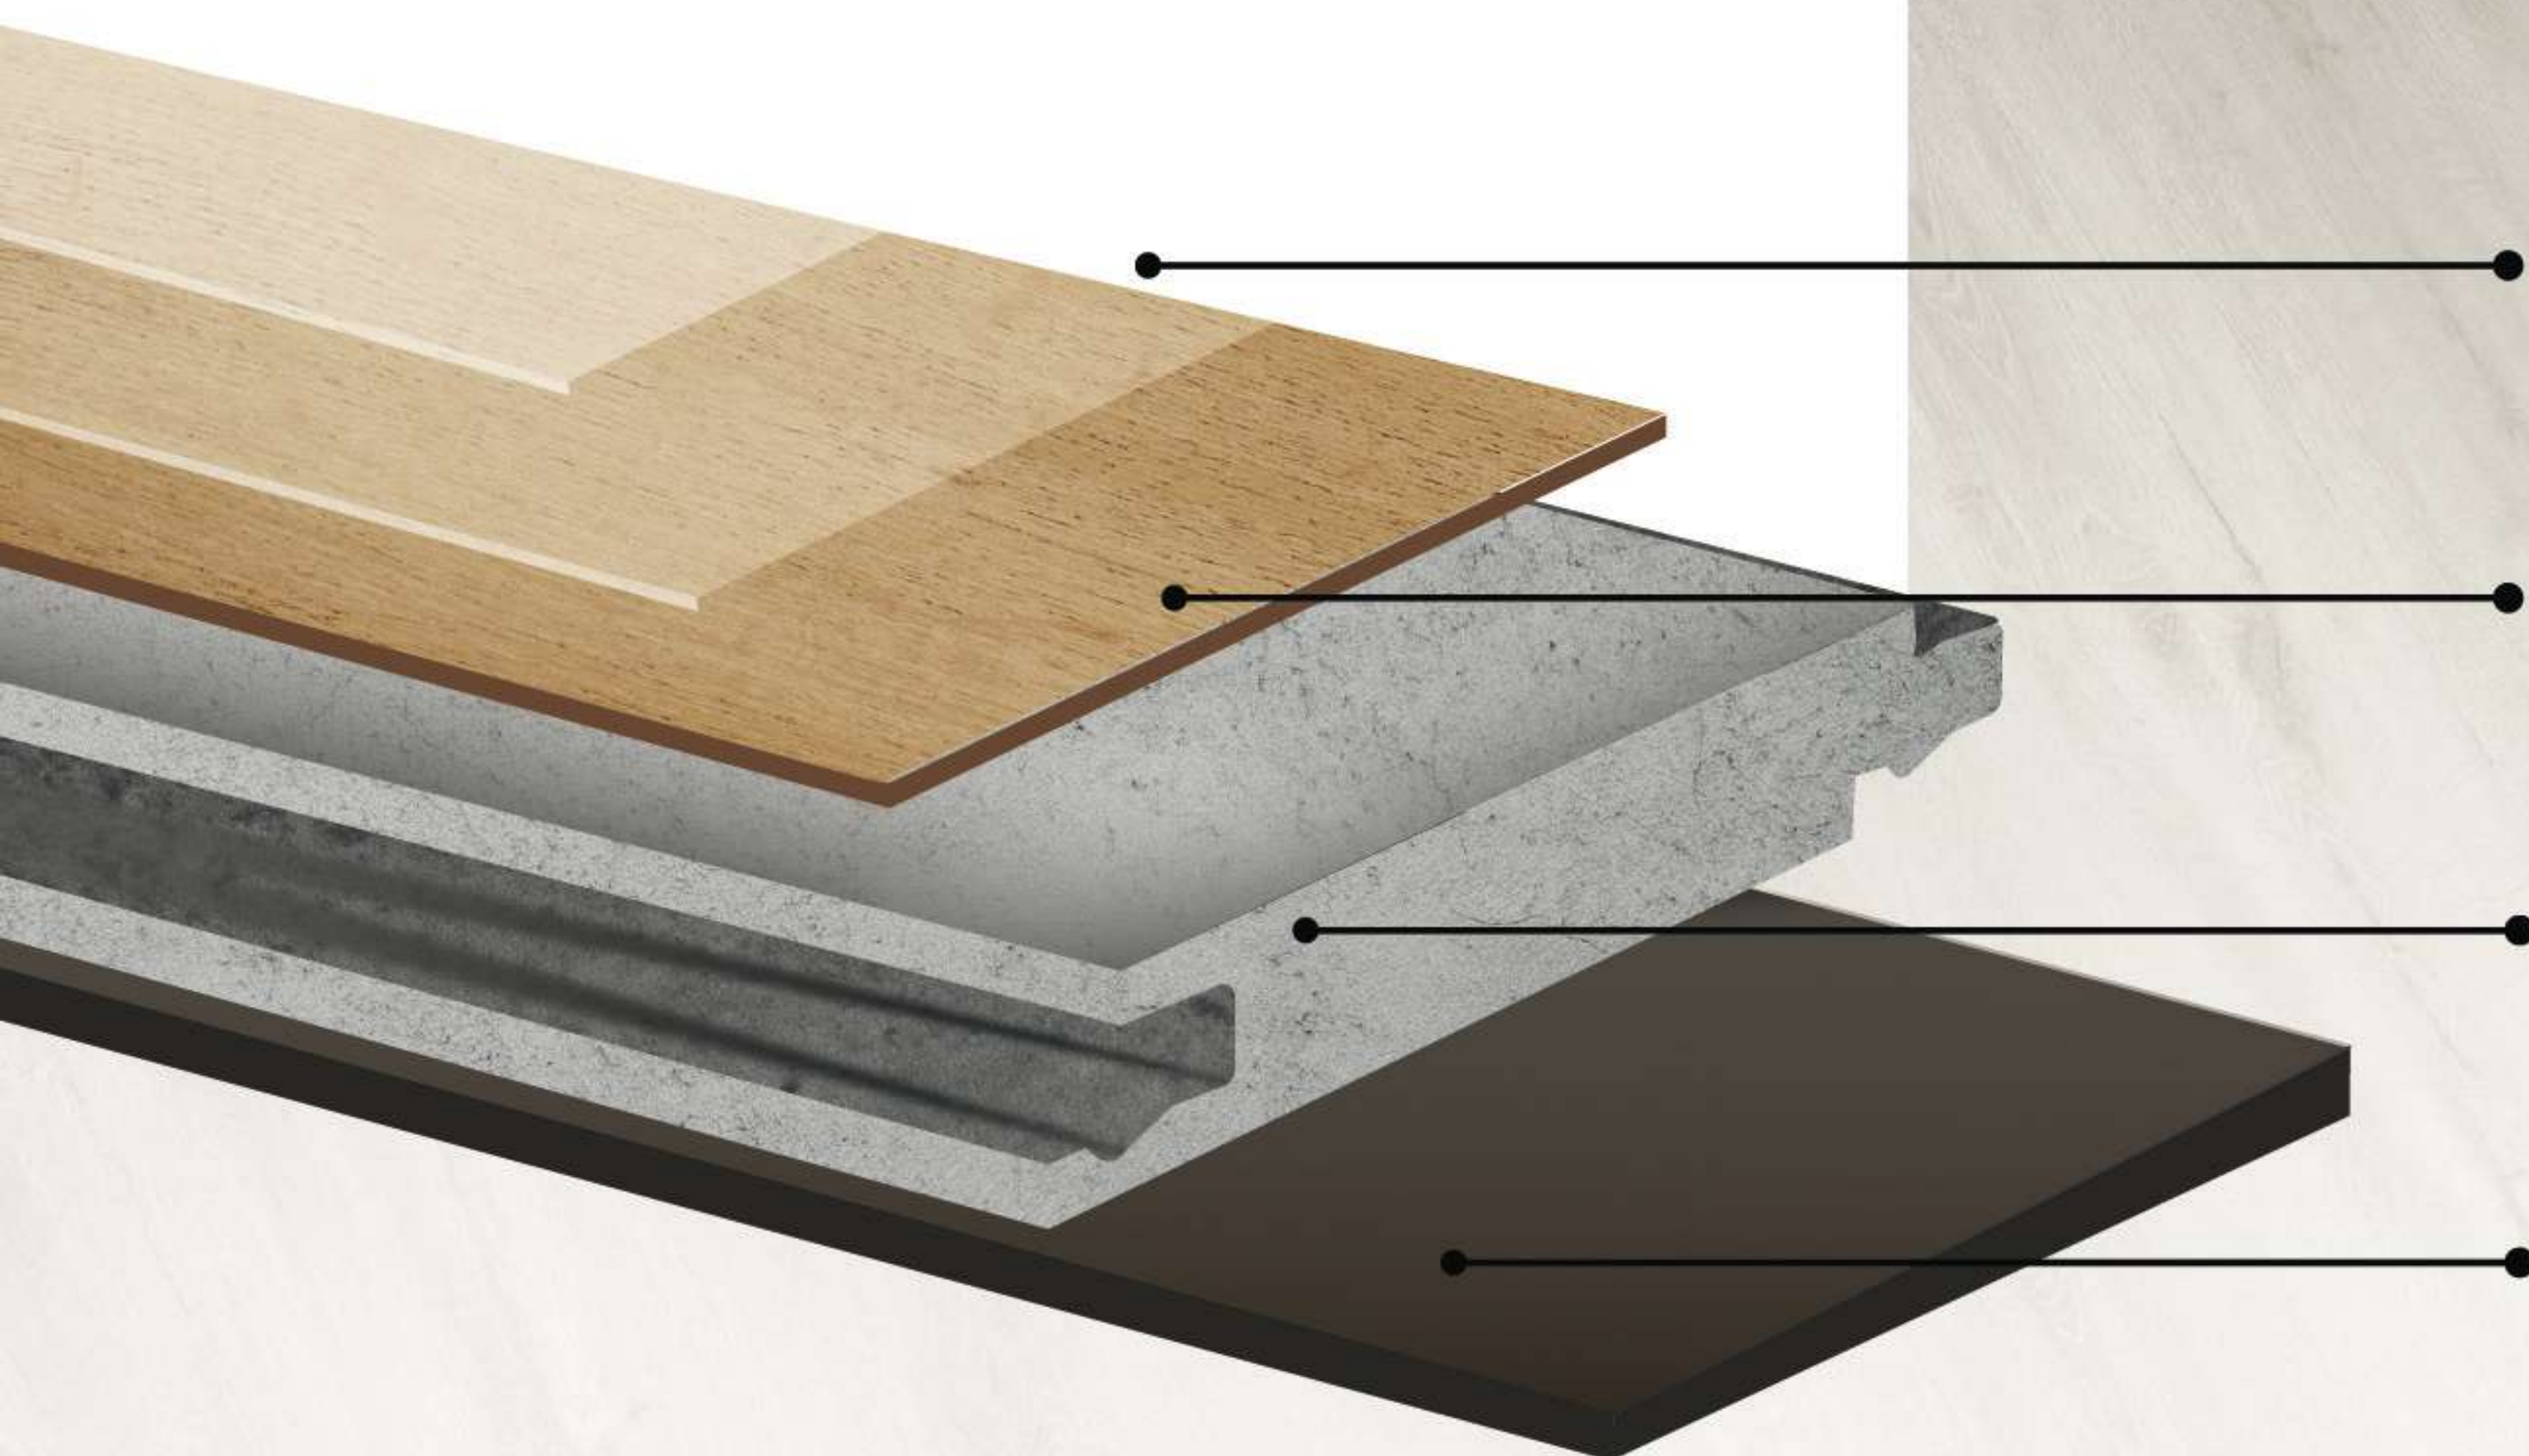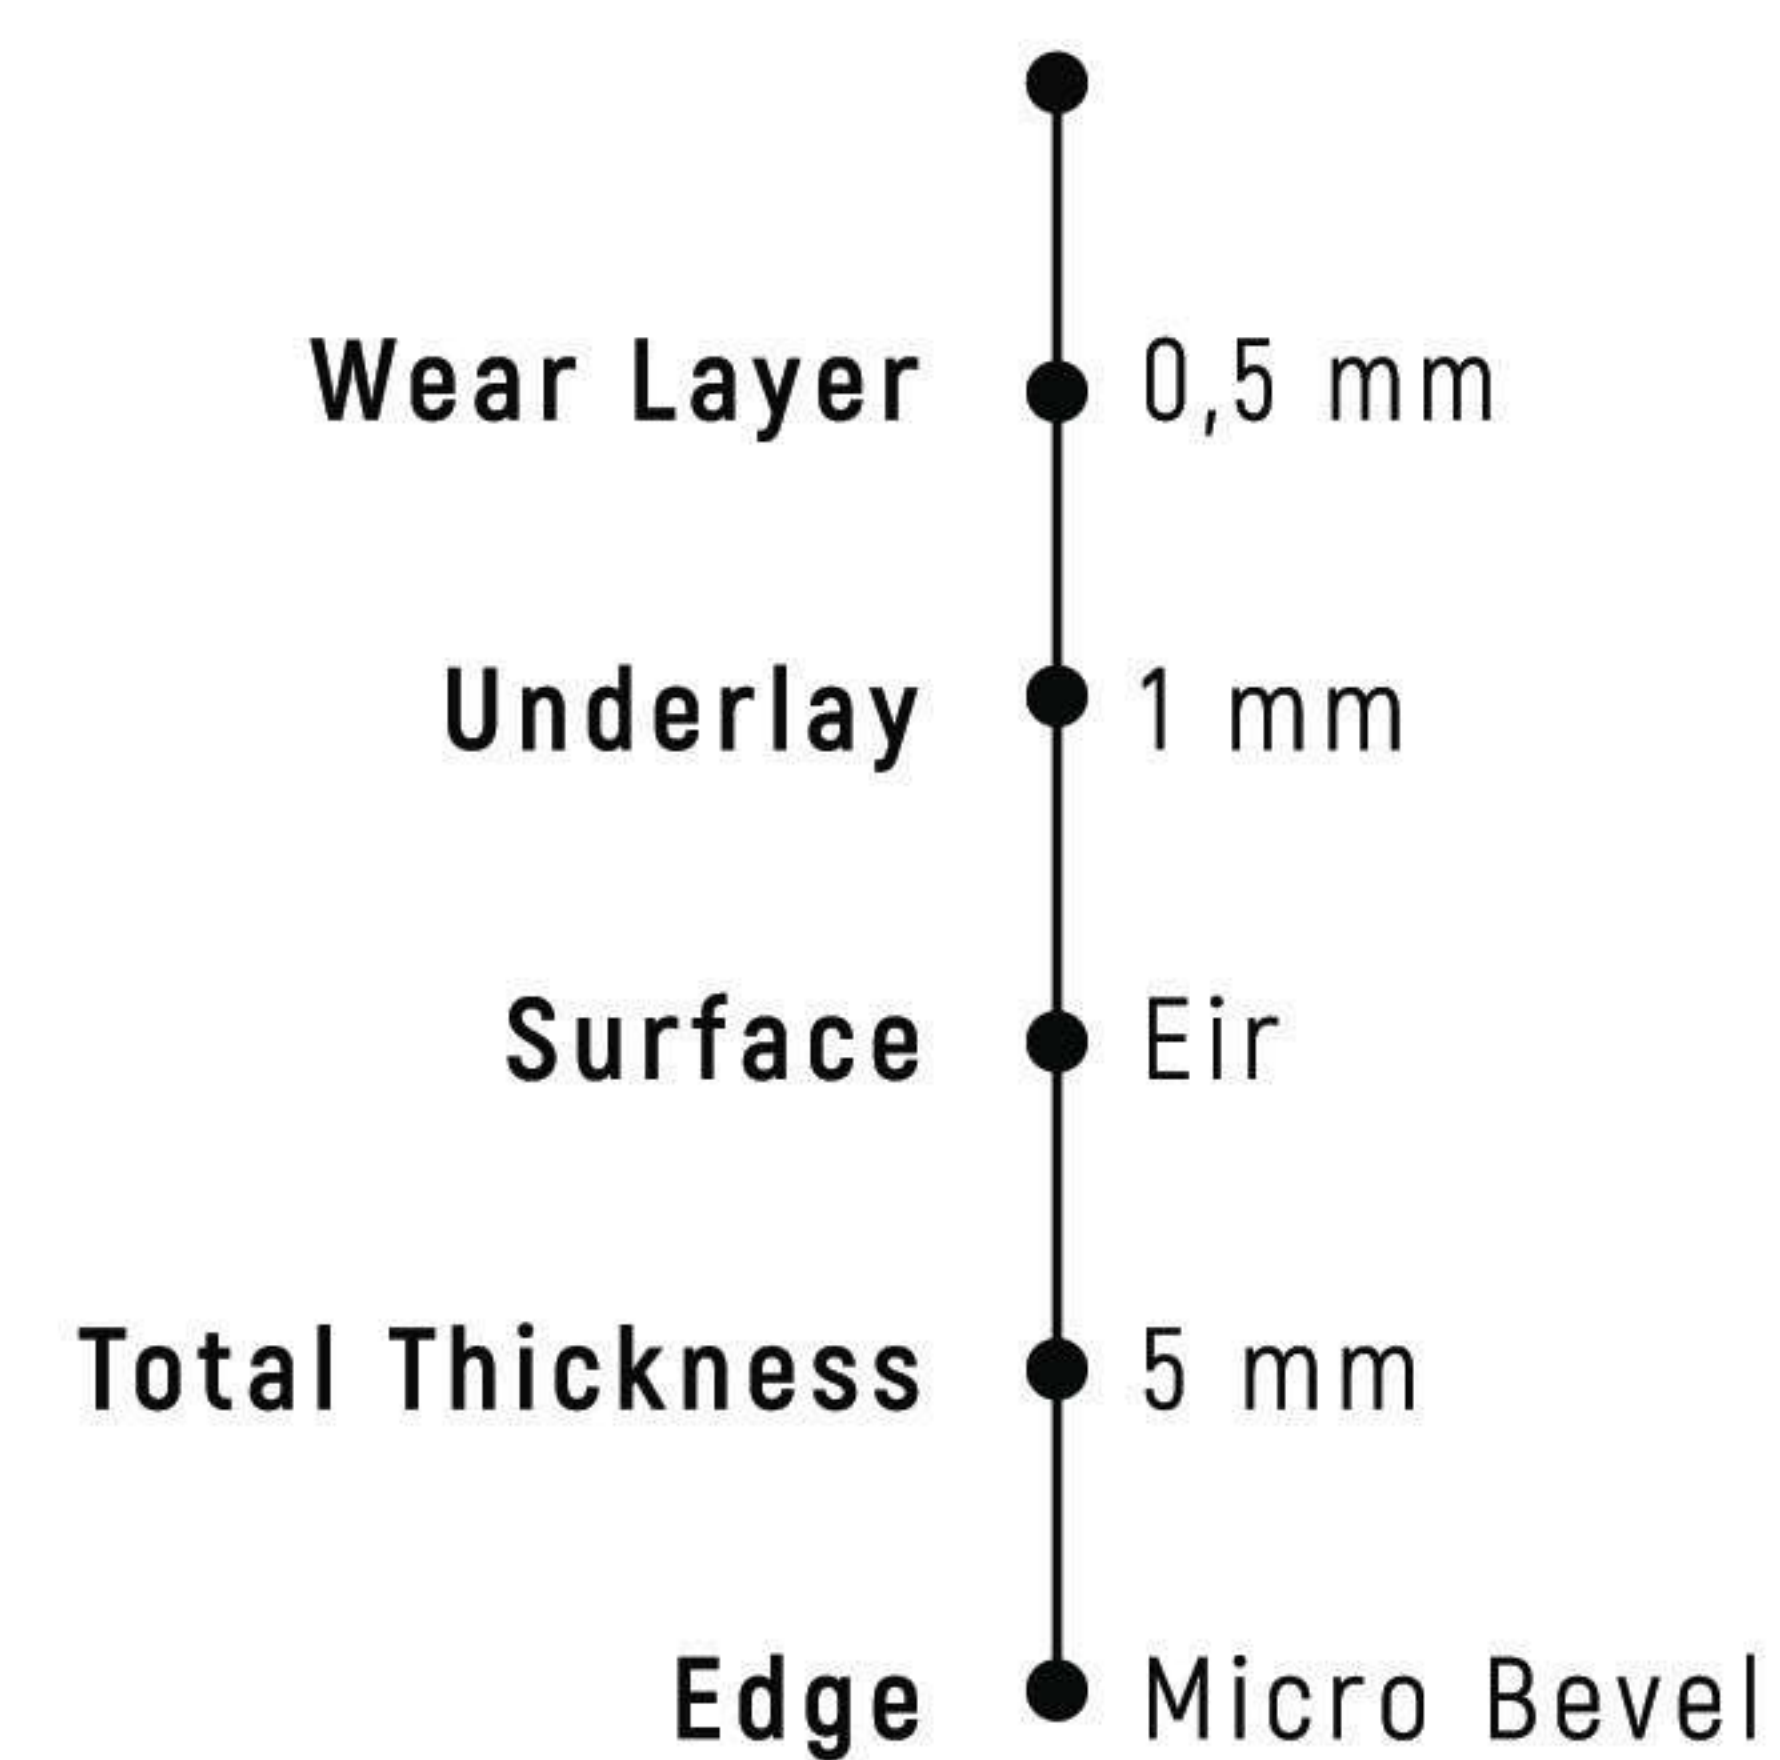

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core

High Density
Underlayment

228mm
1220 mm



150 mm

750 mm



101 BRYCE CANYON



OG-101-PL | PLANK
228 X 1220 X 5 mm



OG-101-HB | HERRINGBONE
150 X 750 X 5 mm




102 MORaine LAKE



OG-102-PL PLANK
228 X 1220 X 5 mm



OG-102-HB HERRINGBONE
150 X 750 X 5 mm

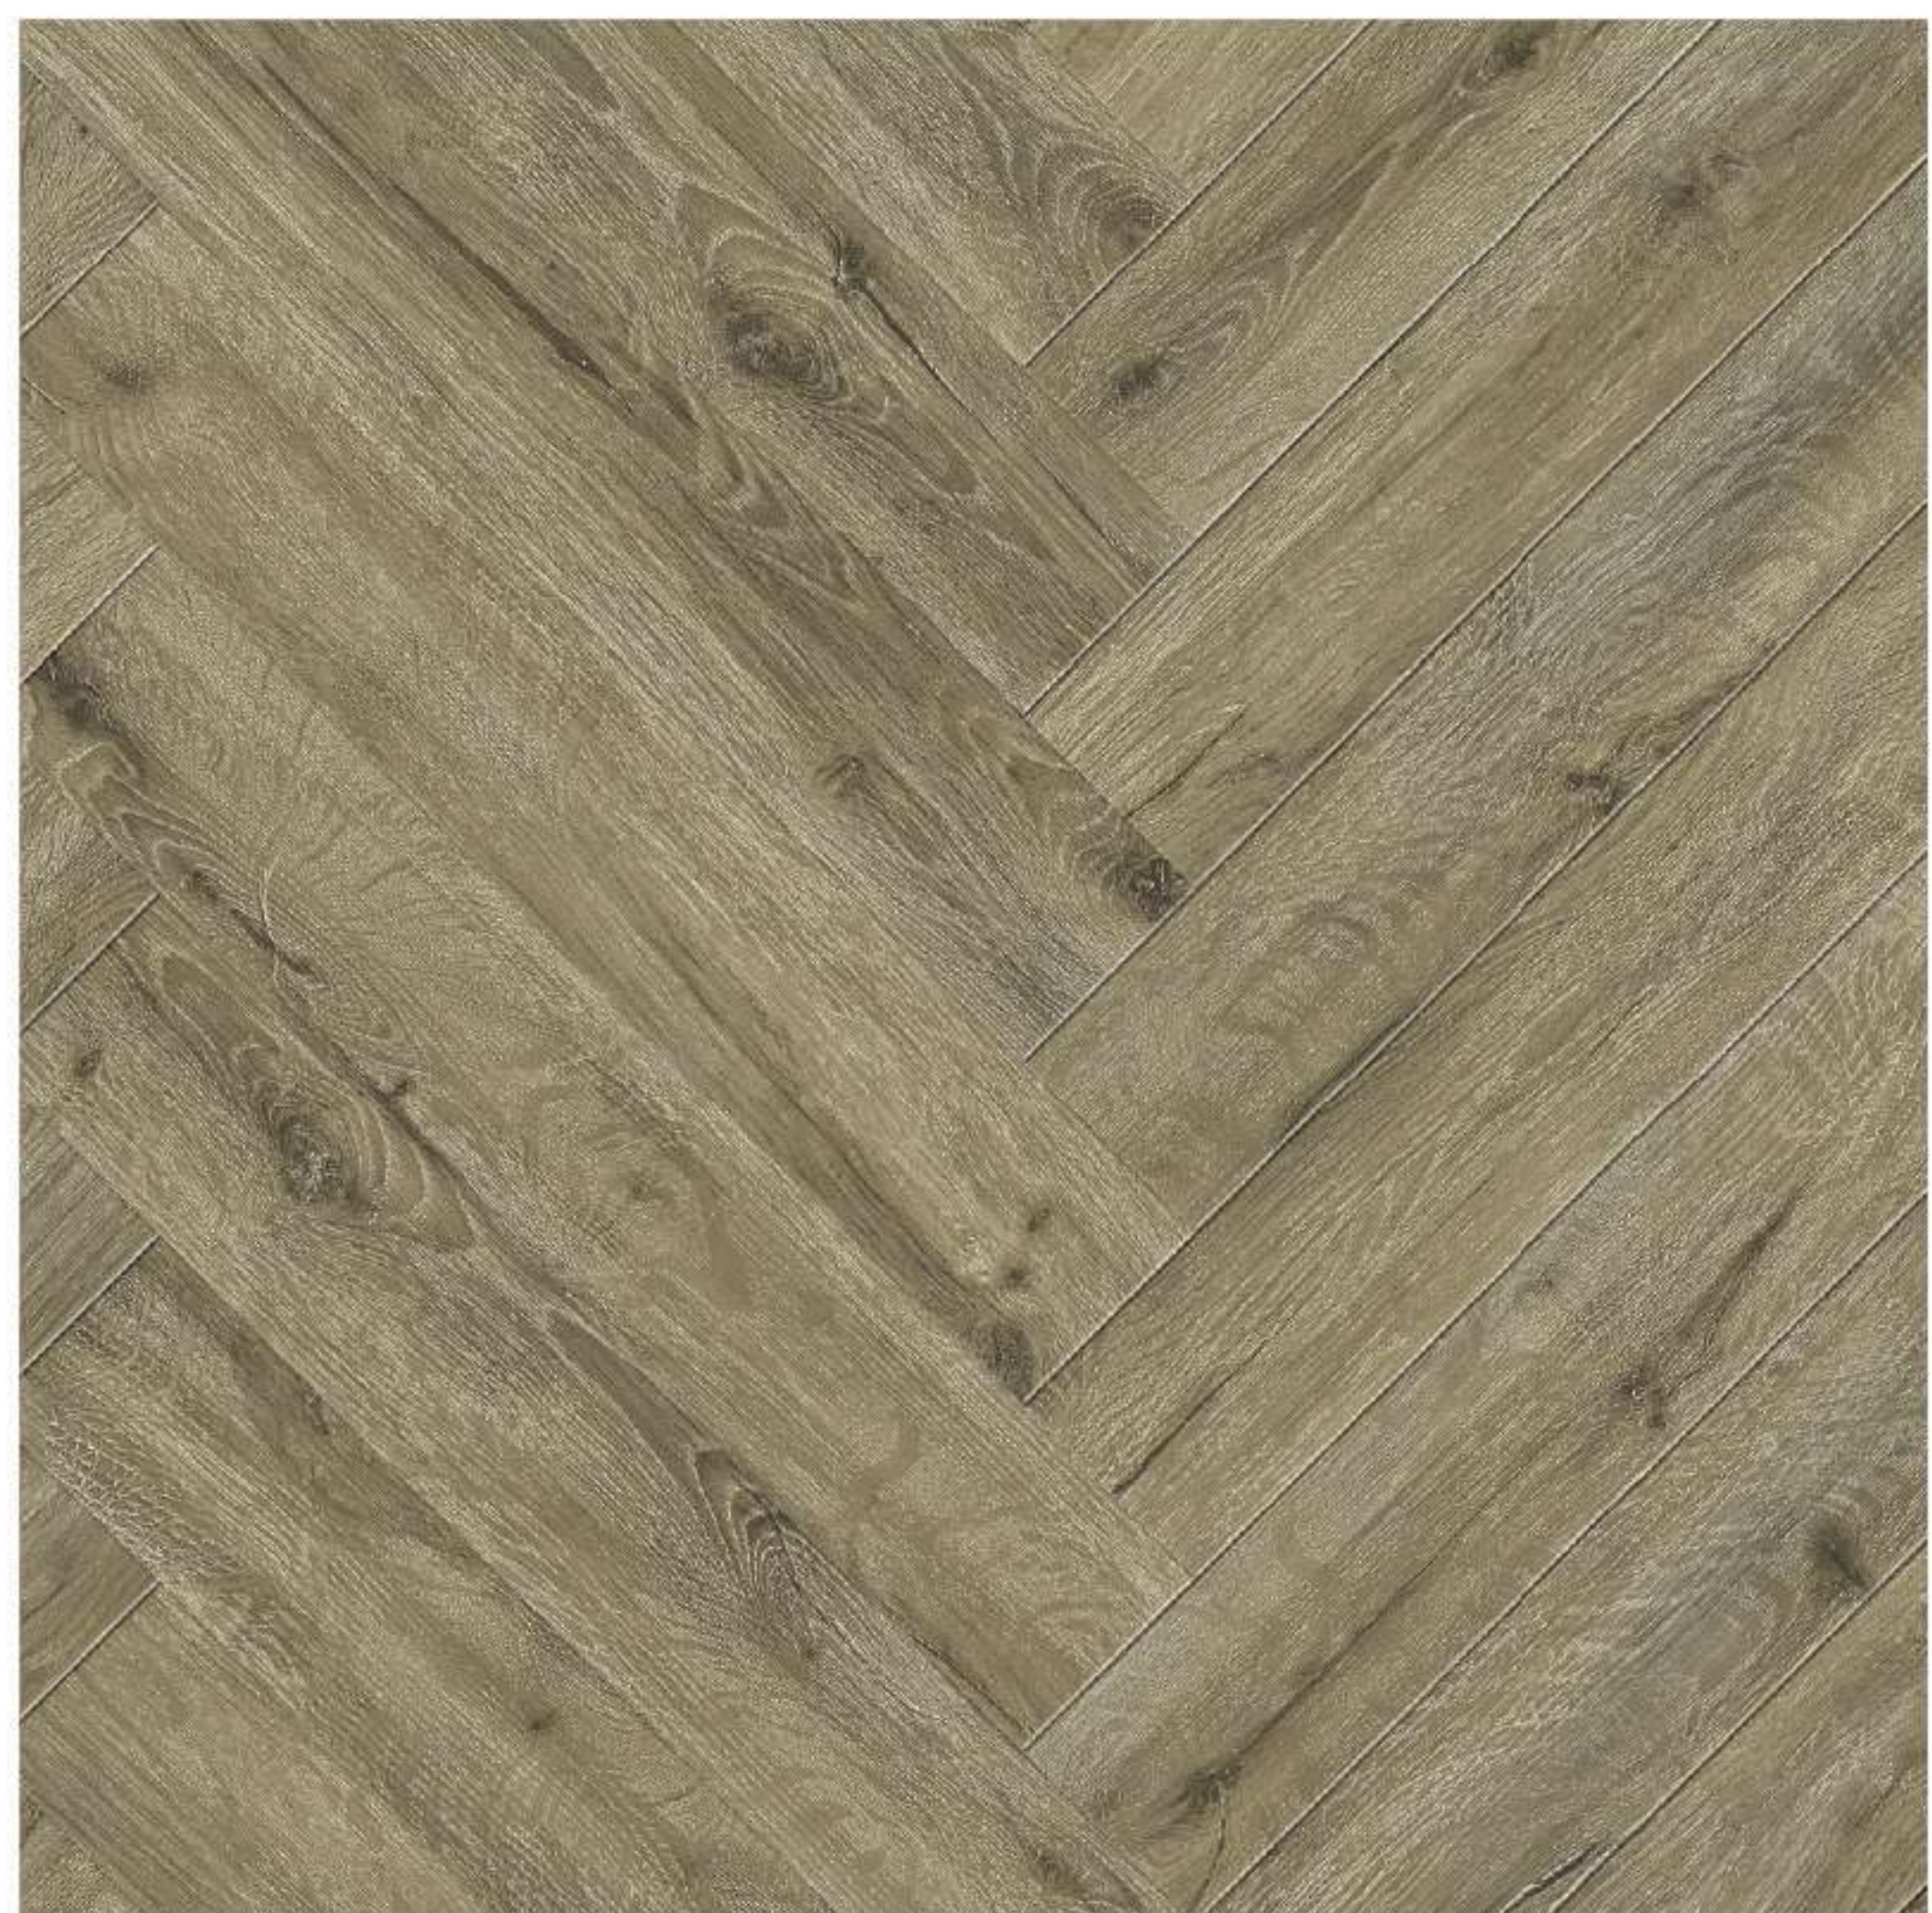



103 AMAZON



OG-103-PL | PLANK
228 X 1220 X 5 mm



OG-103-HB | HERRINGBONE
150 X 750 X 5 mm

103

AMAZON



49

ORIGINALS COLLECTION

104 KAKADU



OG-104-PL| PLANK
228 X 1220 X 5 mm



OG-104-HB| HERRINGBONE
150 X 750 X 5 mm





105

VICTORIA

51

ORIGINALS COLLECTION




105 VICTORIA



OG-105-PL | PLANK
228 X 1220 X 5 mm



OG-105-HB | HERRINGBONE
150 X 750 X 5 mm

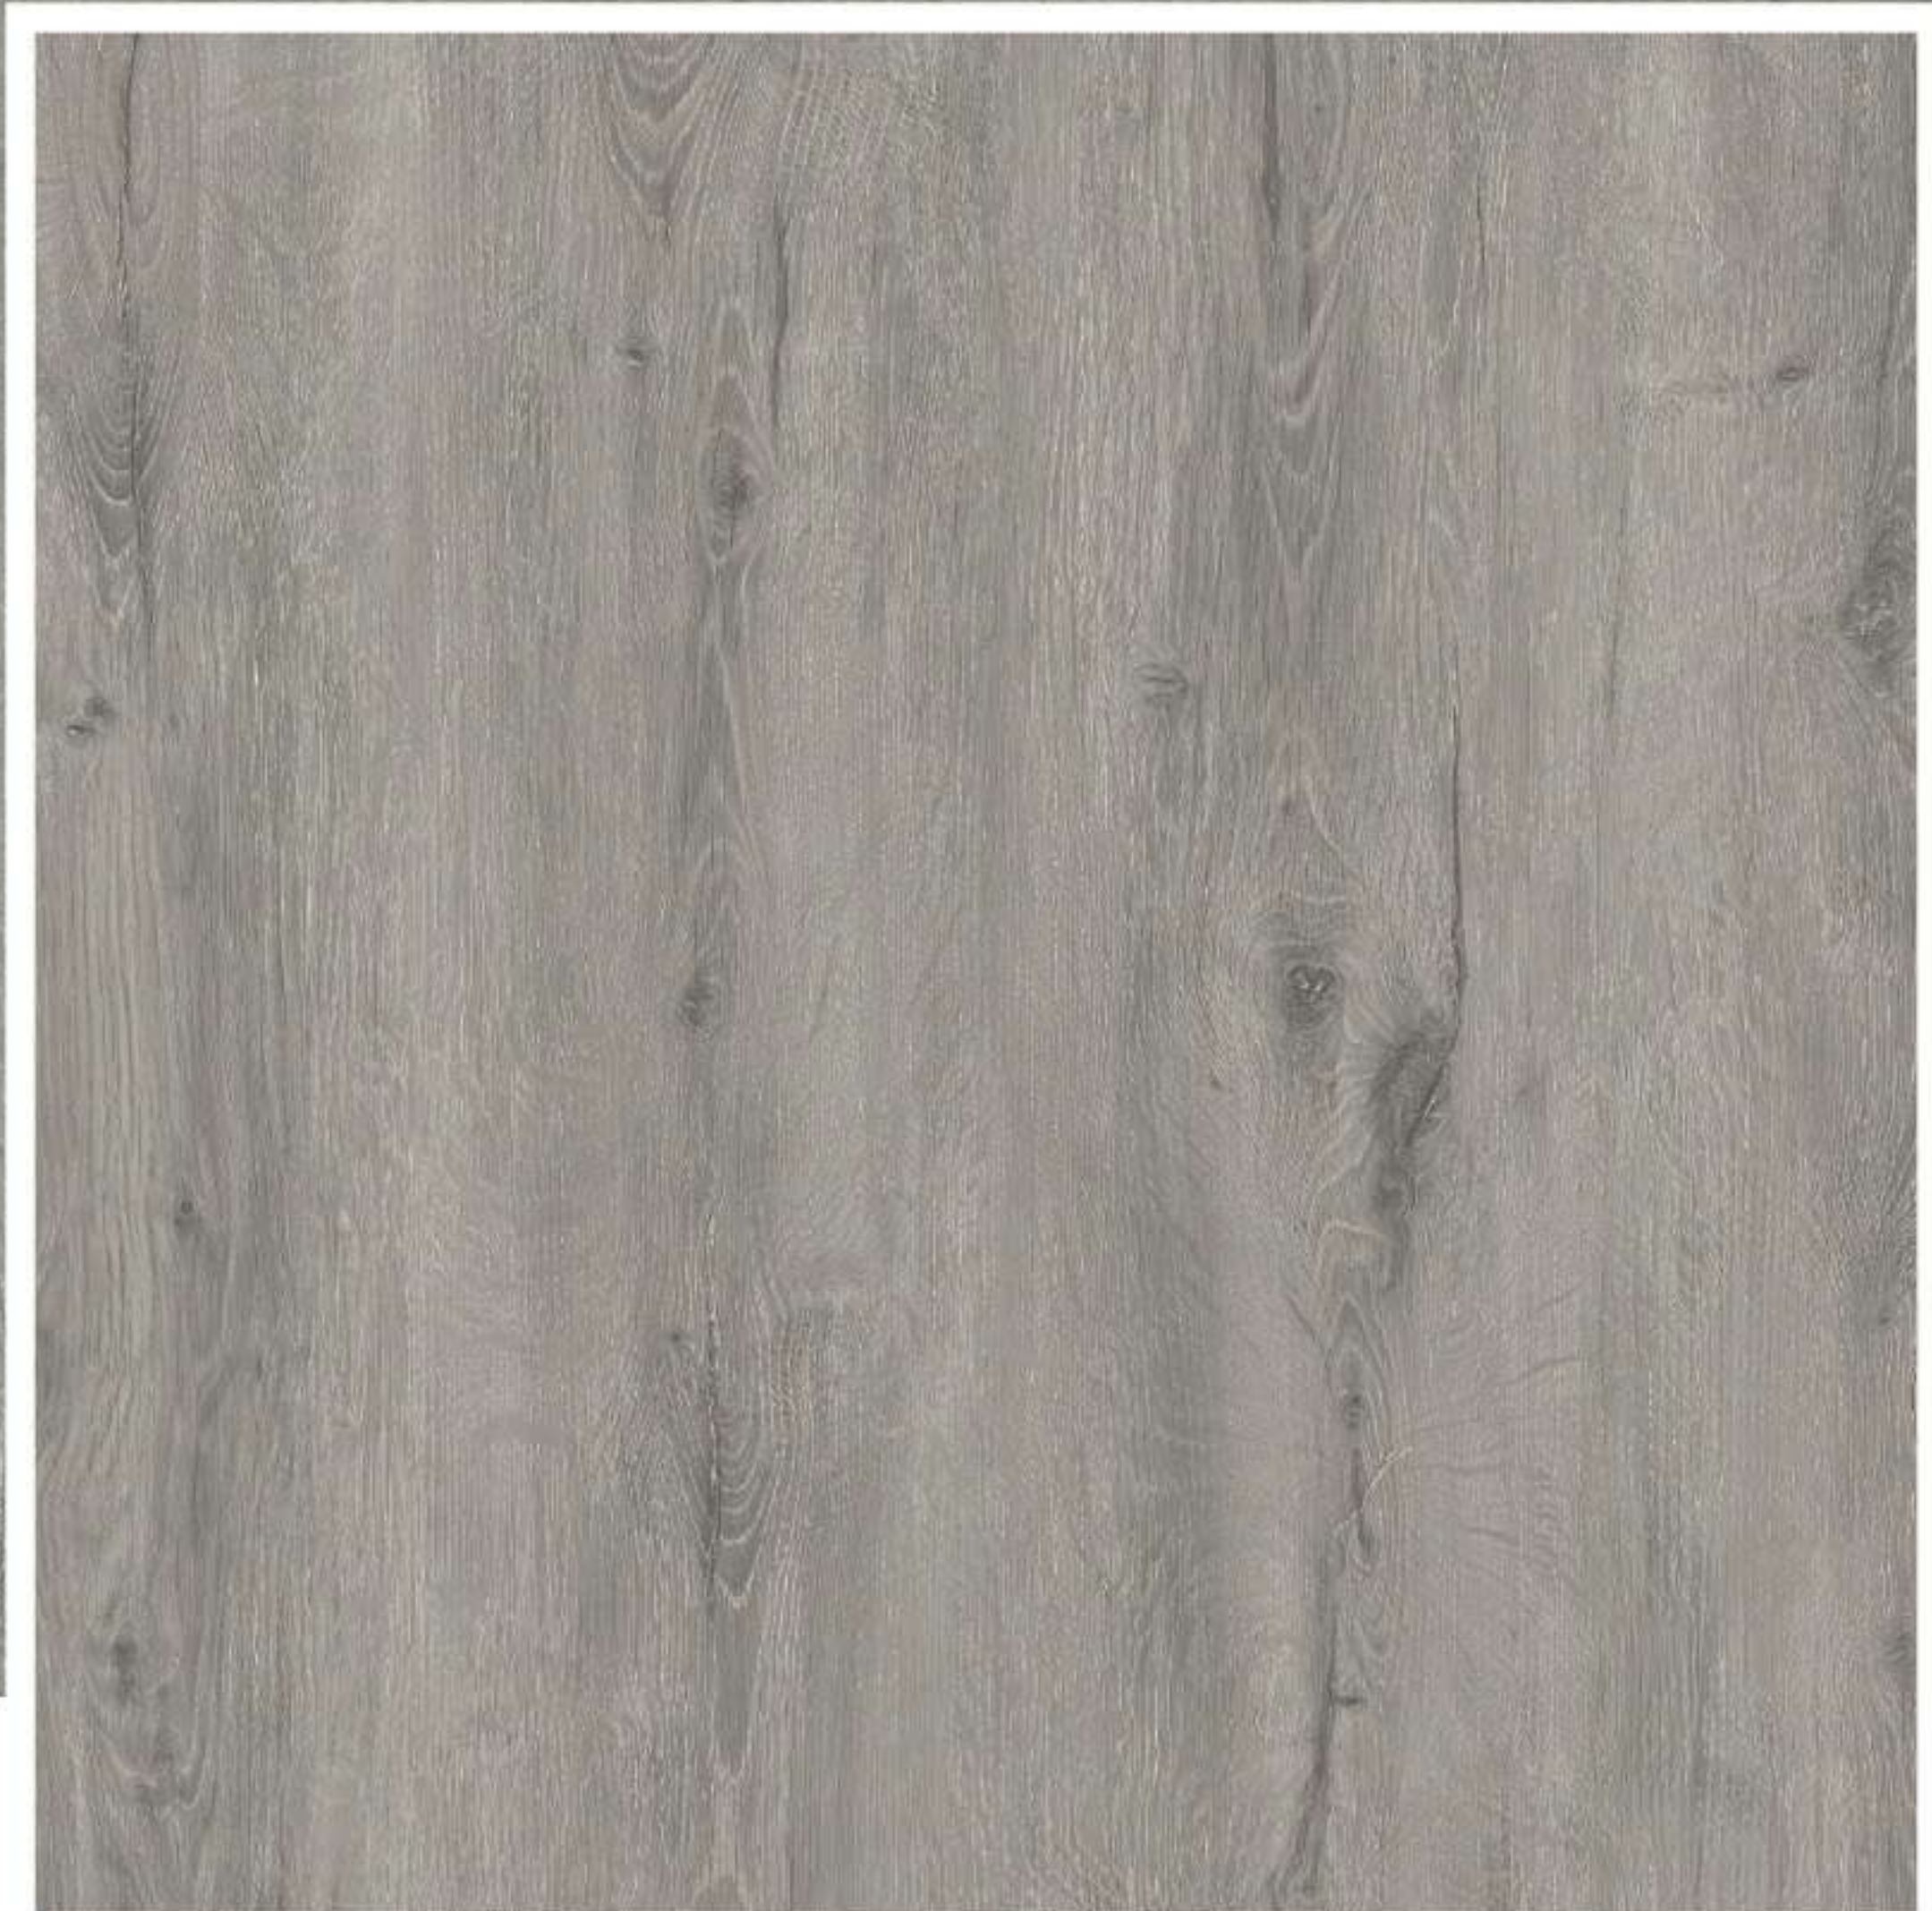

106 GRAN CANARIA



OG-106-PL | PLANK
228 X 1220 X 5 mm



OG-106-HB | HERRINGBONE
150 X 750 X 5 mm





107 HALONG BAY



OG-107-PL | PLANK
228 X 1220 X 5 mm



OG-107-HB | HERRINGBONE
150 X 750 X 5 mm

HALONG BAY 107



53

ORIGINALS COLLECTION

108 CAPPADOCIA







OG-108-PL | PLANK
228 X 1220 X 5 mm



OG-108-HB | HERRINGBONE
150 X 750 X 5 mm

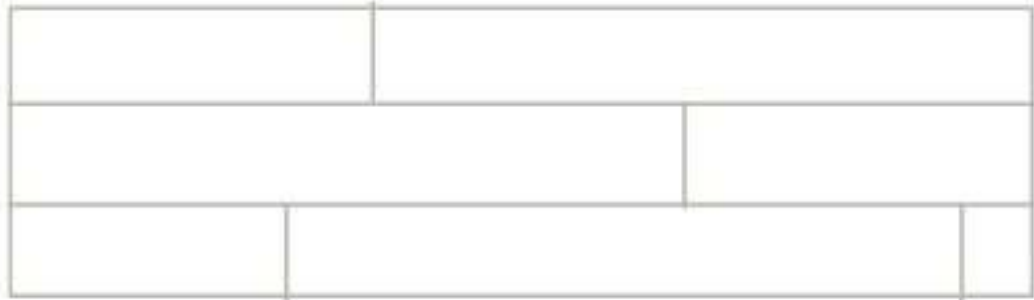

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	228 X 1220	MICRO BEVEL	EIR	UNICLIC PLANK
PLANK	Package[m ²]	Palette [m ²]	Warranty[Year]	
	 9 Pieces = 2.503 m ² = 21,029 kg	 44 Package = 110,151 m ² = 945,271 kg	Residential 20	Commercial 7

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	150 X 750	MICRO BEVEL	EIR	UNIDROP HERRINGBONE
HERRINGBONE	Package[m ²]	Palette [m ²]	Warranty[Year]	
	 16 Pieces = 1.800 m ² = 15,120 kg	 63 Package = 113,400 m ² = 972,560 kg	Residential 20	Commercial 7



WOOD

New Generation Flooring
www.areafloors.com.tr


AESTHETIC ORIGINATES FROM NATURE'S INSPIRATION

With the Wood brand, our SPC Flooring adds an elegant aesthetic to your modern living spaces with the warmth and naturalness of natural wood shades. Its quality and ultramatt features create a perfect balance between durability and visual appeal.

The design, mimicking the natural wood texture, instills a sense of warmth and comfort in any space, while the ultramatt surface prevents glare and offers easy maintenance, enhancing its resistance to stains and scratches.

Wood SPC Flooring is easy to install and long-lasting, ensuring beauty and quality for years to come. It is also environmentally friendly, preserving resources and using materials that promote health.

Transform your living spaces with Wood SPC Flooring, a perfect choice for both residential and commercial areas, seamlessly blending the beauty of nature with modern design comfort. If you seek quality, aesthetics, and durability, Wood SPC Flooring is the ideal solution.

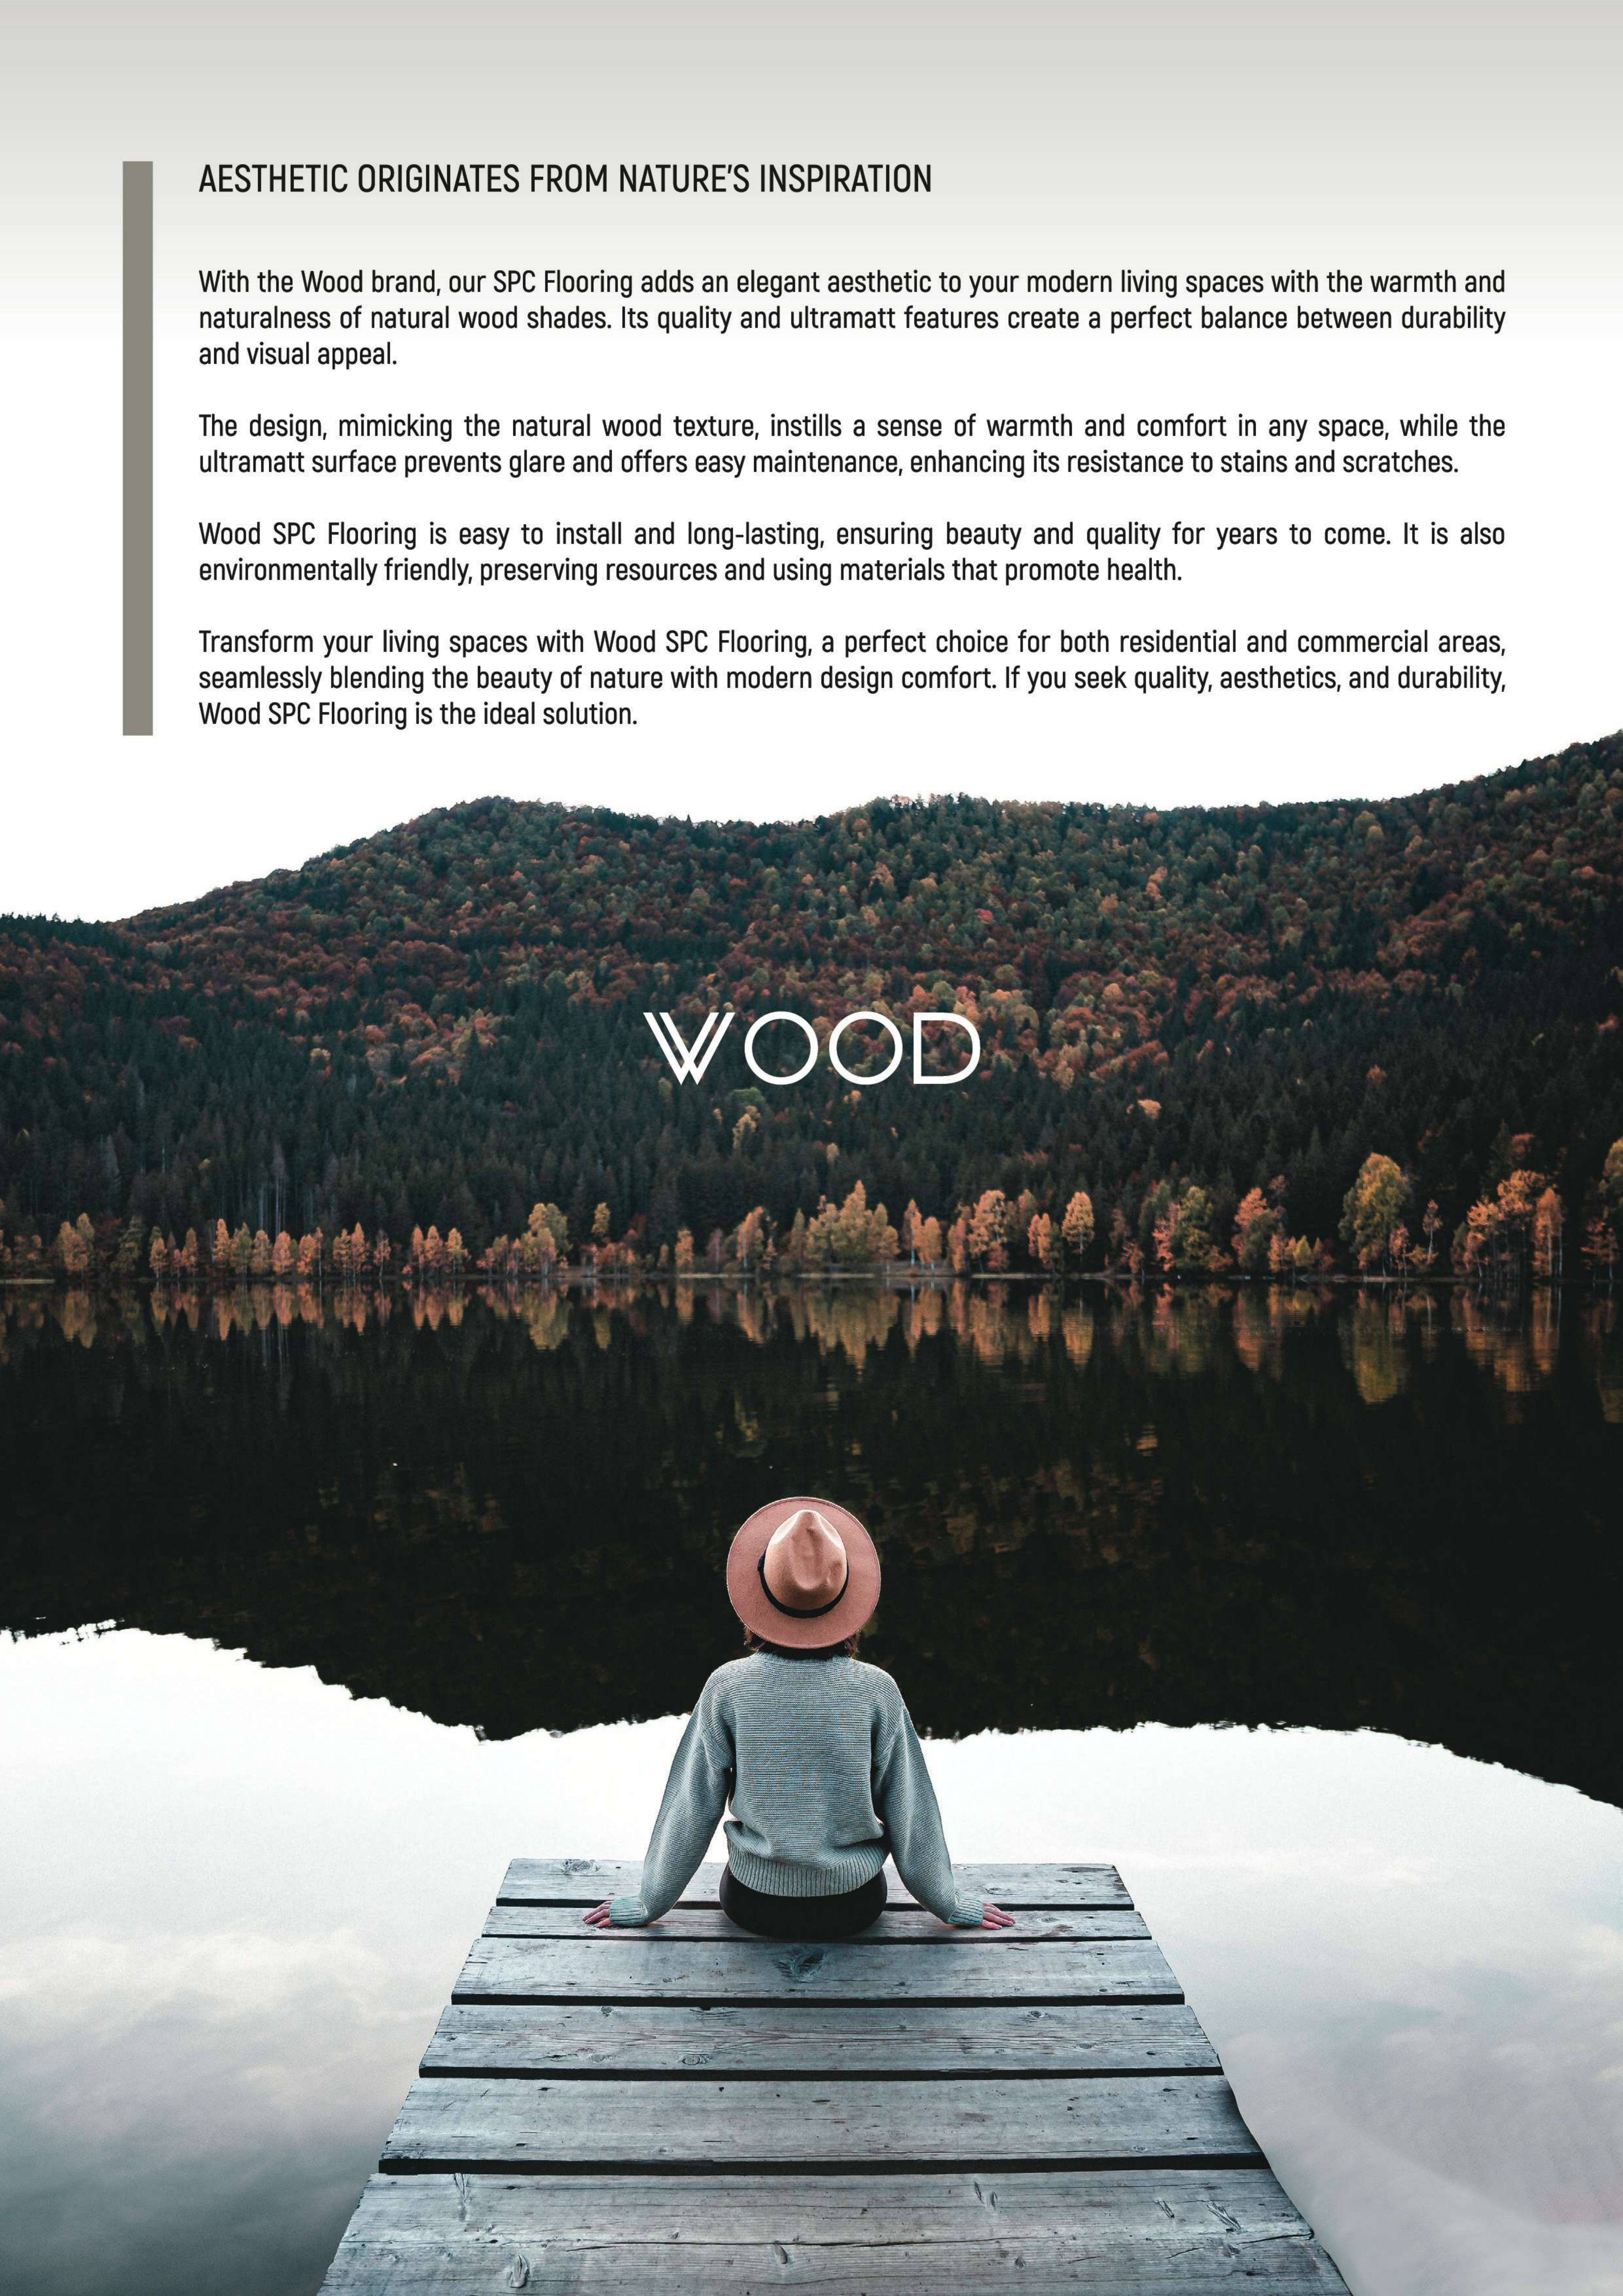

WOOD



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface



Moisture Resistance



High Density Underlay




Suitable for Underfloor Heating

Rediscover
Your Floors
With
Wood Quality



- Wear Layer 0,3 mm
- Underlay 1 mm
- Surface Wood
- Total Thickness 5 mm
- Edge Micro Bevel

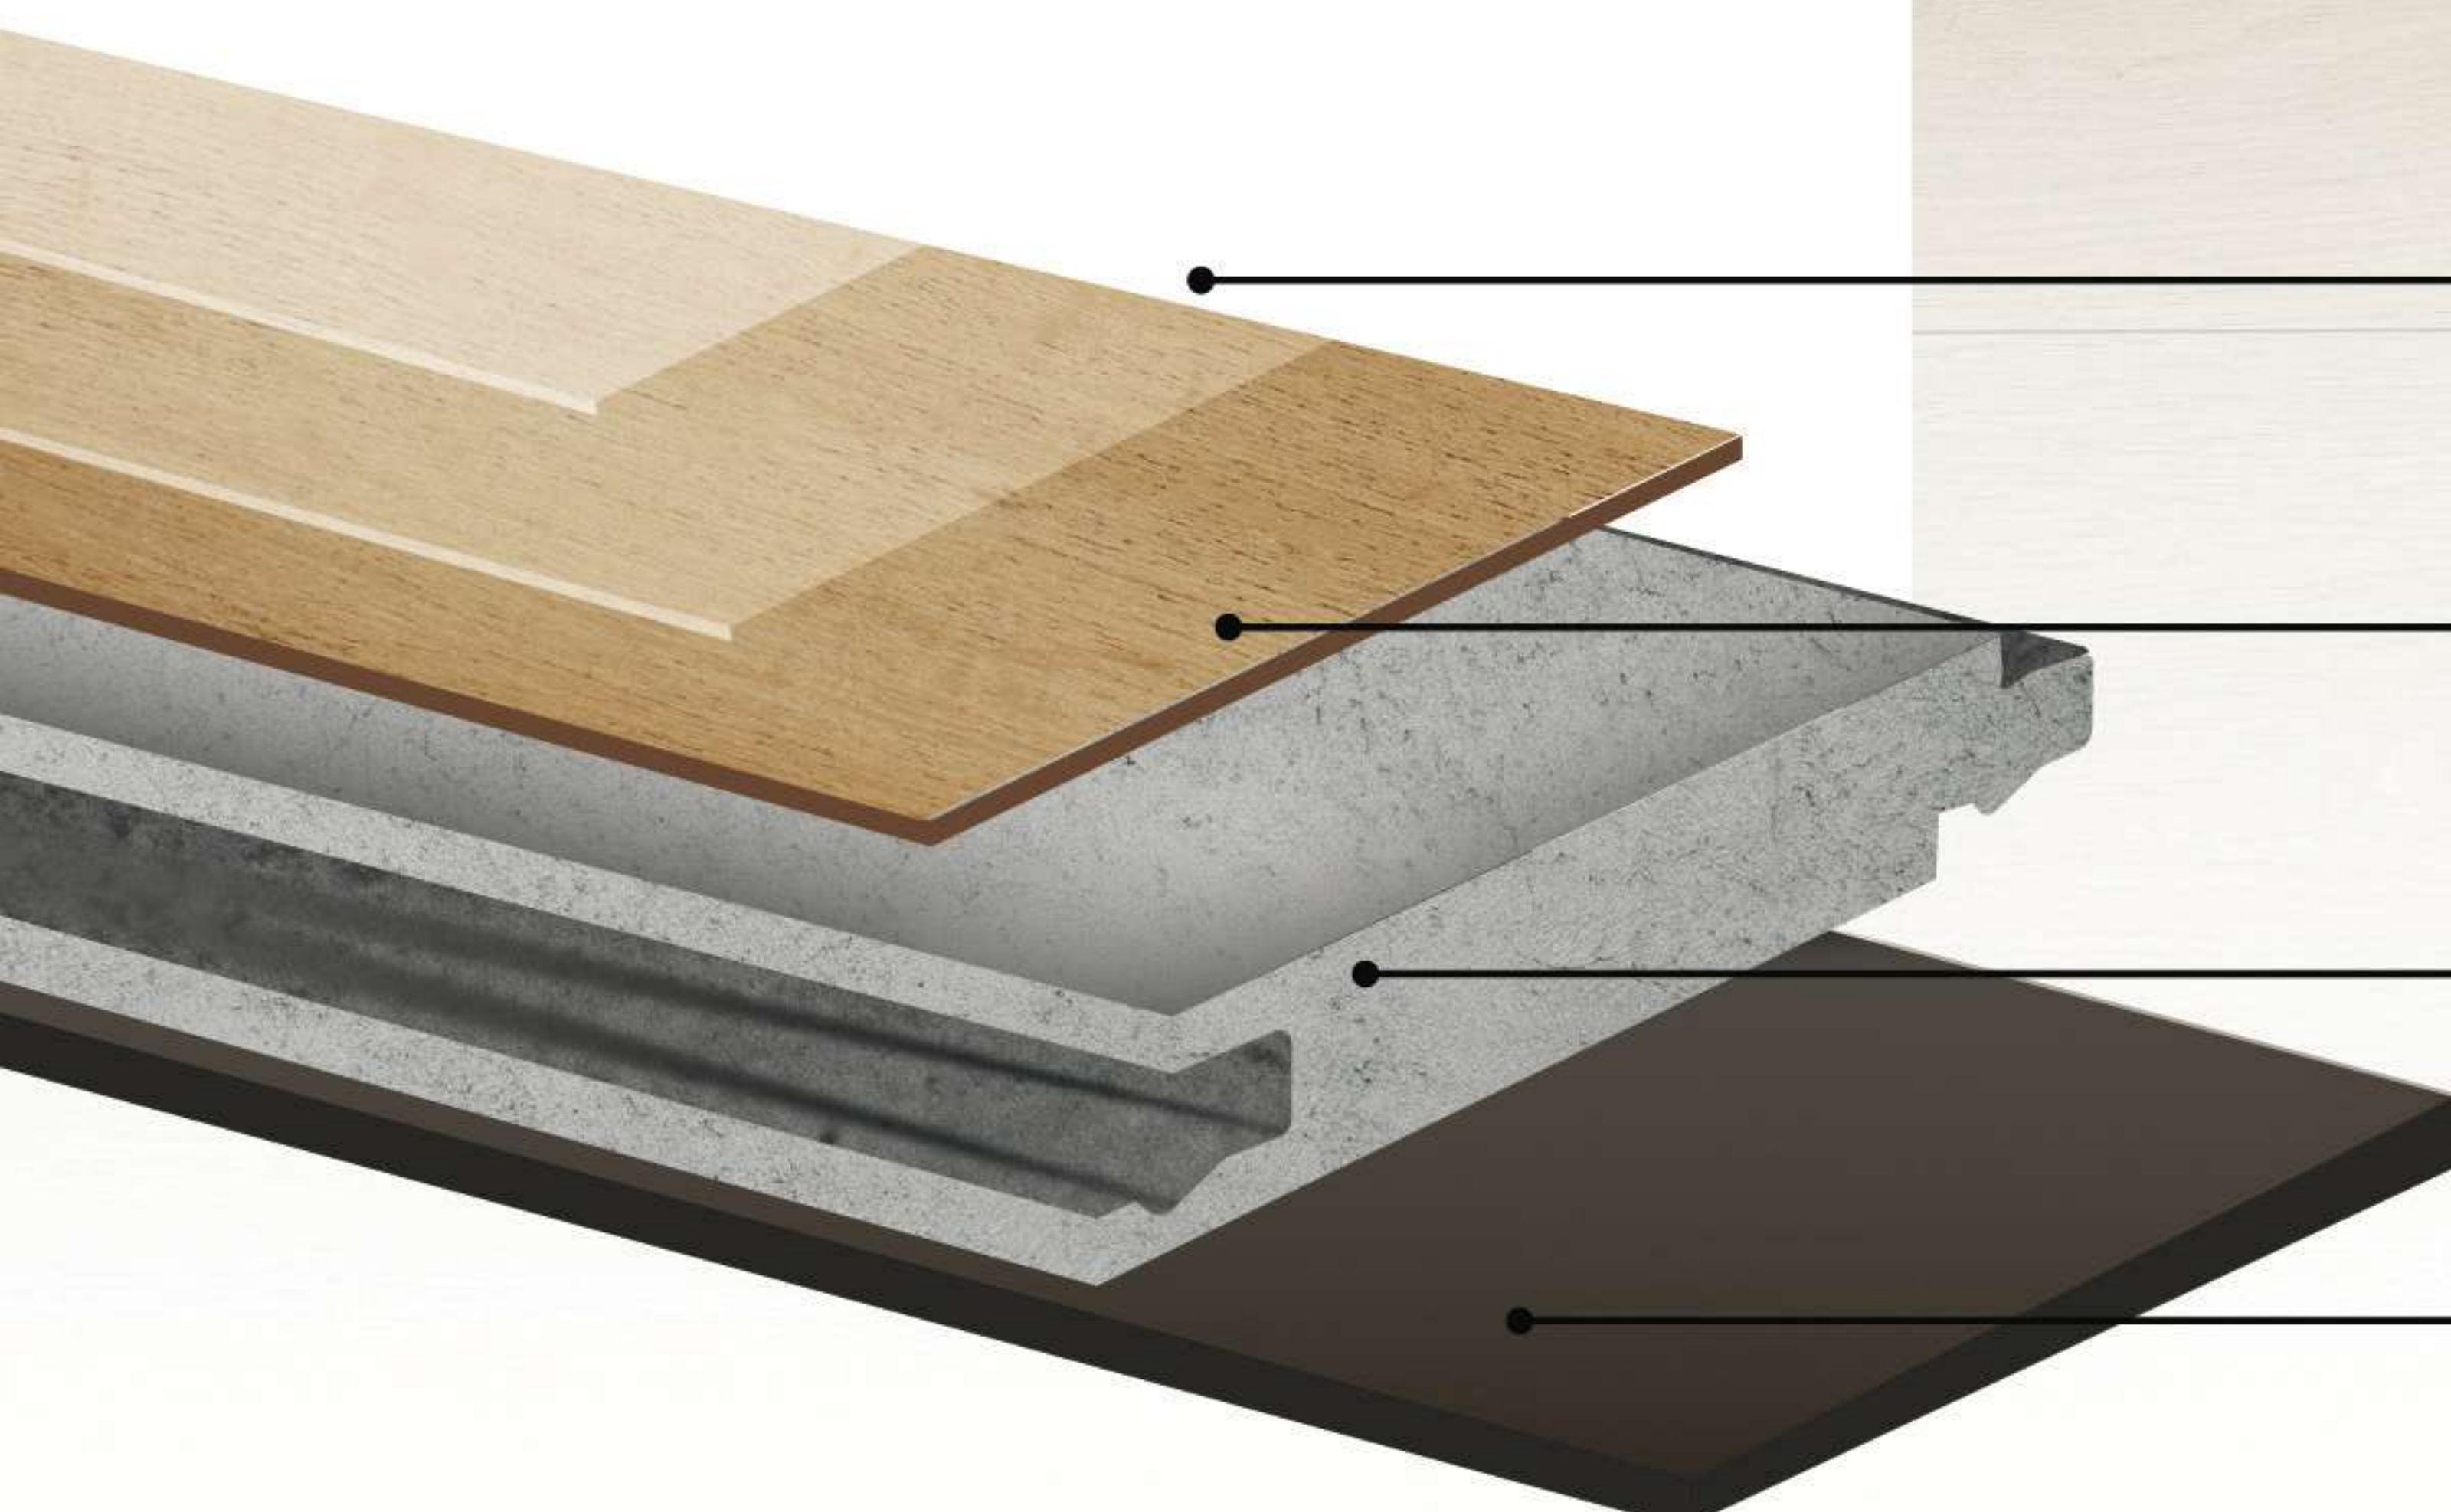

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Flim Layer

SPC Rigid Core

High Destiny
Underlayment

228mm
1220 mm



150 mm

750 mm



201 CANYON OAK



WD-201-PL | PLANK
228 X 1220 X 5 mm



WD-201-HB | HERRINGBONE
150 X 750 X 5 mm




202 DOMINICANO OAK




WD-202-PL | PLANK
228 X 1220 X 5 mm



WD-202-HB | HERRINGBONE
150 X 750 X 5 mm

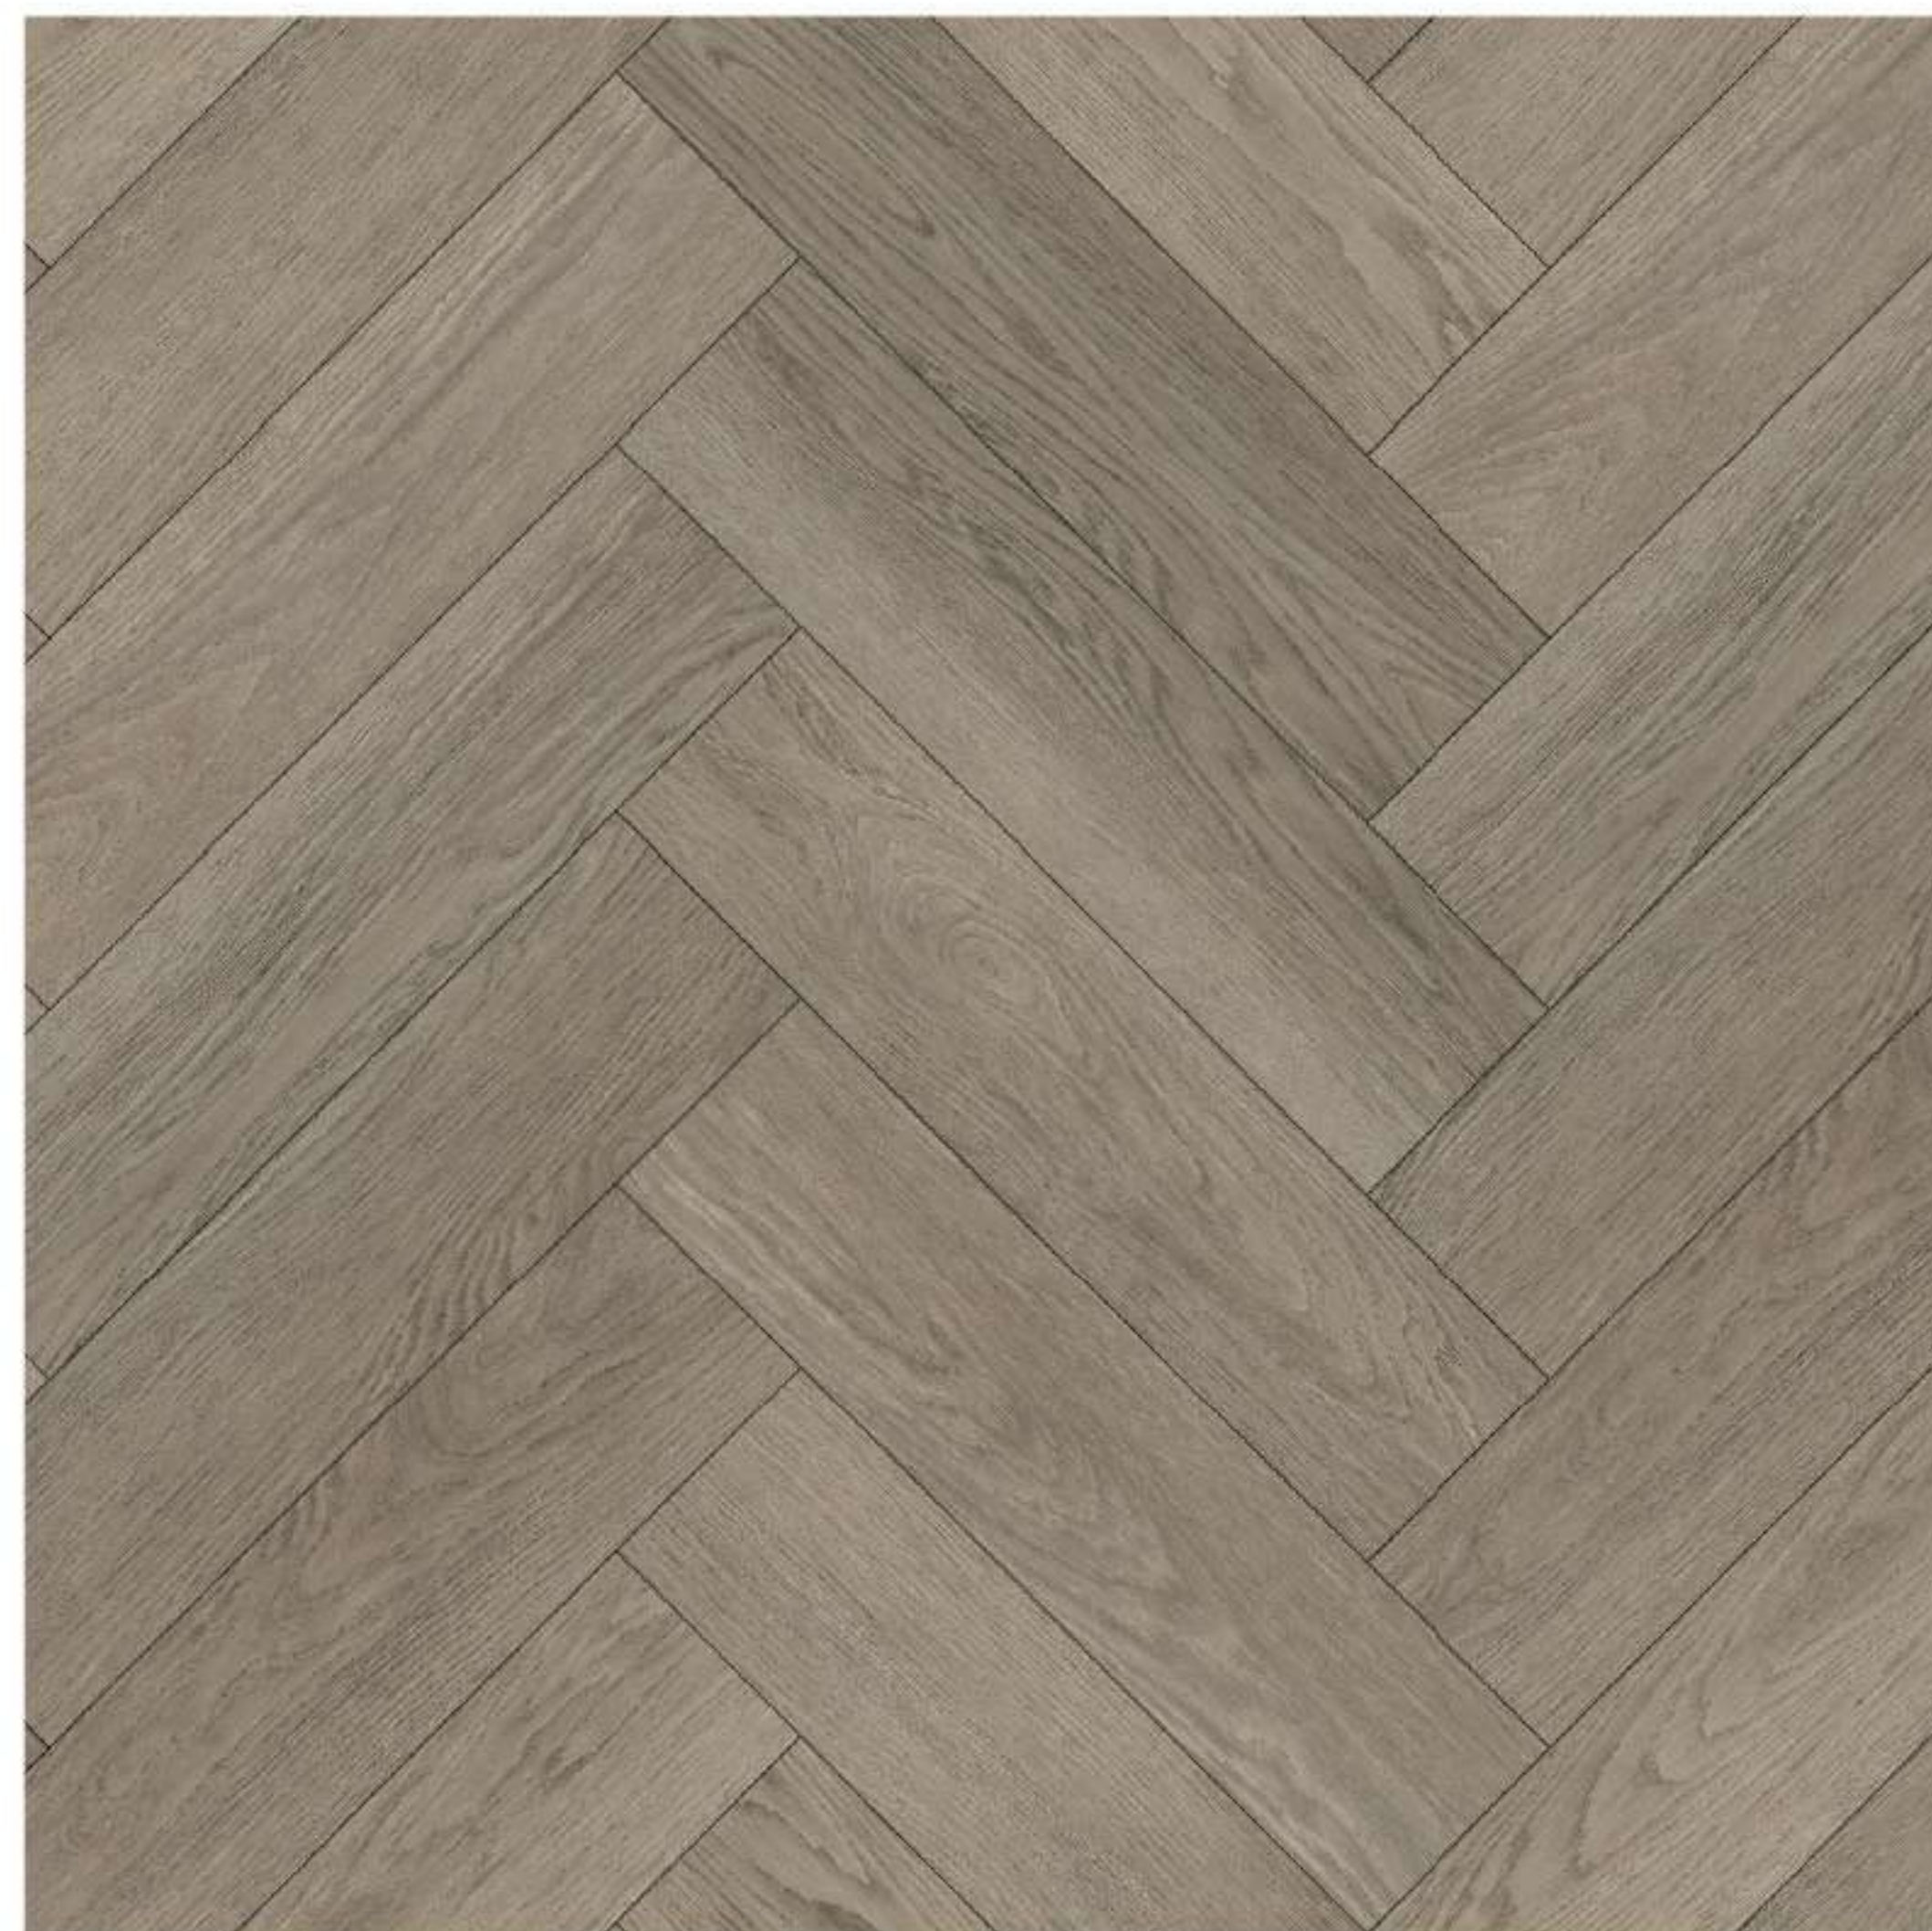

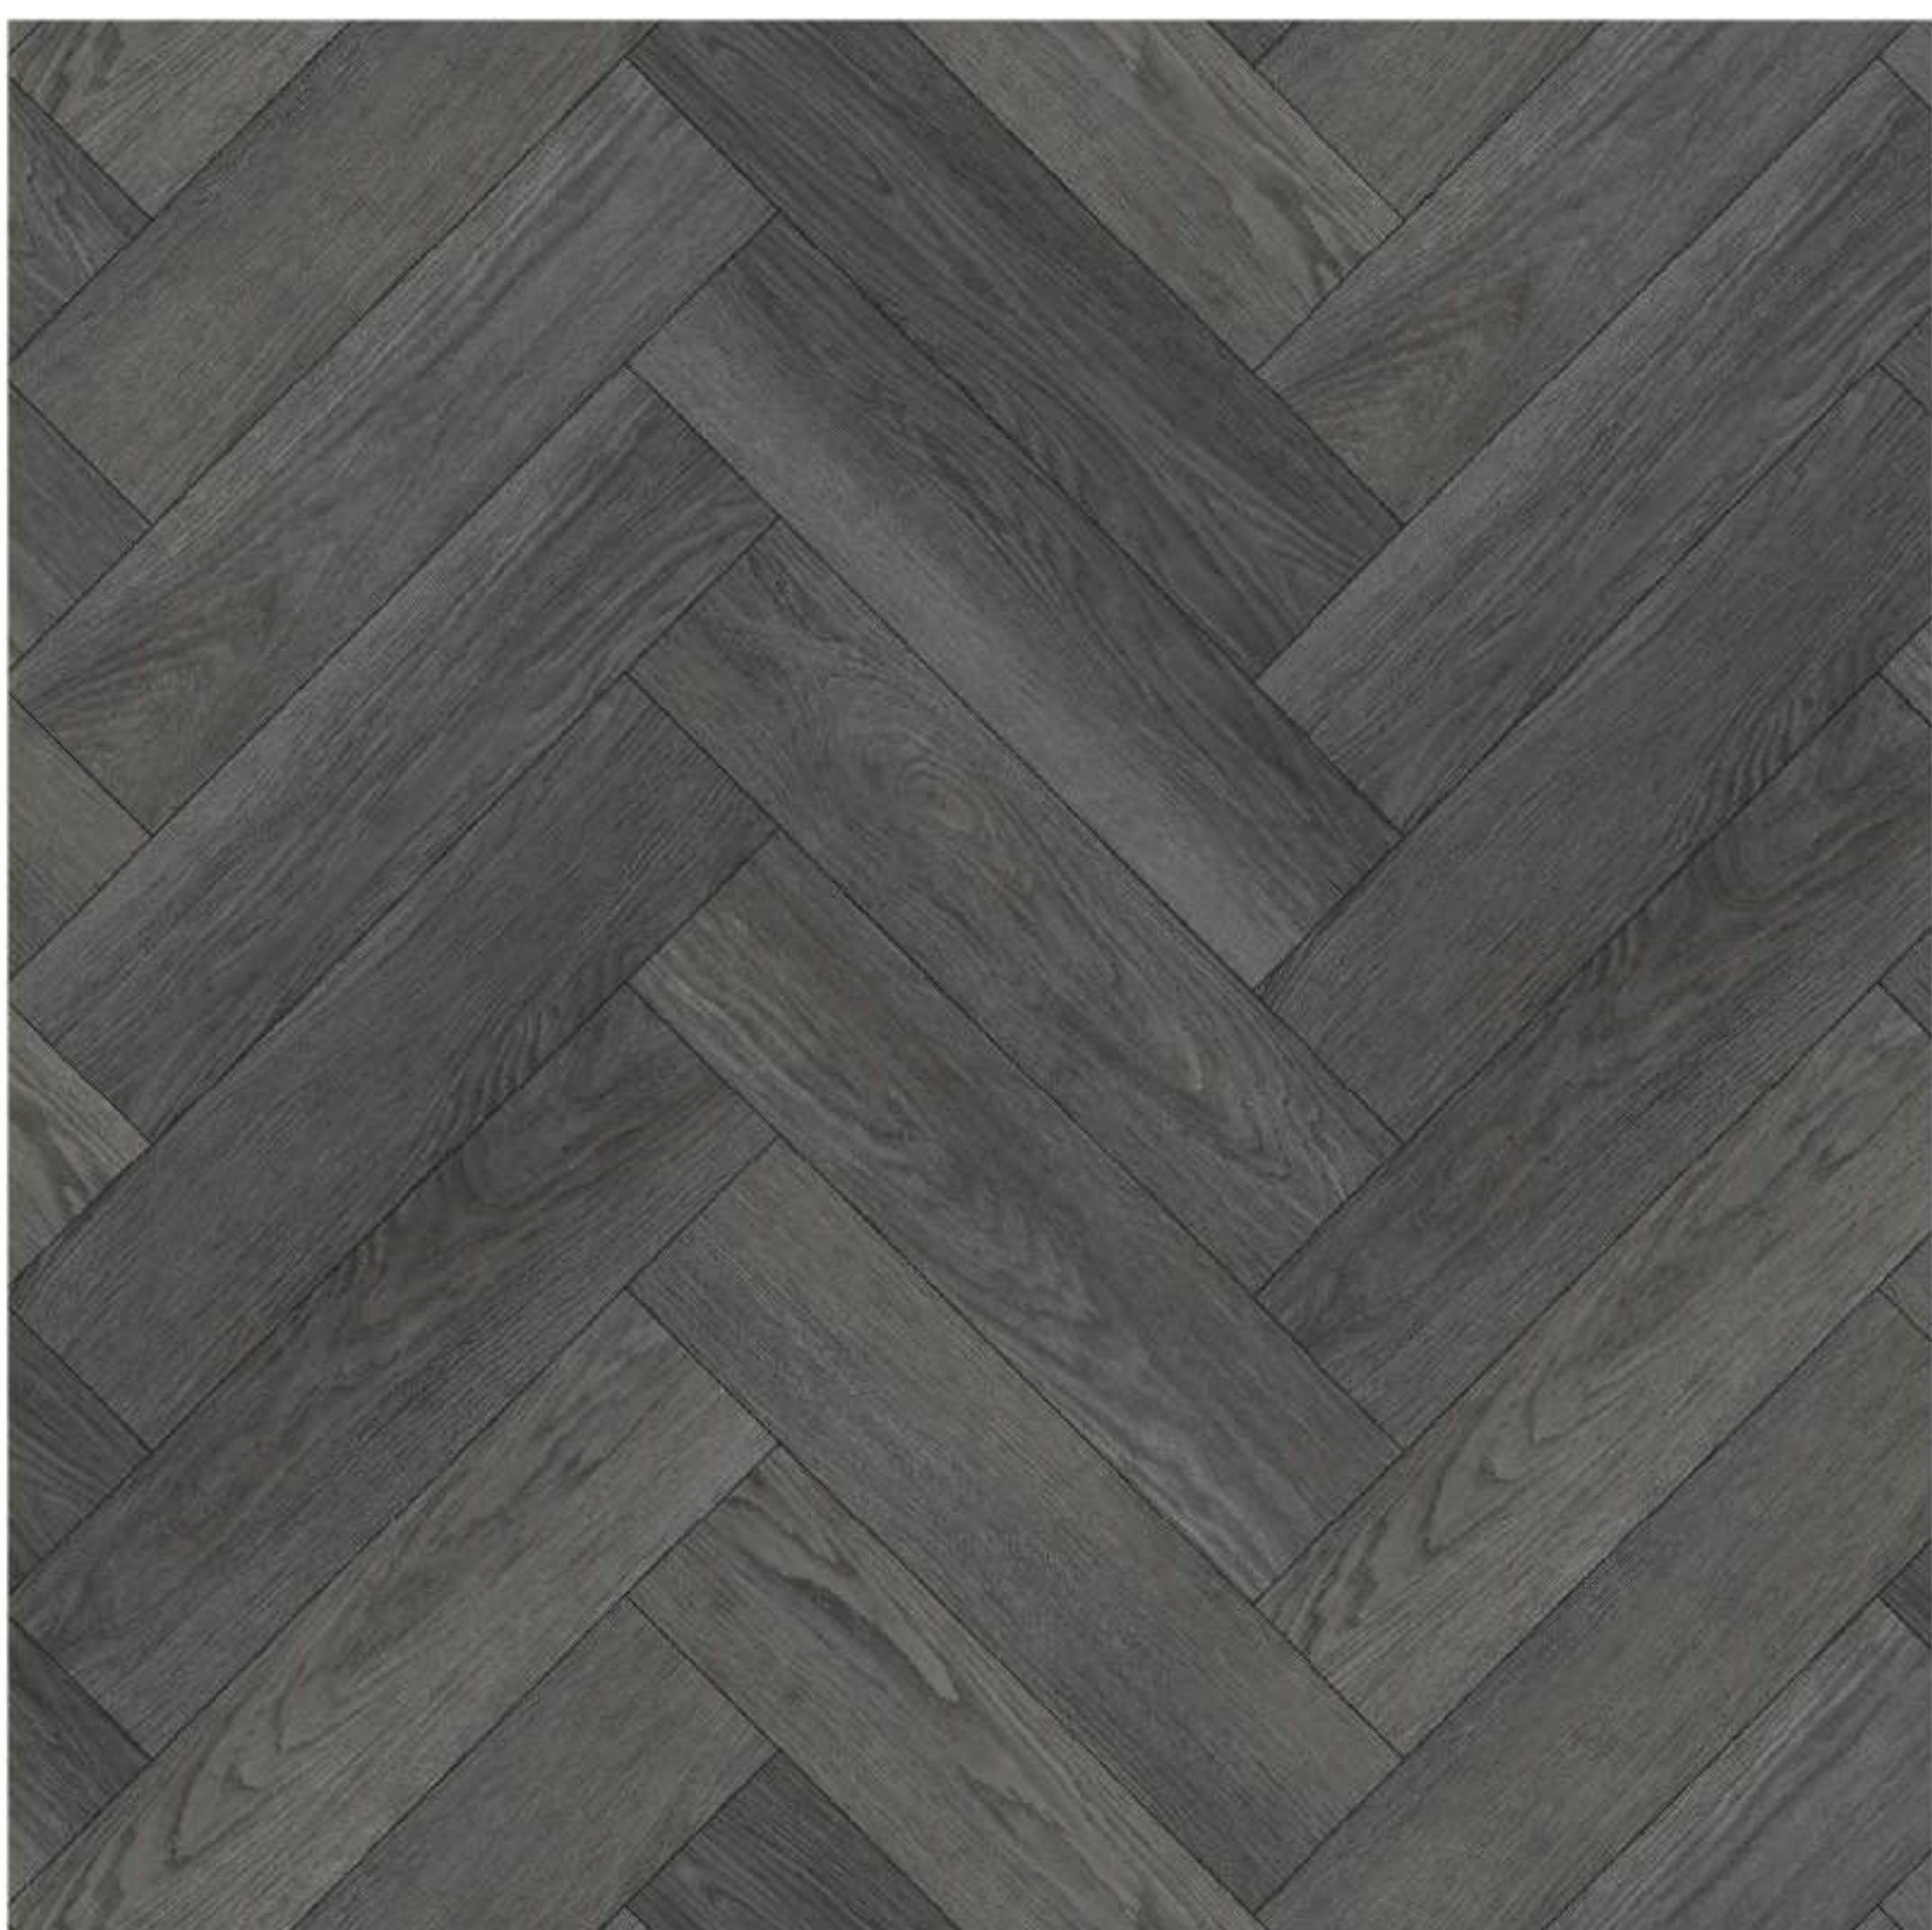

203 HAVANNA OAK



WD-203-PL | PLANK
228 X 1220 X 5 mm



WD-203-HB | HERRINGBONE
150 X 750 X 5 mm




204 SLATE OAK



WD-204-PL | PLANK
228 X 1220 X 5 mm



WD-204-HB | HERRINGBONE
150 X 750 X 5 mm

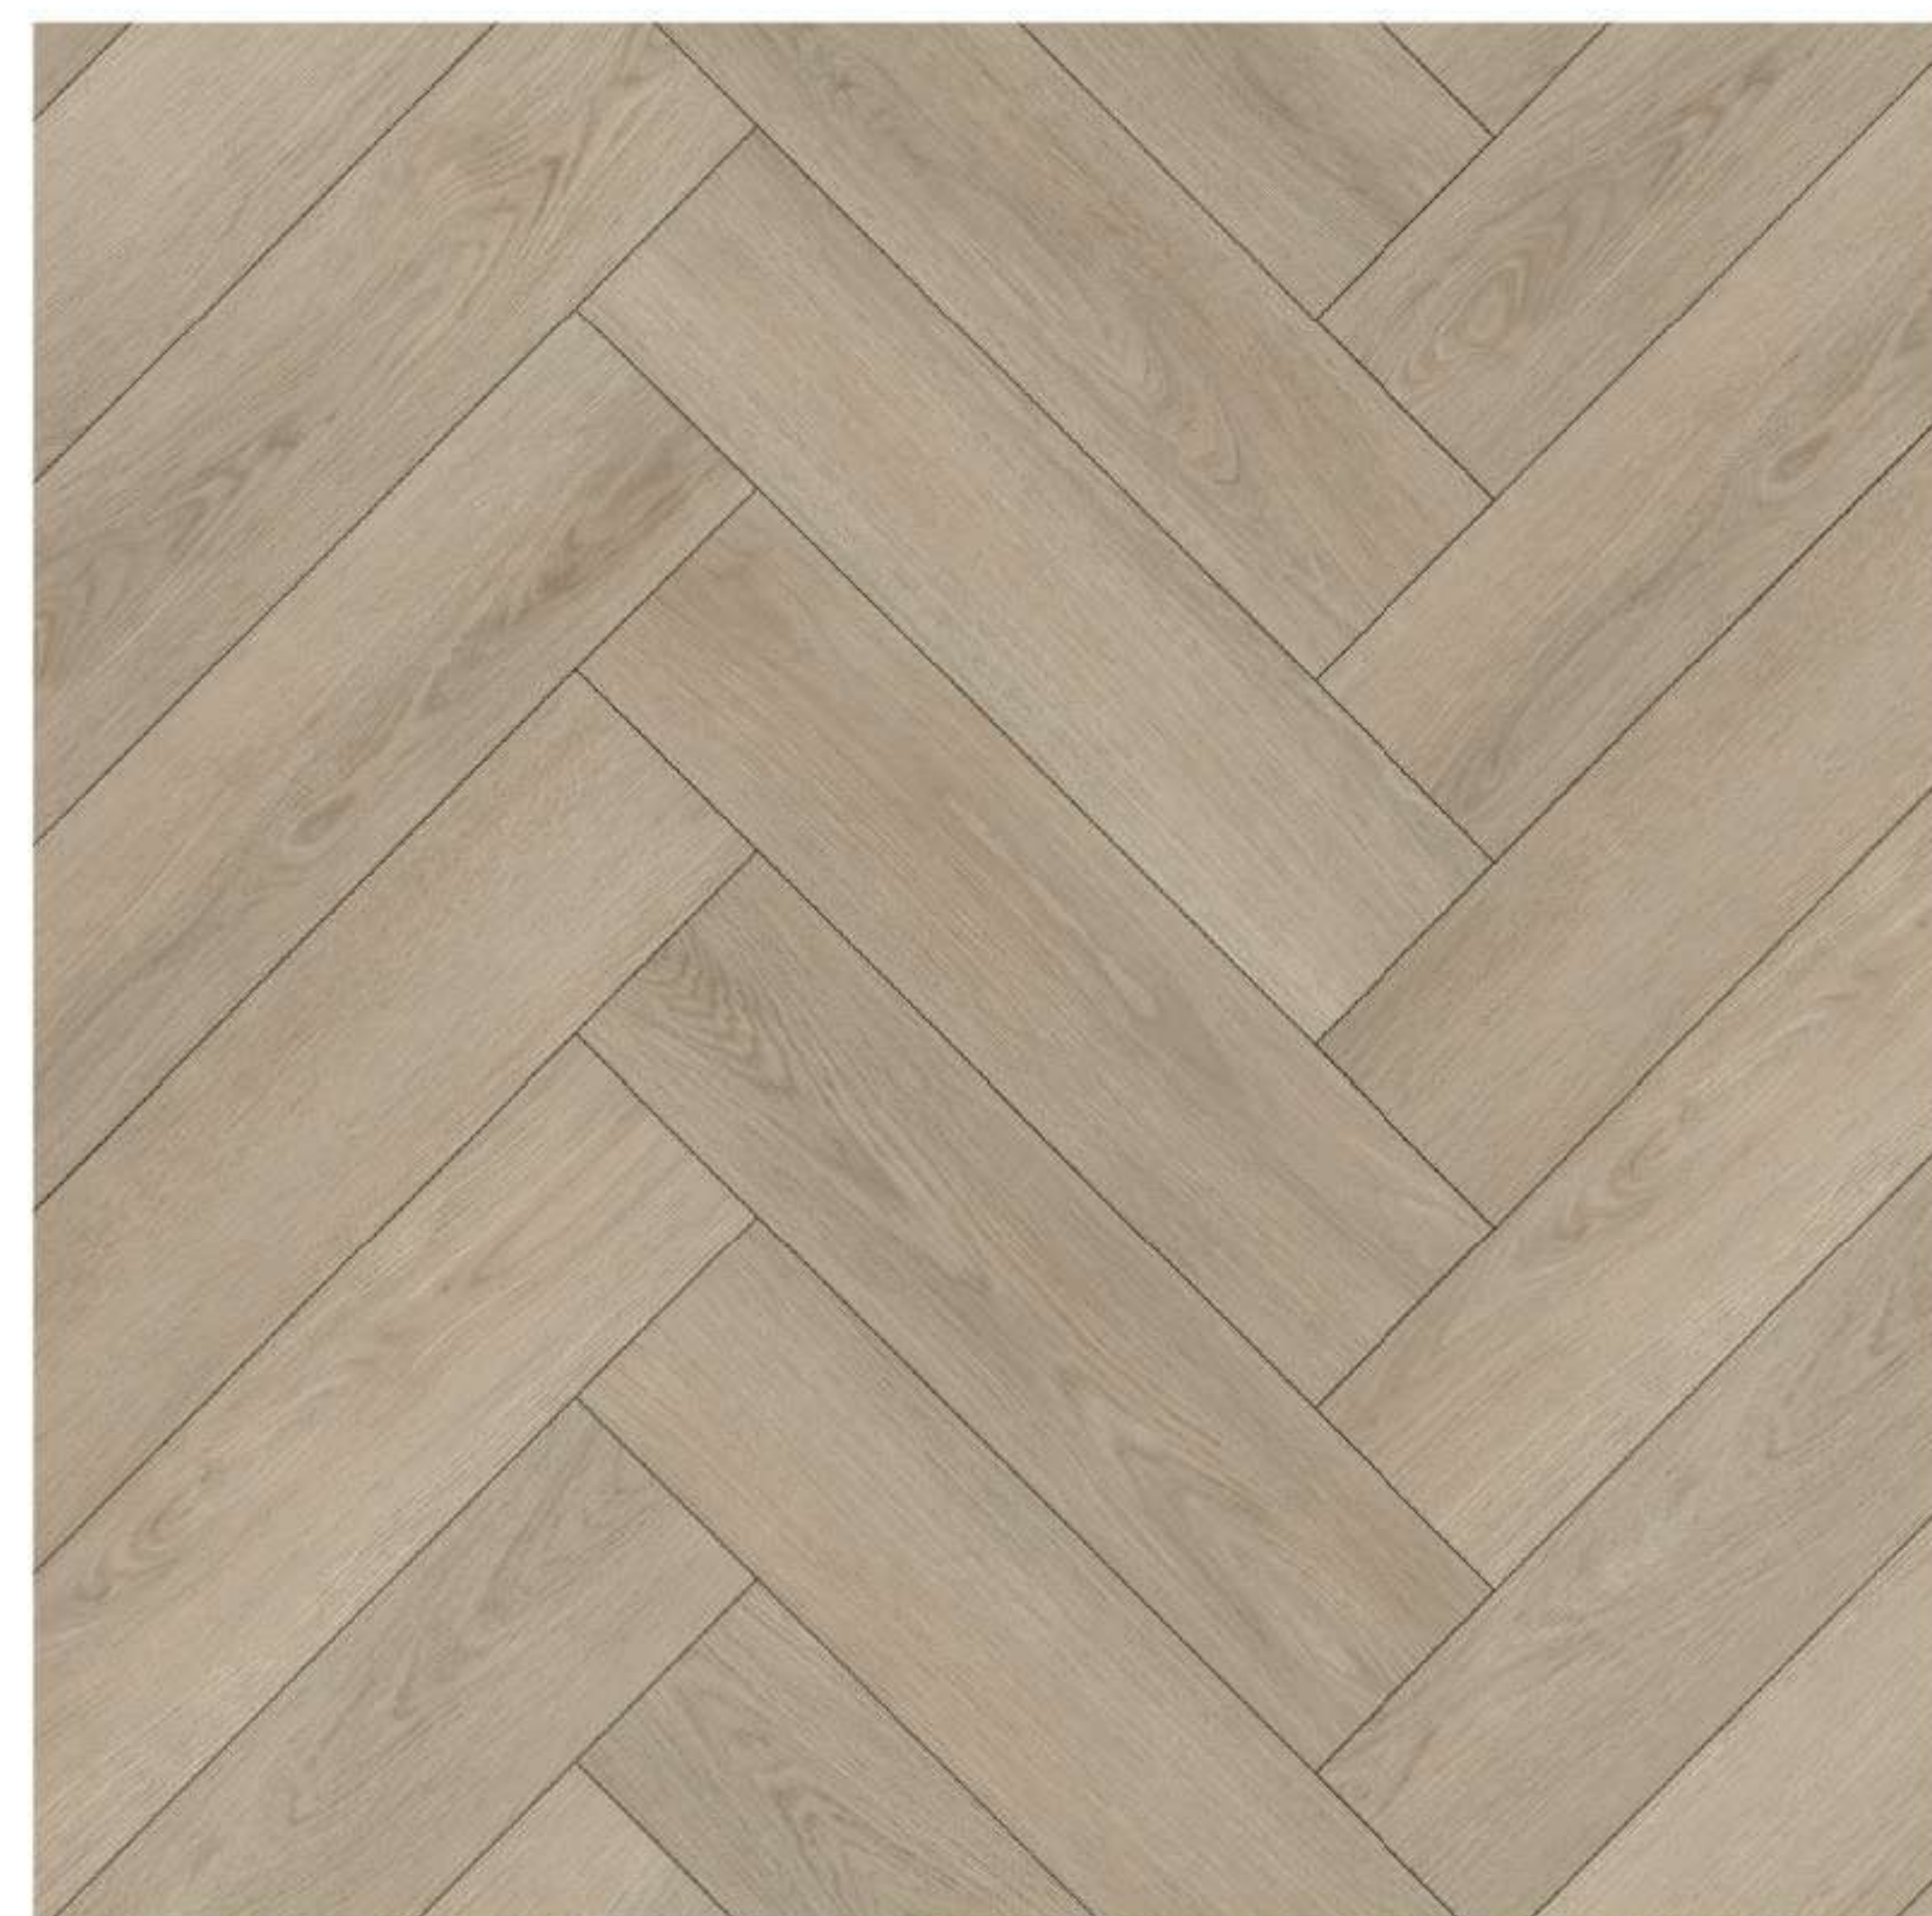



205 BOSLAND OAK



WD-205-PL | PLANK
228 X 1220 X 5 mm



WD-205-HB | HERRINGBONE
150 X 750 X 5 mm

BOSLAND OAK 205



63

WOOD COLLECTION



206 VALLEY OAK





WD-206-PL | PLANK
228 X 1220 X 5 mm



WD-206-HB | HERRINGBONE
150 X 750 X 5 mm

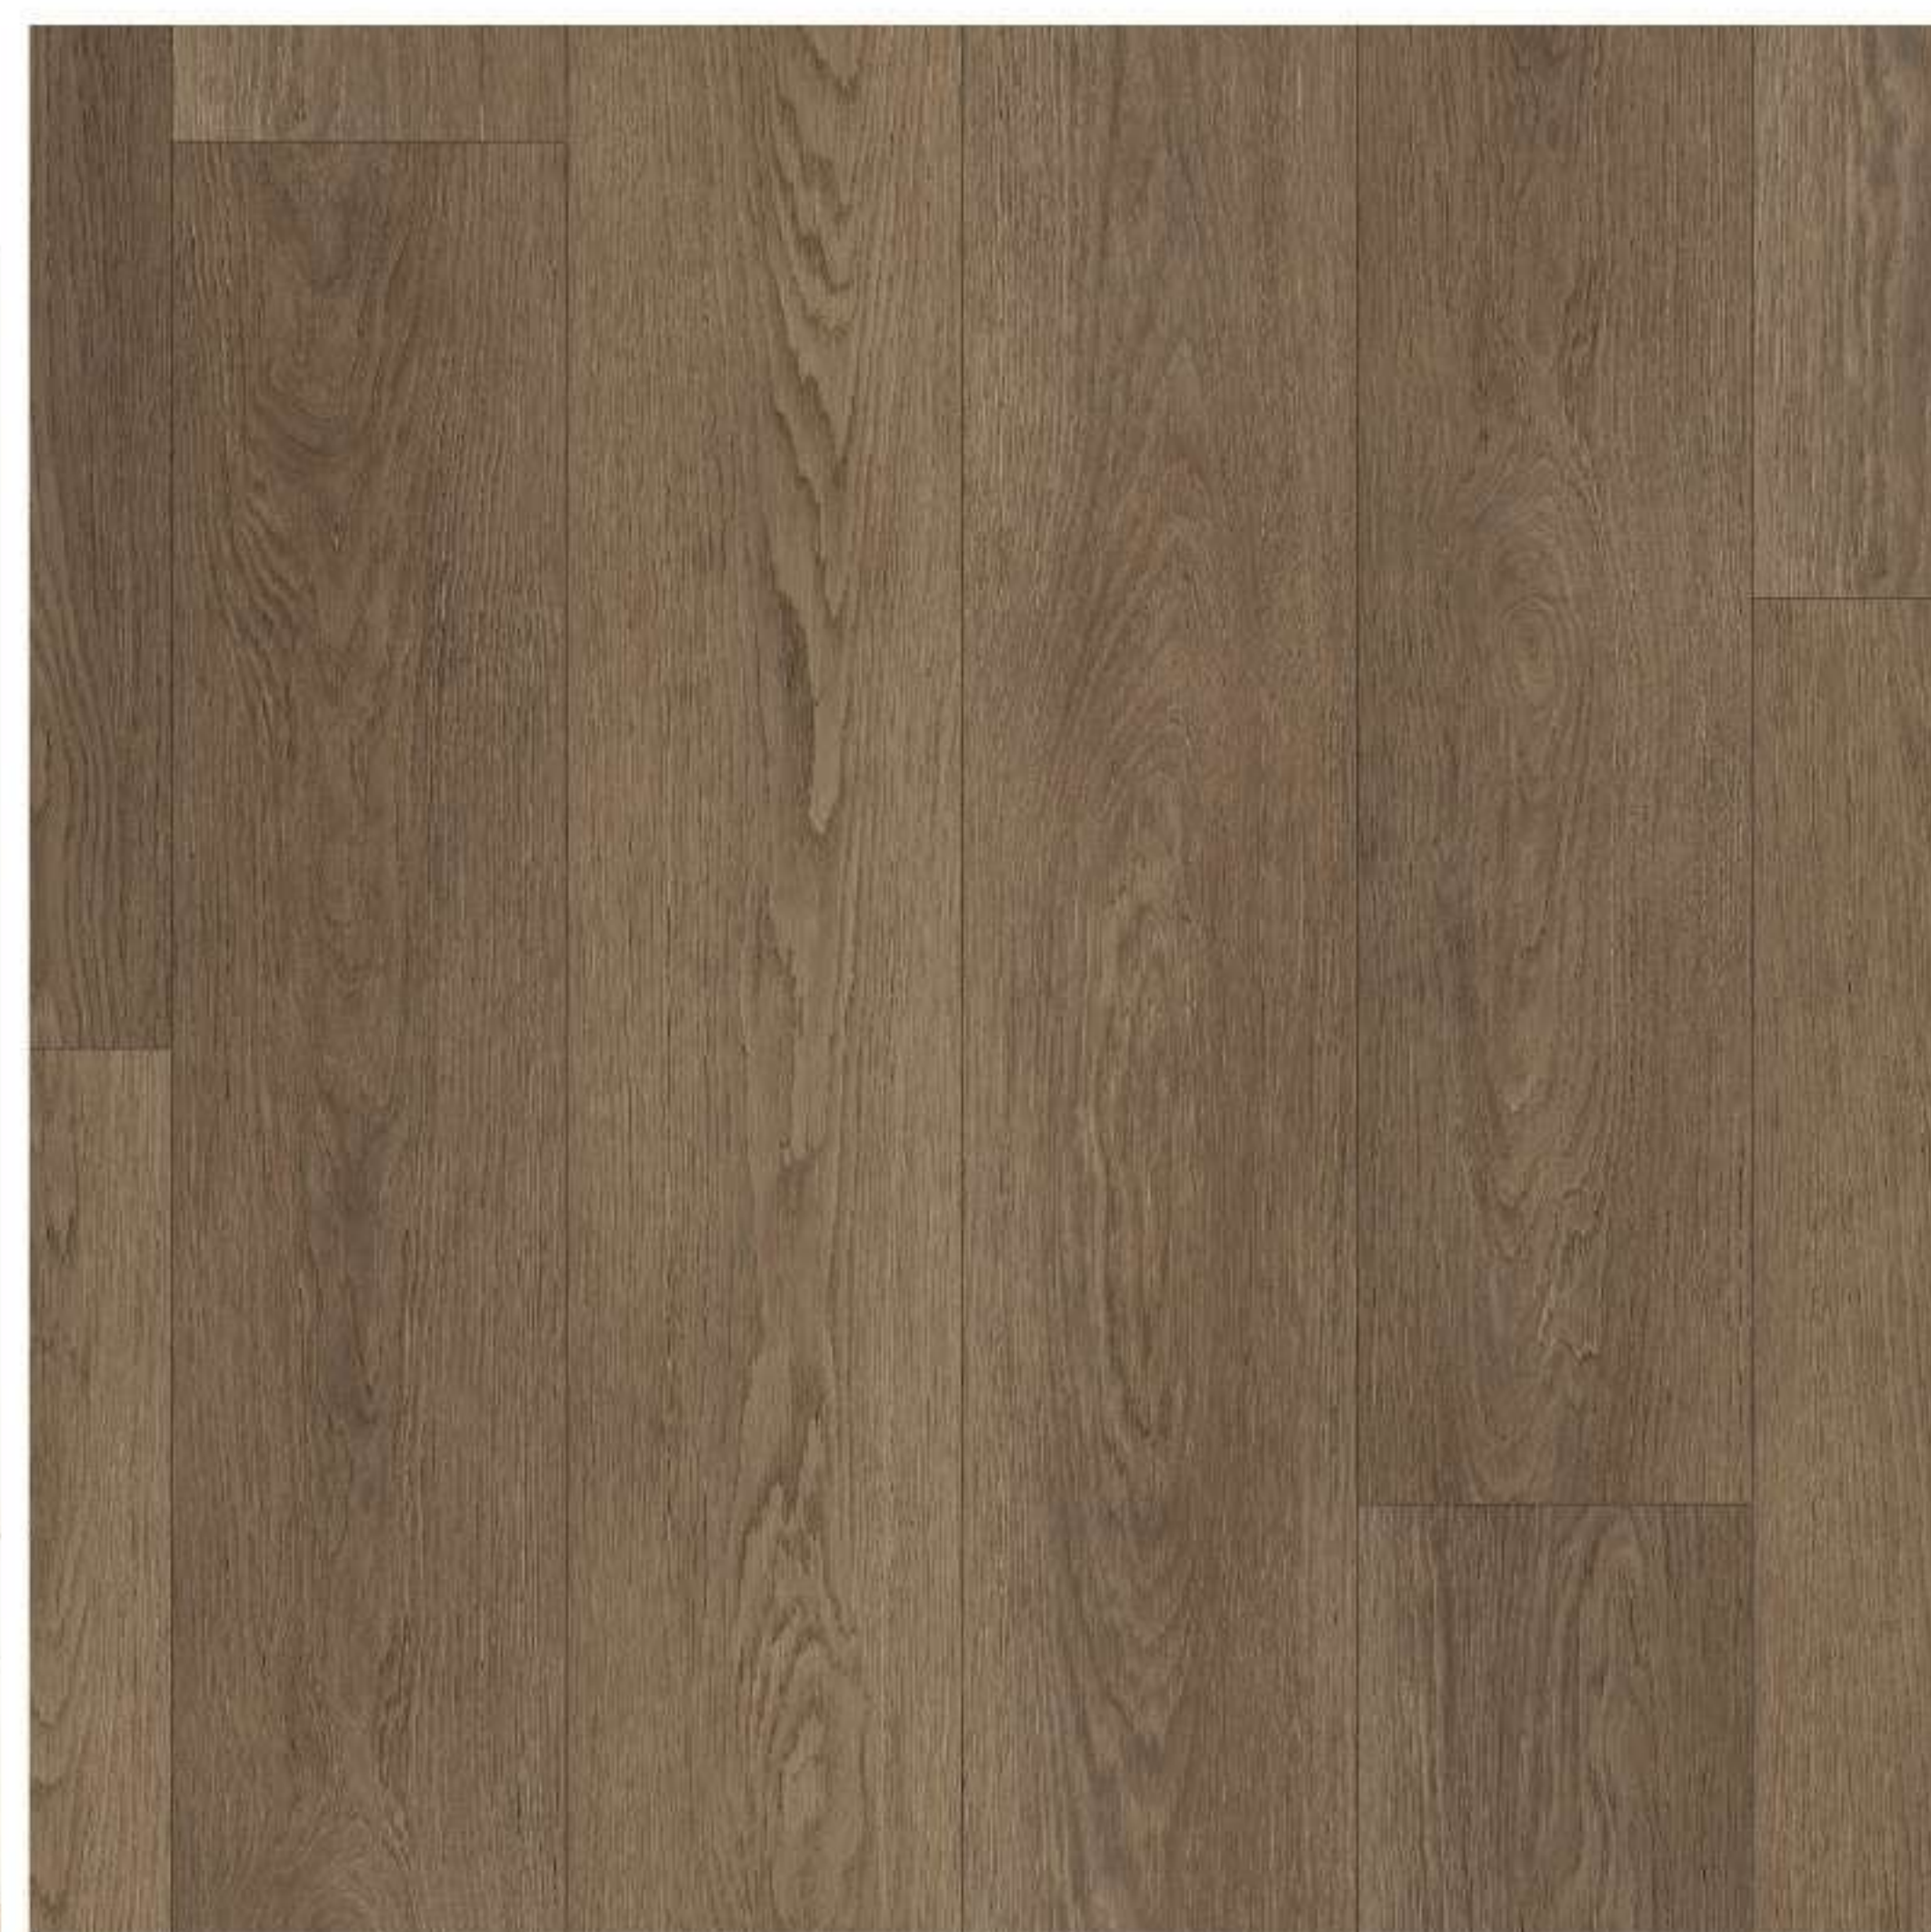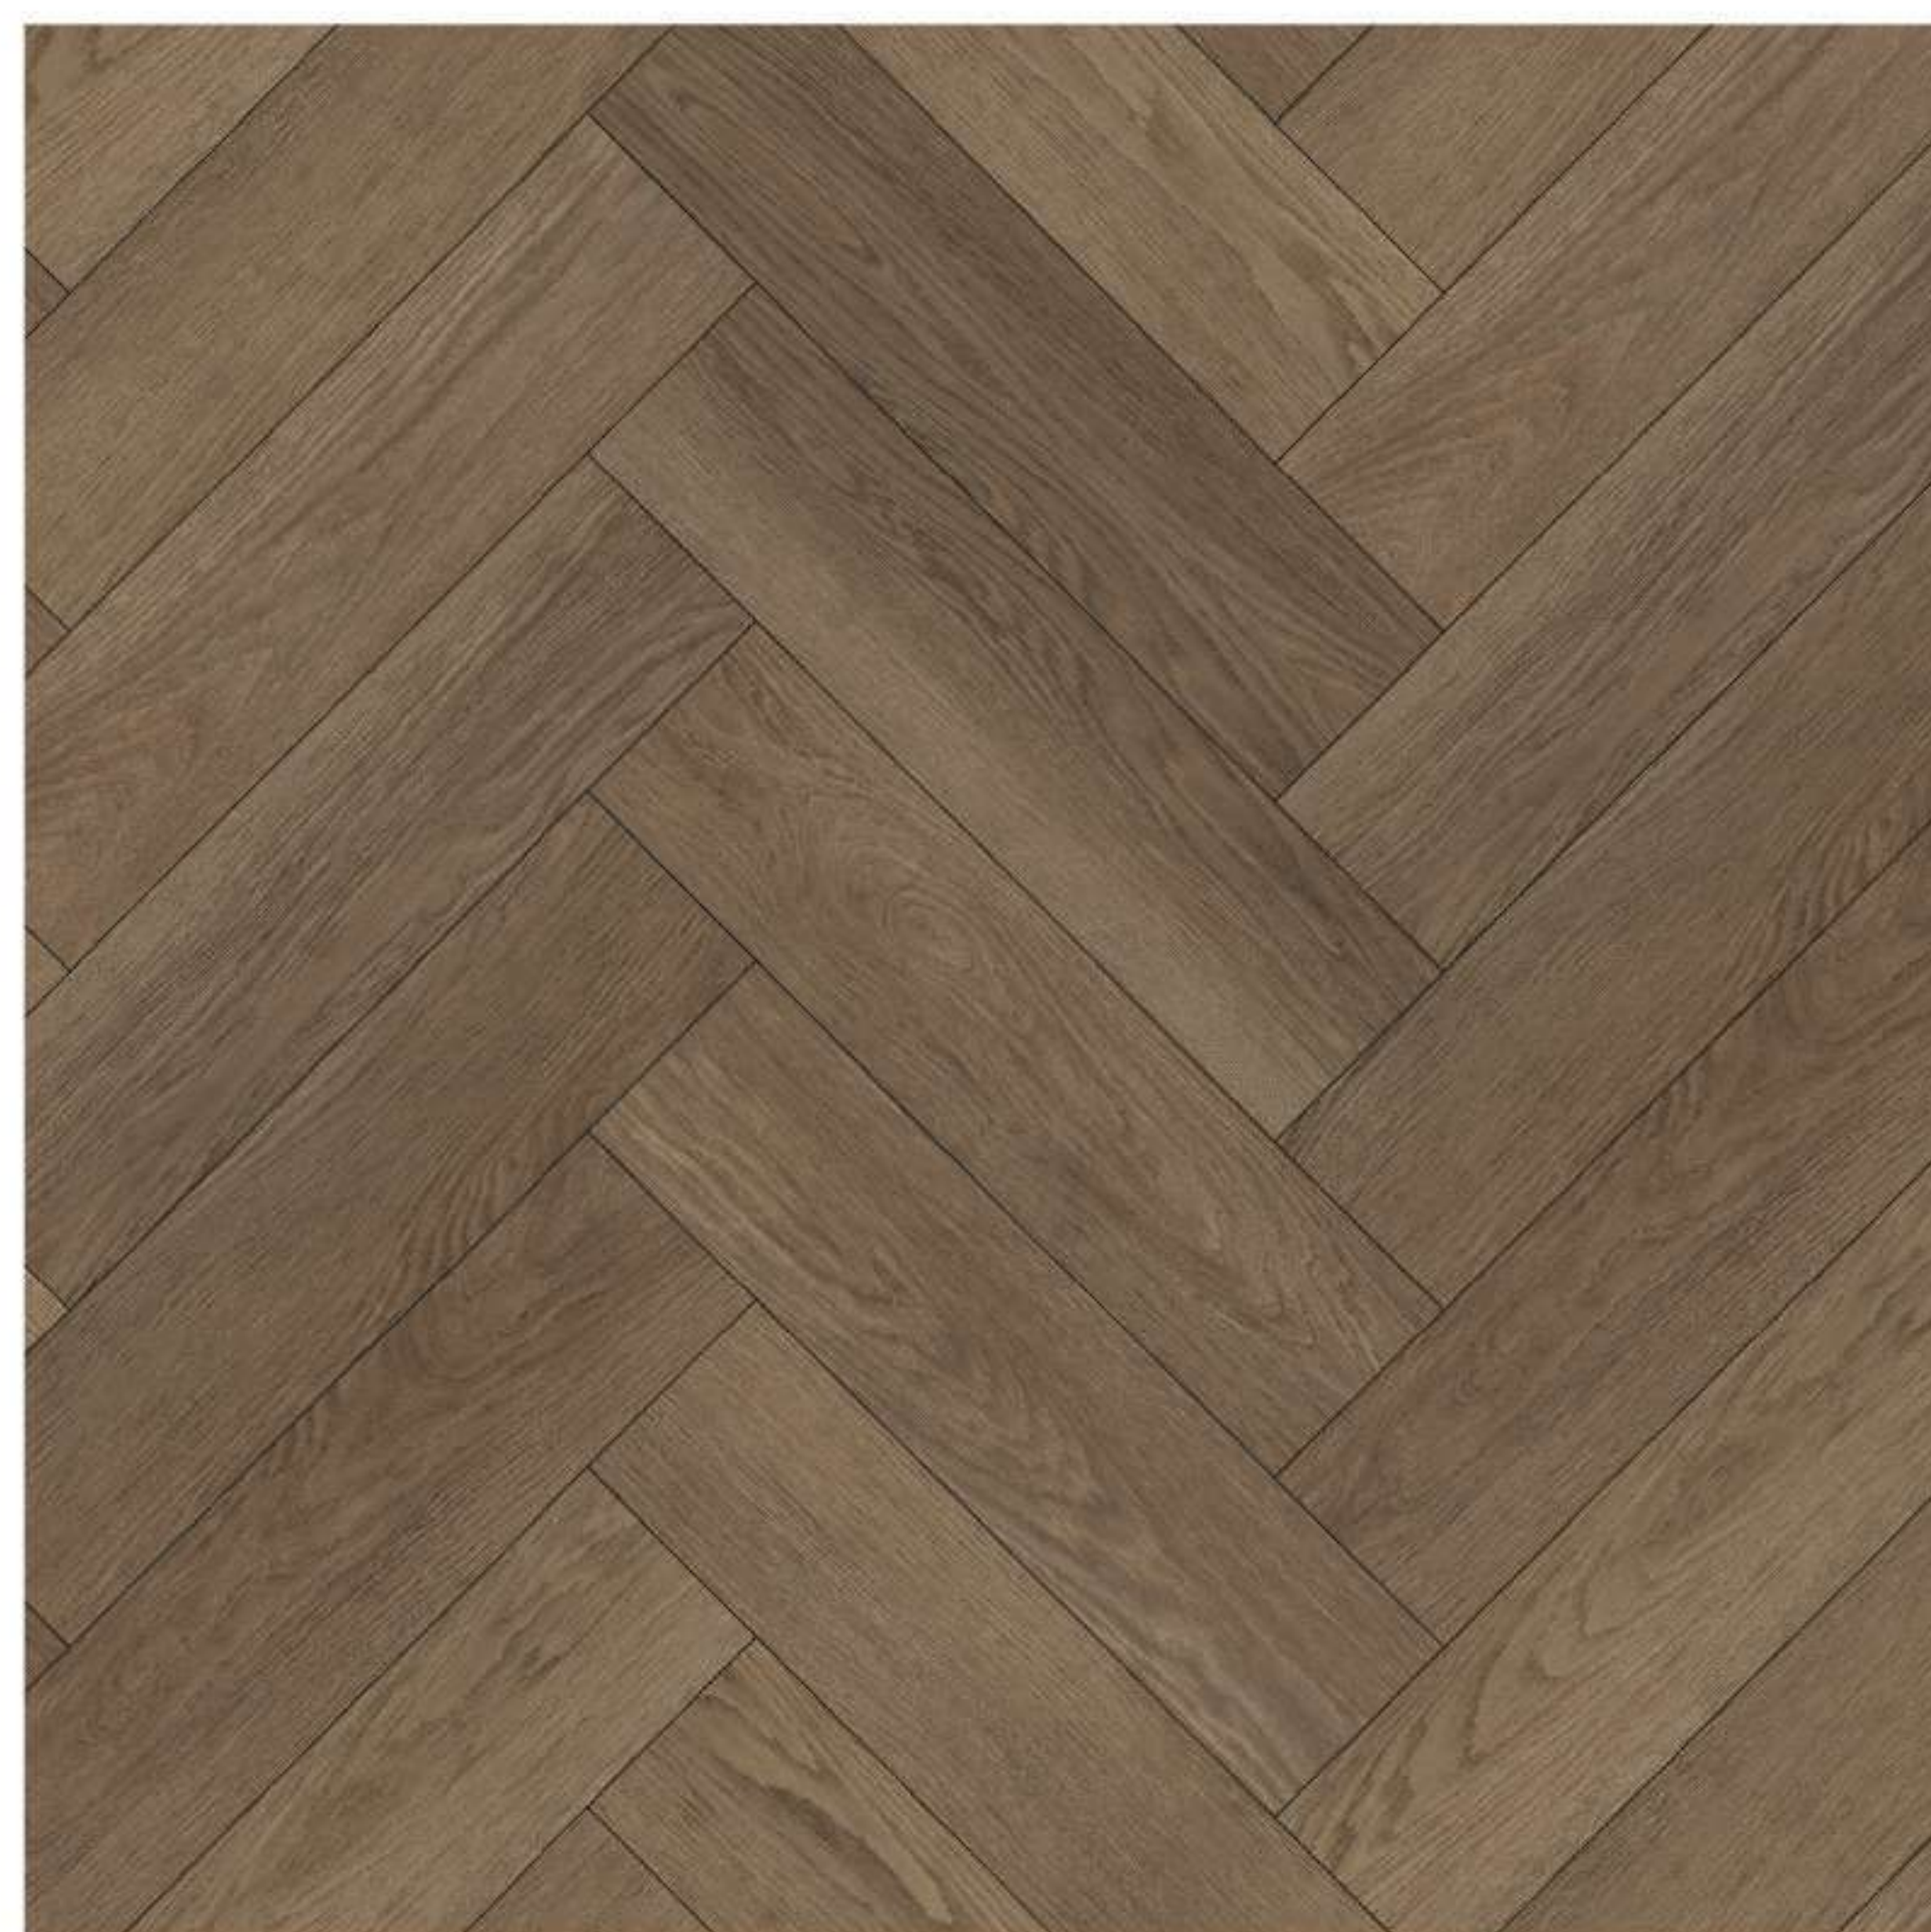

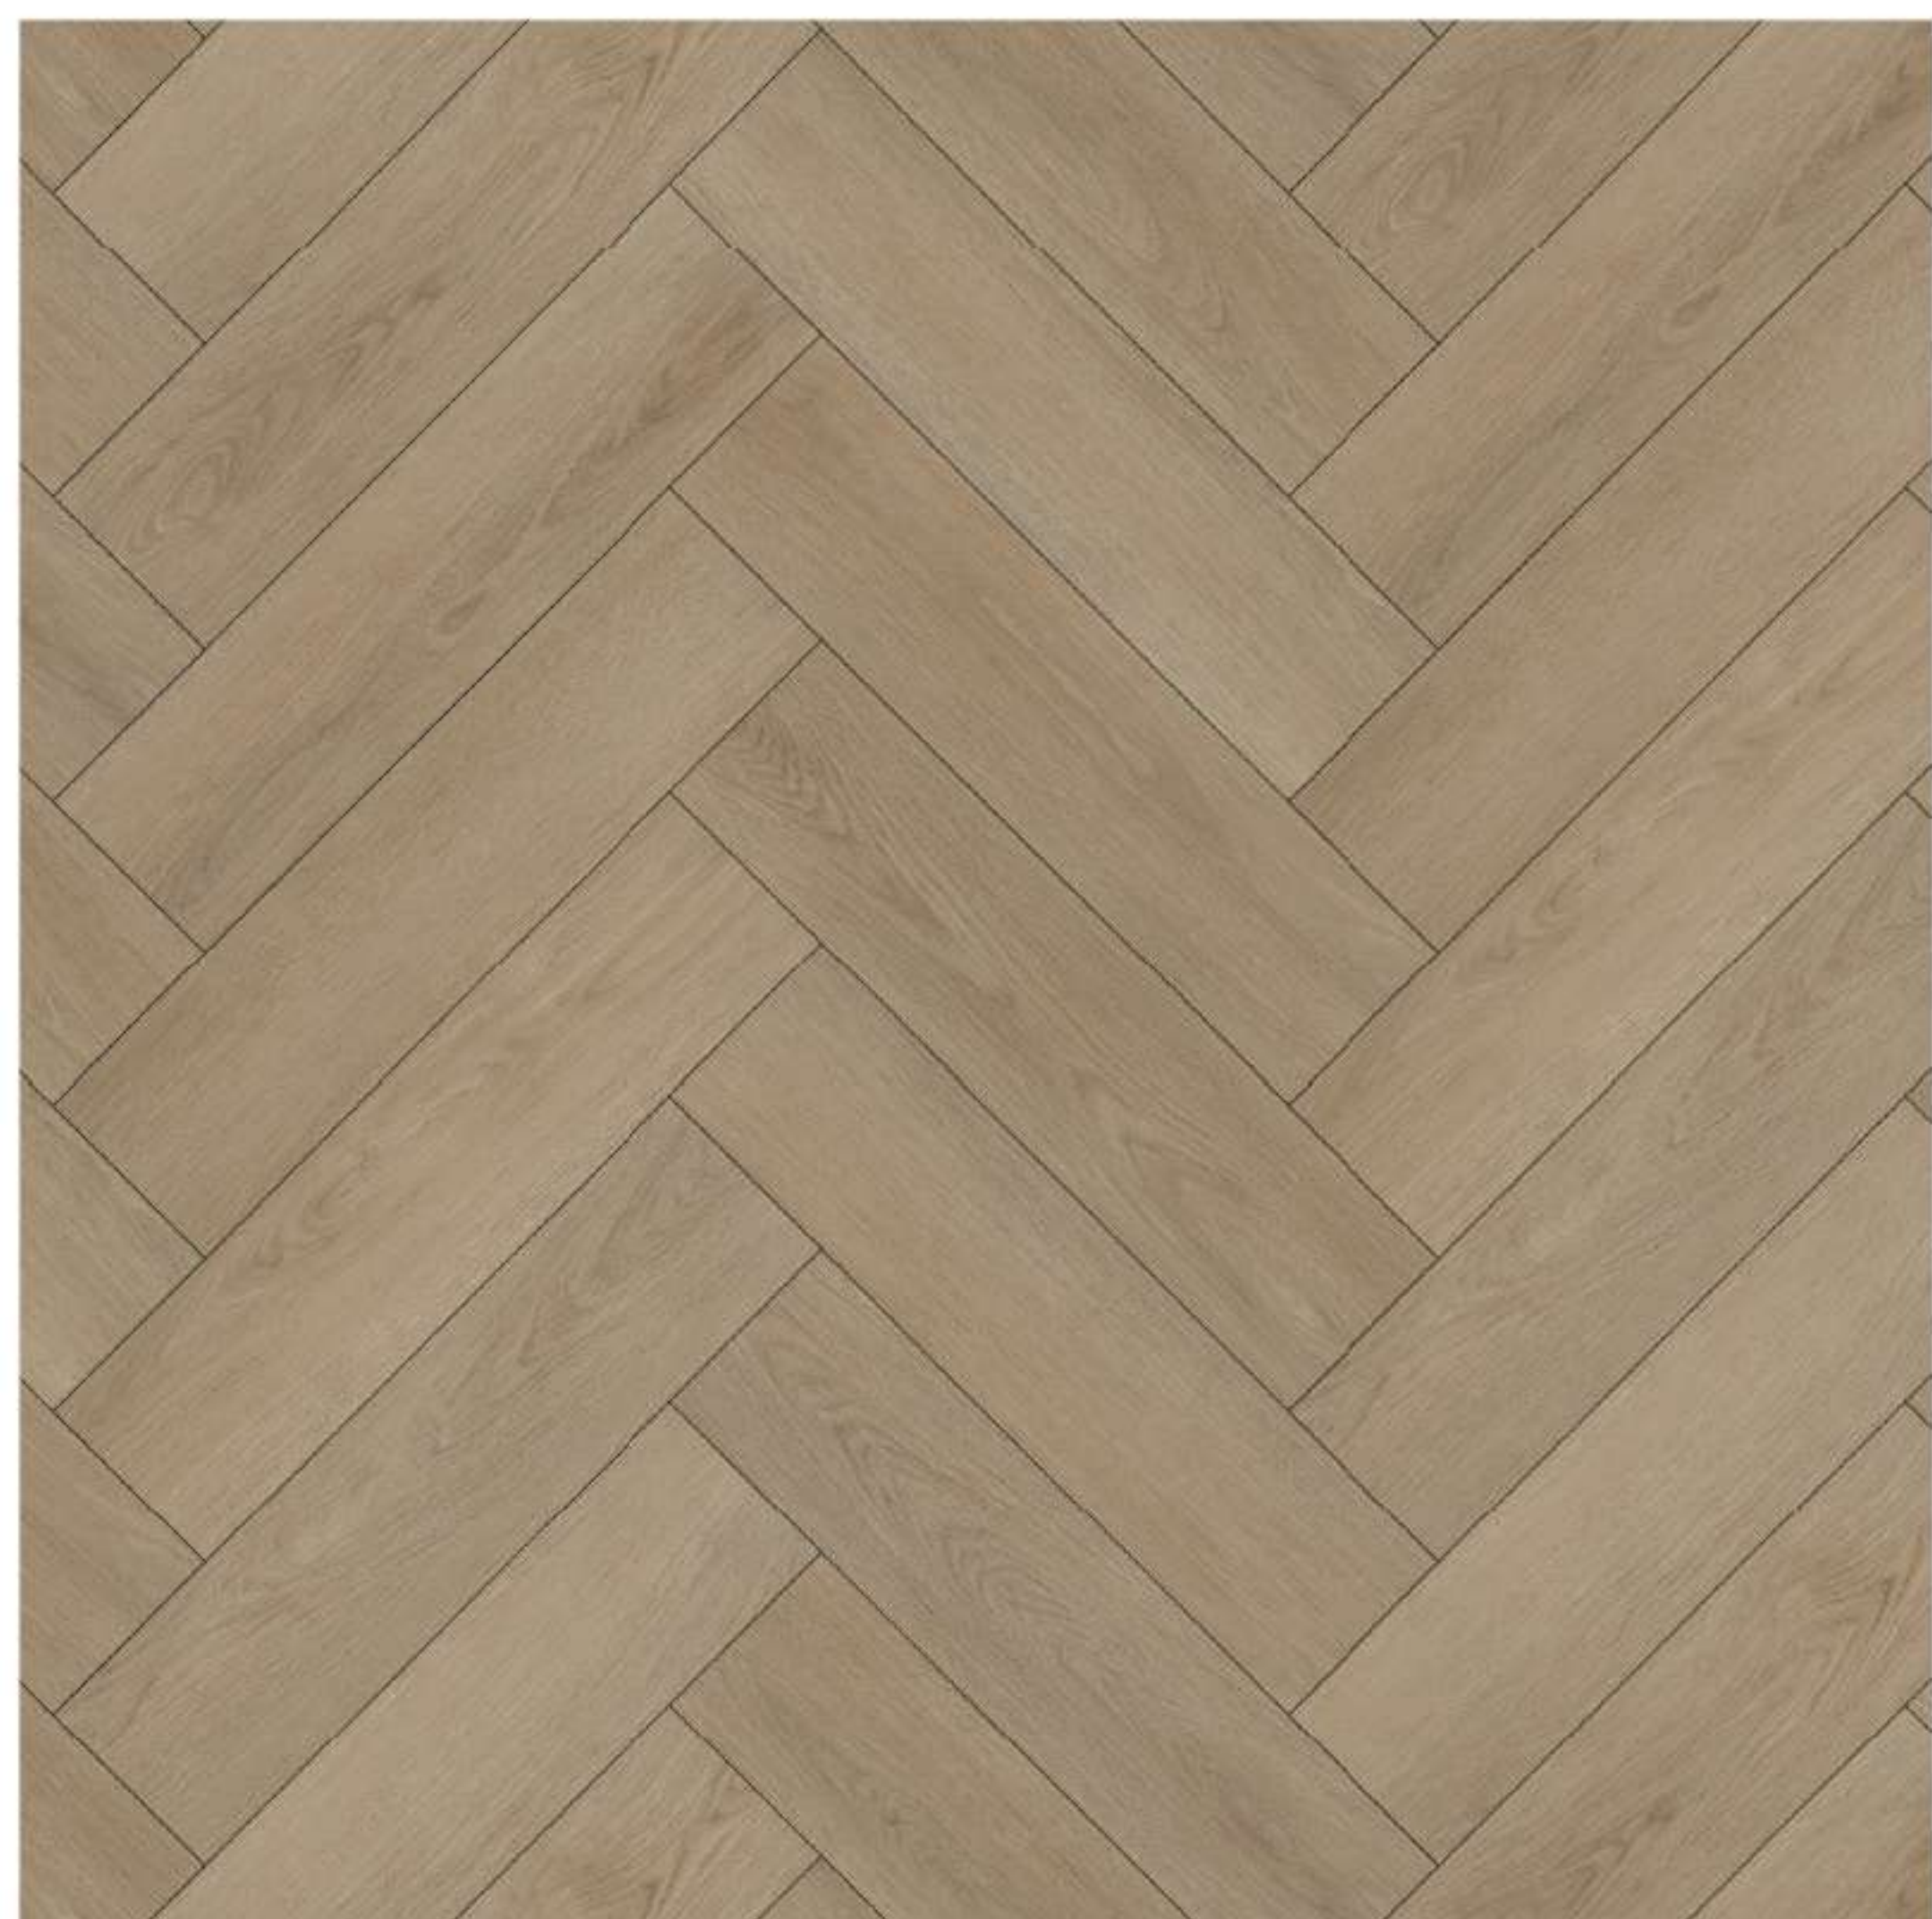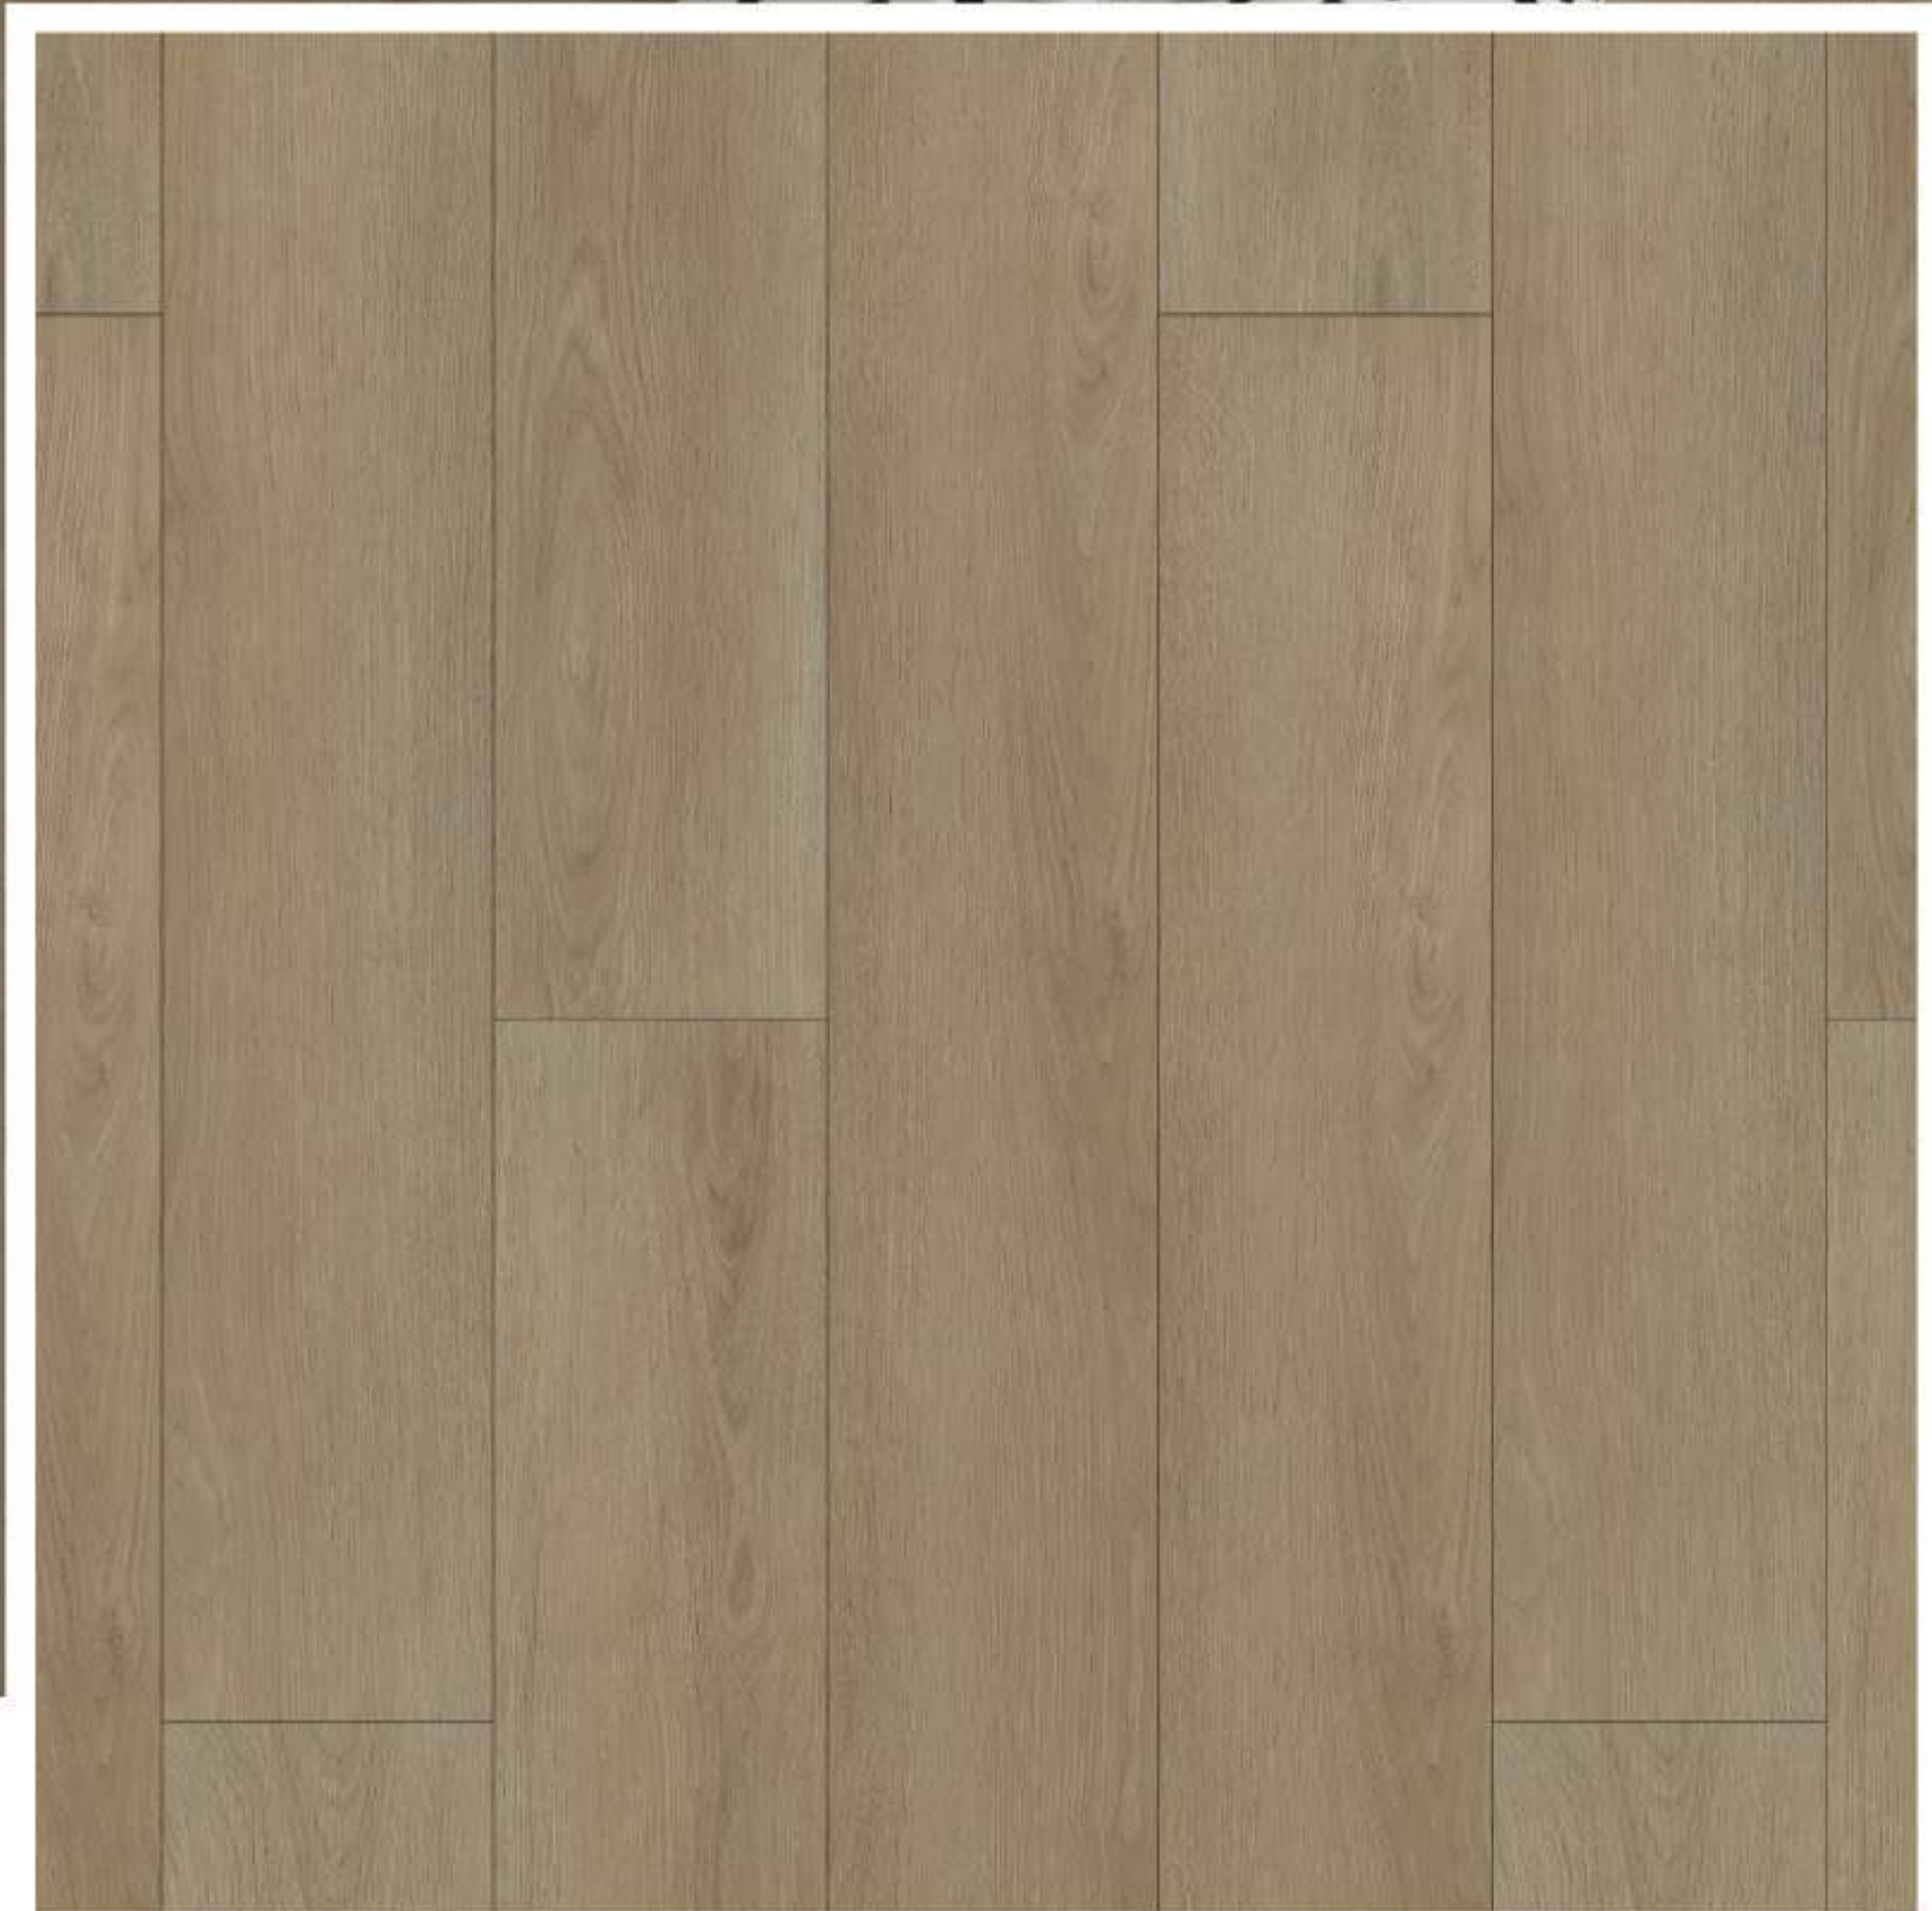

207 DESERT OAK



WD-207-PL | PLANK
228 X 1220 X 5 mm



WD-207-HB | HERRINGBONE
150 X 750 X 5 mm



208 WALNUT OAK



WD-208-PL | PLANK
228 X 1220 X 5 mm



WD-208-HB | HERRINGBONE
150 X 750 X 5 mm





209 SCRAPED OAK



WD-209-PL | PLANK
228 X 1220 X 5 mm



WD-209-HB | HERRINGBONE
150 X 750 X 5 mm



210 CAMBRIDGE OAK



WD-210-PL | PLANK
228 X 1220 X 5 mm



WD-210-HB | HERRINGBONE
150 X 750 X 5 mm









New Generation Flooring


WEARLAYER : 0,3 mm

UNDERLAY(IXPE) : 1 mm

TOTAL THICKNESS : 5 mm

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	228 X 1220	MICRO BEVEL	WOOD	UNICLIC PLANK
 PLANK	Package[m ²]	Palette [m ²]	Warranty[Year]	
	 9 Pieces	 44 Package	Residential	Commercial
	= 2.503 m ² = 21,029 kg	= 110,151 m ² = 945,271 kg	15	3

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	150x750	MICRO BEVEL	WOOD	UNIDROP HERRINGBONE
 HERRINGBONE	Package[m ²]	Palette [m ²]	Warranty[Year]	
	 16 Pieces	 63 Package	Residential	Commercial
	= 1.800 m ² = 15,120 kg	= 113,400 m ² = 972,560 kg		3

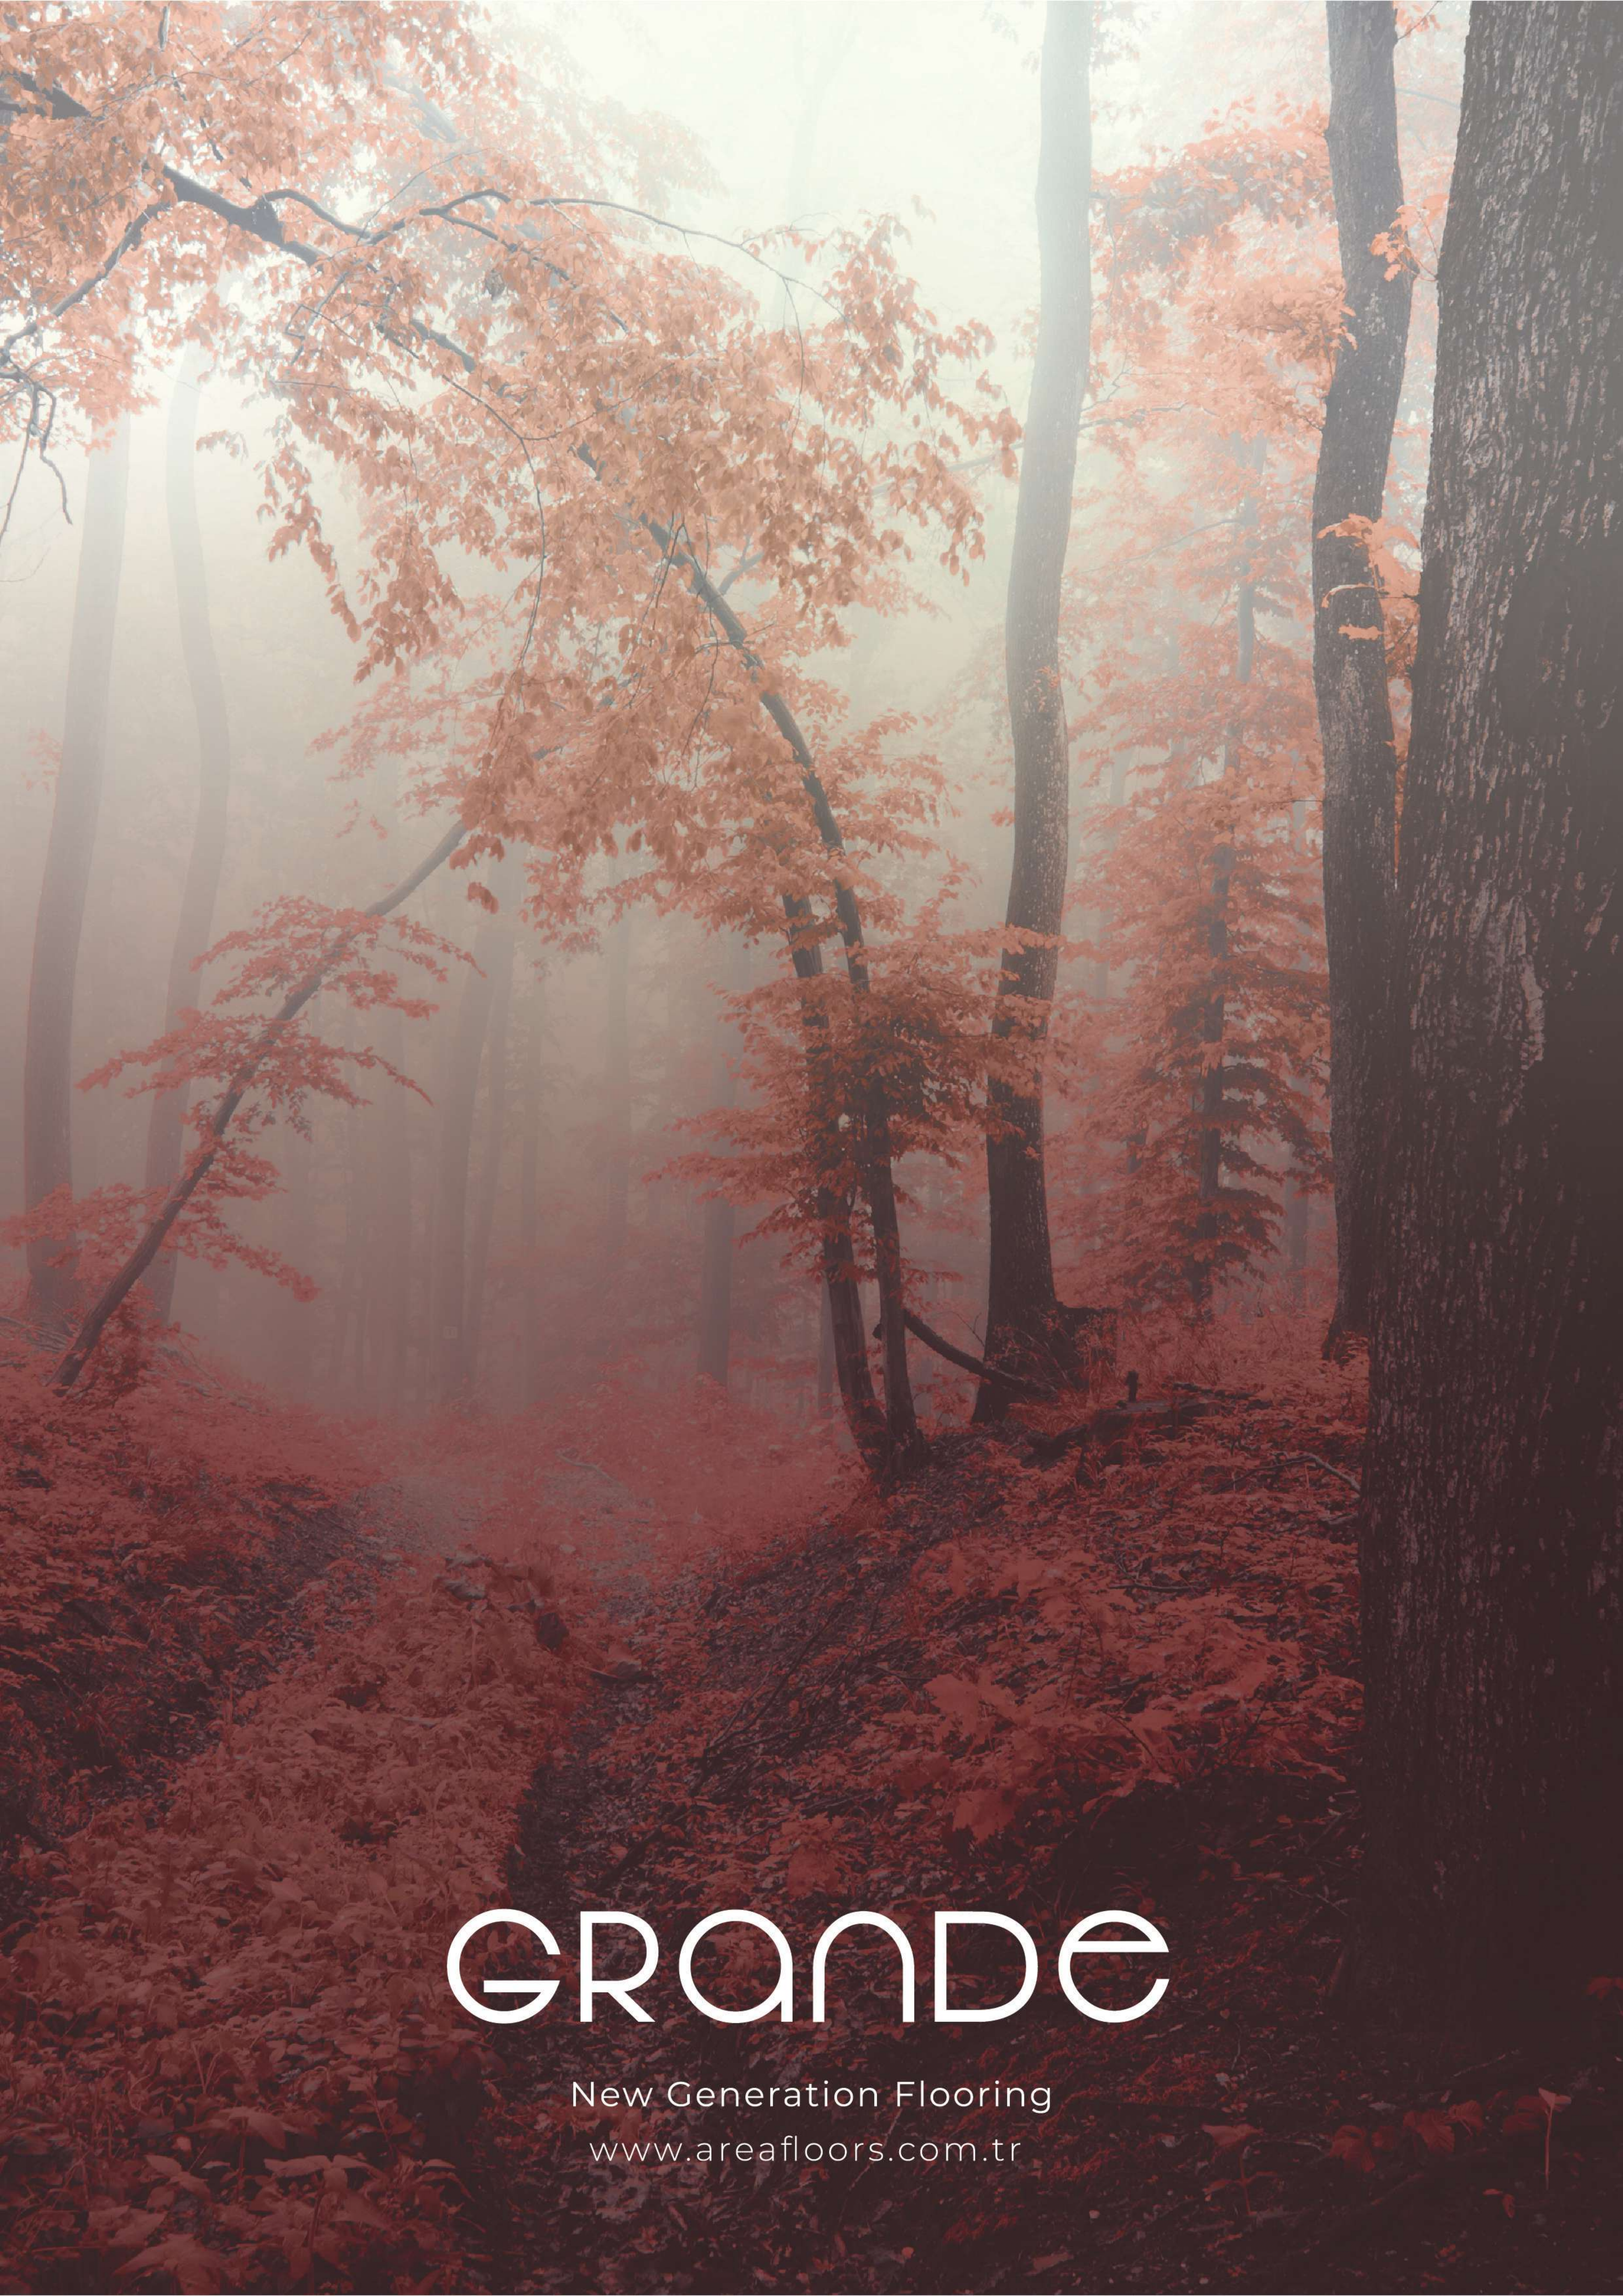

GRANDE

New Generation Flooring
www.areafloors.com.tr



GRANDE

by

AREA FLOORS

Grande Collection reshapes your living spaces with timeless elegance and superior quality. Designed to cater to the needs of your family and lifestyle, these floors offer both aesthetic appeal and functional excellence. Grande is your go-to solution for luxury and comfort in your home.

Grande flooring doesn't just enhance your space but also supports a healthier lifestyle. Its hygienic and easy-to-clean surfaces create a cleaner, healthier and more serene environment.

Every panel in the Grande Collection is meticulously crafted, ensuring years of durability. These products not only transform your floors but also elevate the moments you share with your loved ones.



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface





Moisture Resistance



High Density Underlay



Suitable for Underfloor Heating

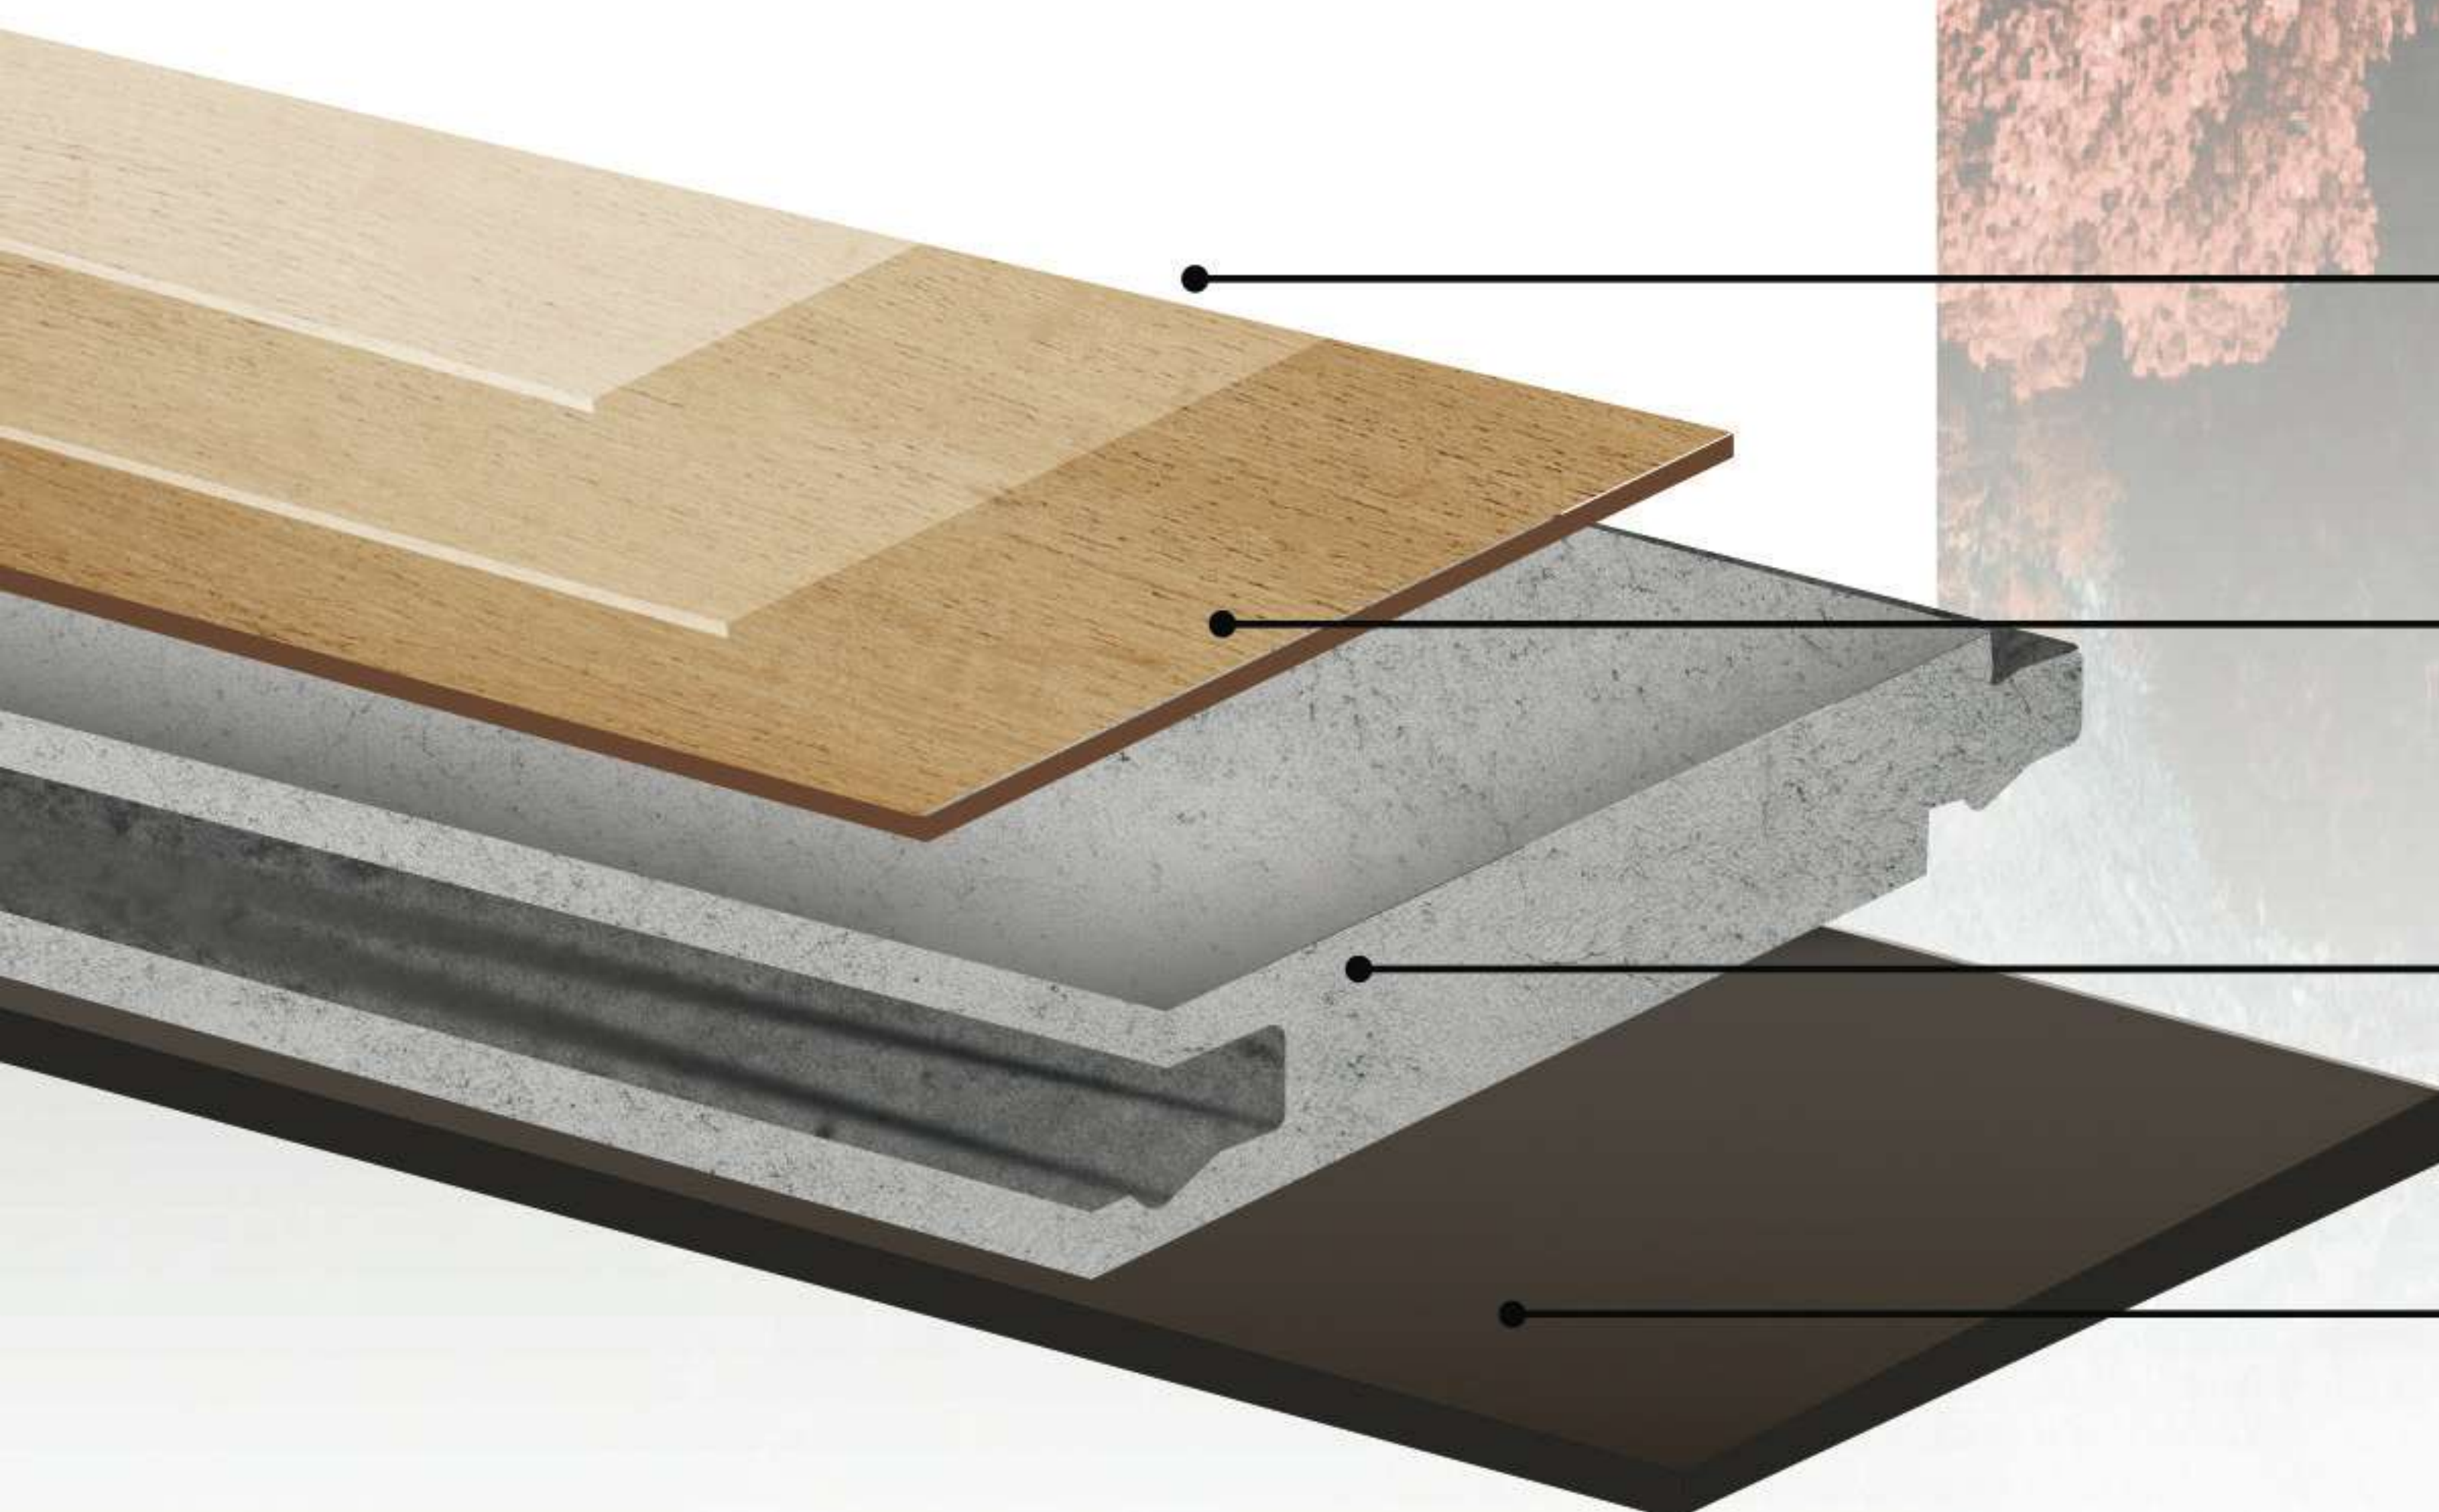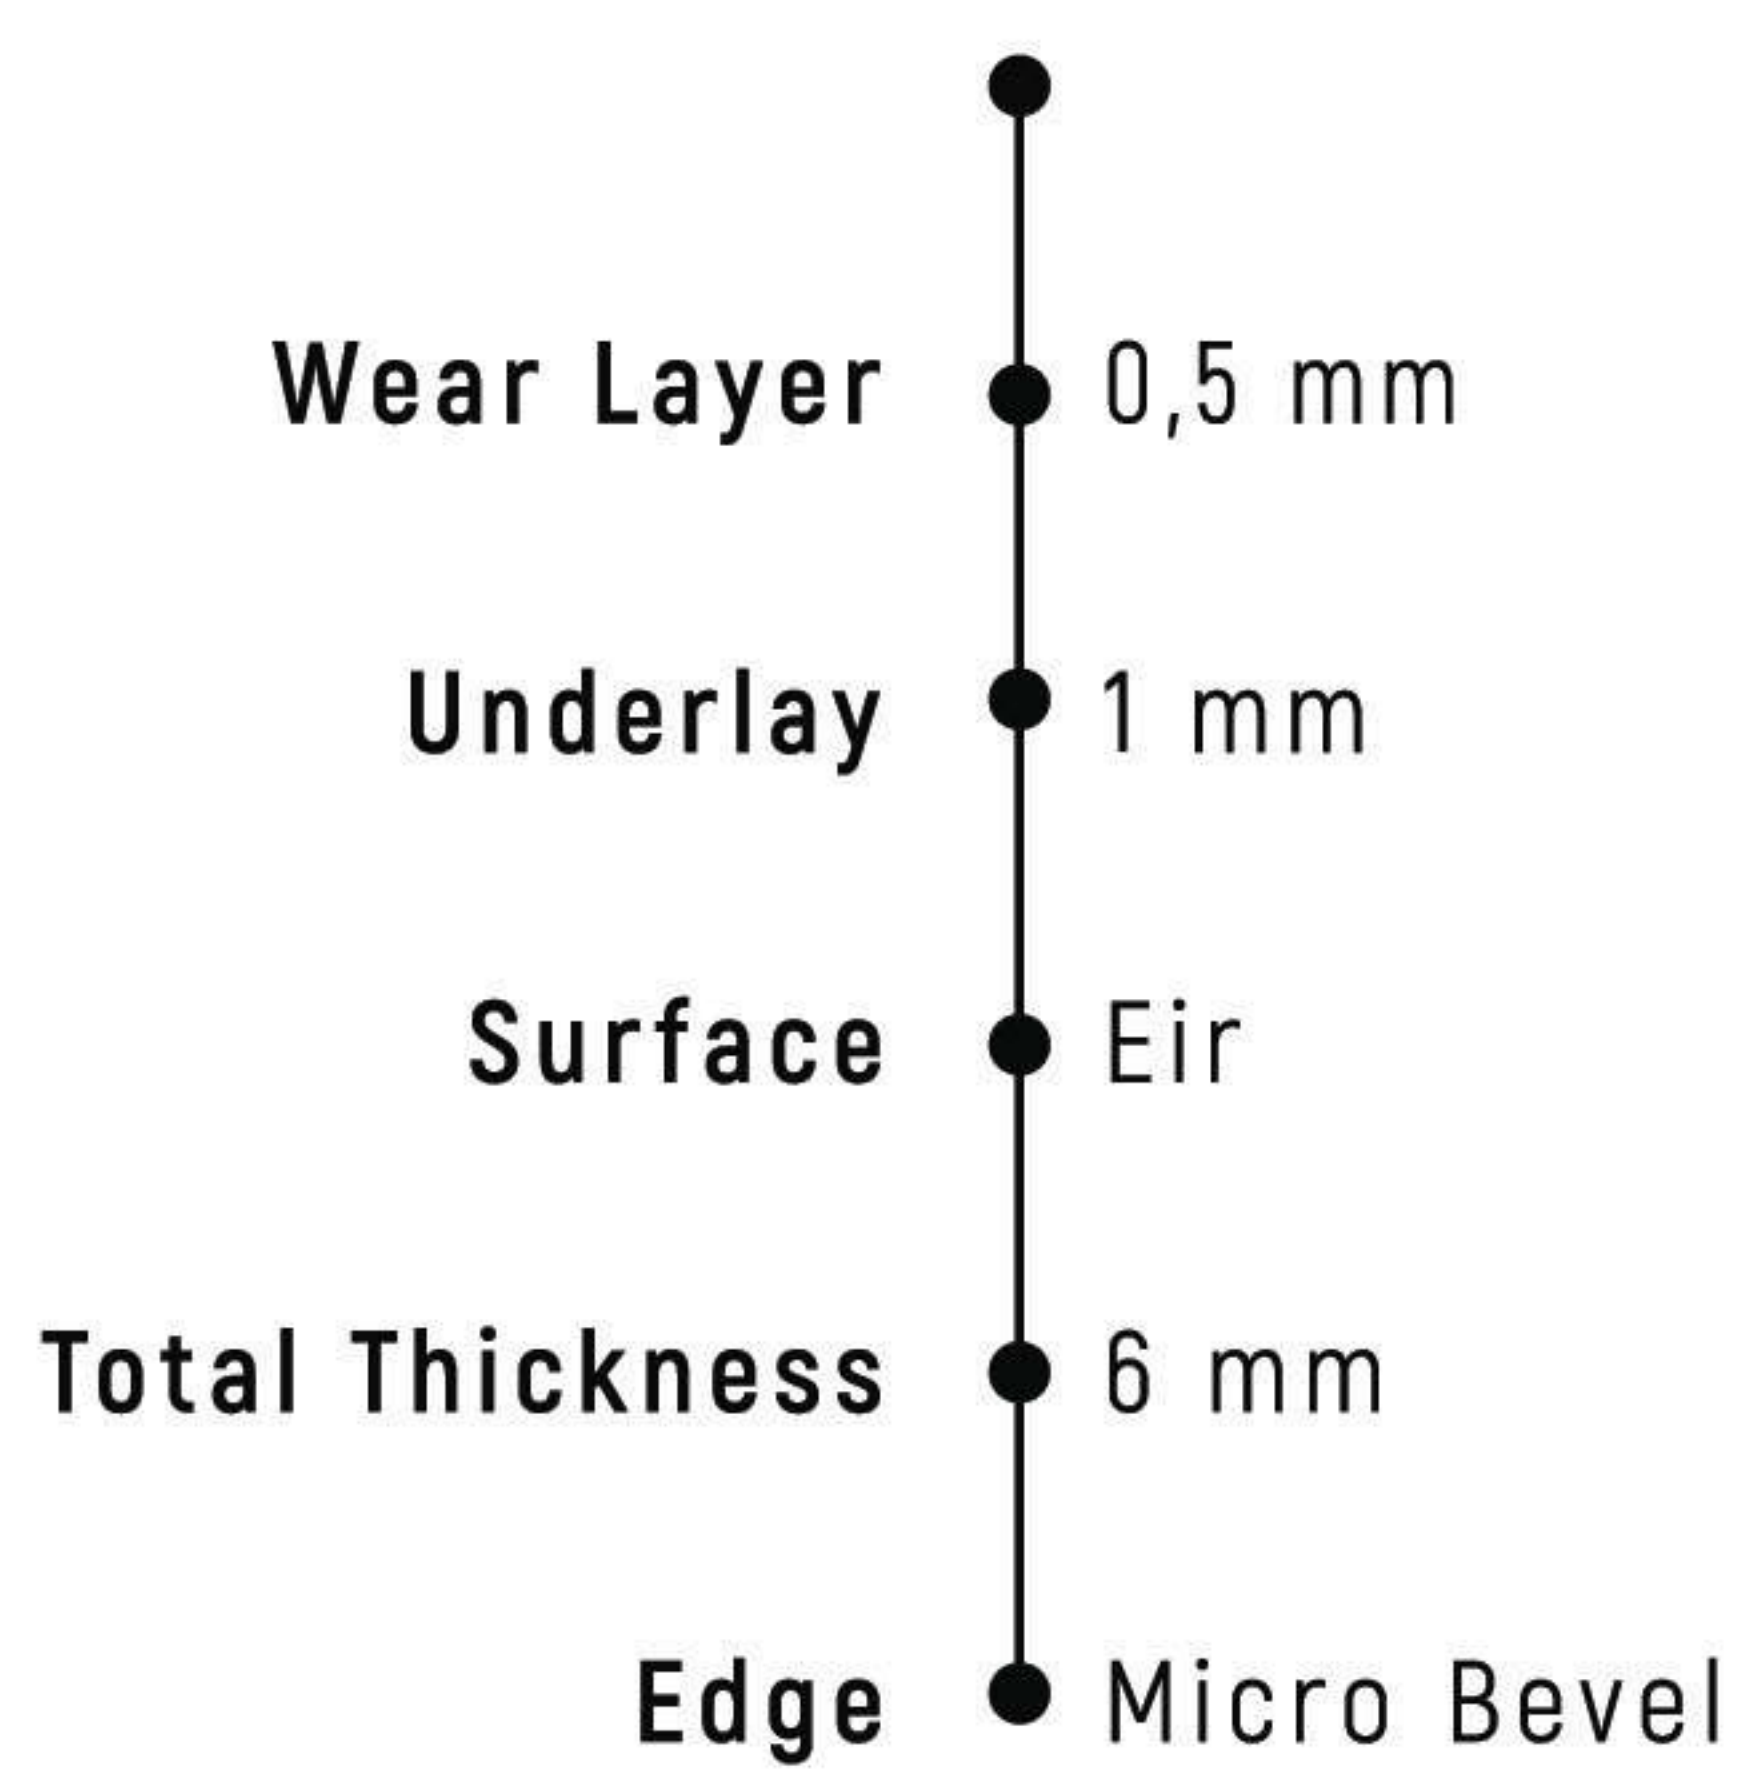

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Flim Layer

SPC Rigid Core

High Destiny
Underlayment

Elegance
Meets
Durability

1524 mm
228mm







RUBY 301

73



GRANDE COLLECTION

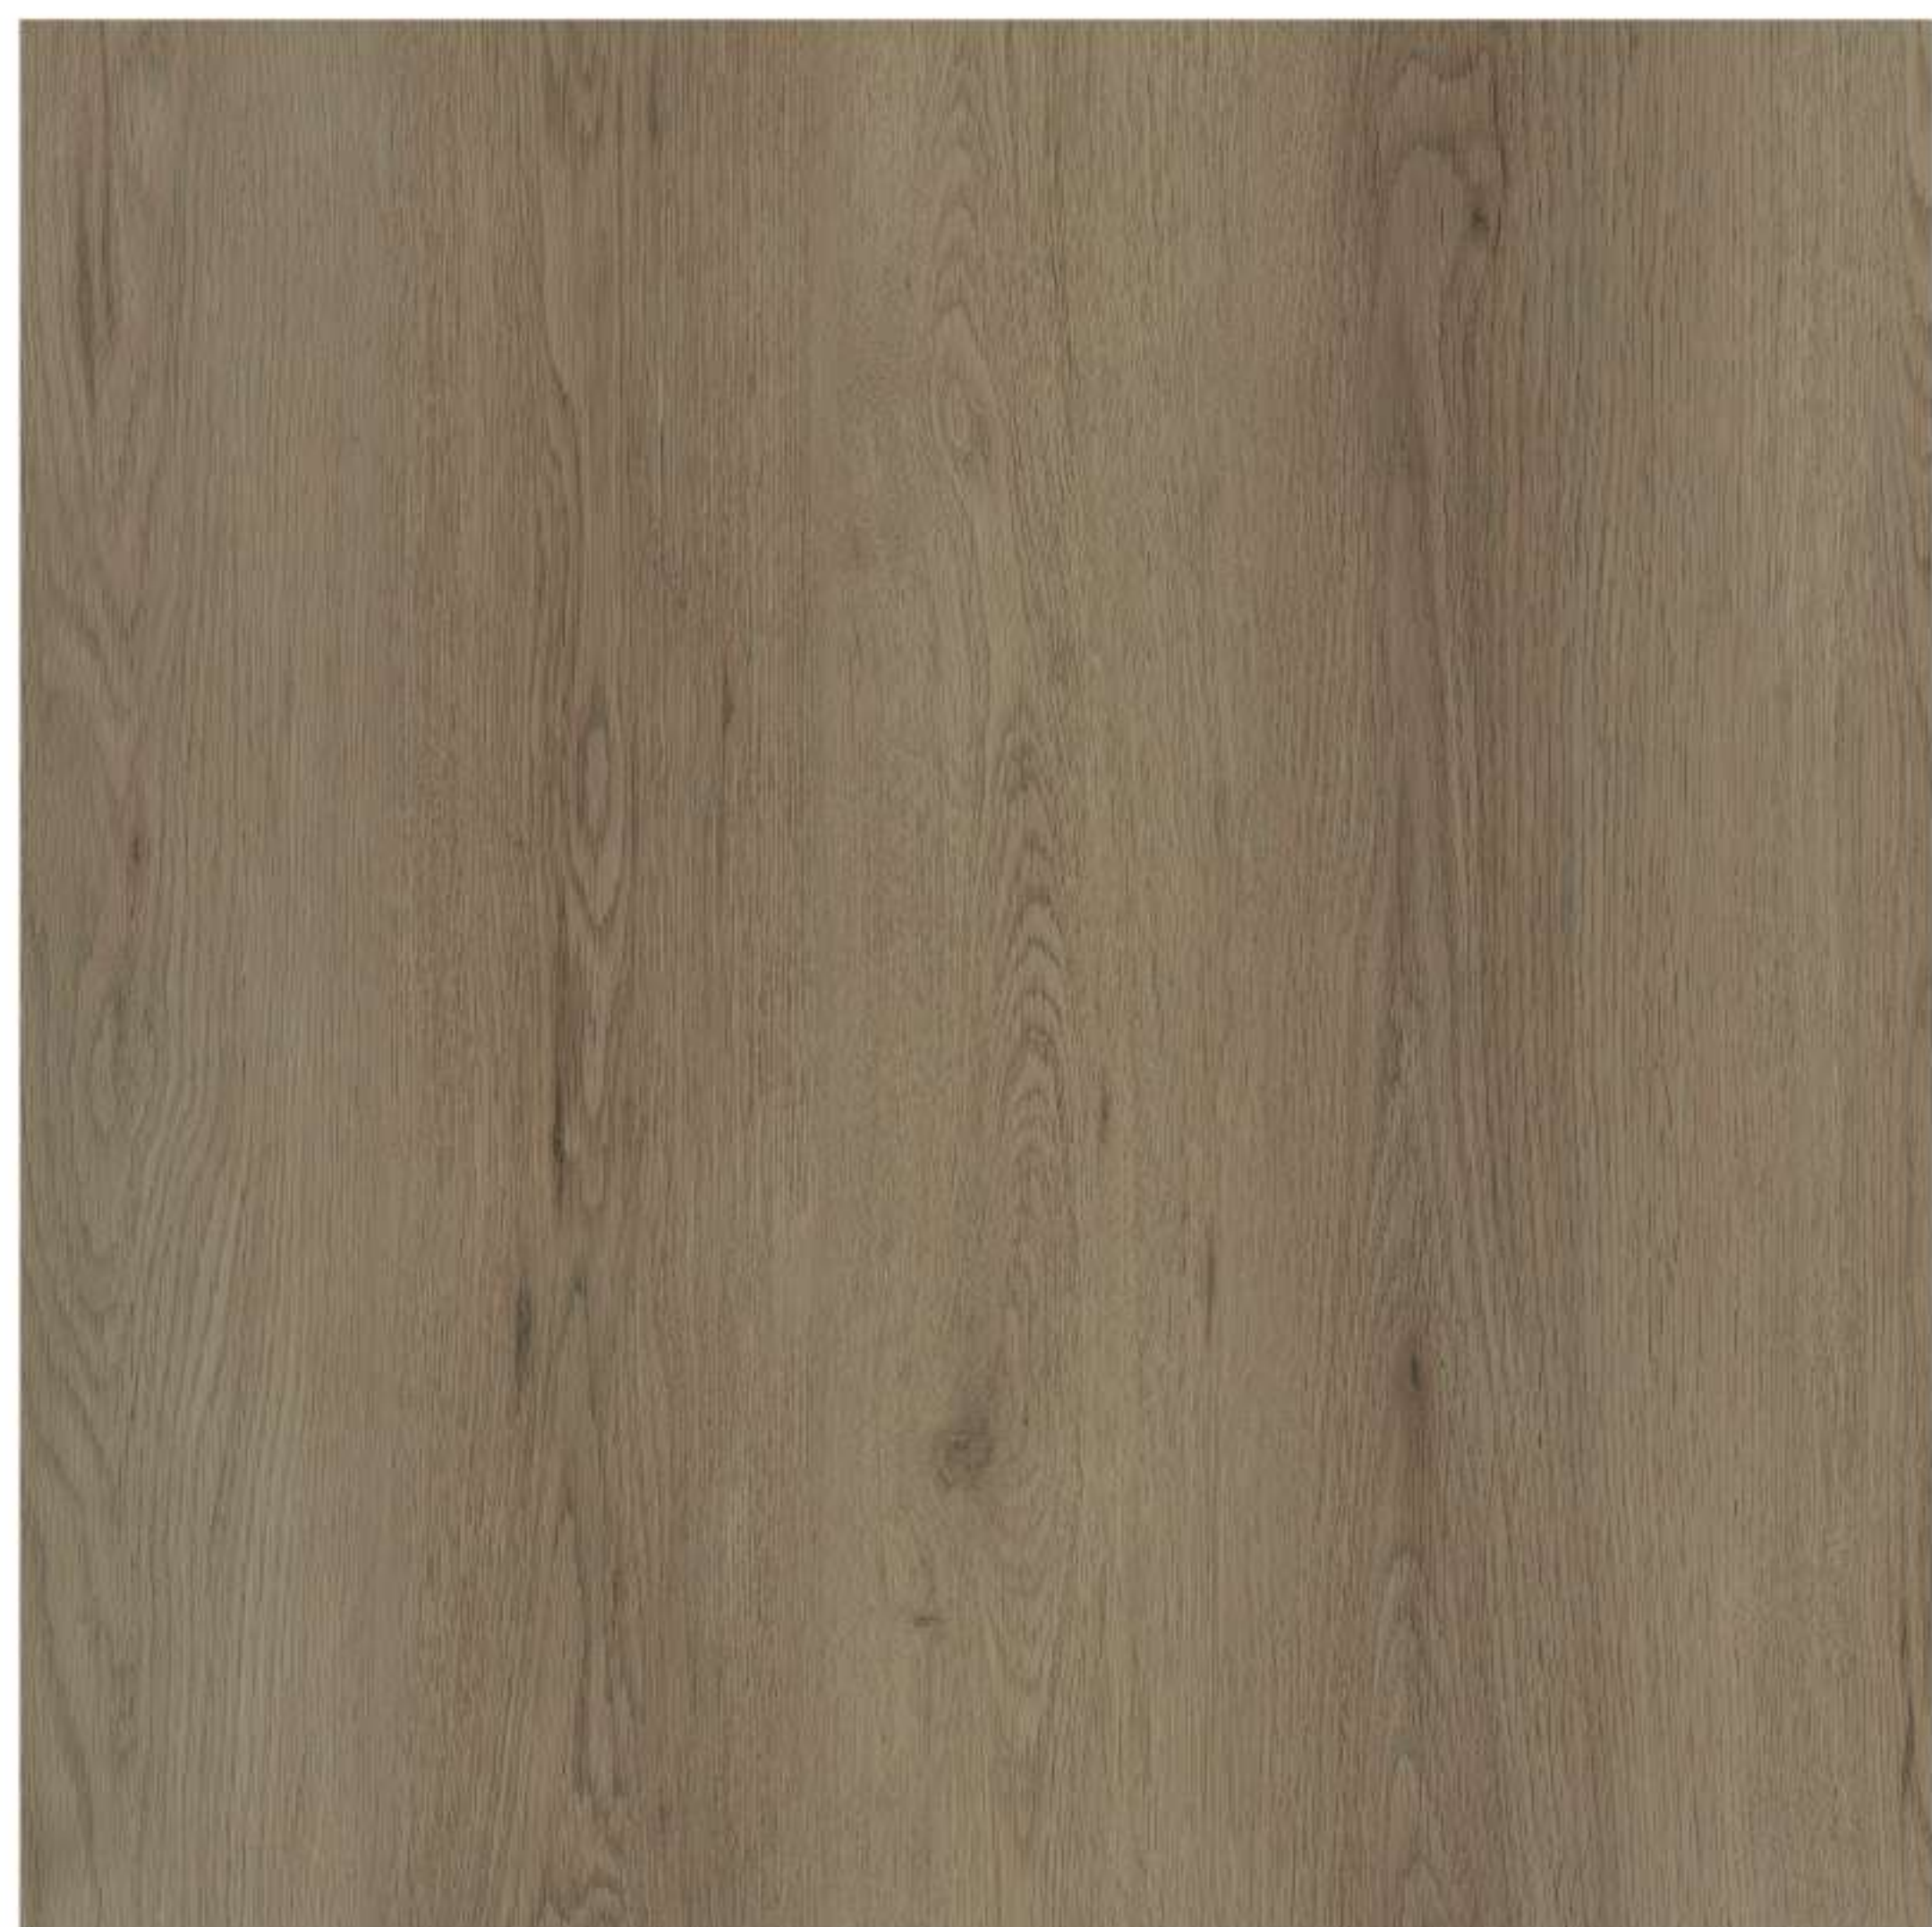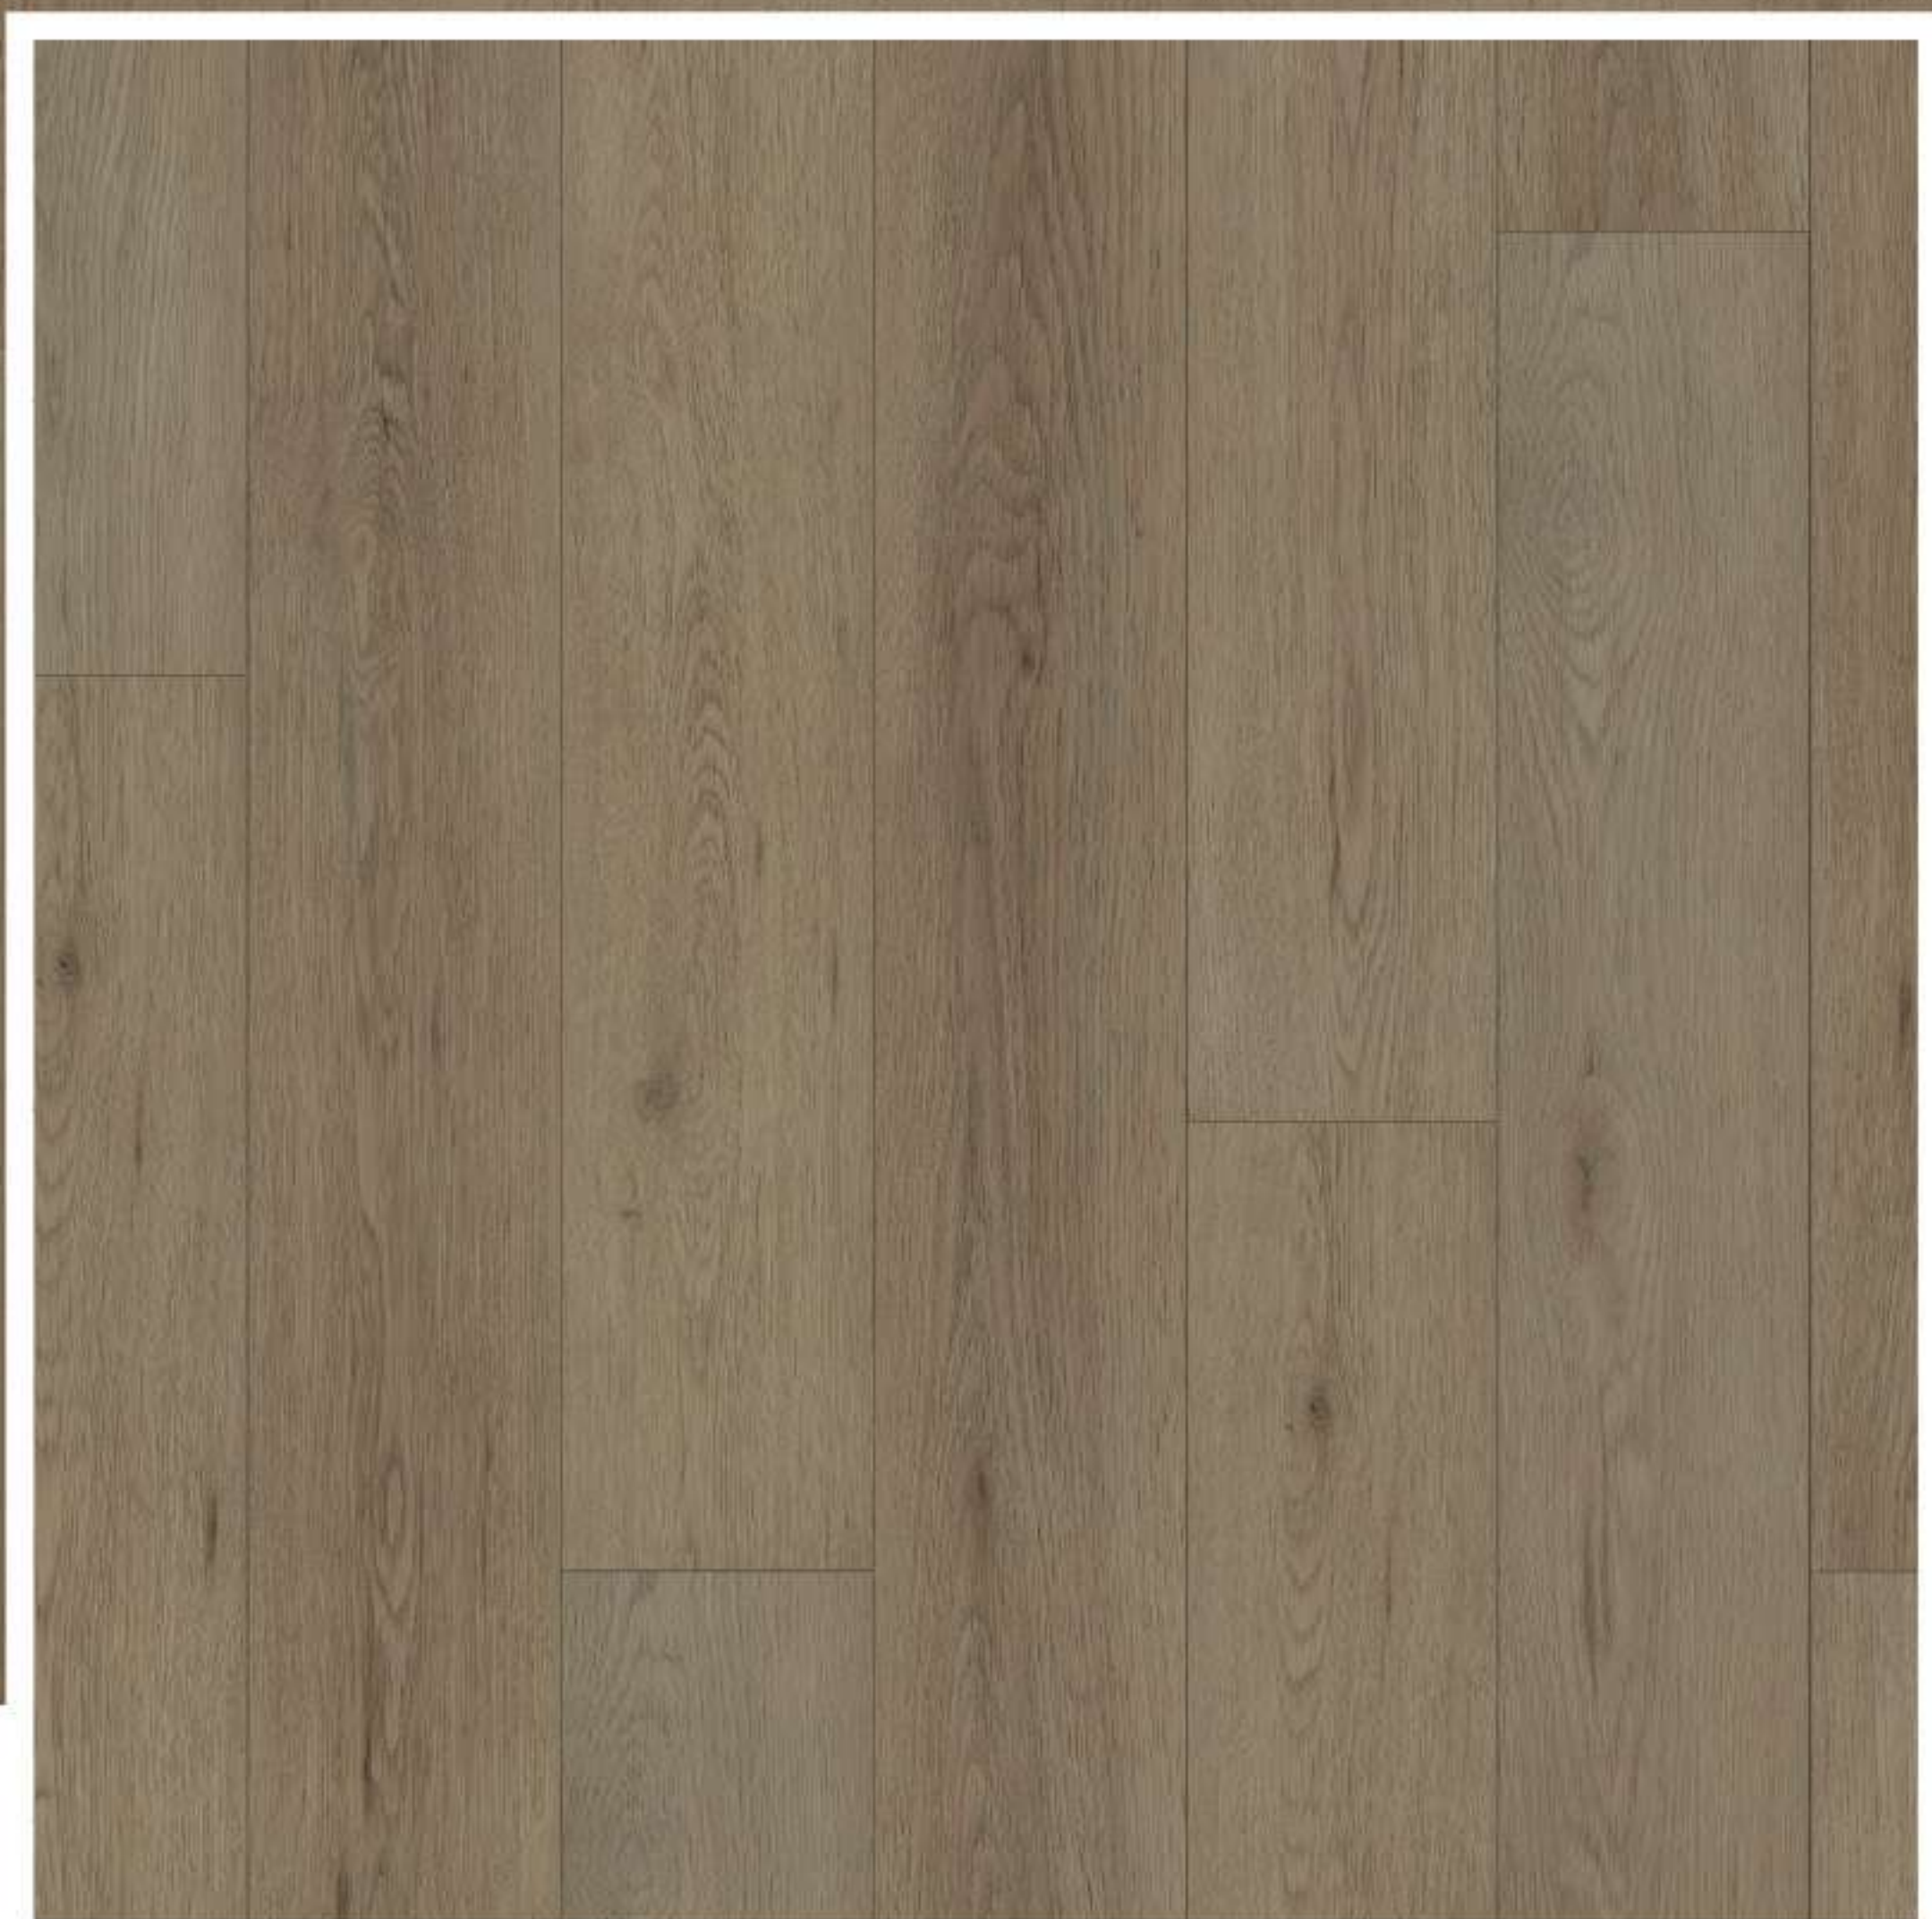

301 RUBYLESEDI



GR-301-PL | PLANK
228 X 1524 X 6 mm

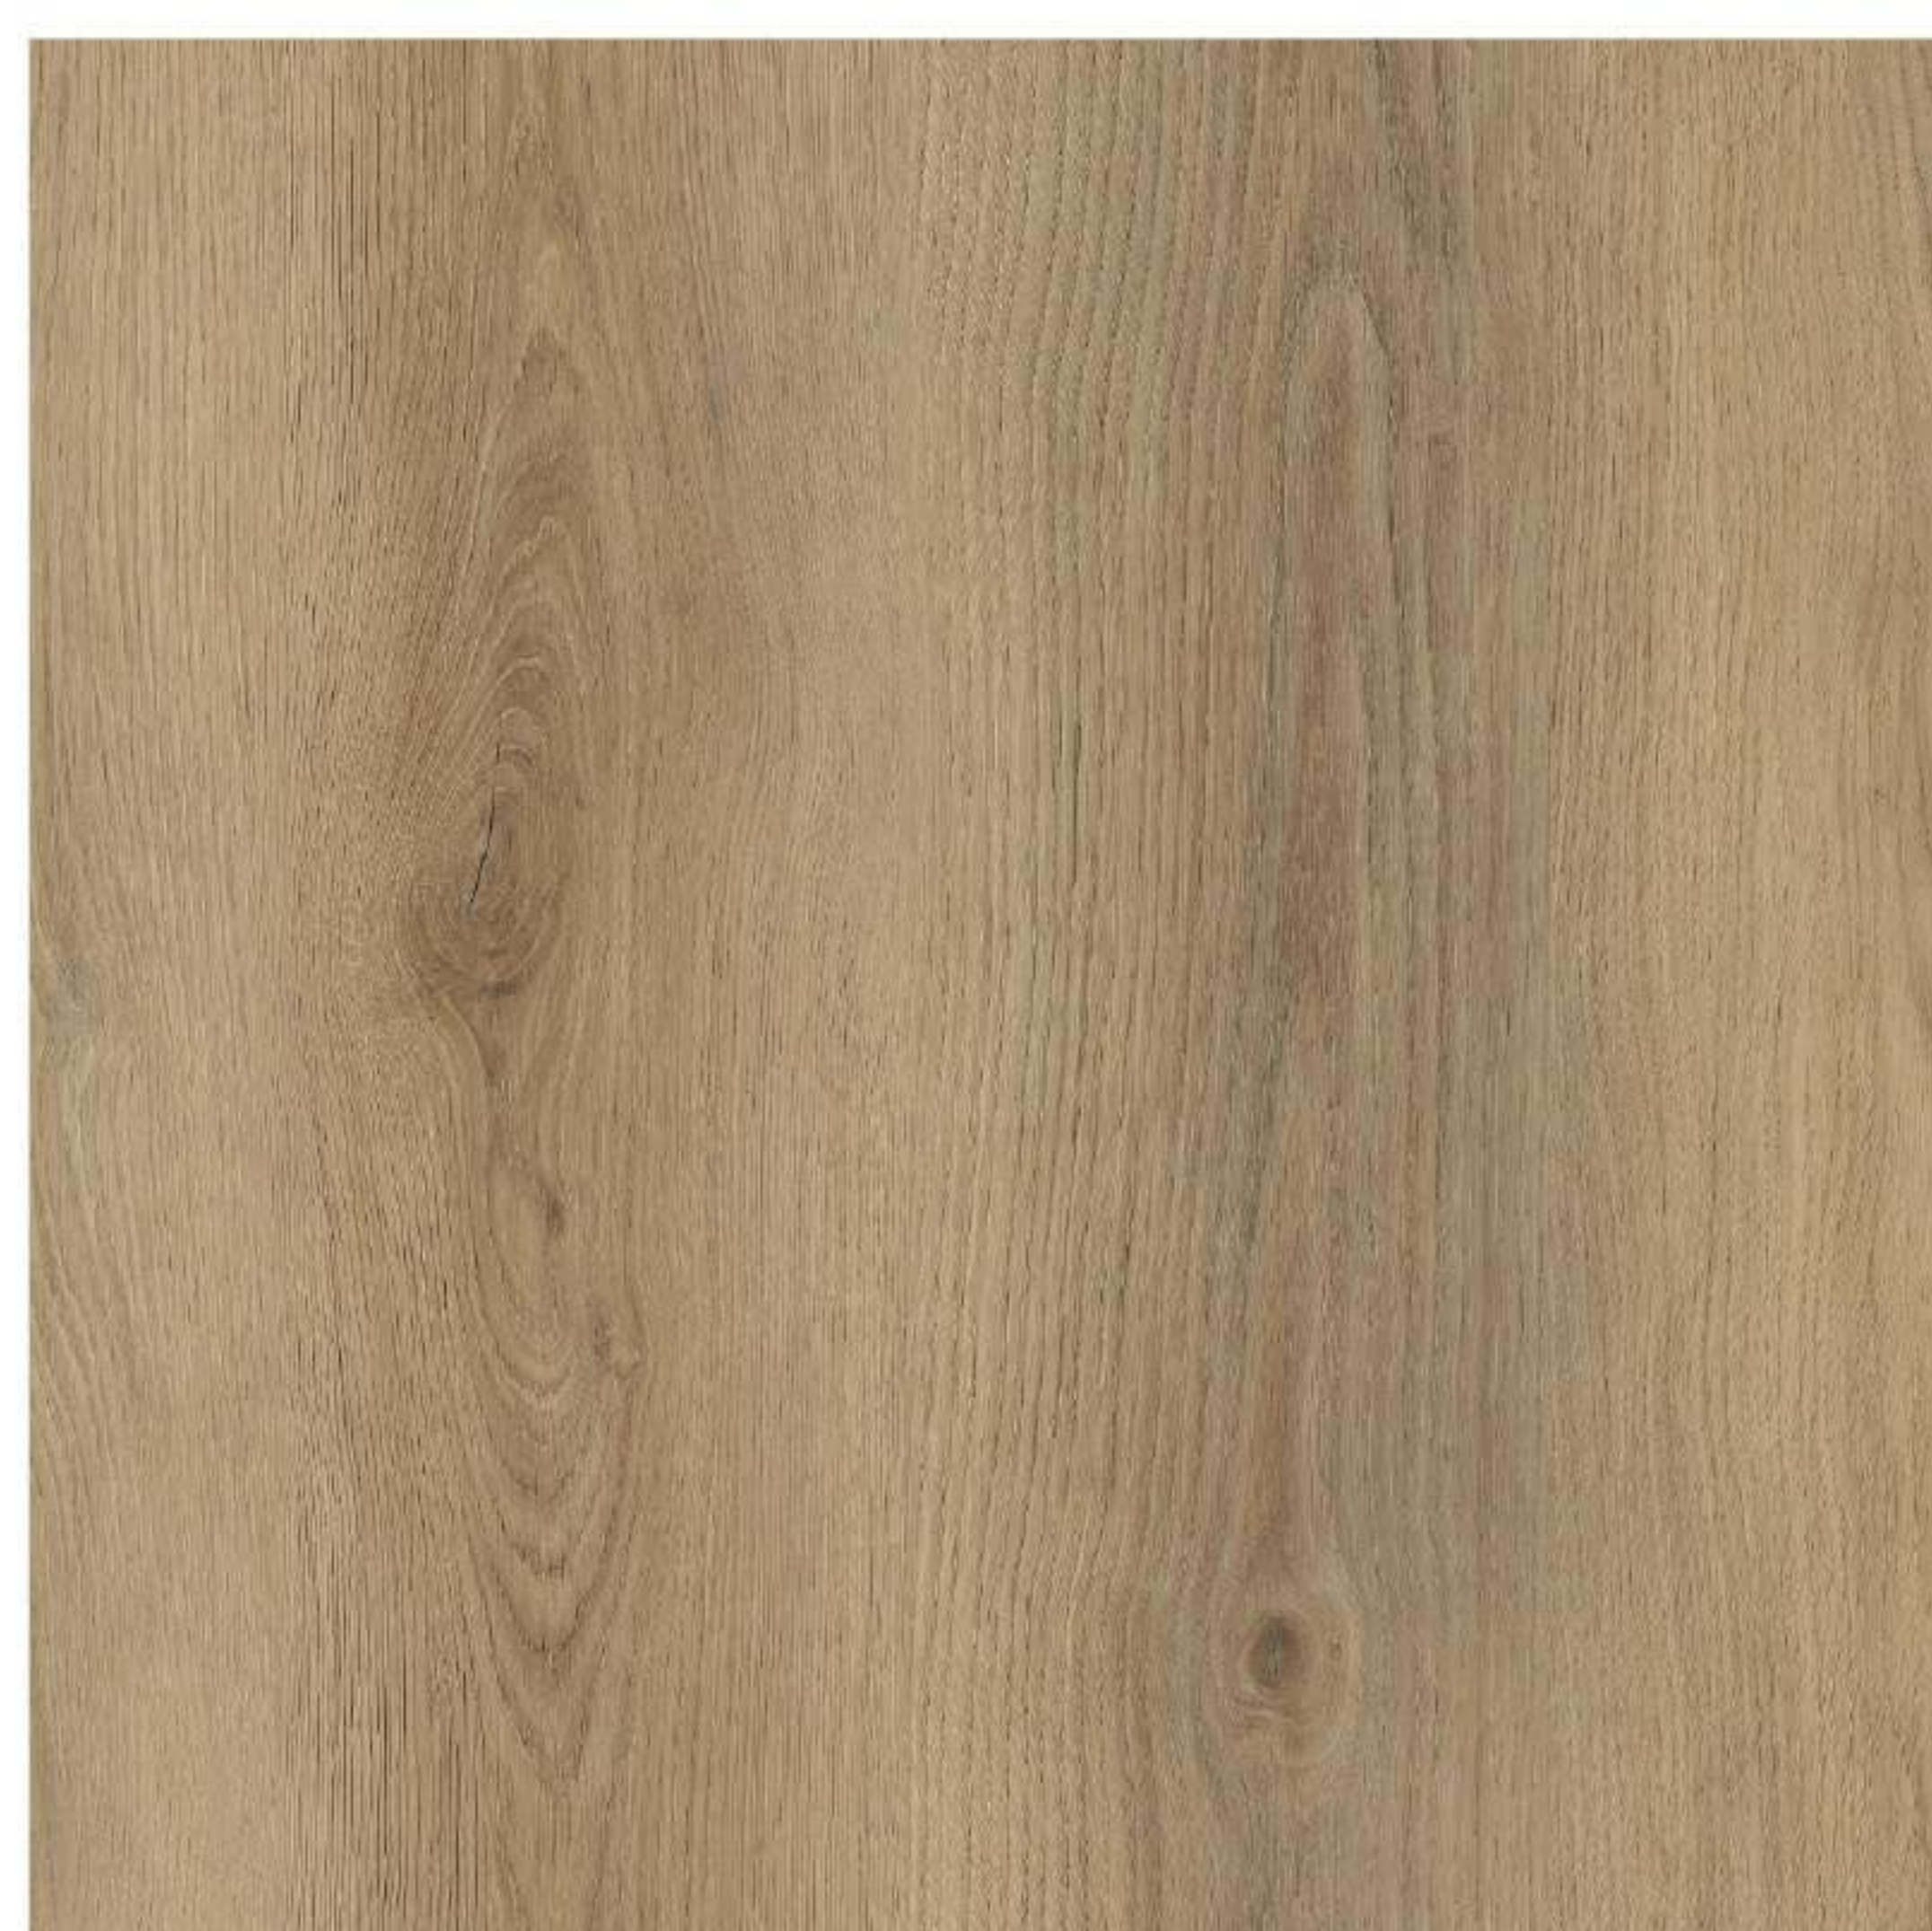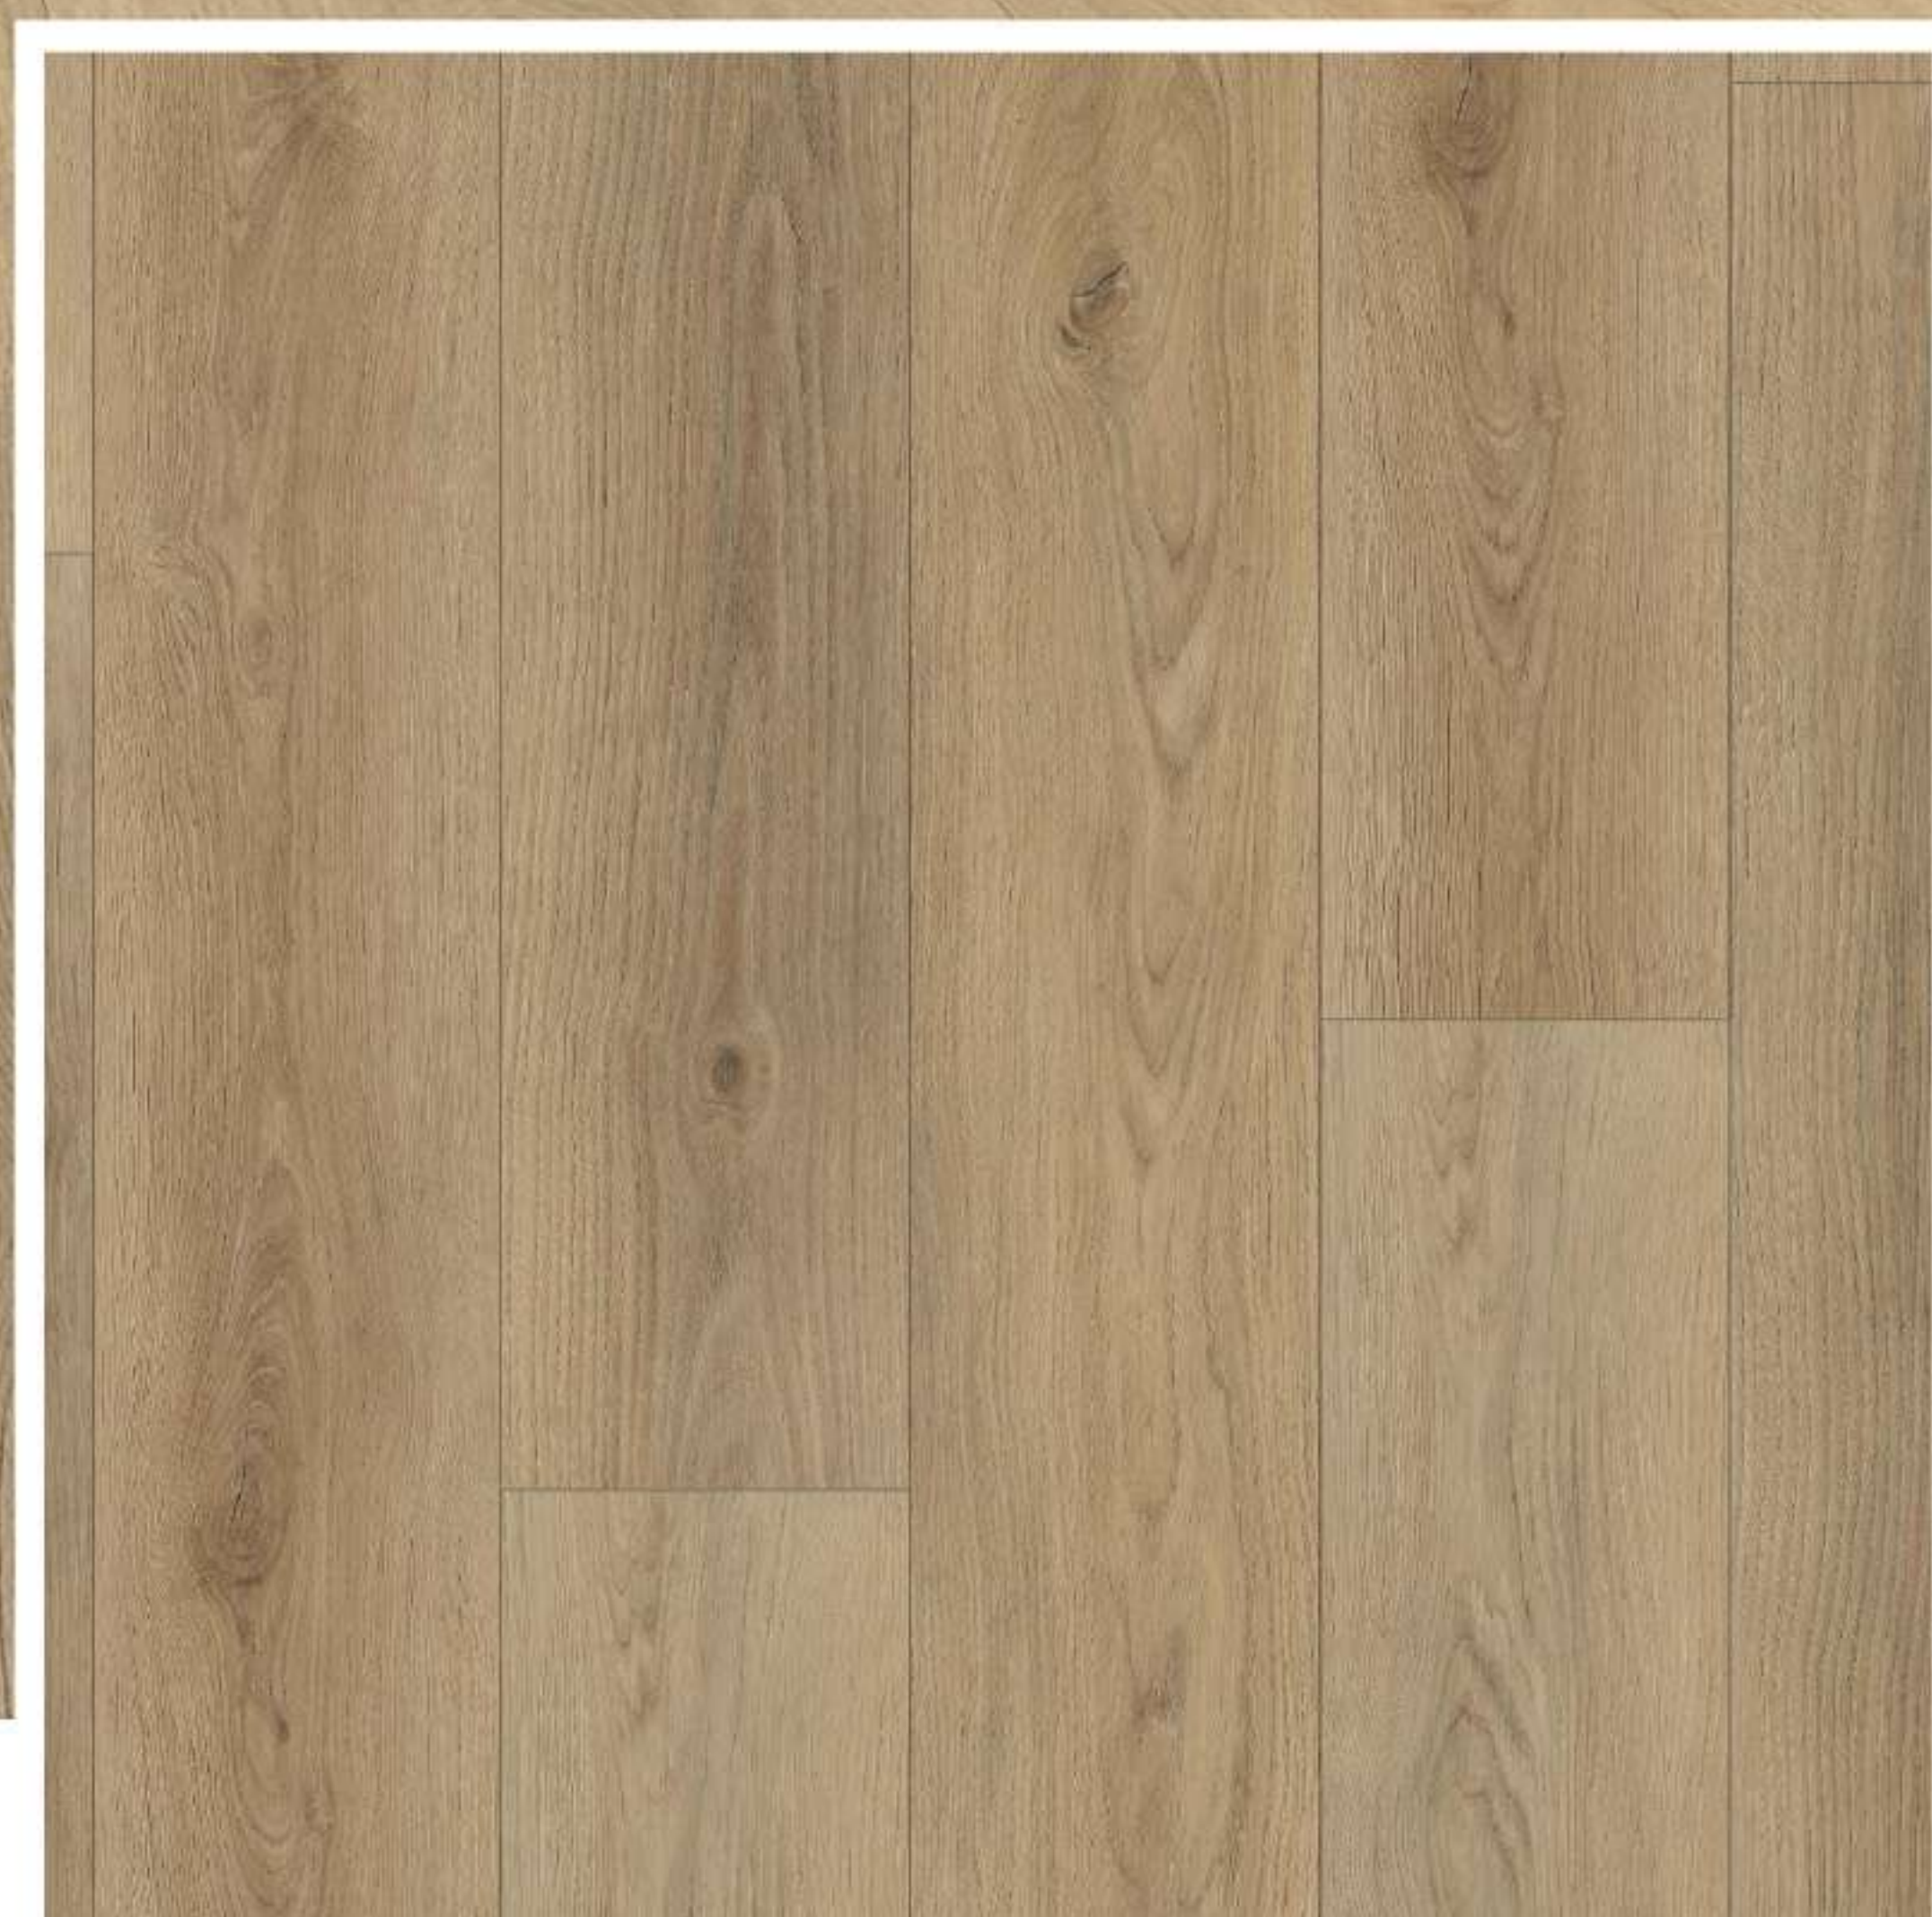

302LESEDI



GR-302-PL | PLANK
228 X 1524 X 6 mm



304 EXCELSIOR



GR-303-PL | PLANK
228 X 1524 X 6 mm



EXCELSIOR 303

75


GRANDE COLLECTION




303 ETERNITY



GR-304-PL | PLANK
228 X 1524 X 6 mm

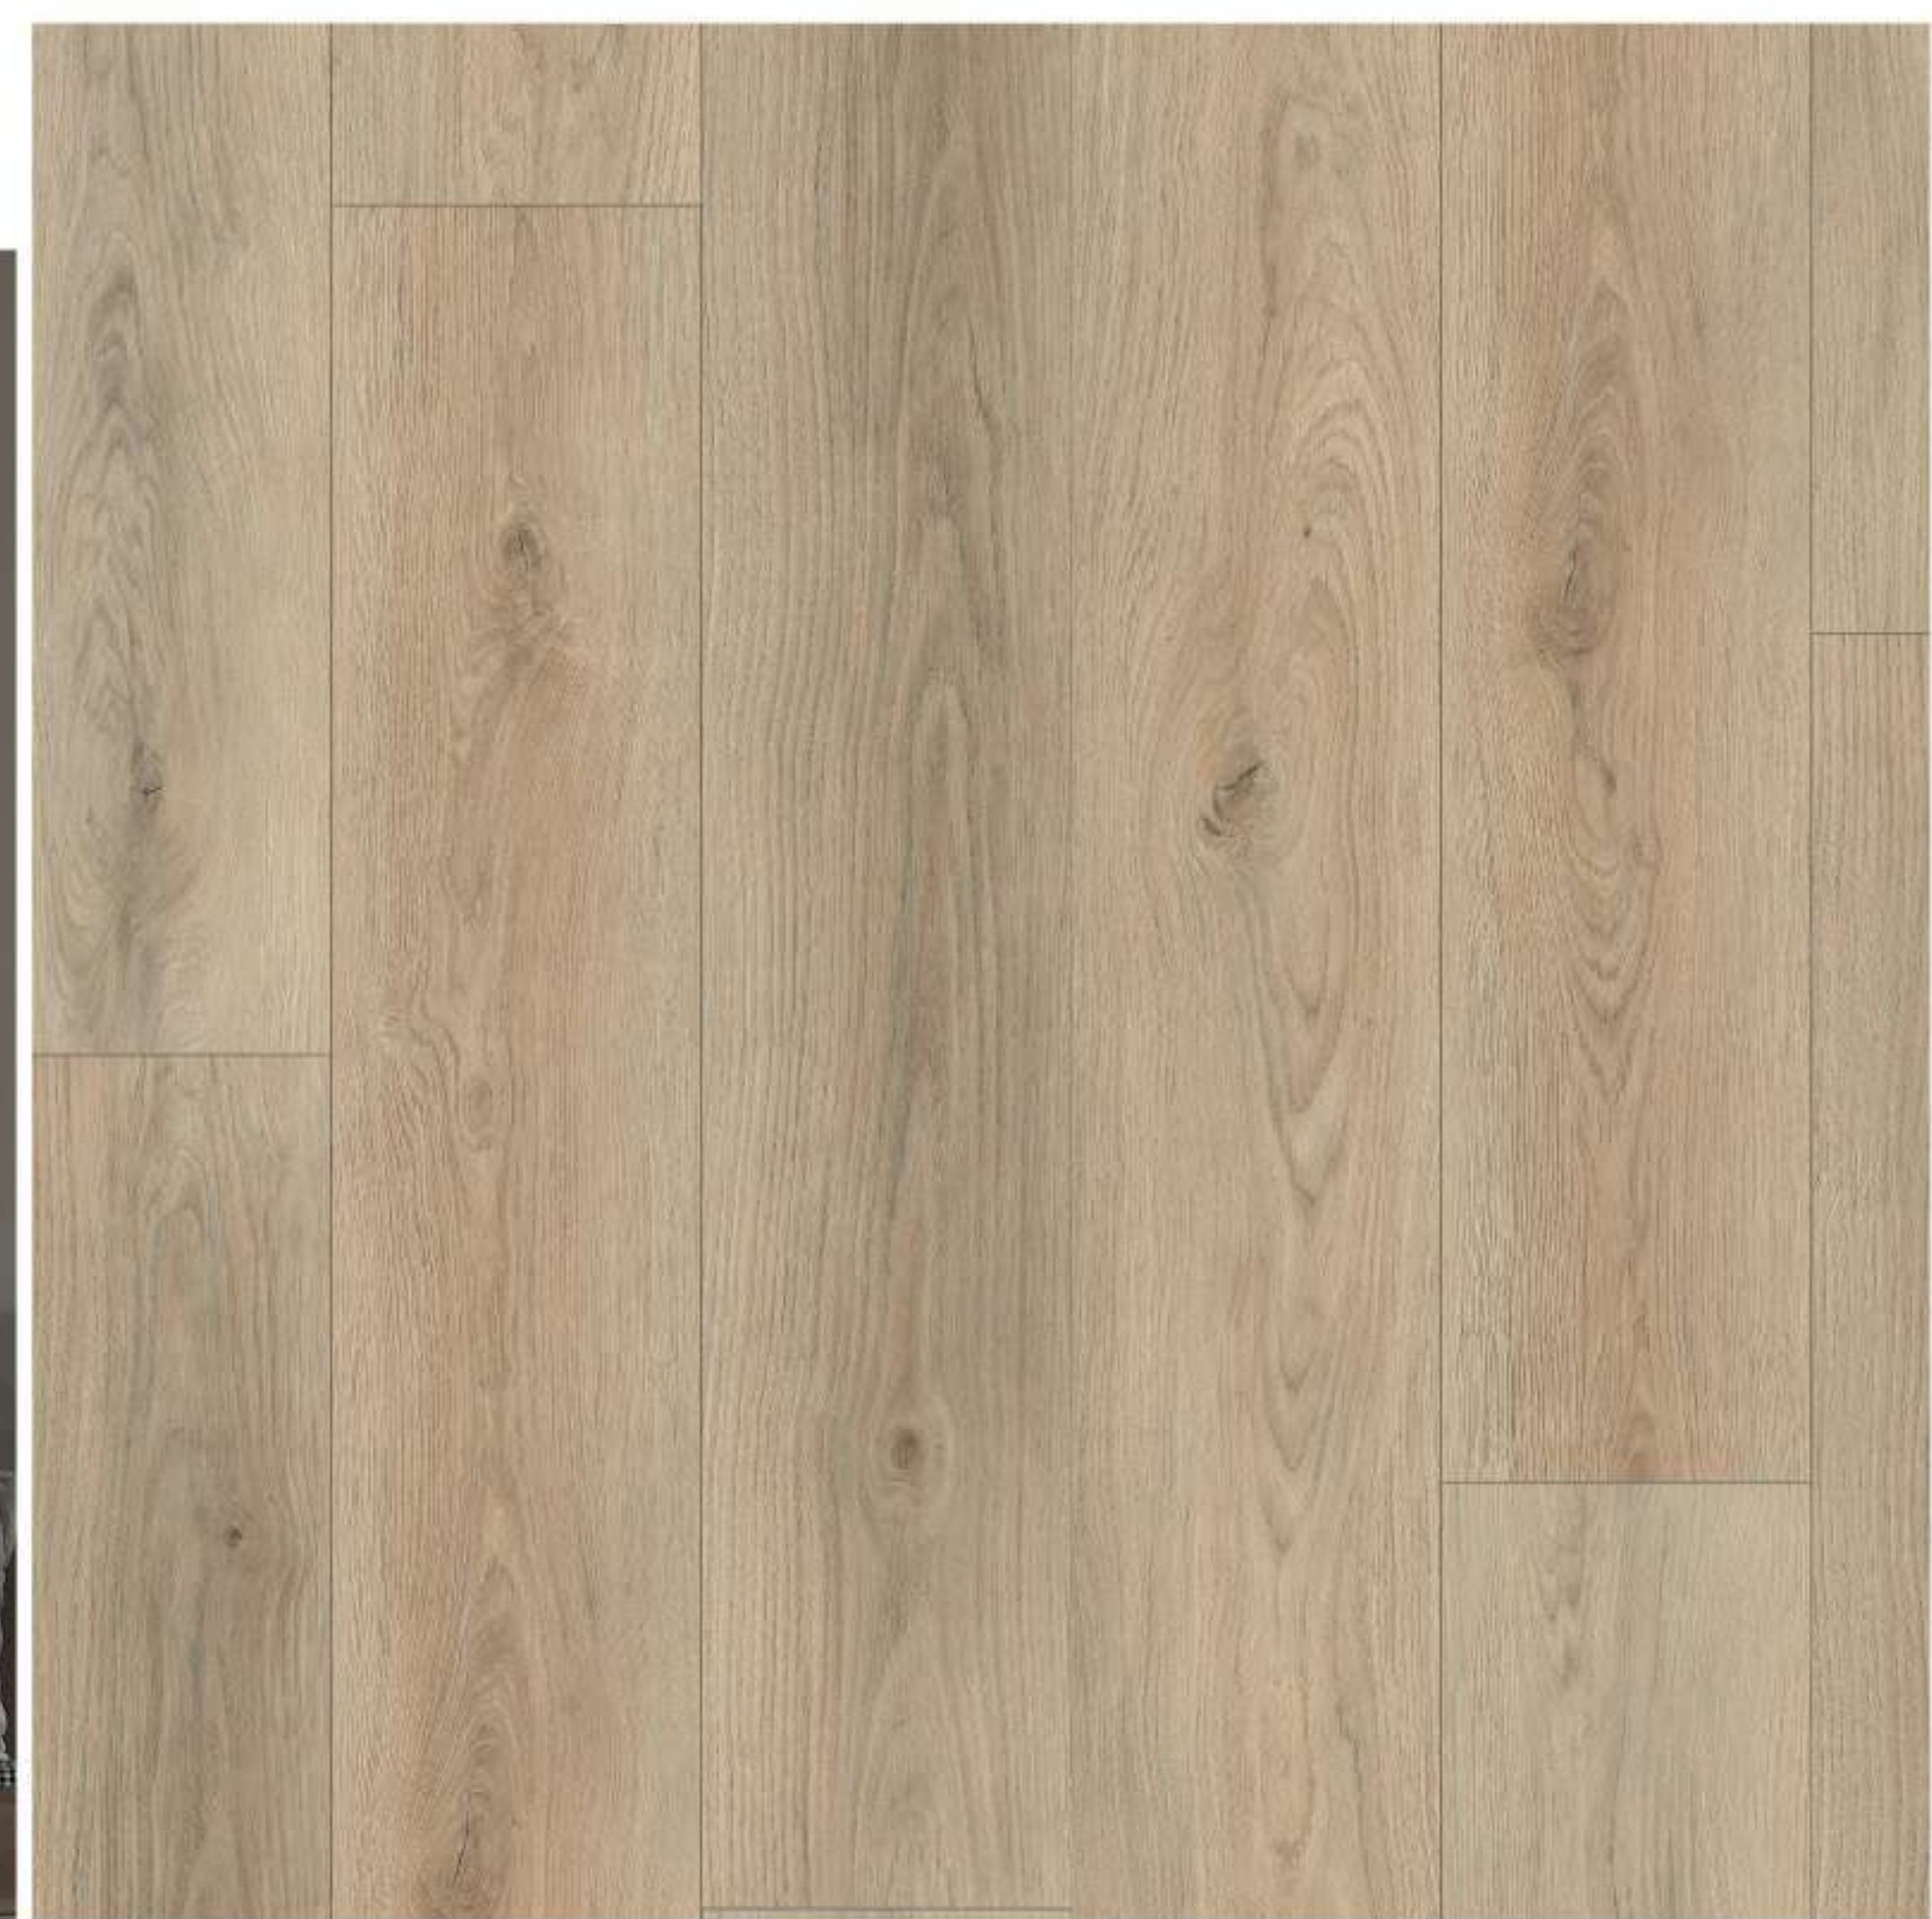

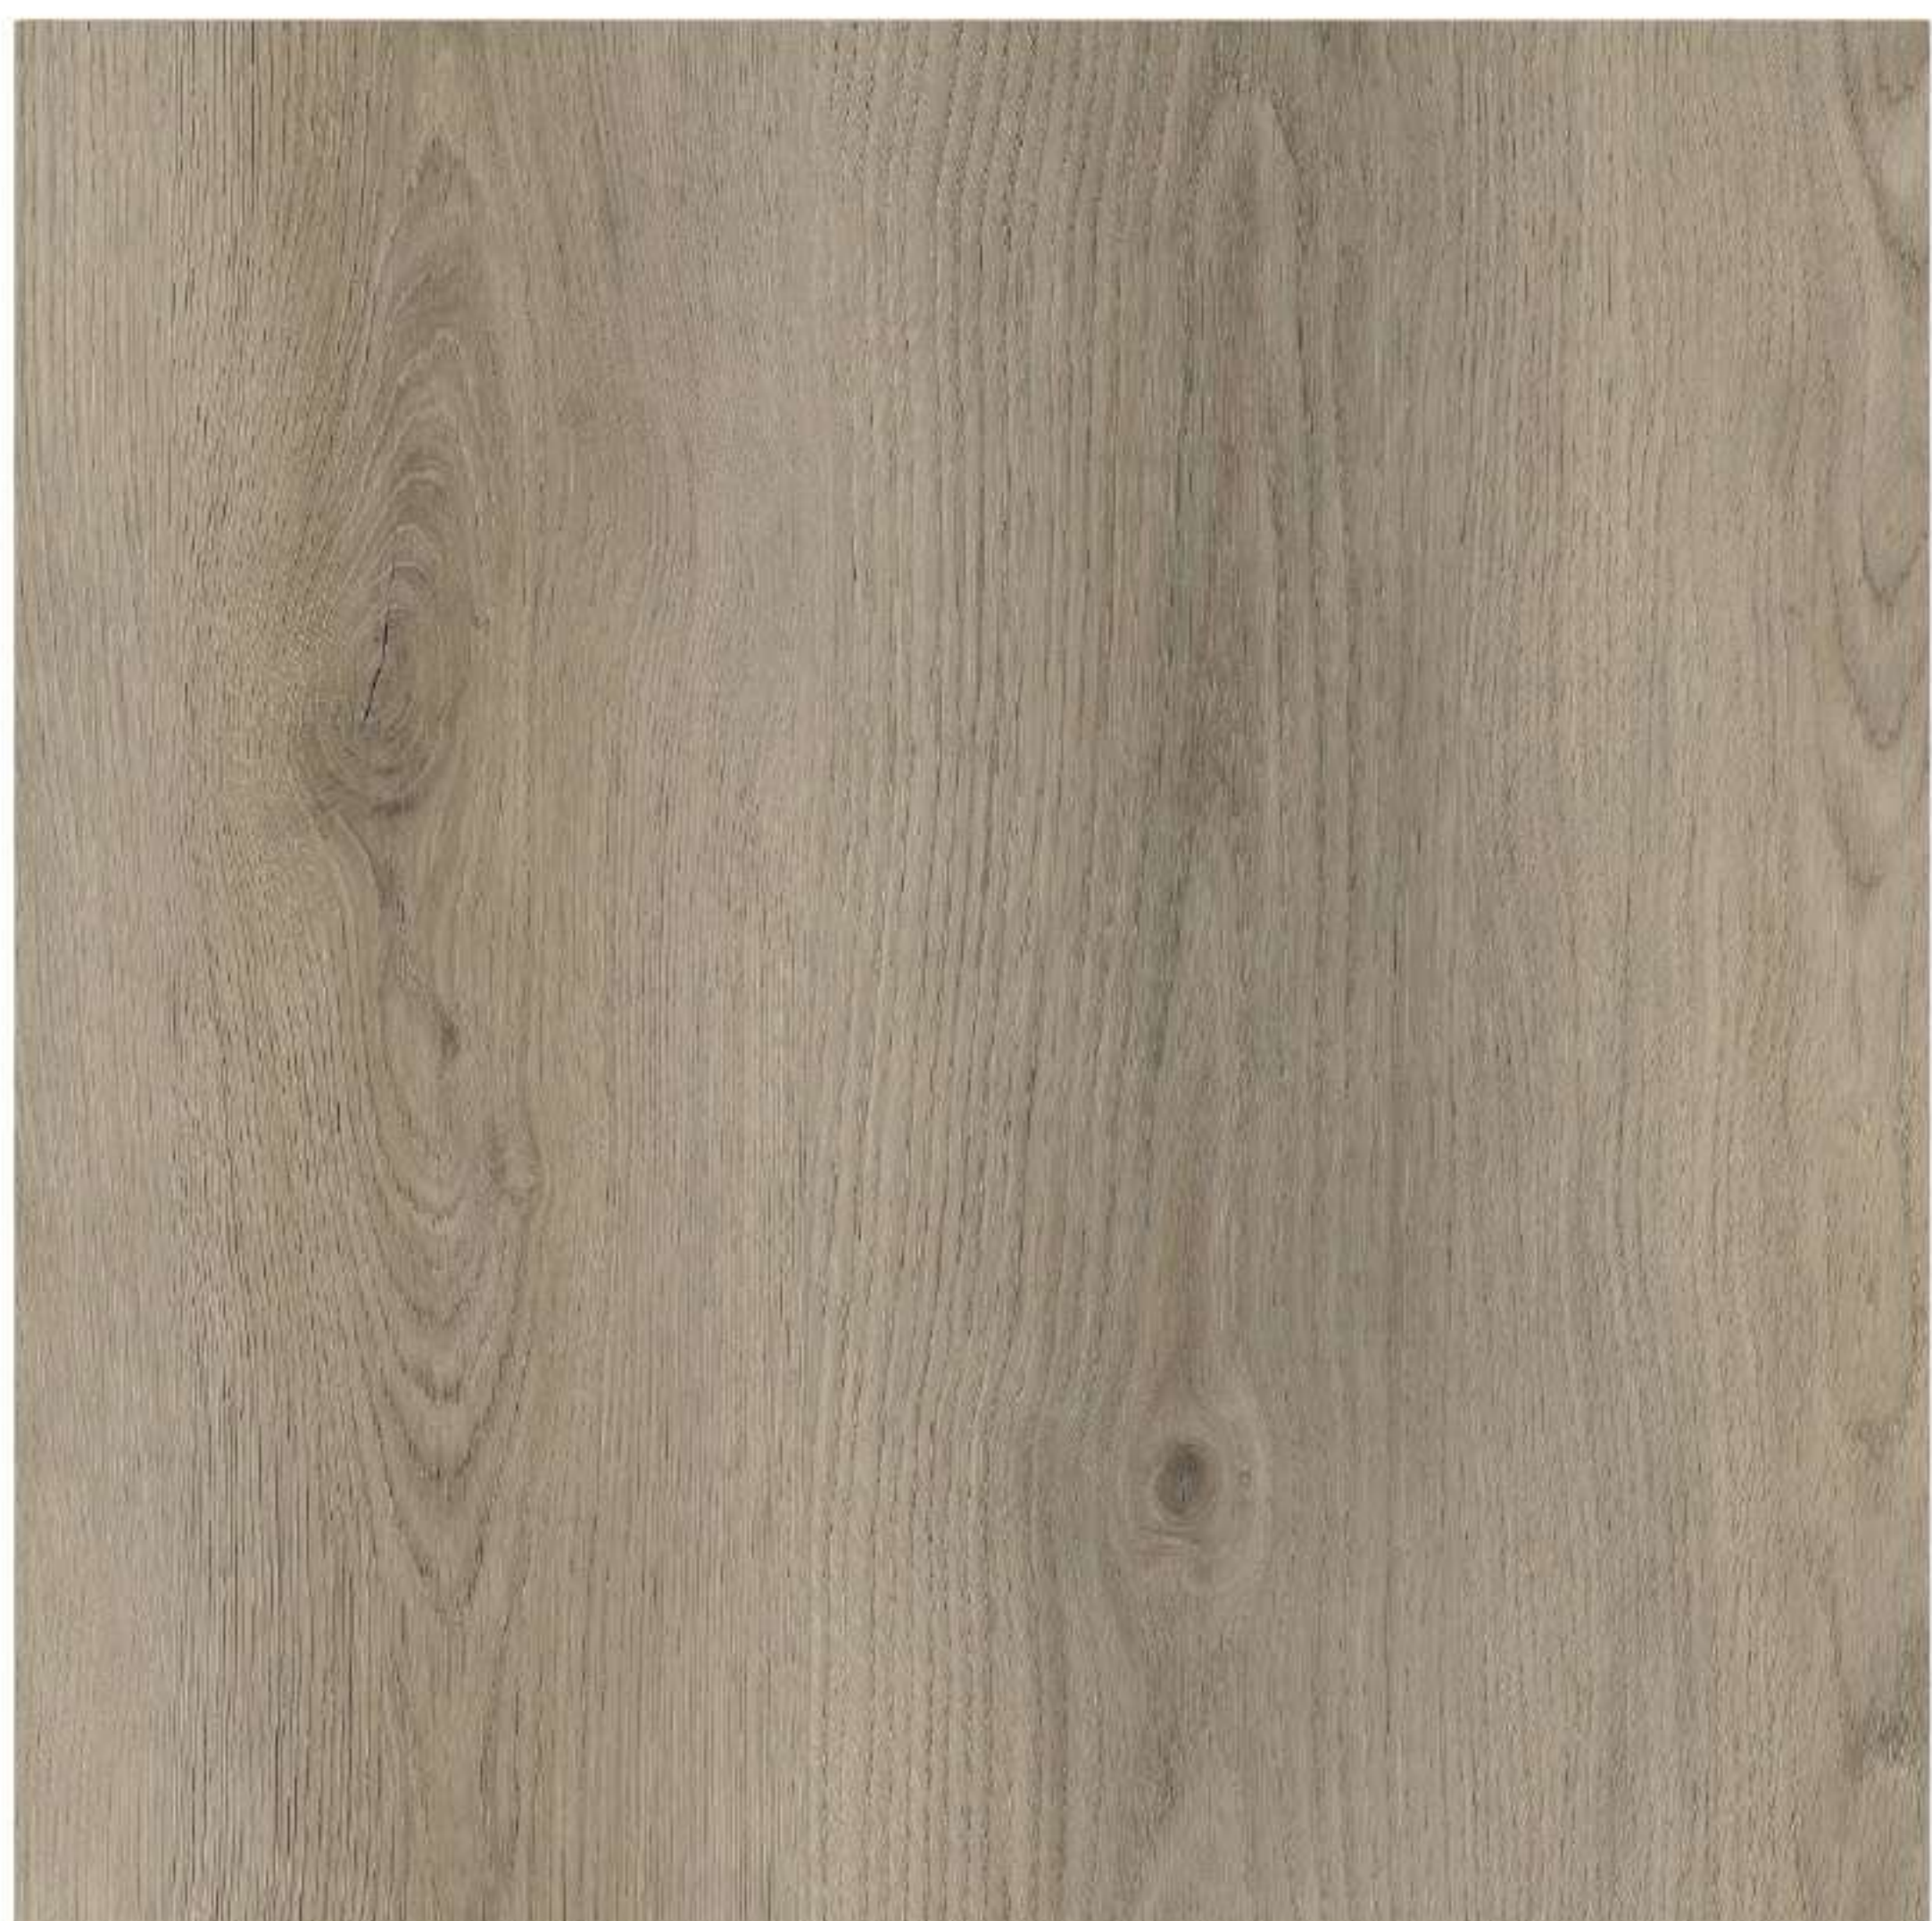

305 LESATHO




GR-305-PL | PLANK
228 X 1524 X 6 mm



306 HOPE



GR-306-PL | PLANK
228 X 1524 X 6 mm

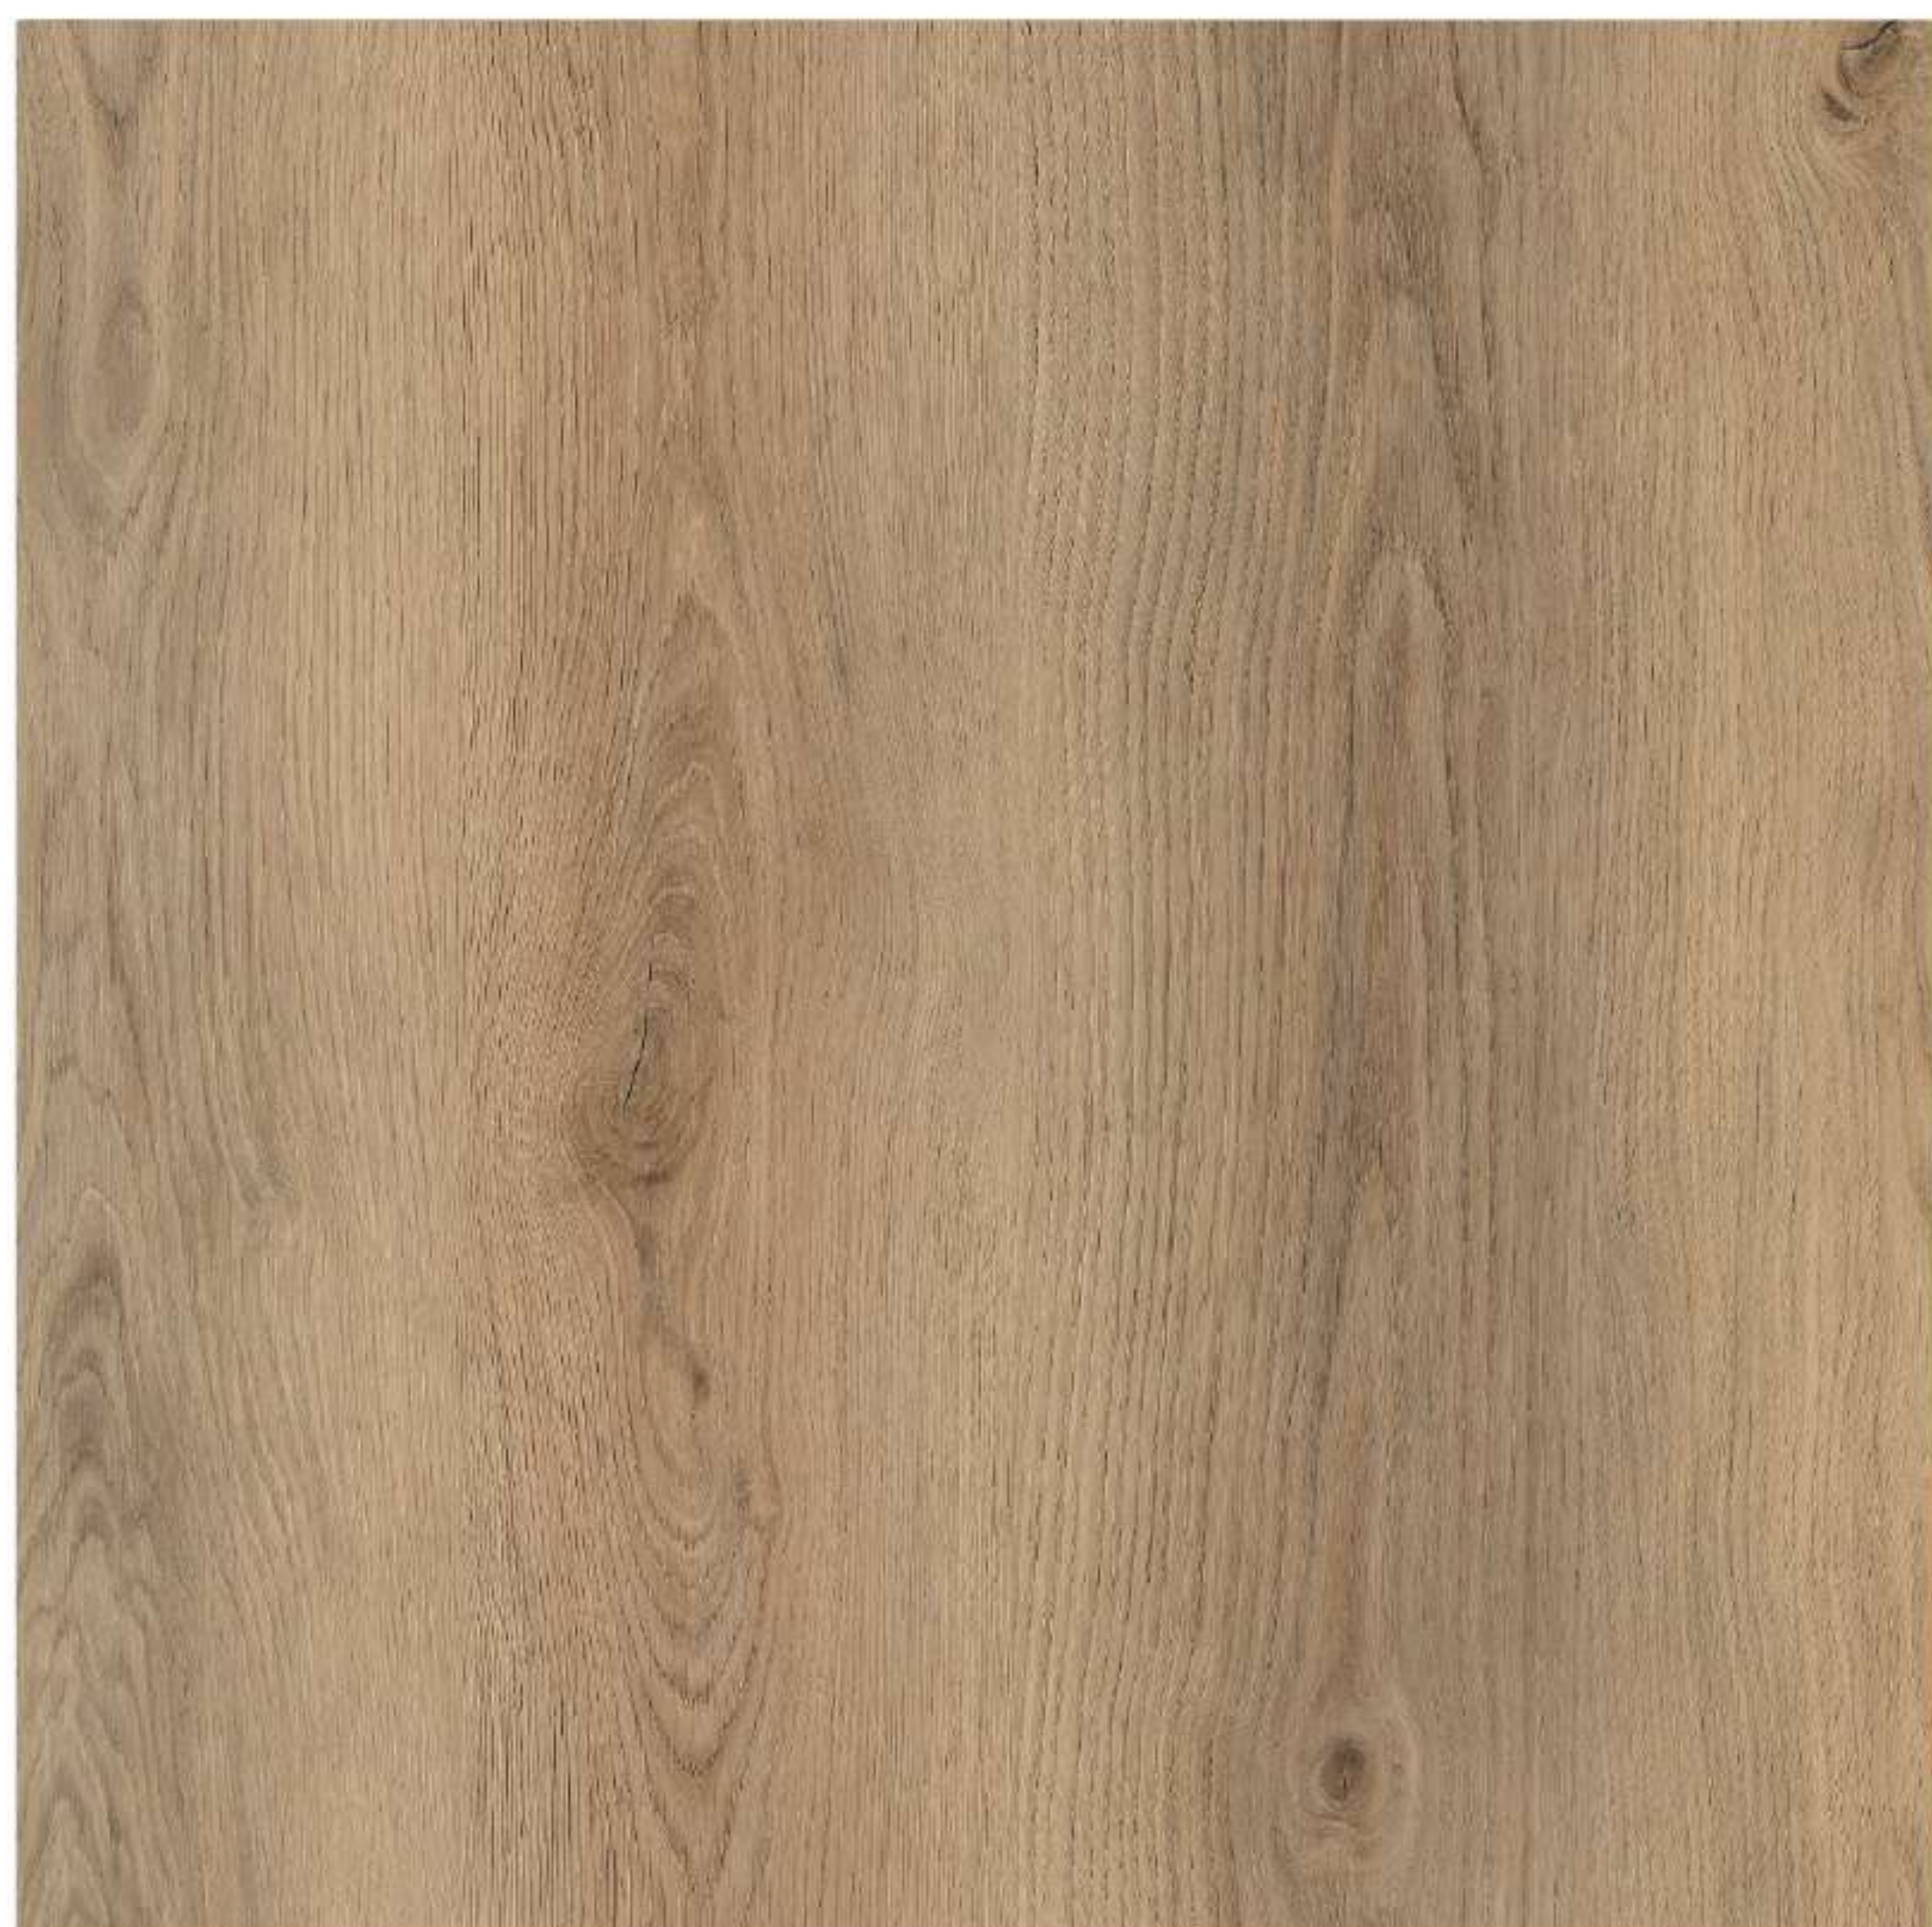




307 LUCIANO



GR-307-PL | PLANK
228 X 1524 X 6 mm

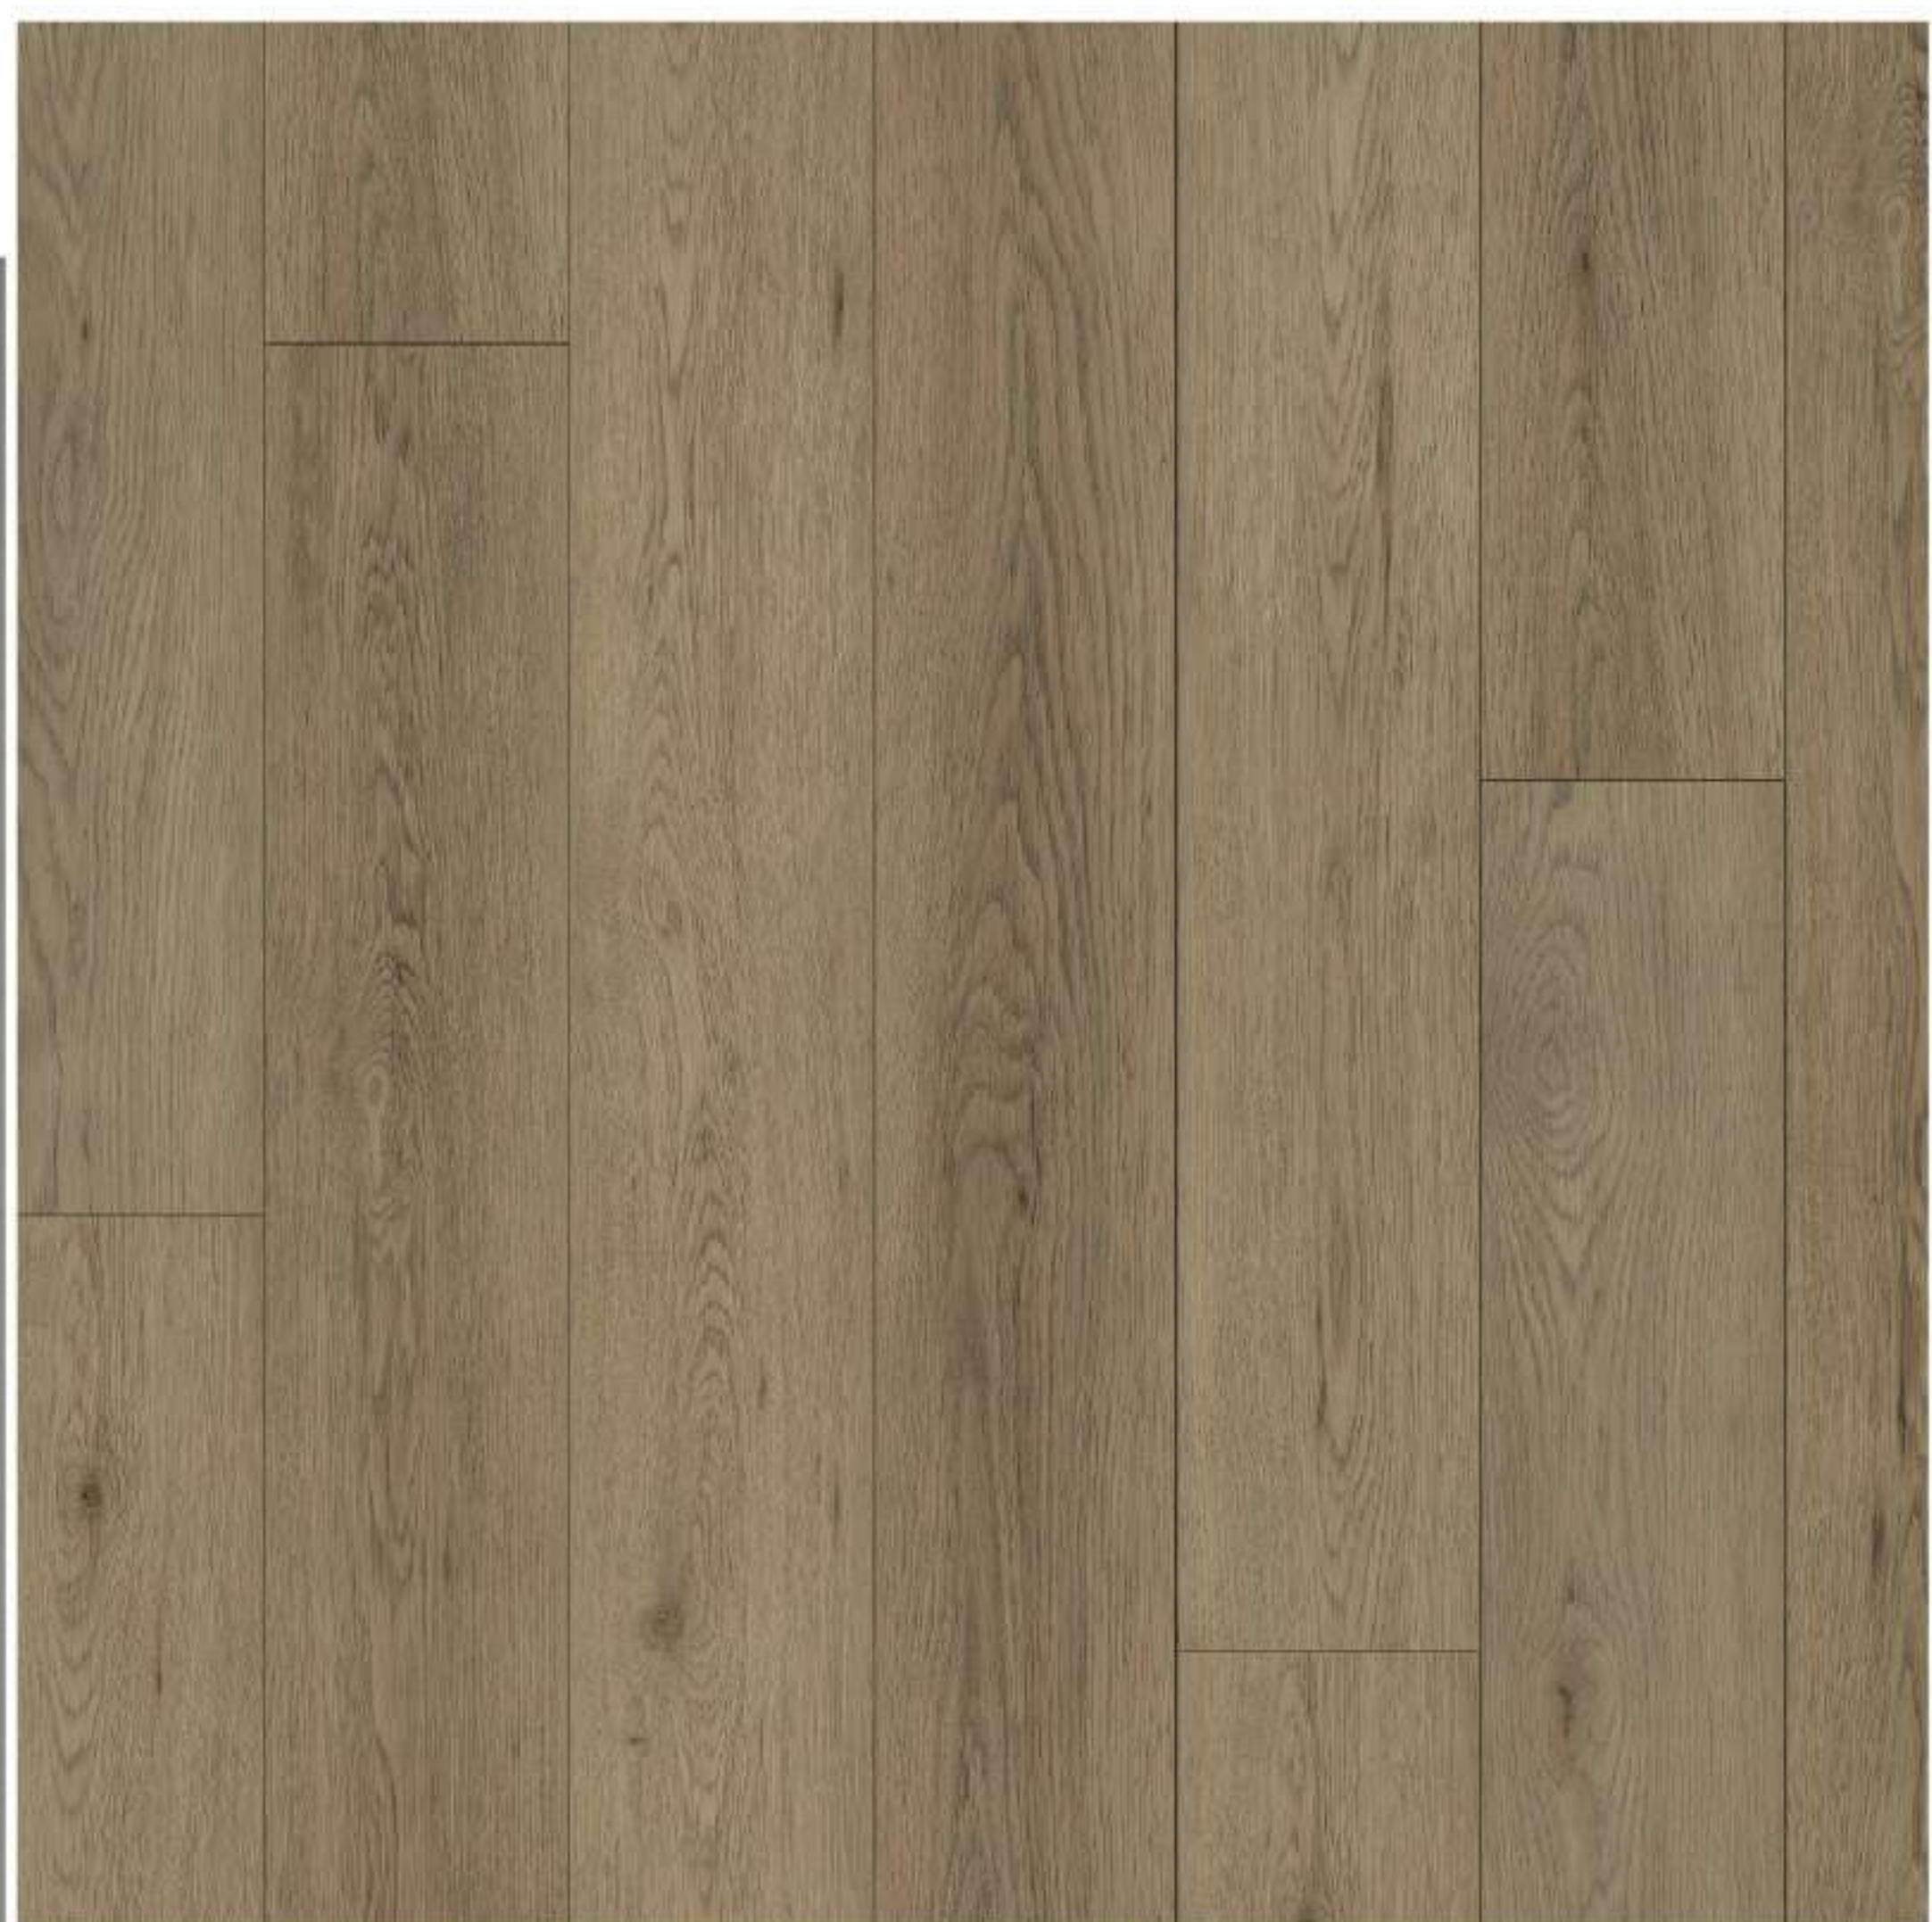

LUCIANO 307


79

GRANDE COLLECTION

308SIERRA



GR-308-PL | PLANK
228 X 1524 X 6 mm

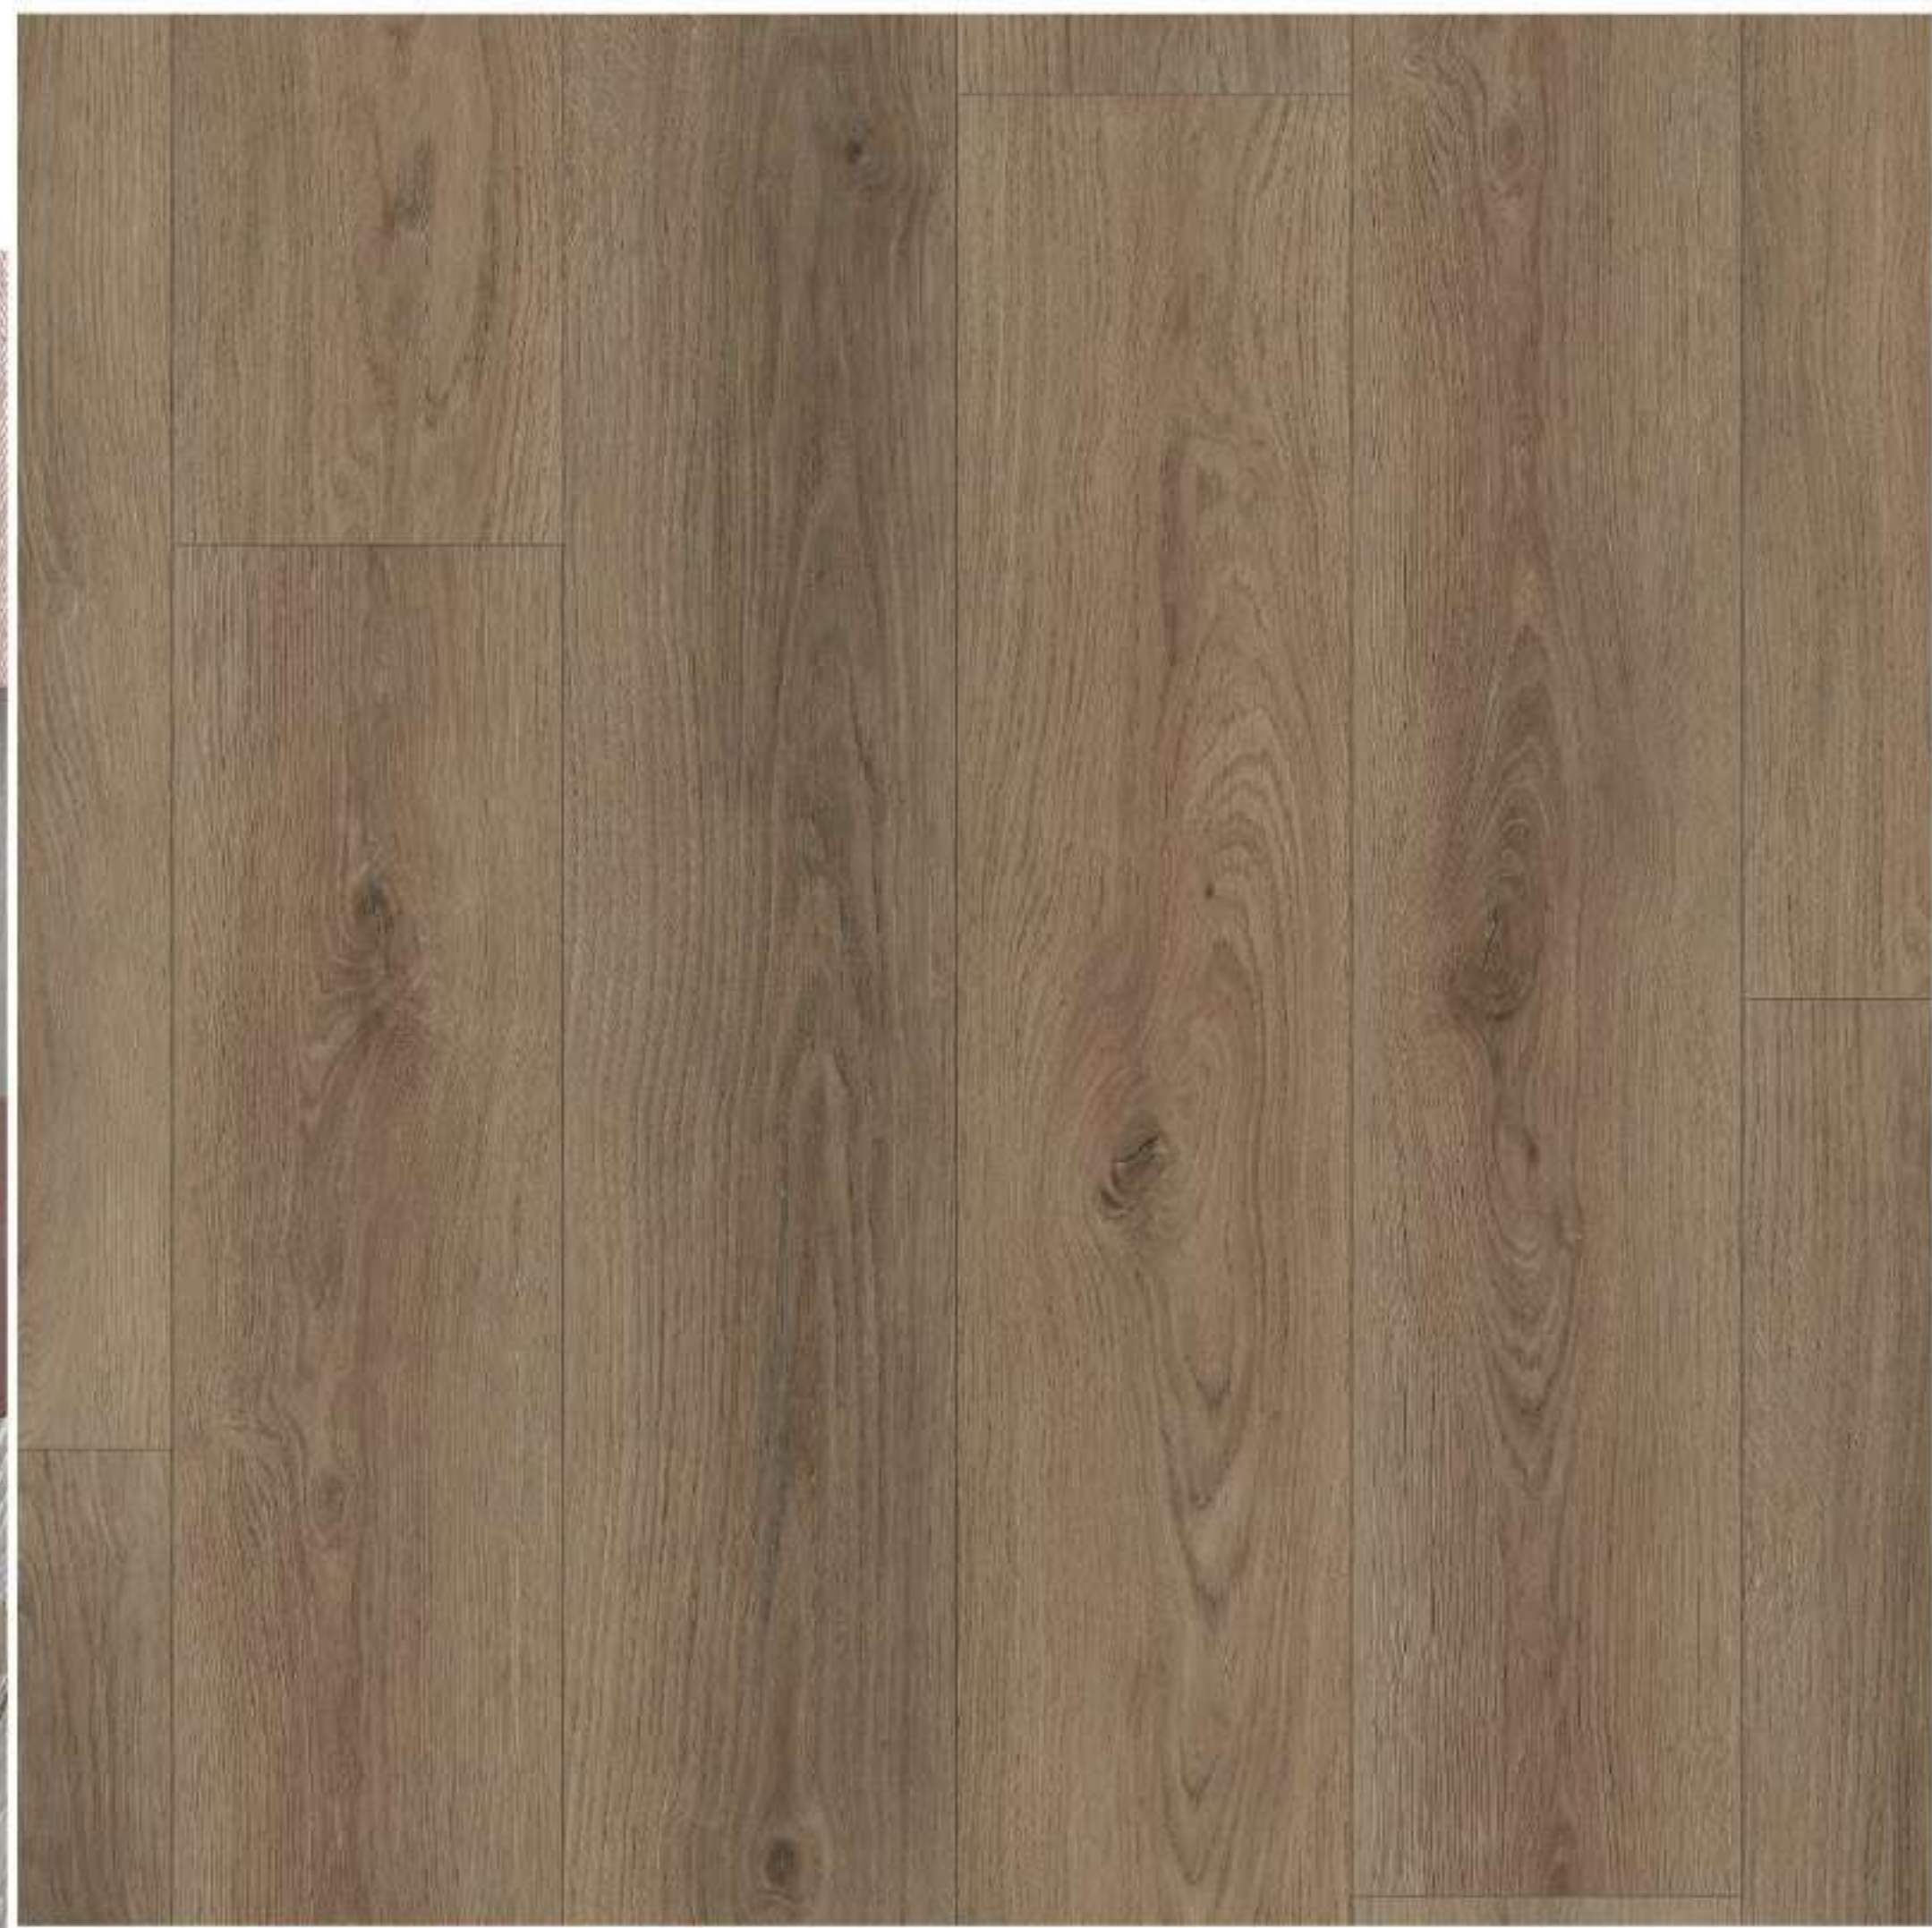



309 CULLINAN



GR-309-PL | PLANK
228 X 1524 X 6 mm



310 SANCY




GR-310-PL | PLANK
228 X 1524 X 6 mm



501 GOLD OAK



GR-501-PL | PLANK
228 X 1524 X 6 mm

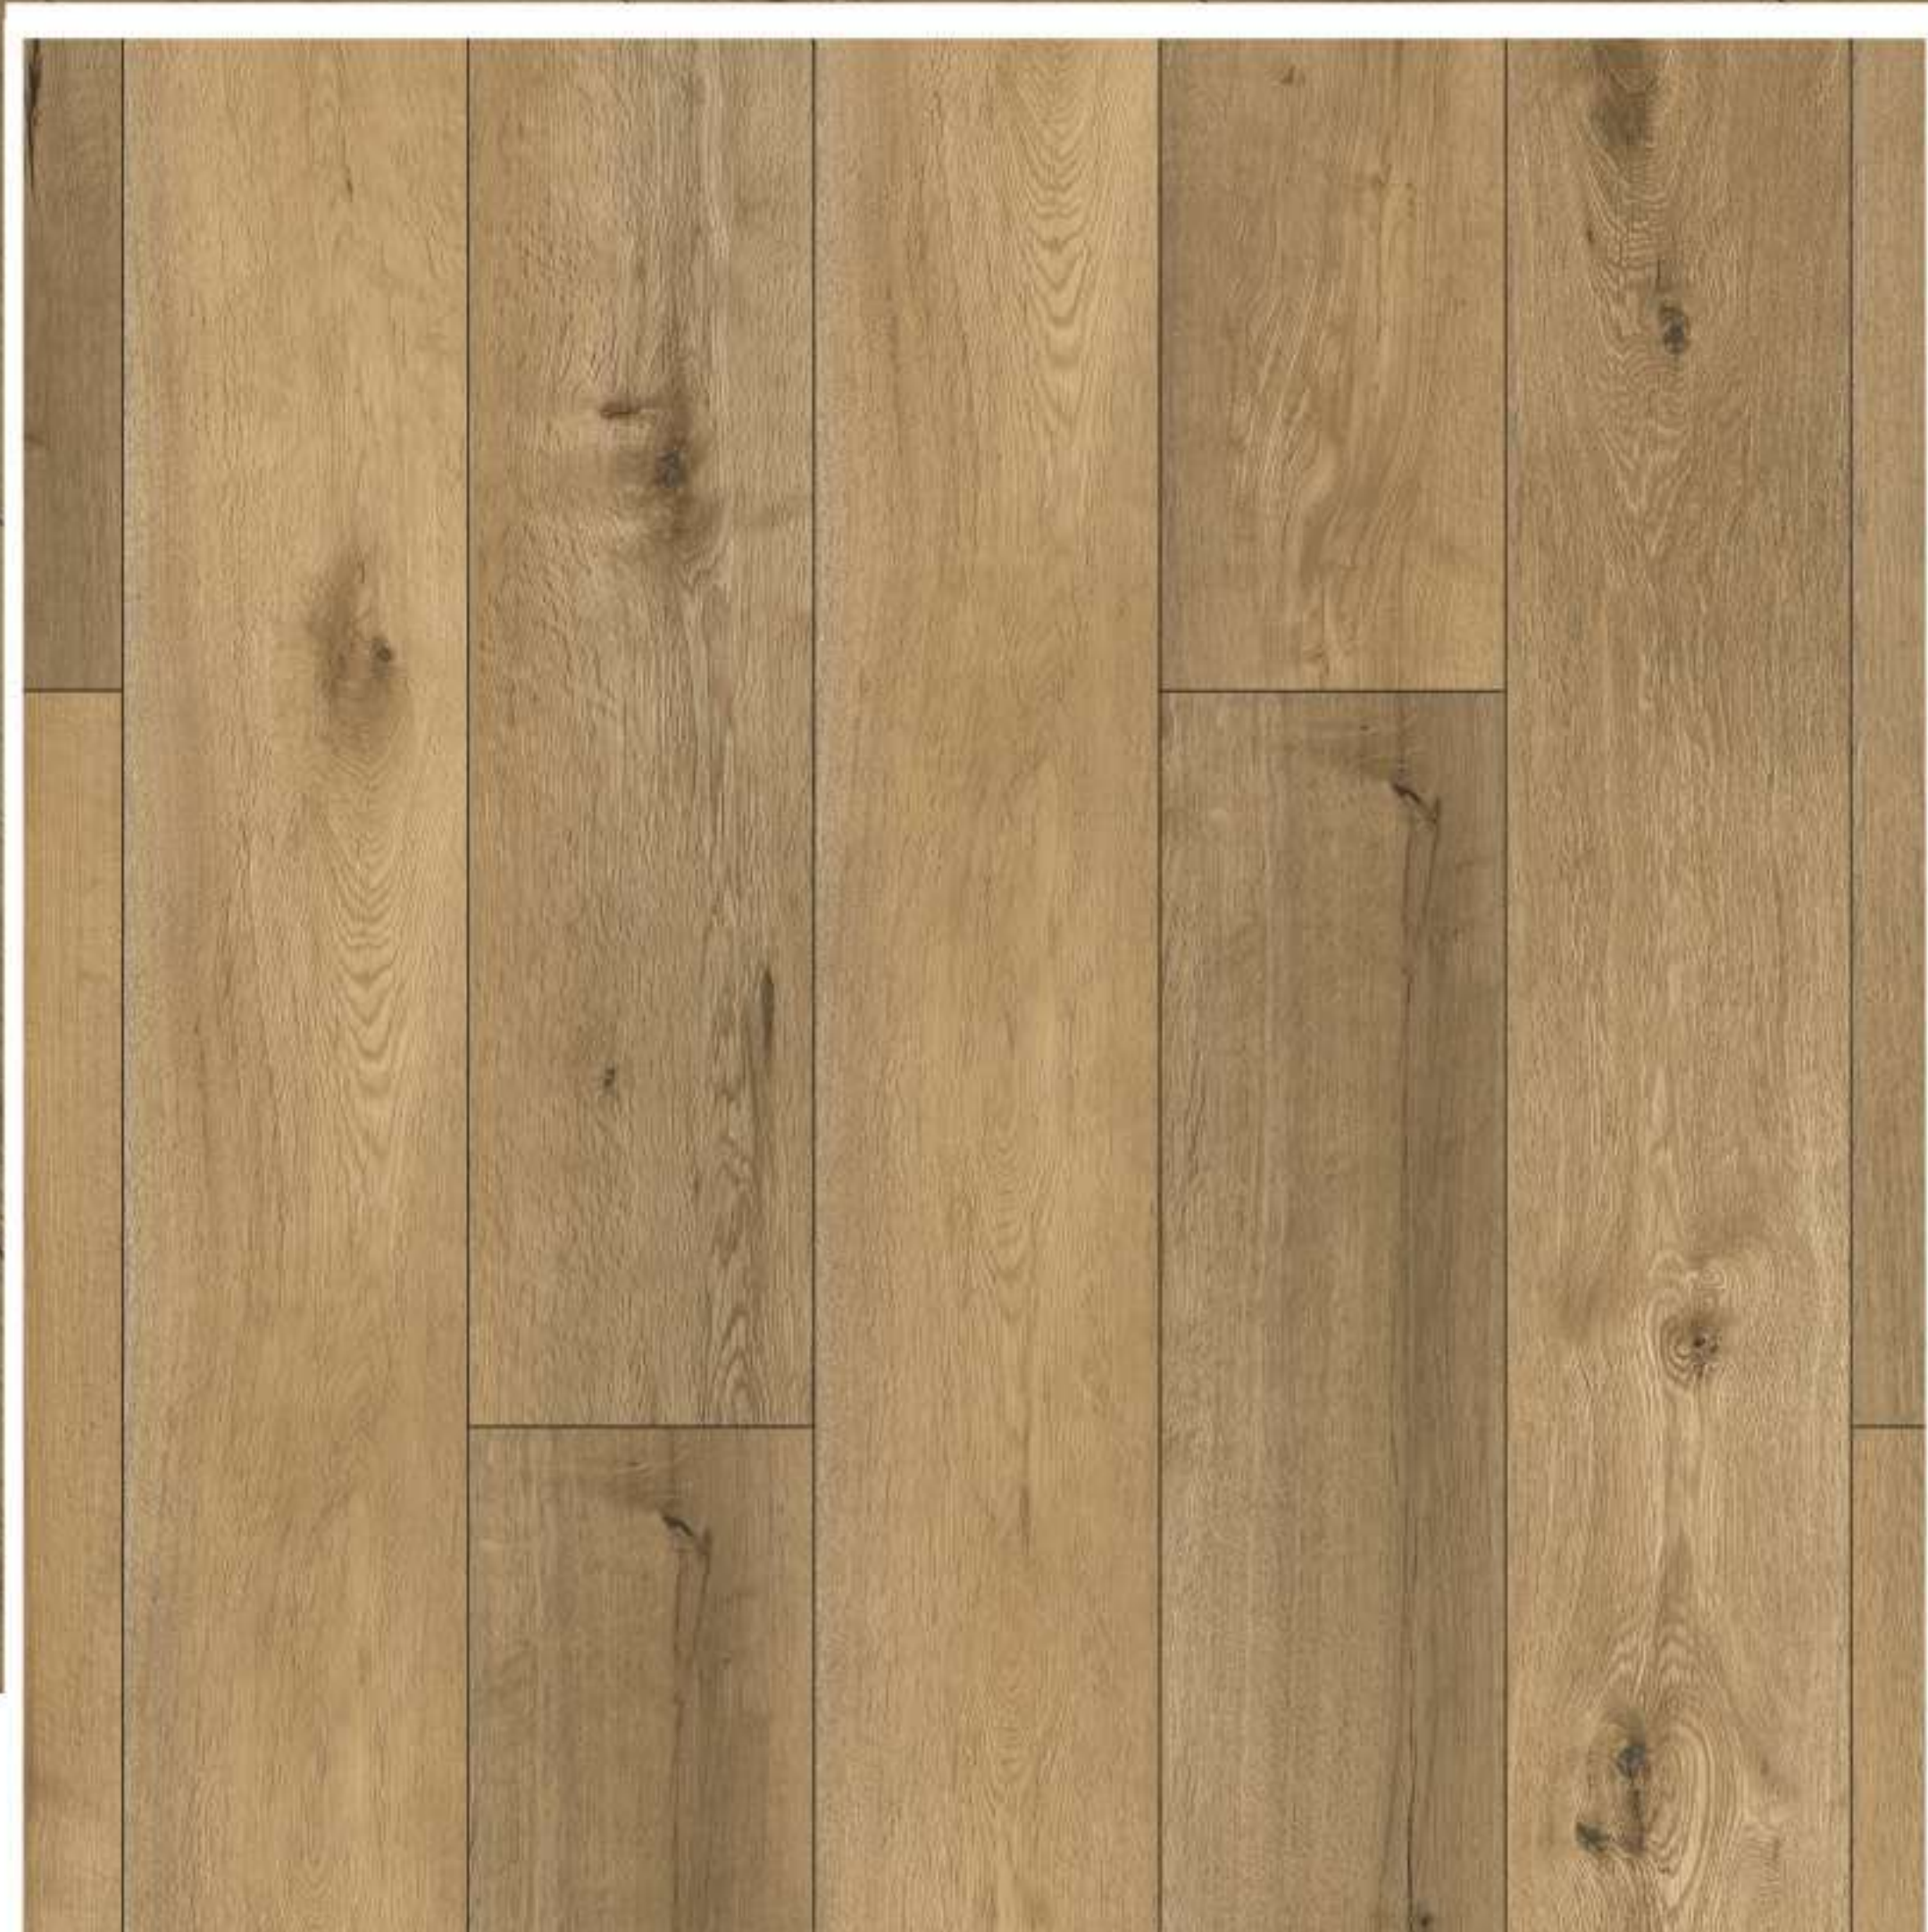

502 NATURAL OAK



GR-502-PL | PLANK
228 X 1524 X 6 mm




503 AMBER OAK



GR-503-PL | PLANK
228 X 1524 X 6 mm

503

AMBER OAK

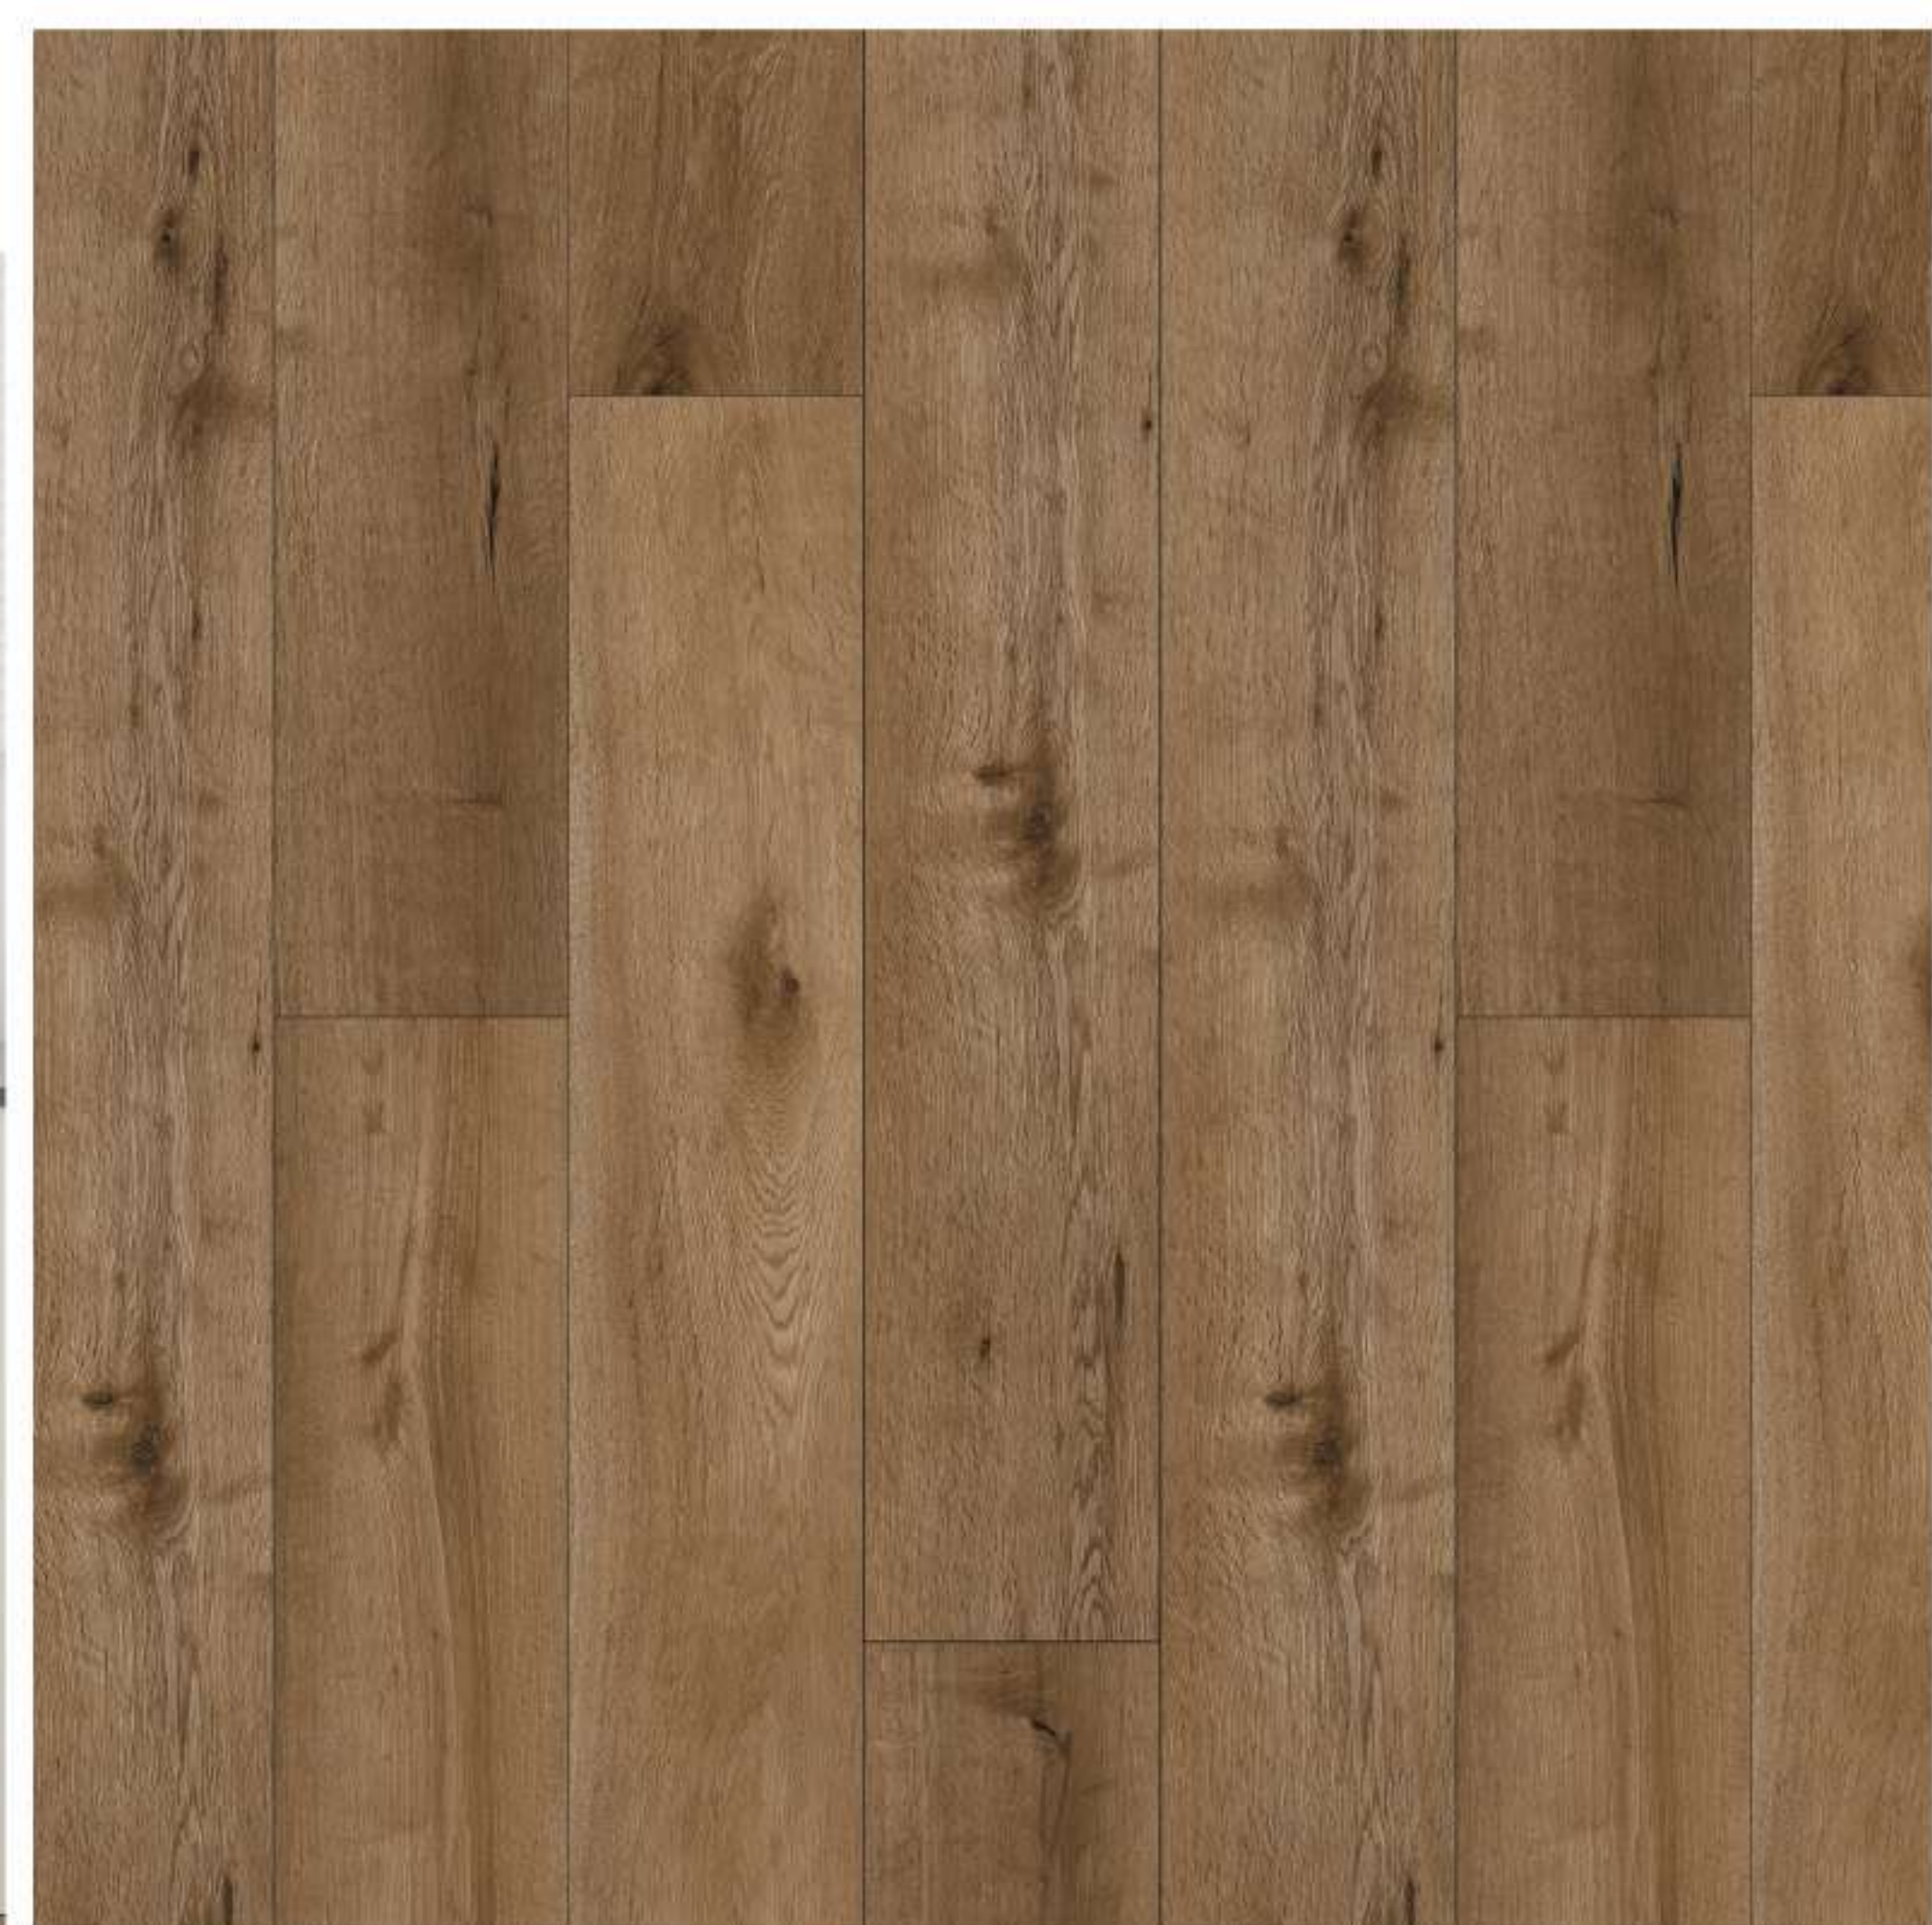

85

GRANDE COLLECTION

504 MELANGE OAK



GR-504-PL | PLANK
228 X 1524 X 6 mm





505 KASCHMIR OAK





GR-505-PL | PLANK
228 X 1524 X 6 mm

COGNAC OAK 506



GRANDE COLLECTION

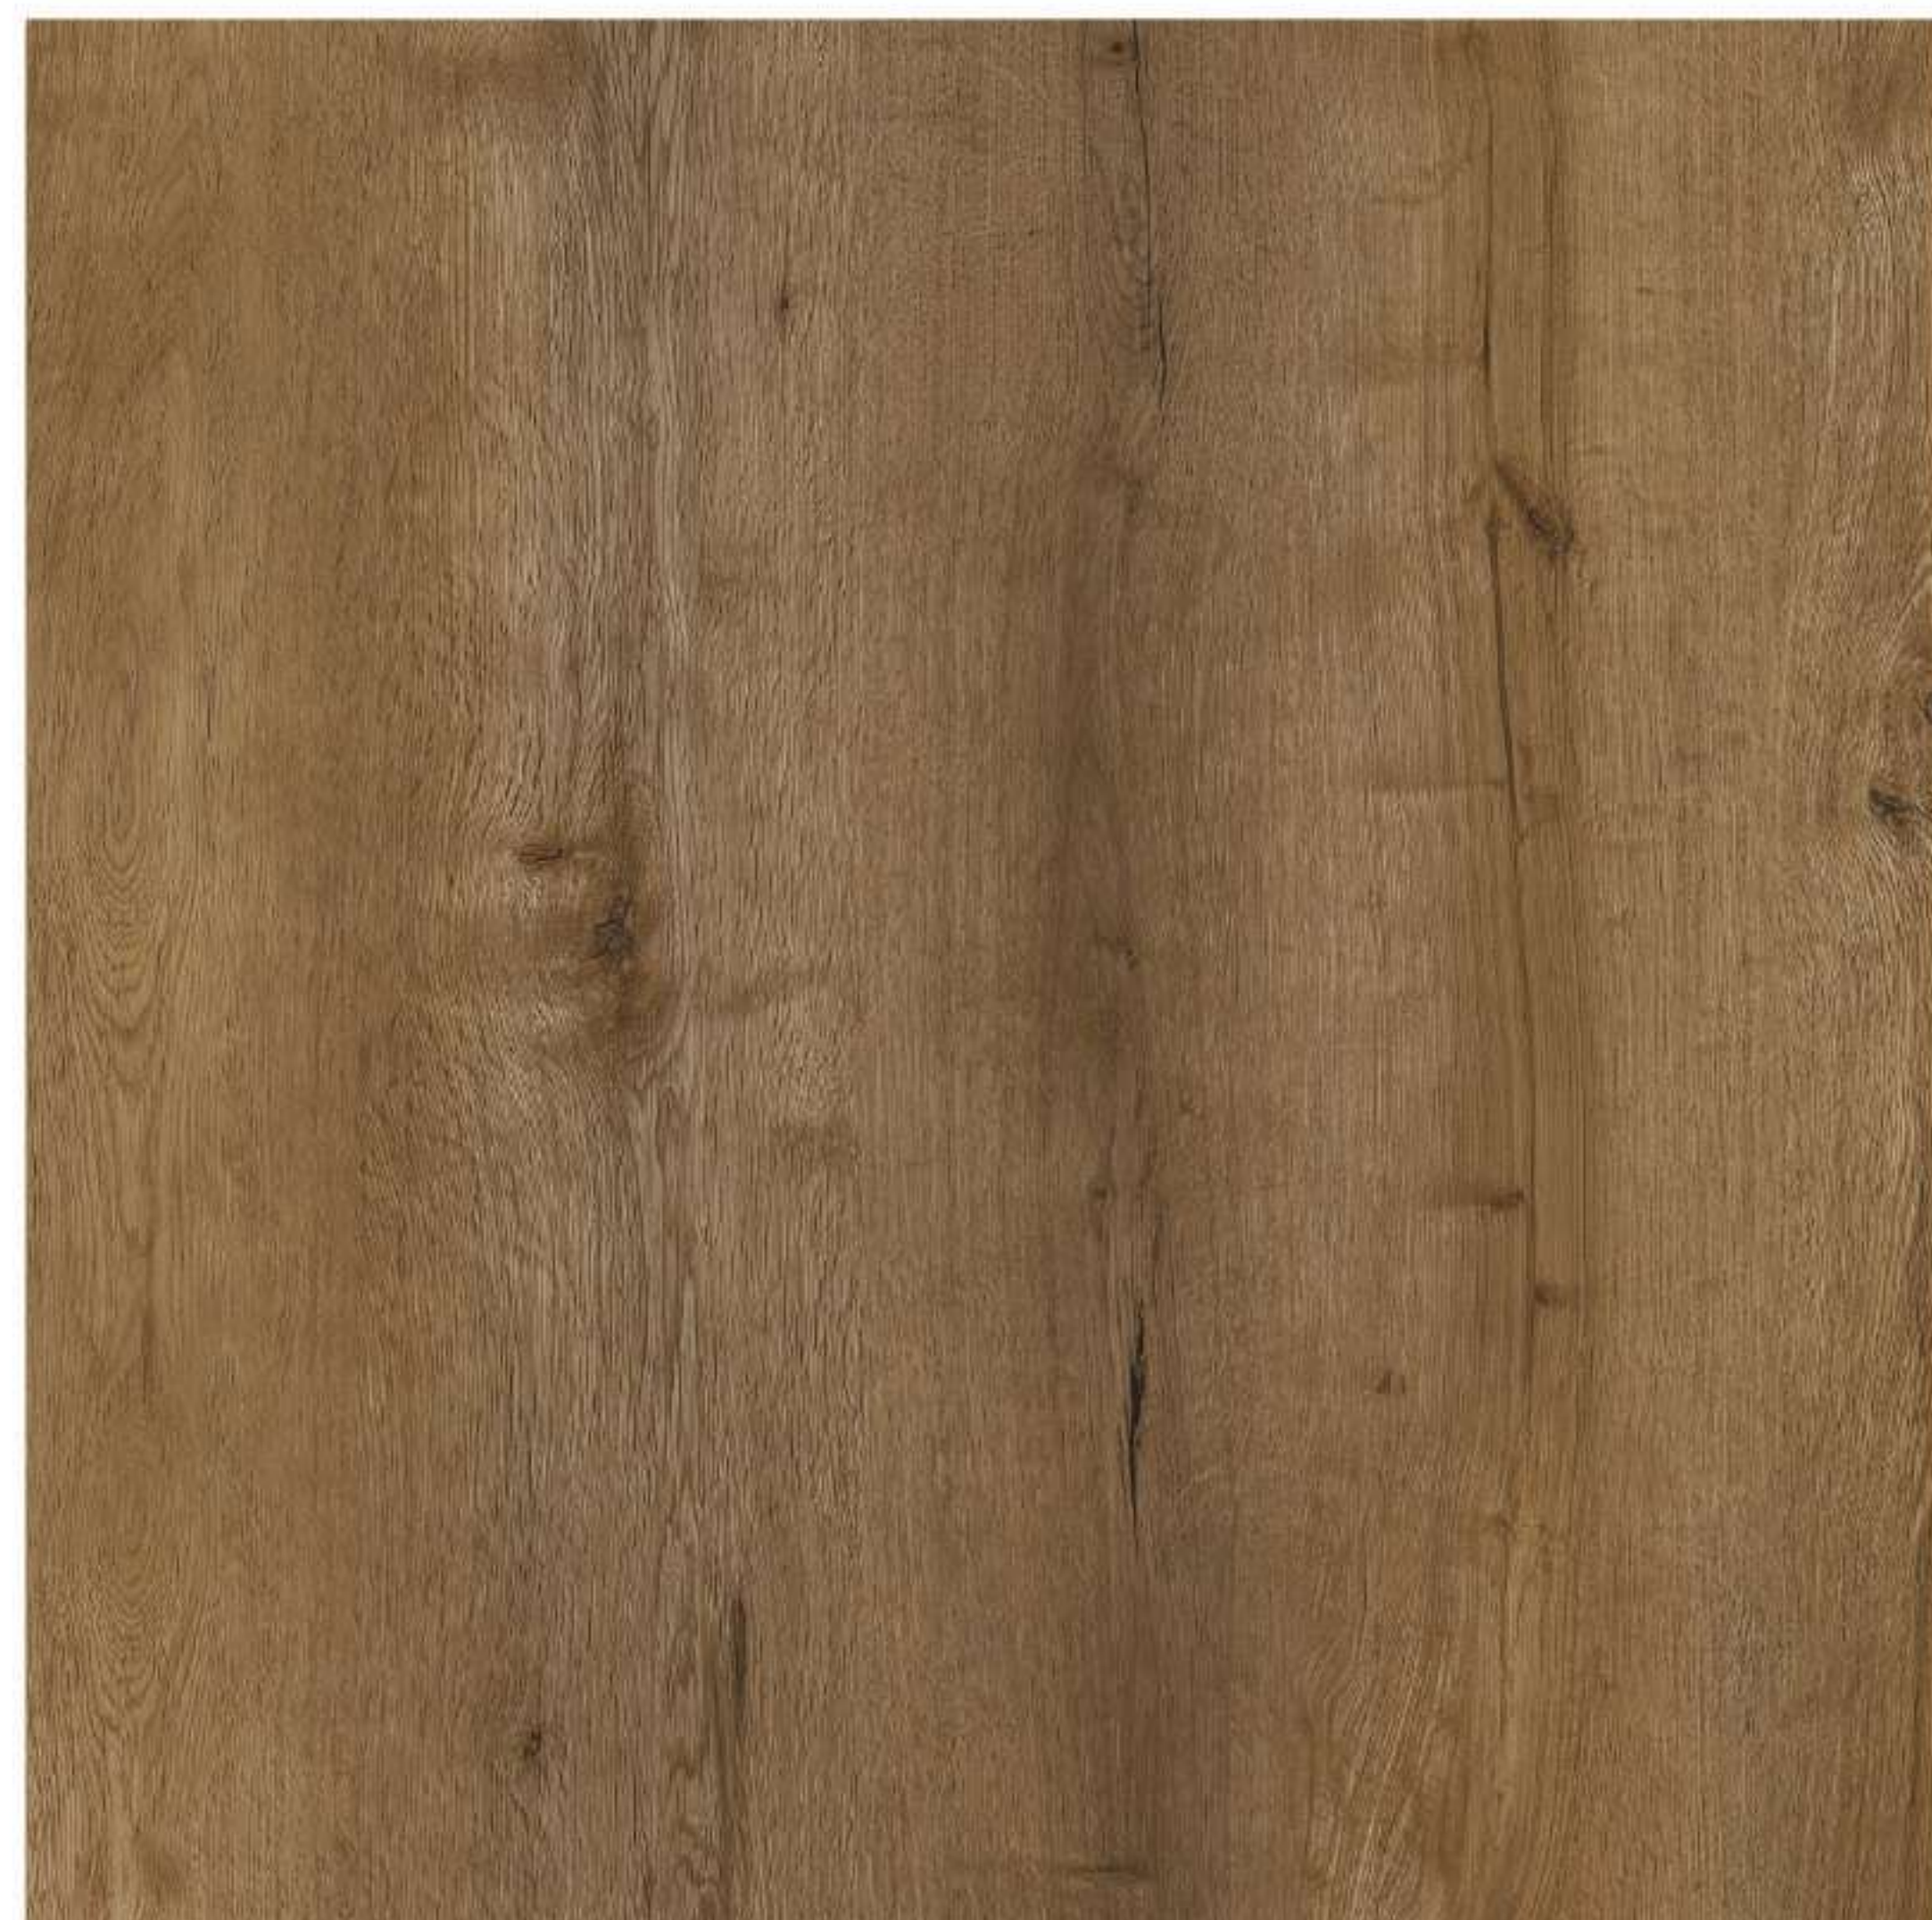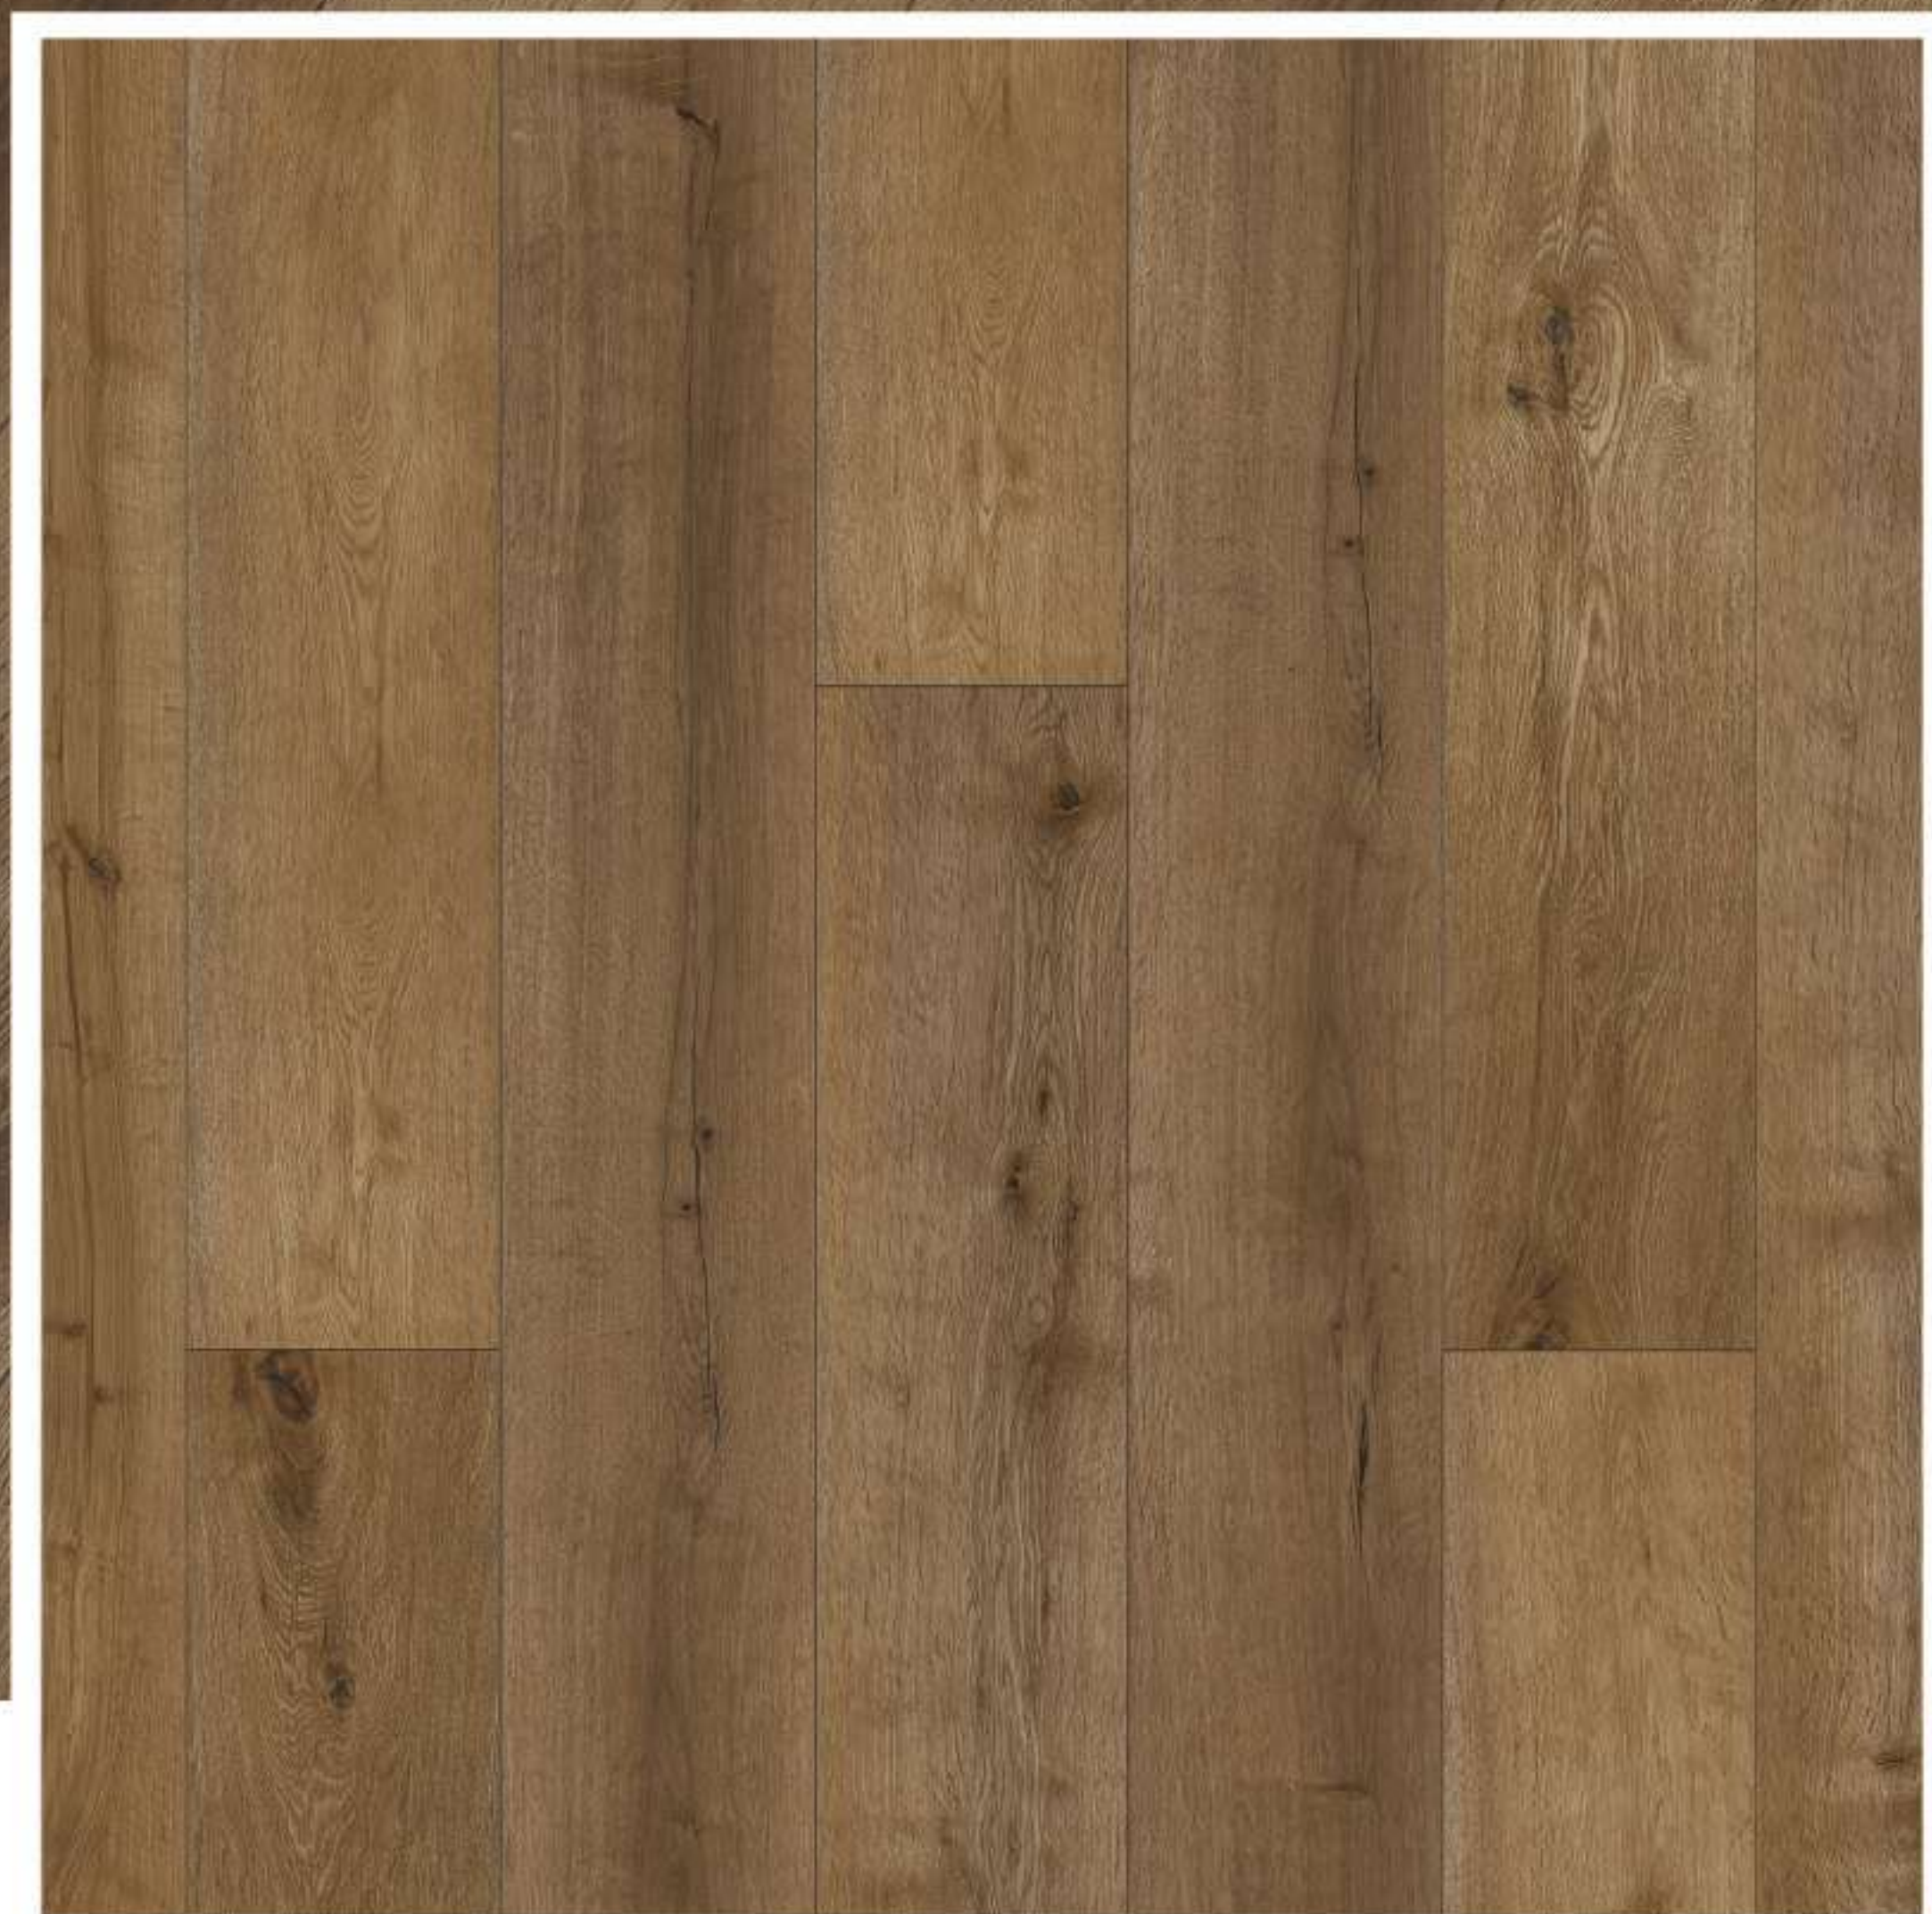

506 COGNAC OAK



GR-506-PL | PLANK
228 X 1524 X 6 mm




507 BITTER OAK



GR-507-PL | PLANK
228 X 1524 X 6 mm

BITTER OAK 508

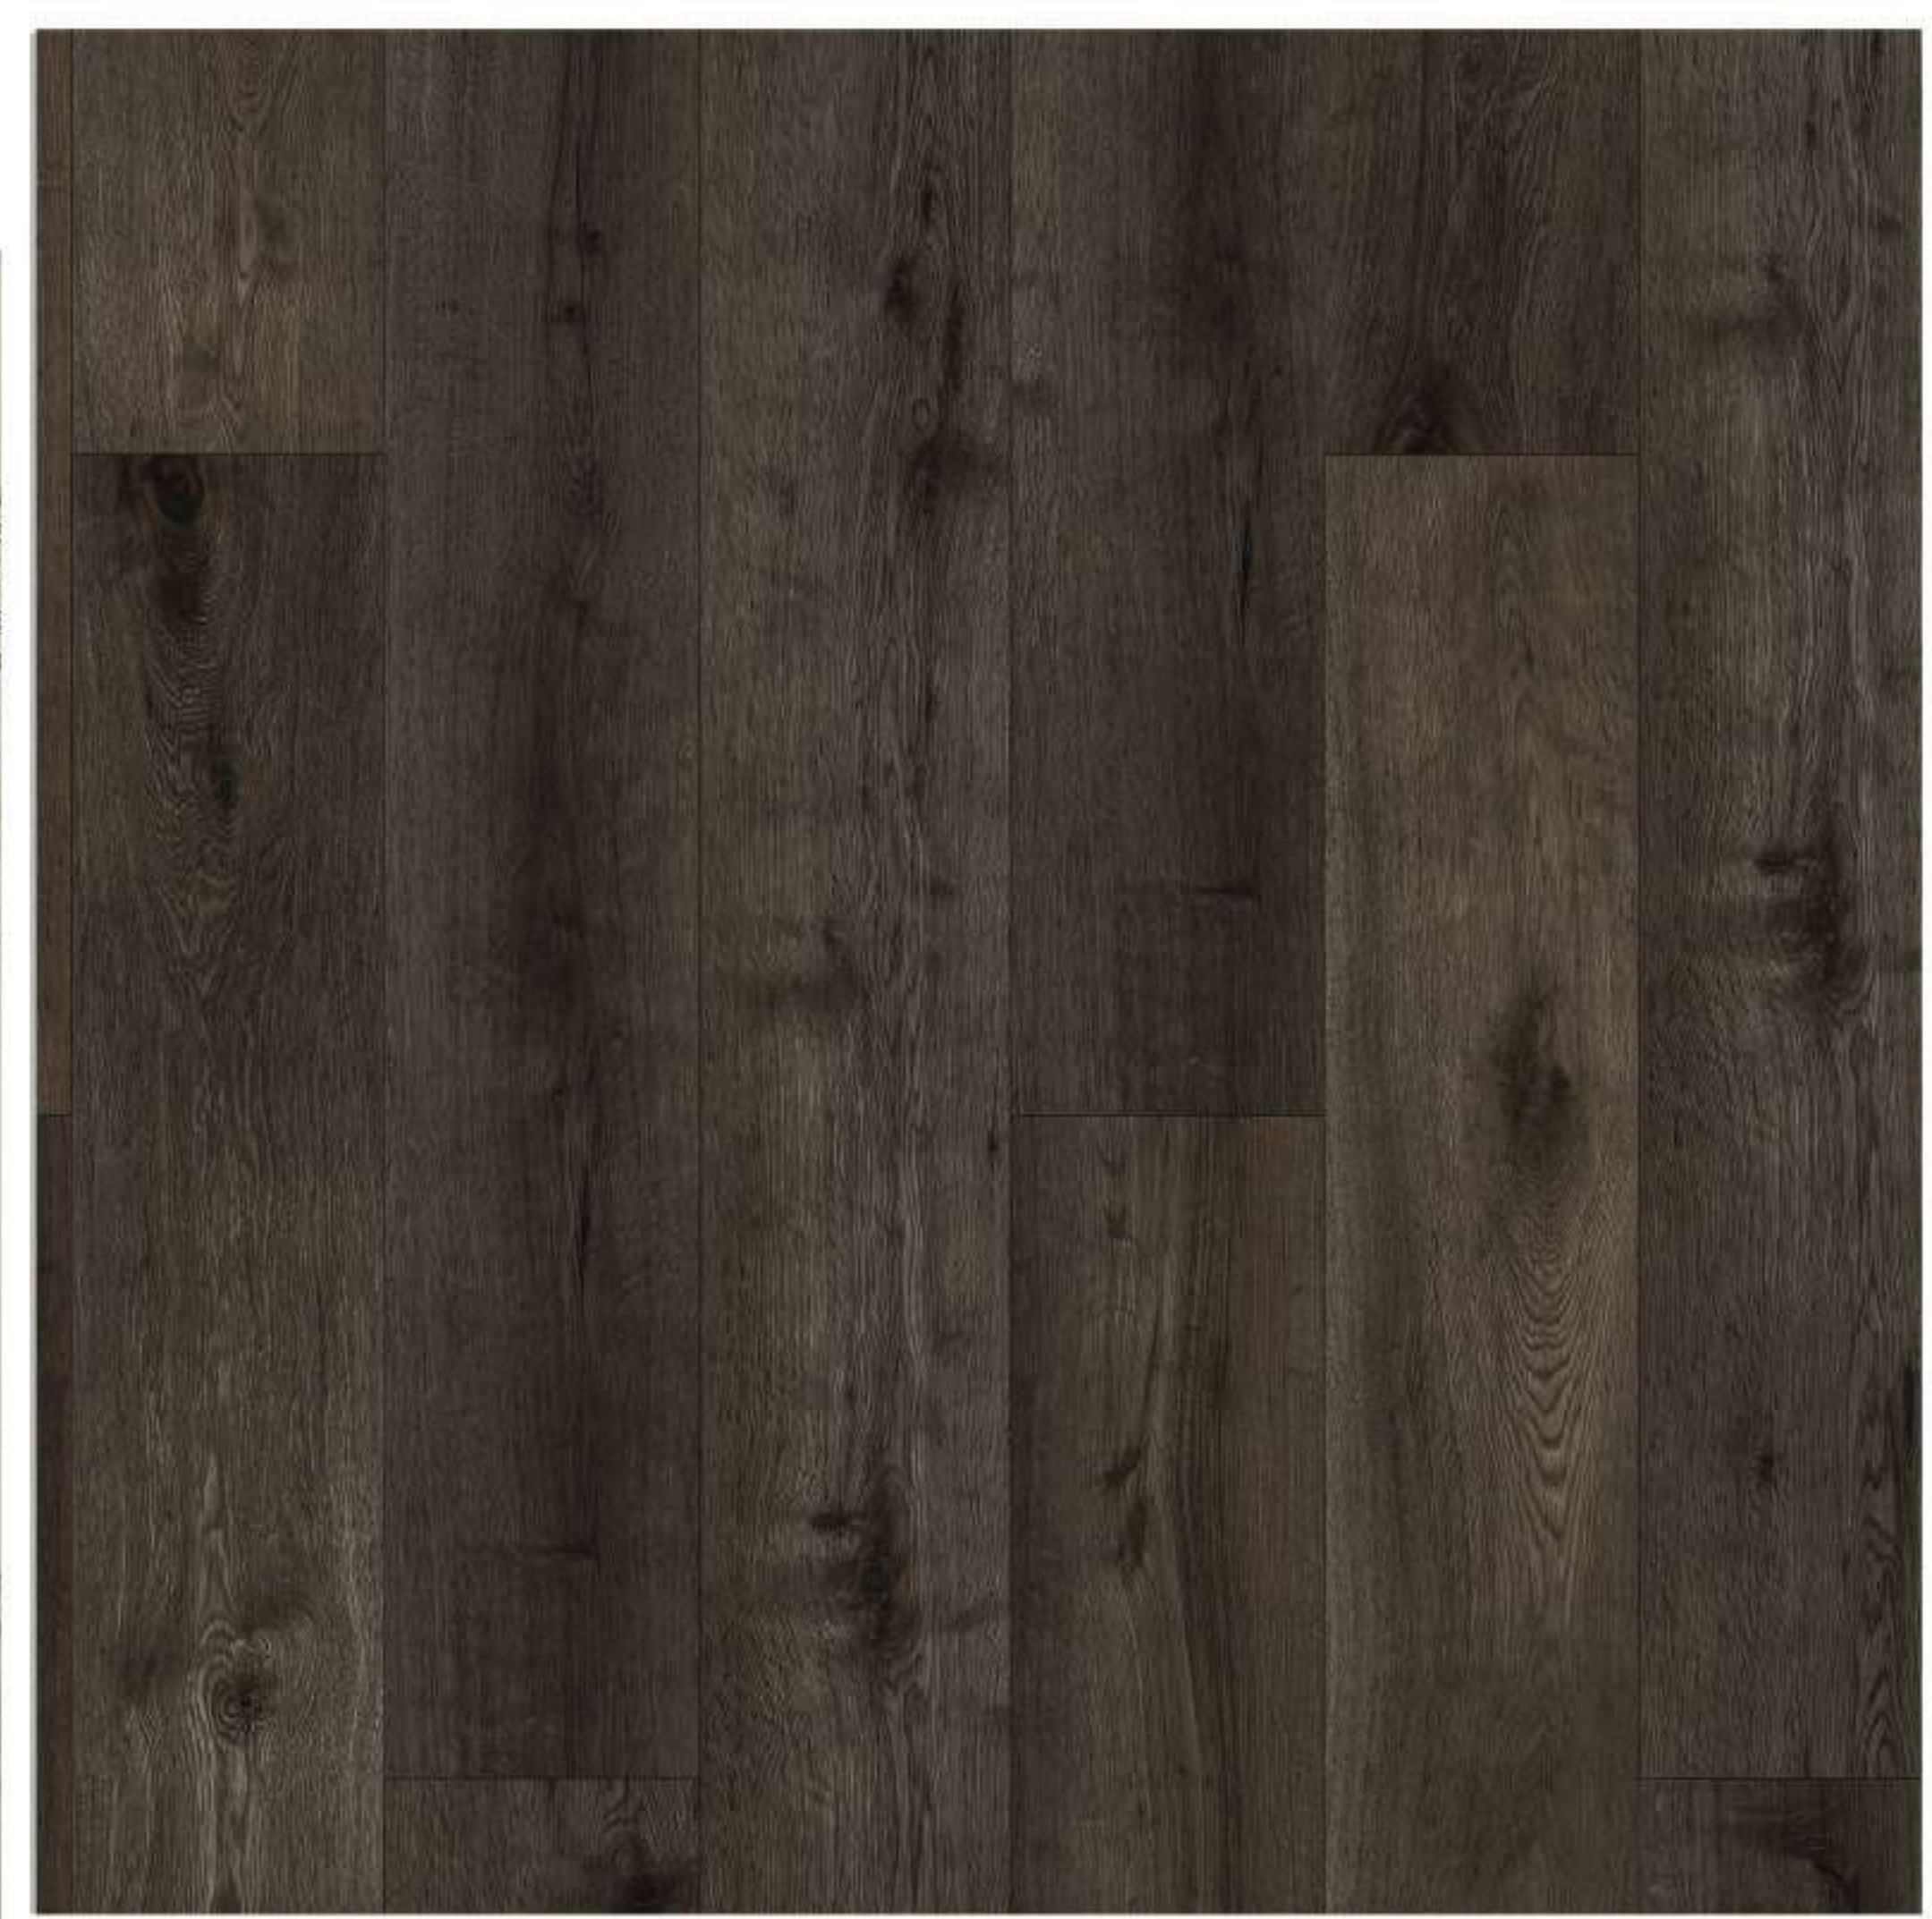

89

GRANDE COLLECTION

508 CROCANT OAK



GR-508-PL | PLANK
228 X 1524 X 6 mm






SMOKED OAK 509

91



GRANDE COLLECTION

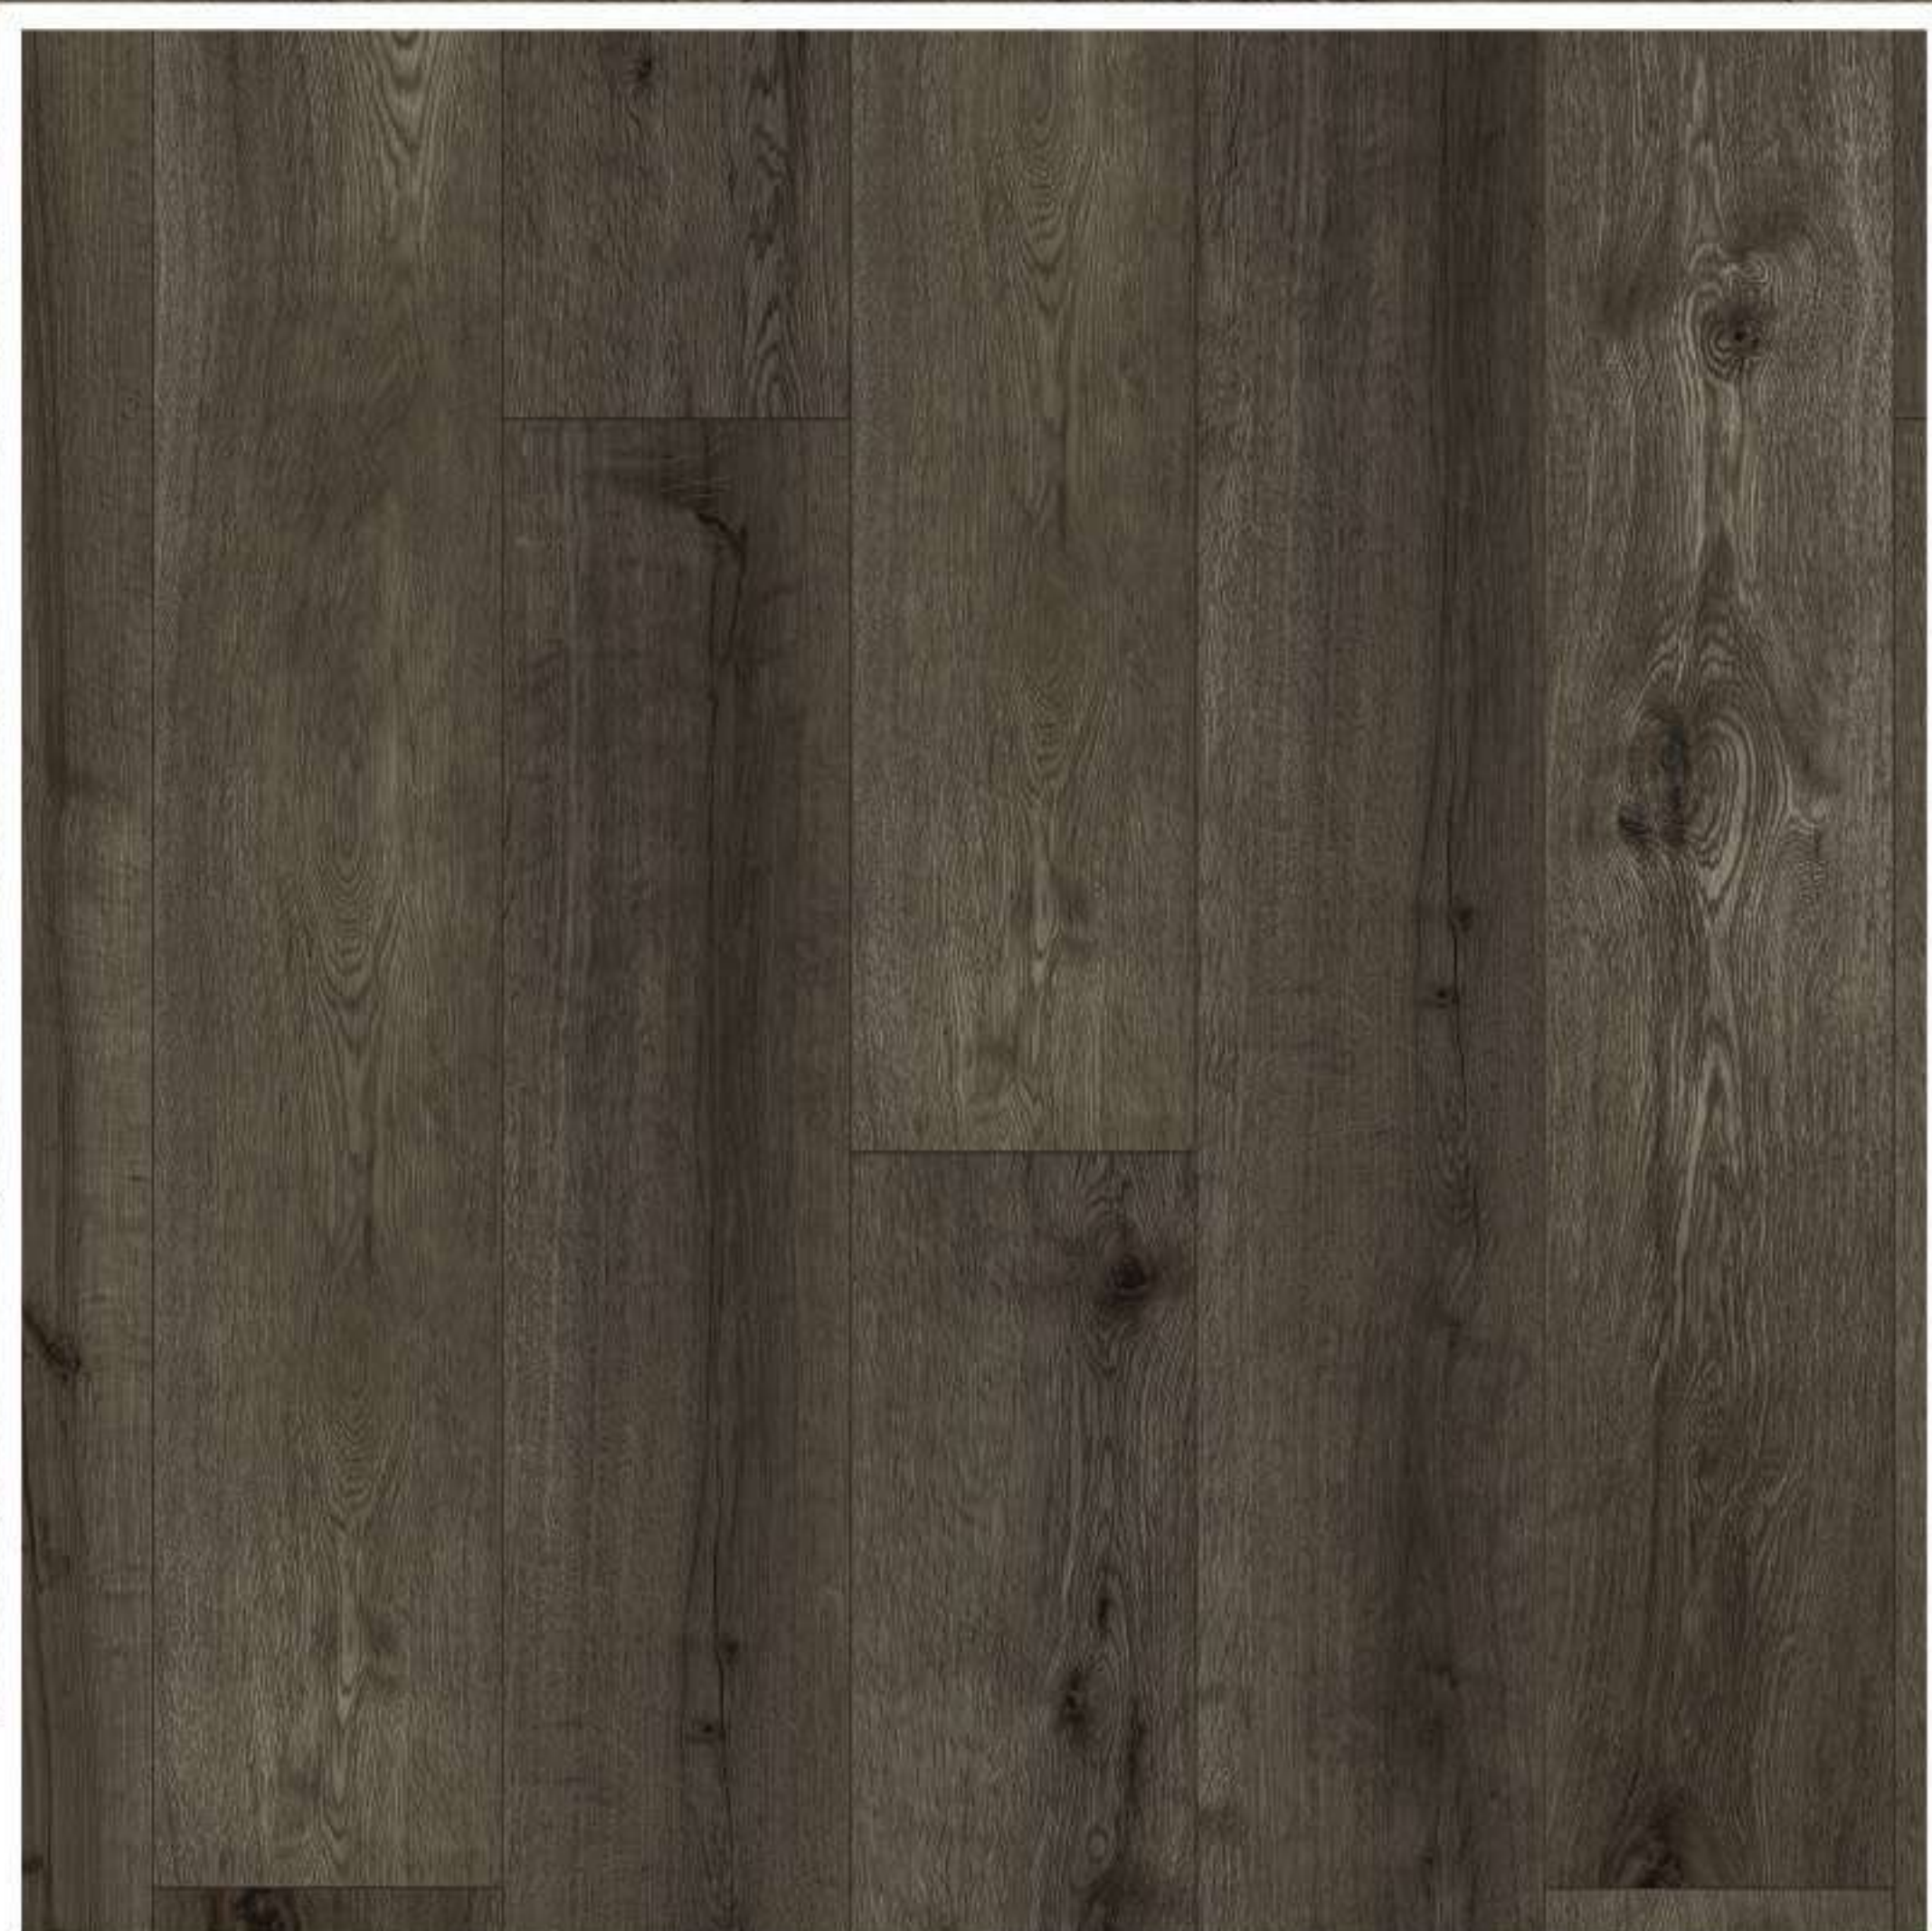

509 SMOKED OAK



GR-509-PL | PLANK
228 X 1524 X 6 mm

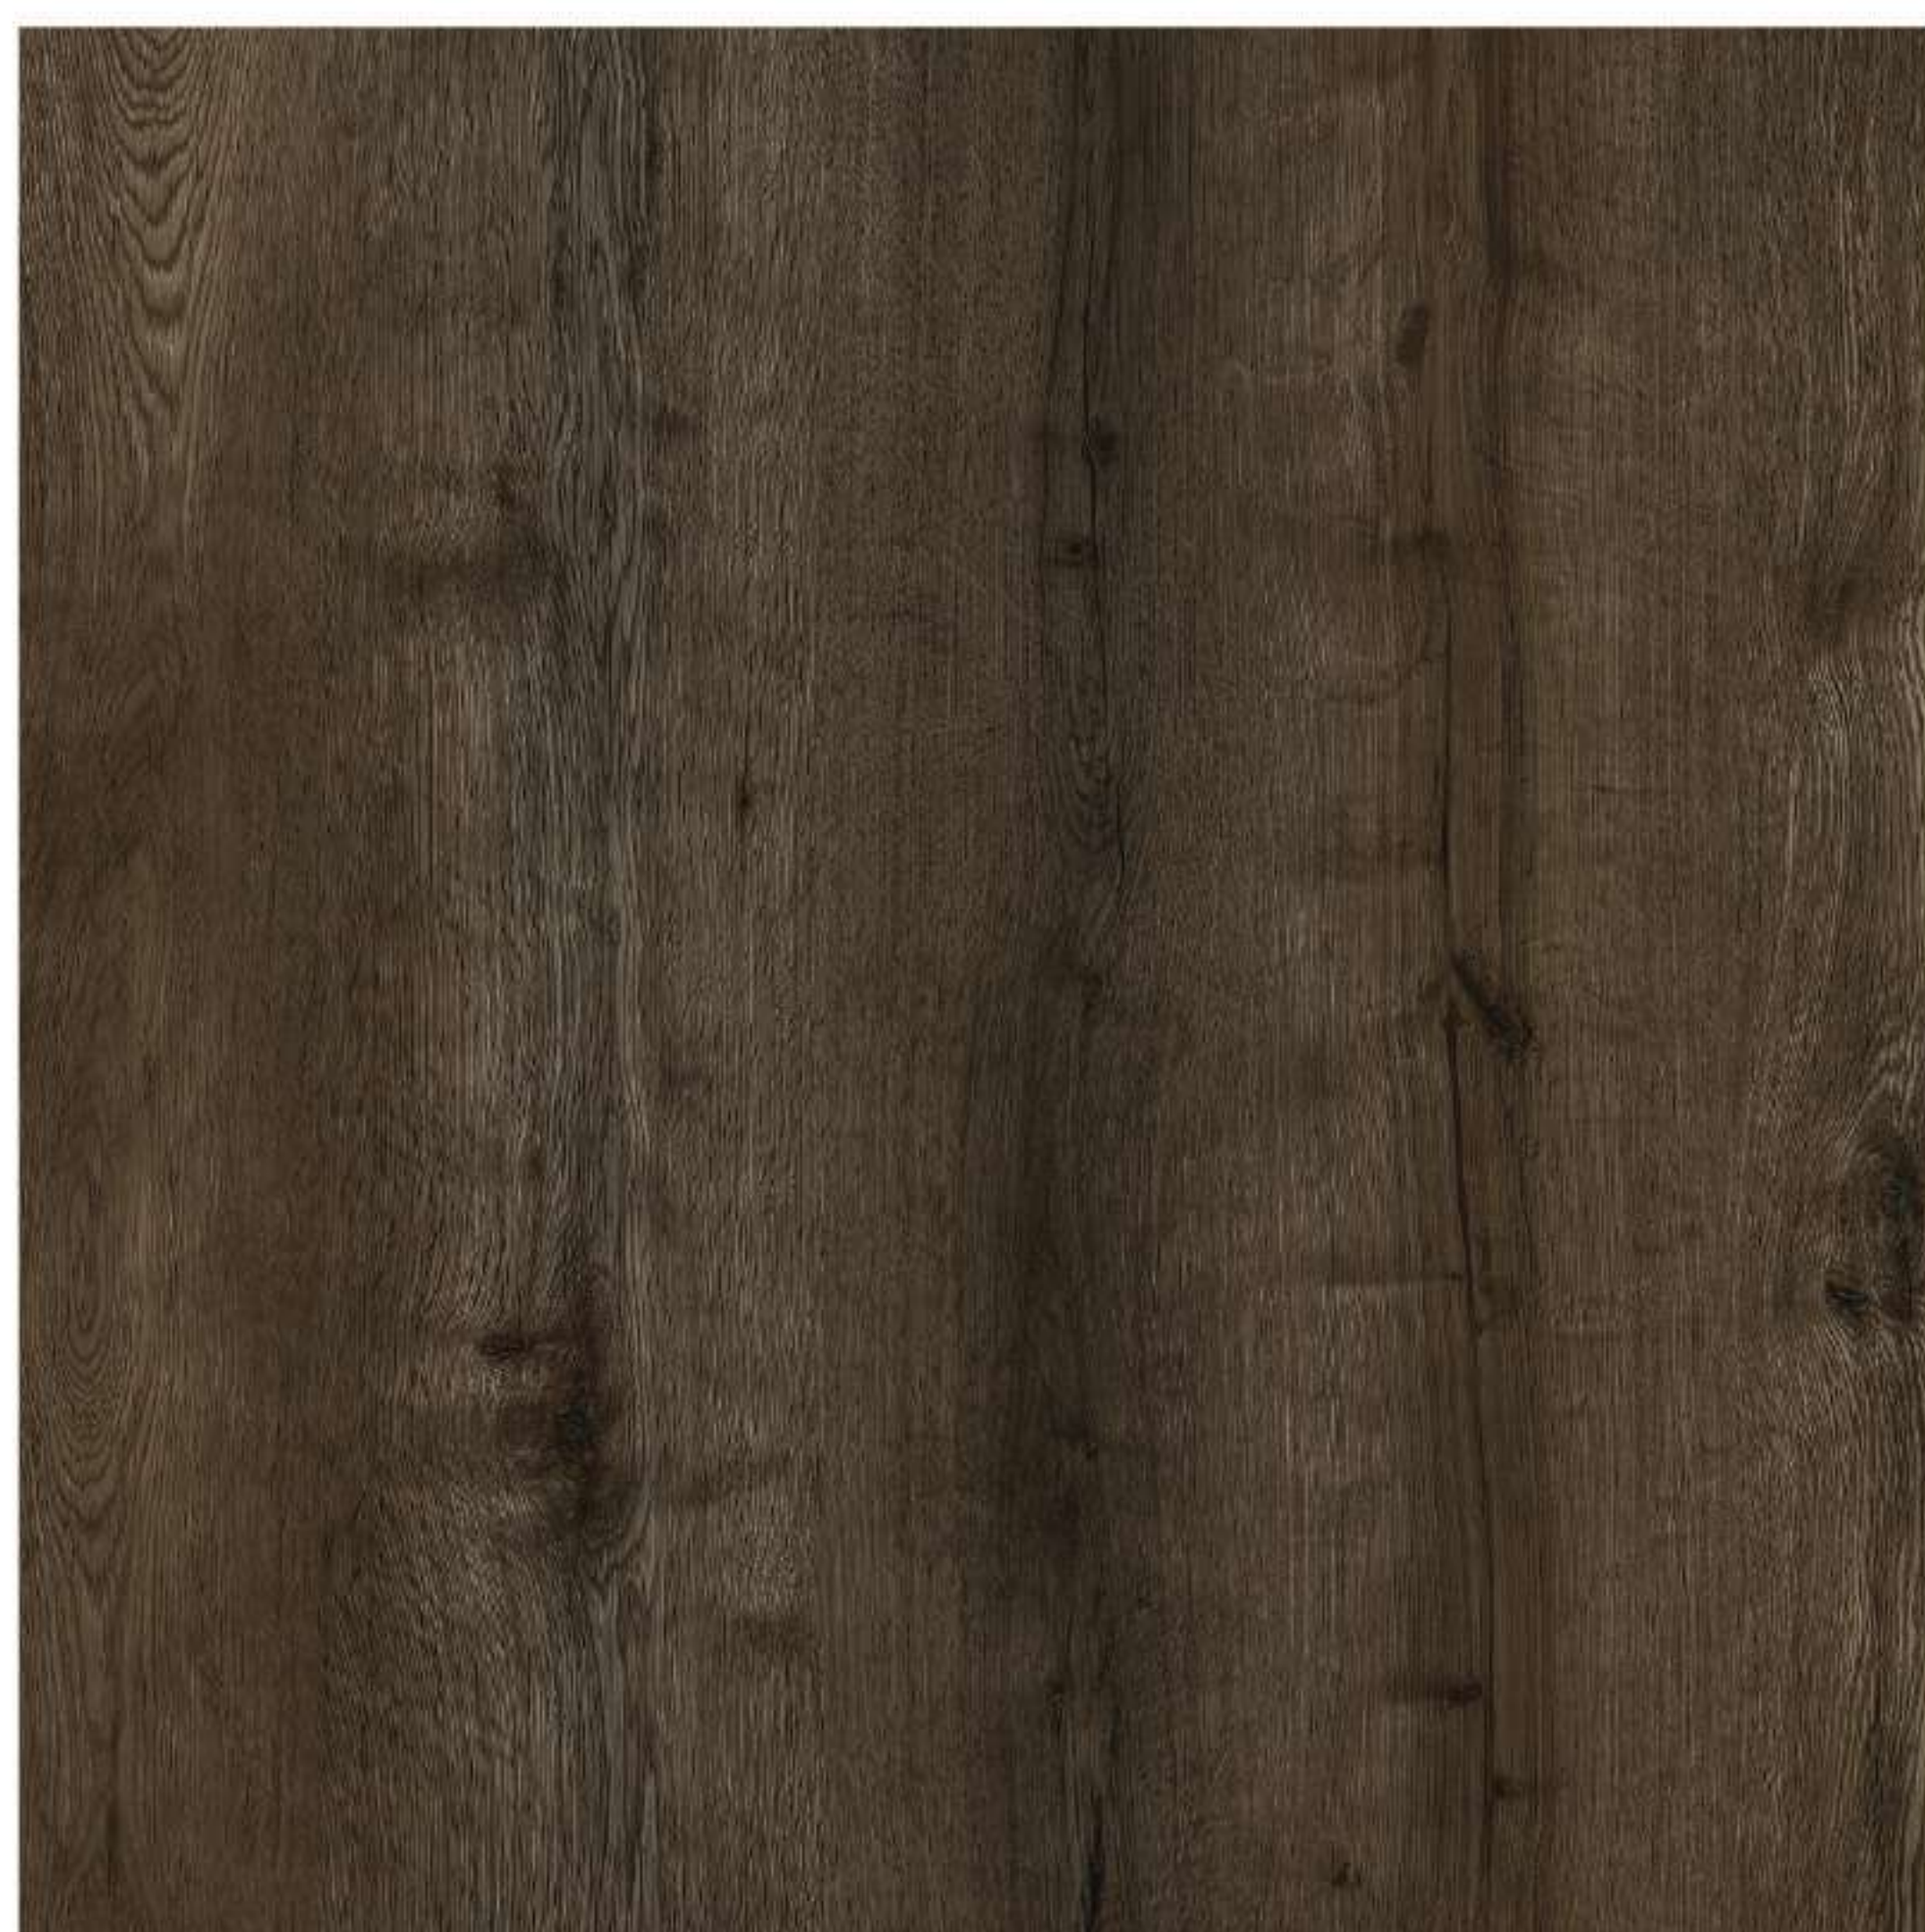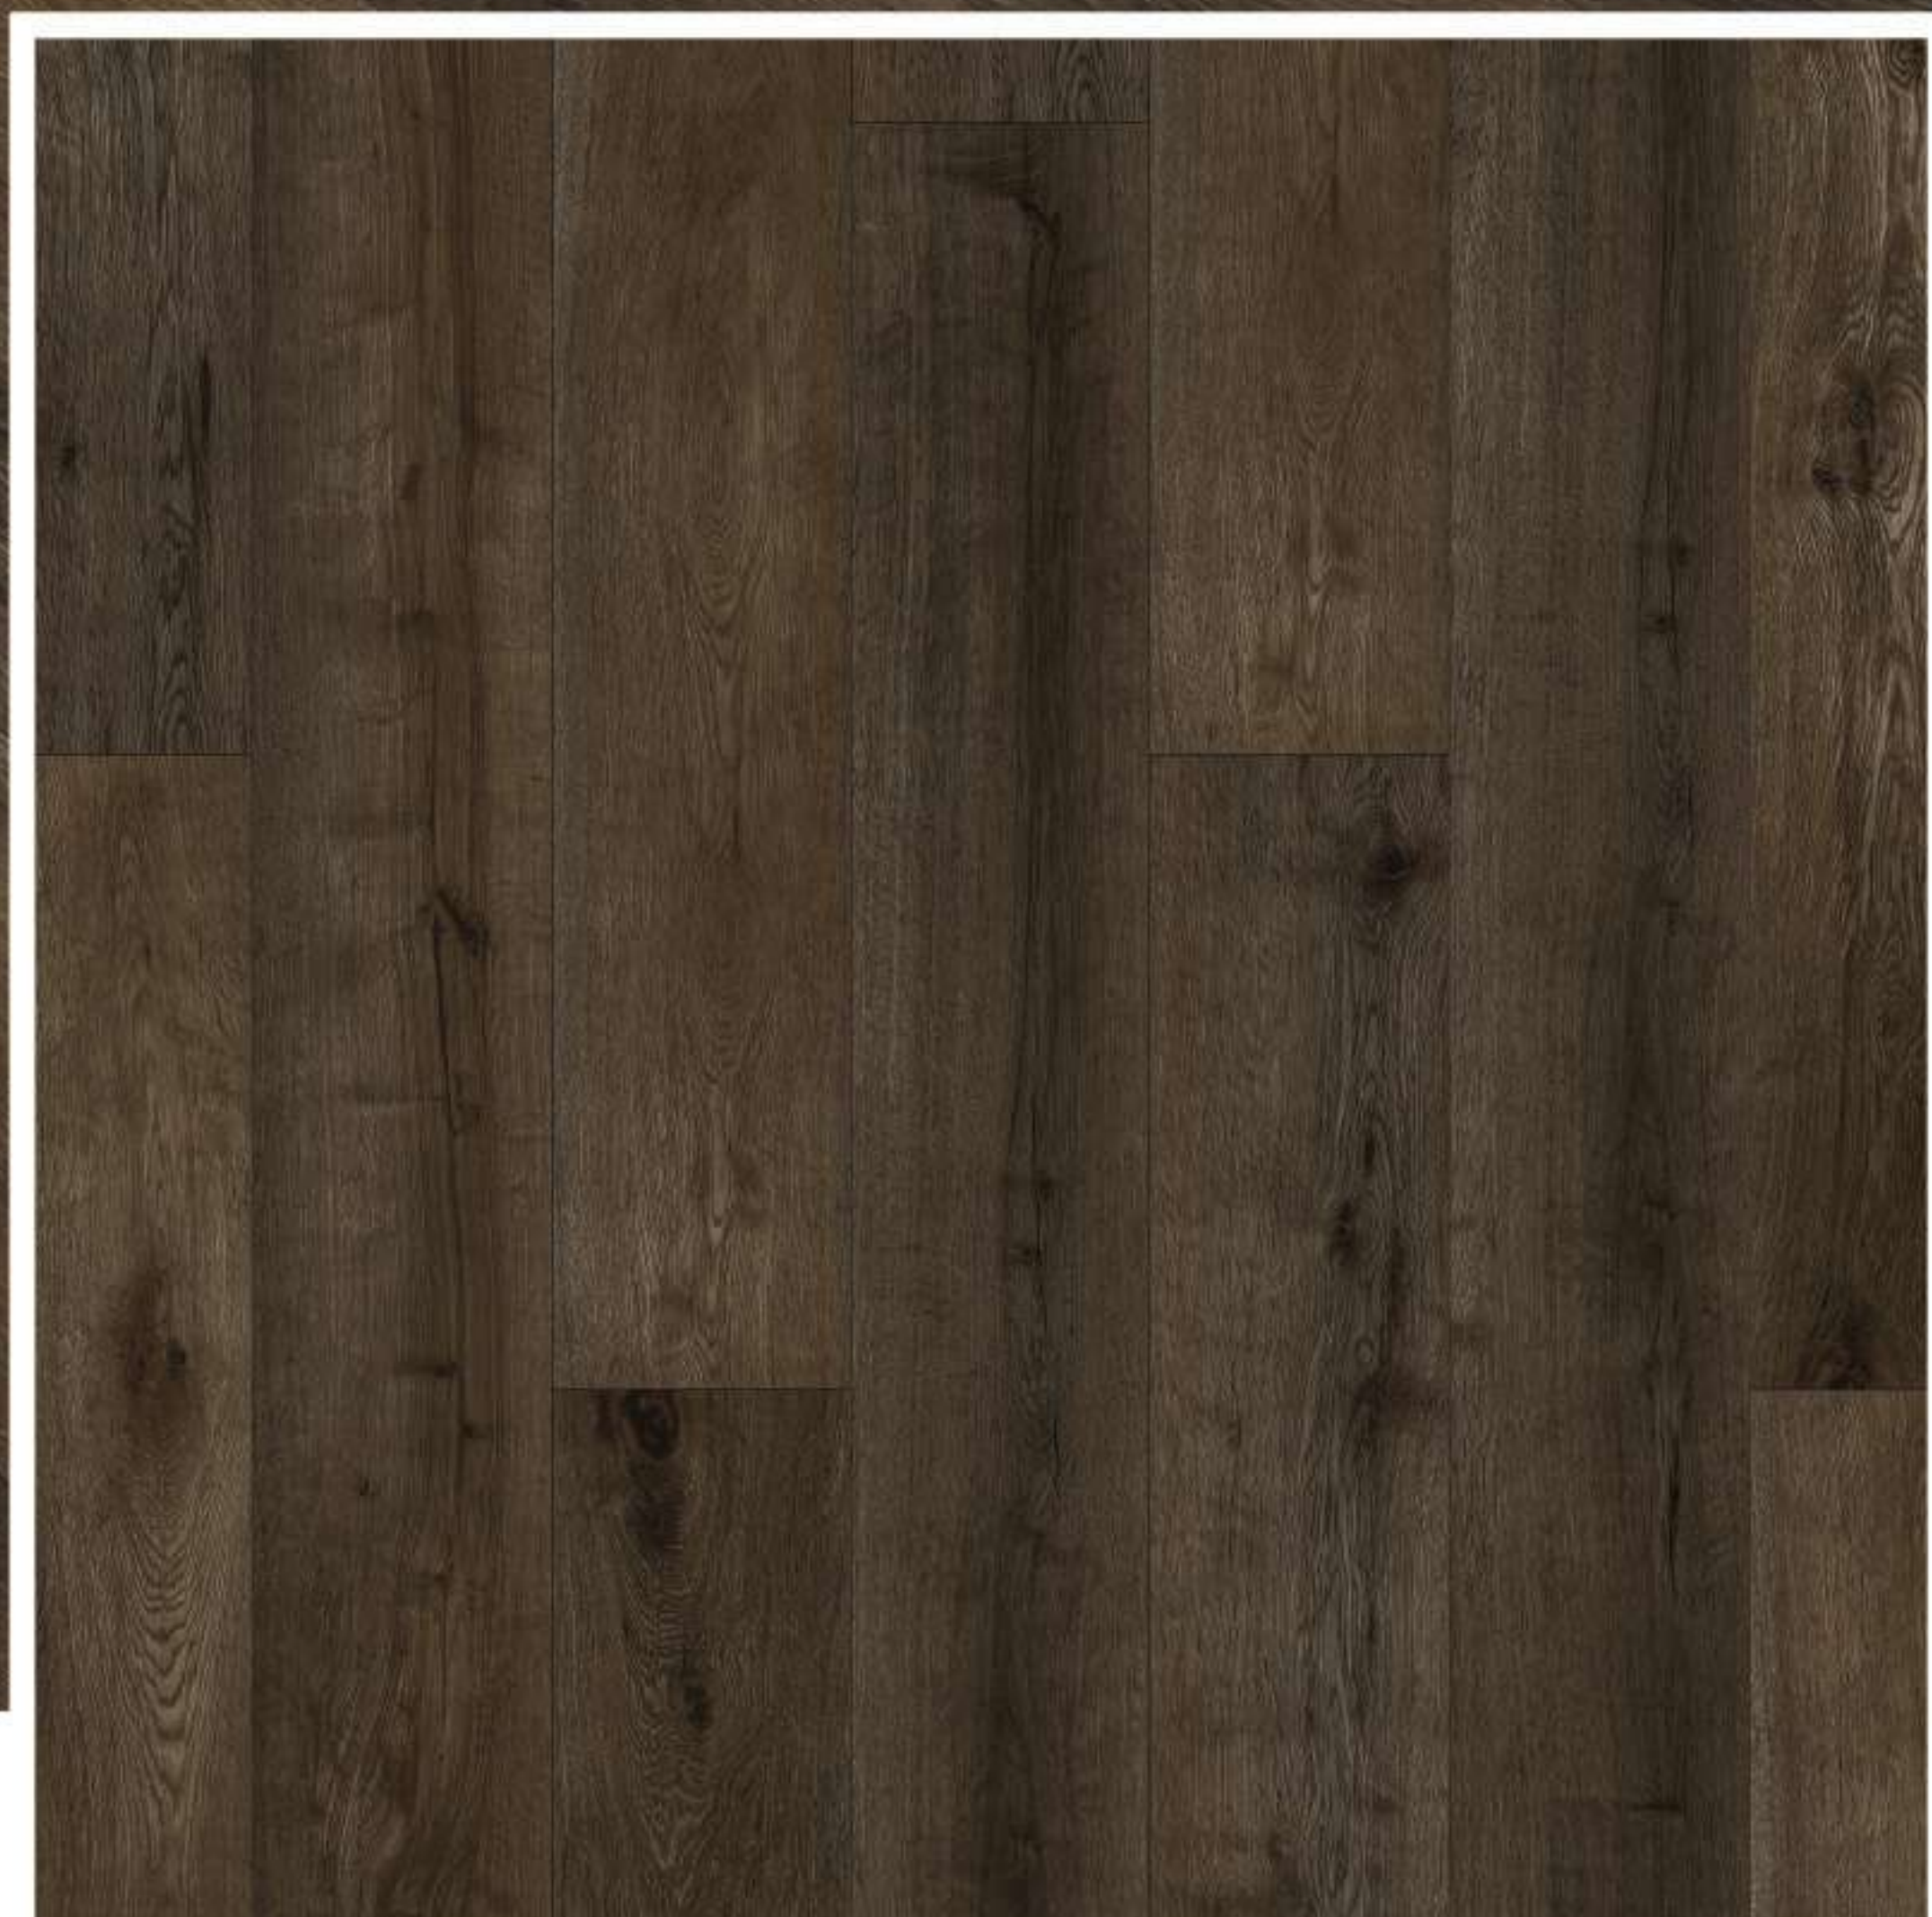

510 COFFEE OAK



GR-510-PL | PLANK
228 X 1524 X 6 mm

DECOR

DIMENSIONS

EDGE

SURFACE

CLICK



PLANK

228 X 1524

MICRO BEVEL


EIR

UNICLIC PLANK

Package(m²)

Palette (m²)

Warranty(Year)



7
Pieces




40
Package

Residential
20

Commercial
7

= 2,432 m²
= 25,296 kg

= 97,292 m²
= 1031,838 kg

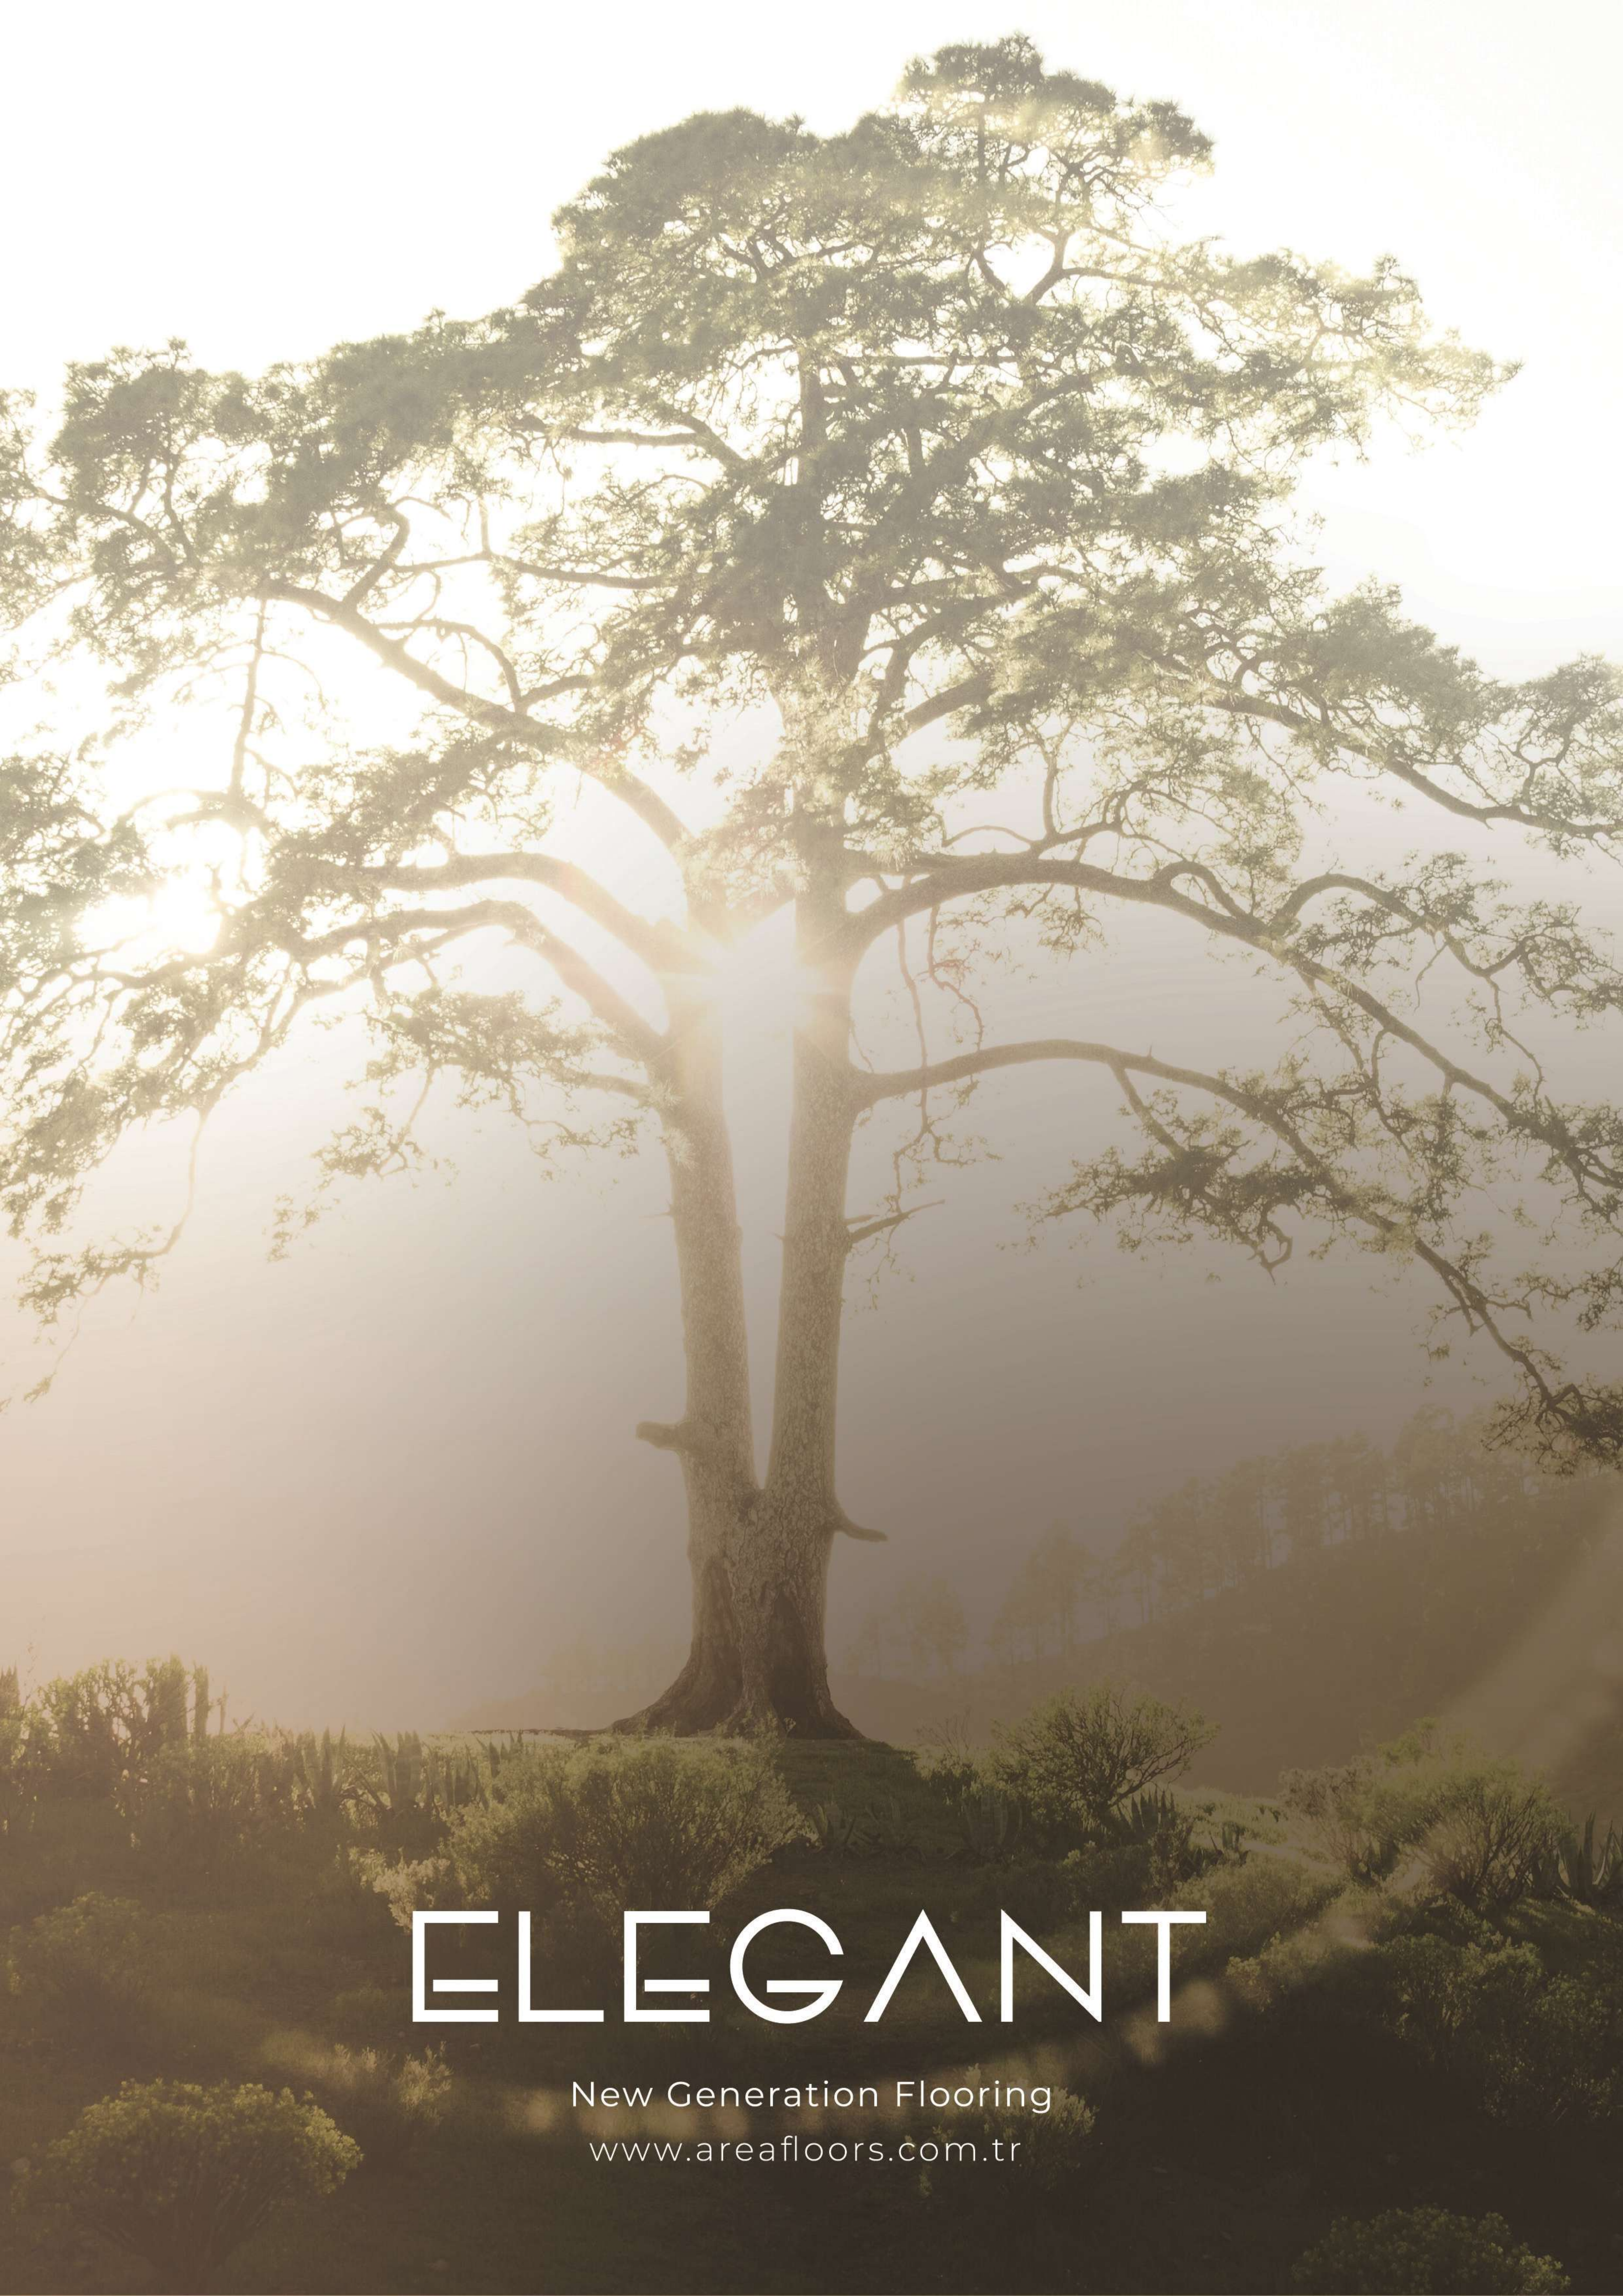

ELEGANT

New Generation Flooring
www.areafloors.com.tr



ELEGANT

by

AREA FLOORS

Elegant Collection is a refined series that brings the warm texture of nature into modern living spaces. Each surface is crafted with a grace that lets you feel the authentic rhythm of real wood. The serene harmony of its color tones lends a subtle yet distinctive character to interiors.

Its softly reflective surface evokes a sense of calm with every step, while minimalist lines create a natural balance within contemporary spaces.

Captivating in its simplicity, the Elegant Collection stands the test of time and transforms living environments into a seamless expression of refined sophistication.



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface





Moisture Resistance



High Density Underlay



Suitable for Underfloor Heating

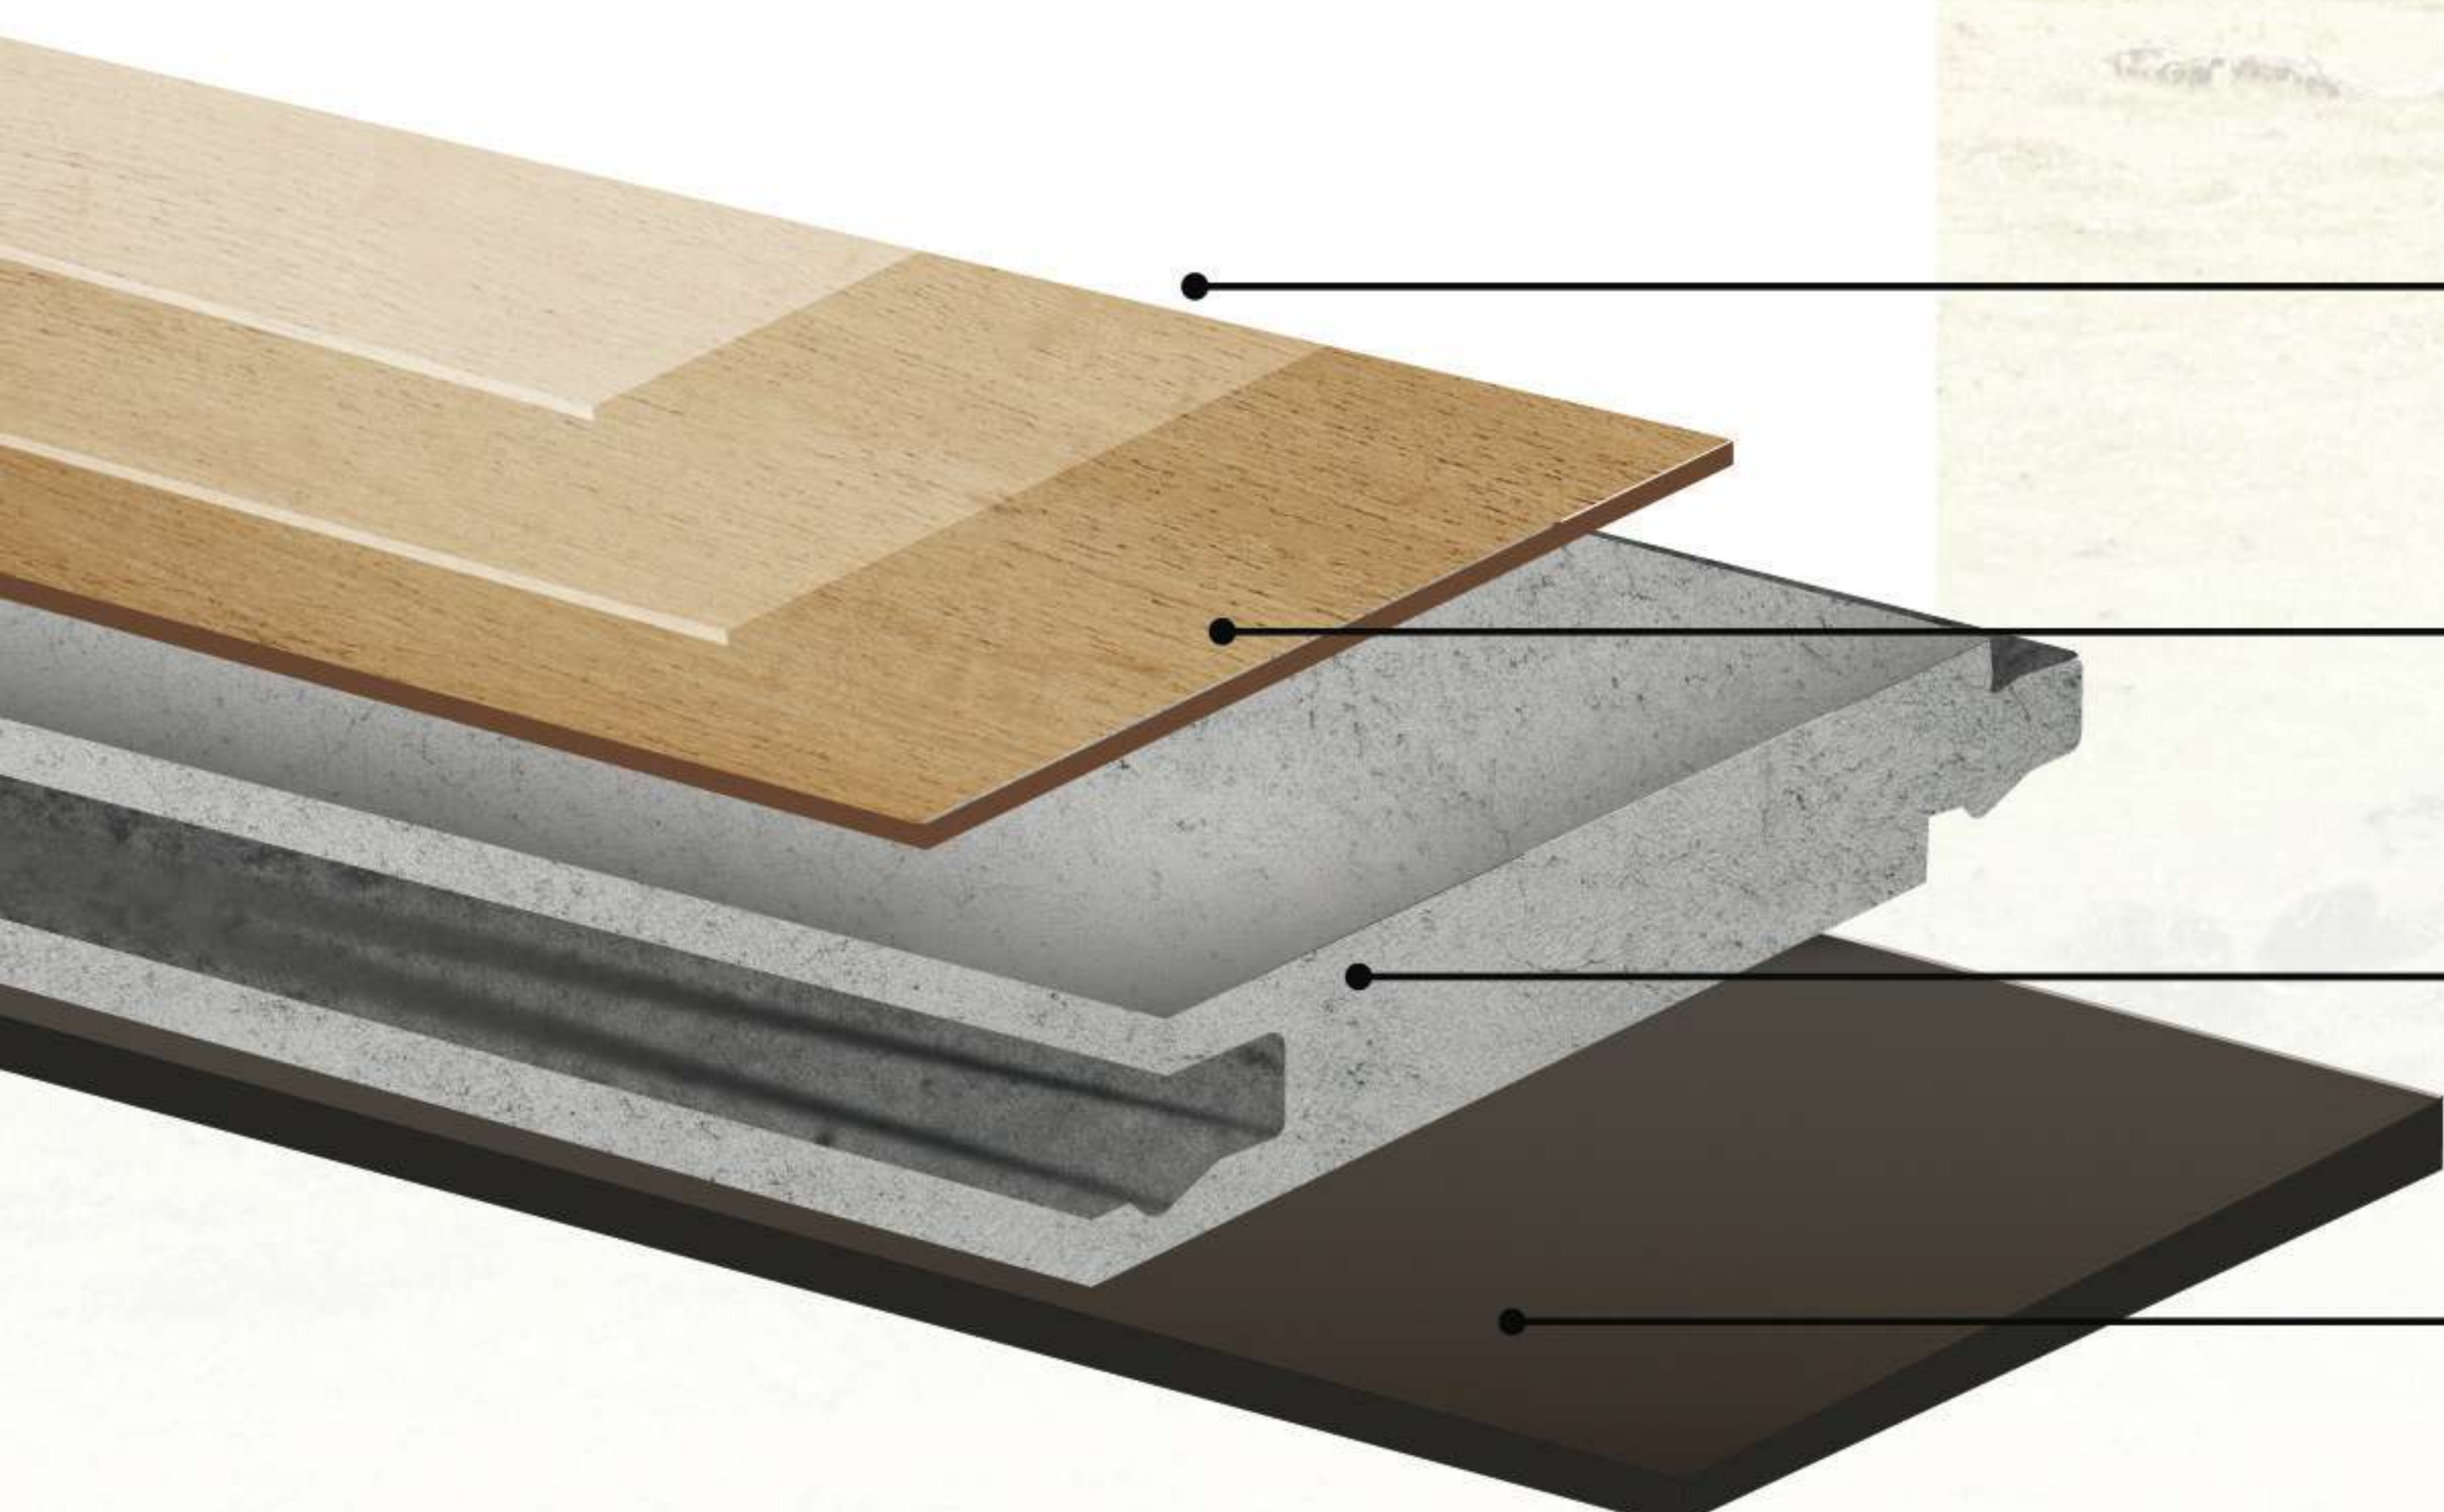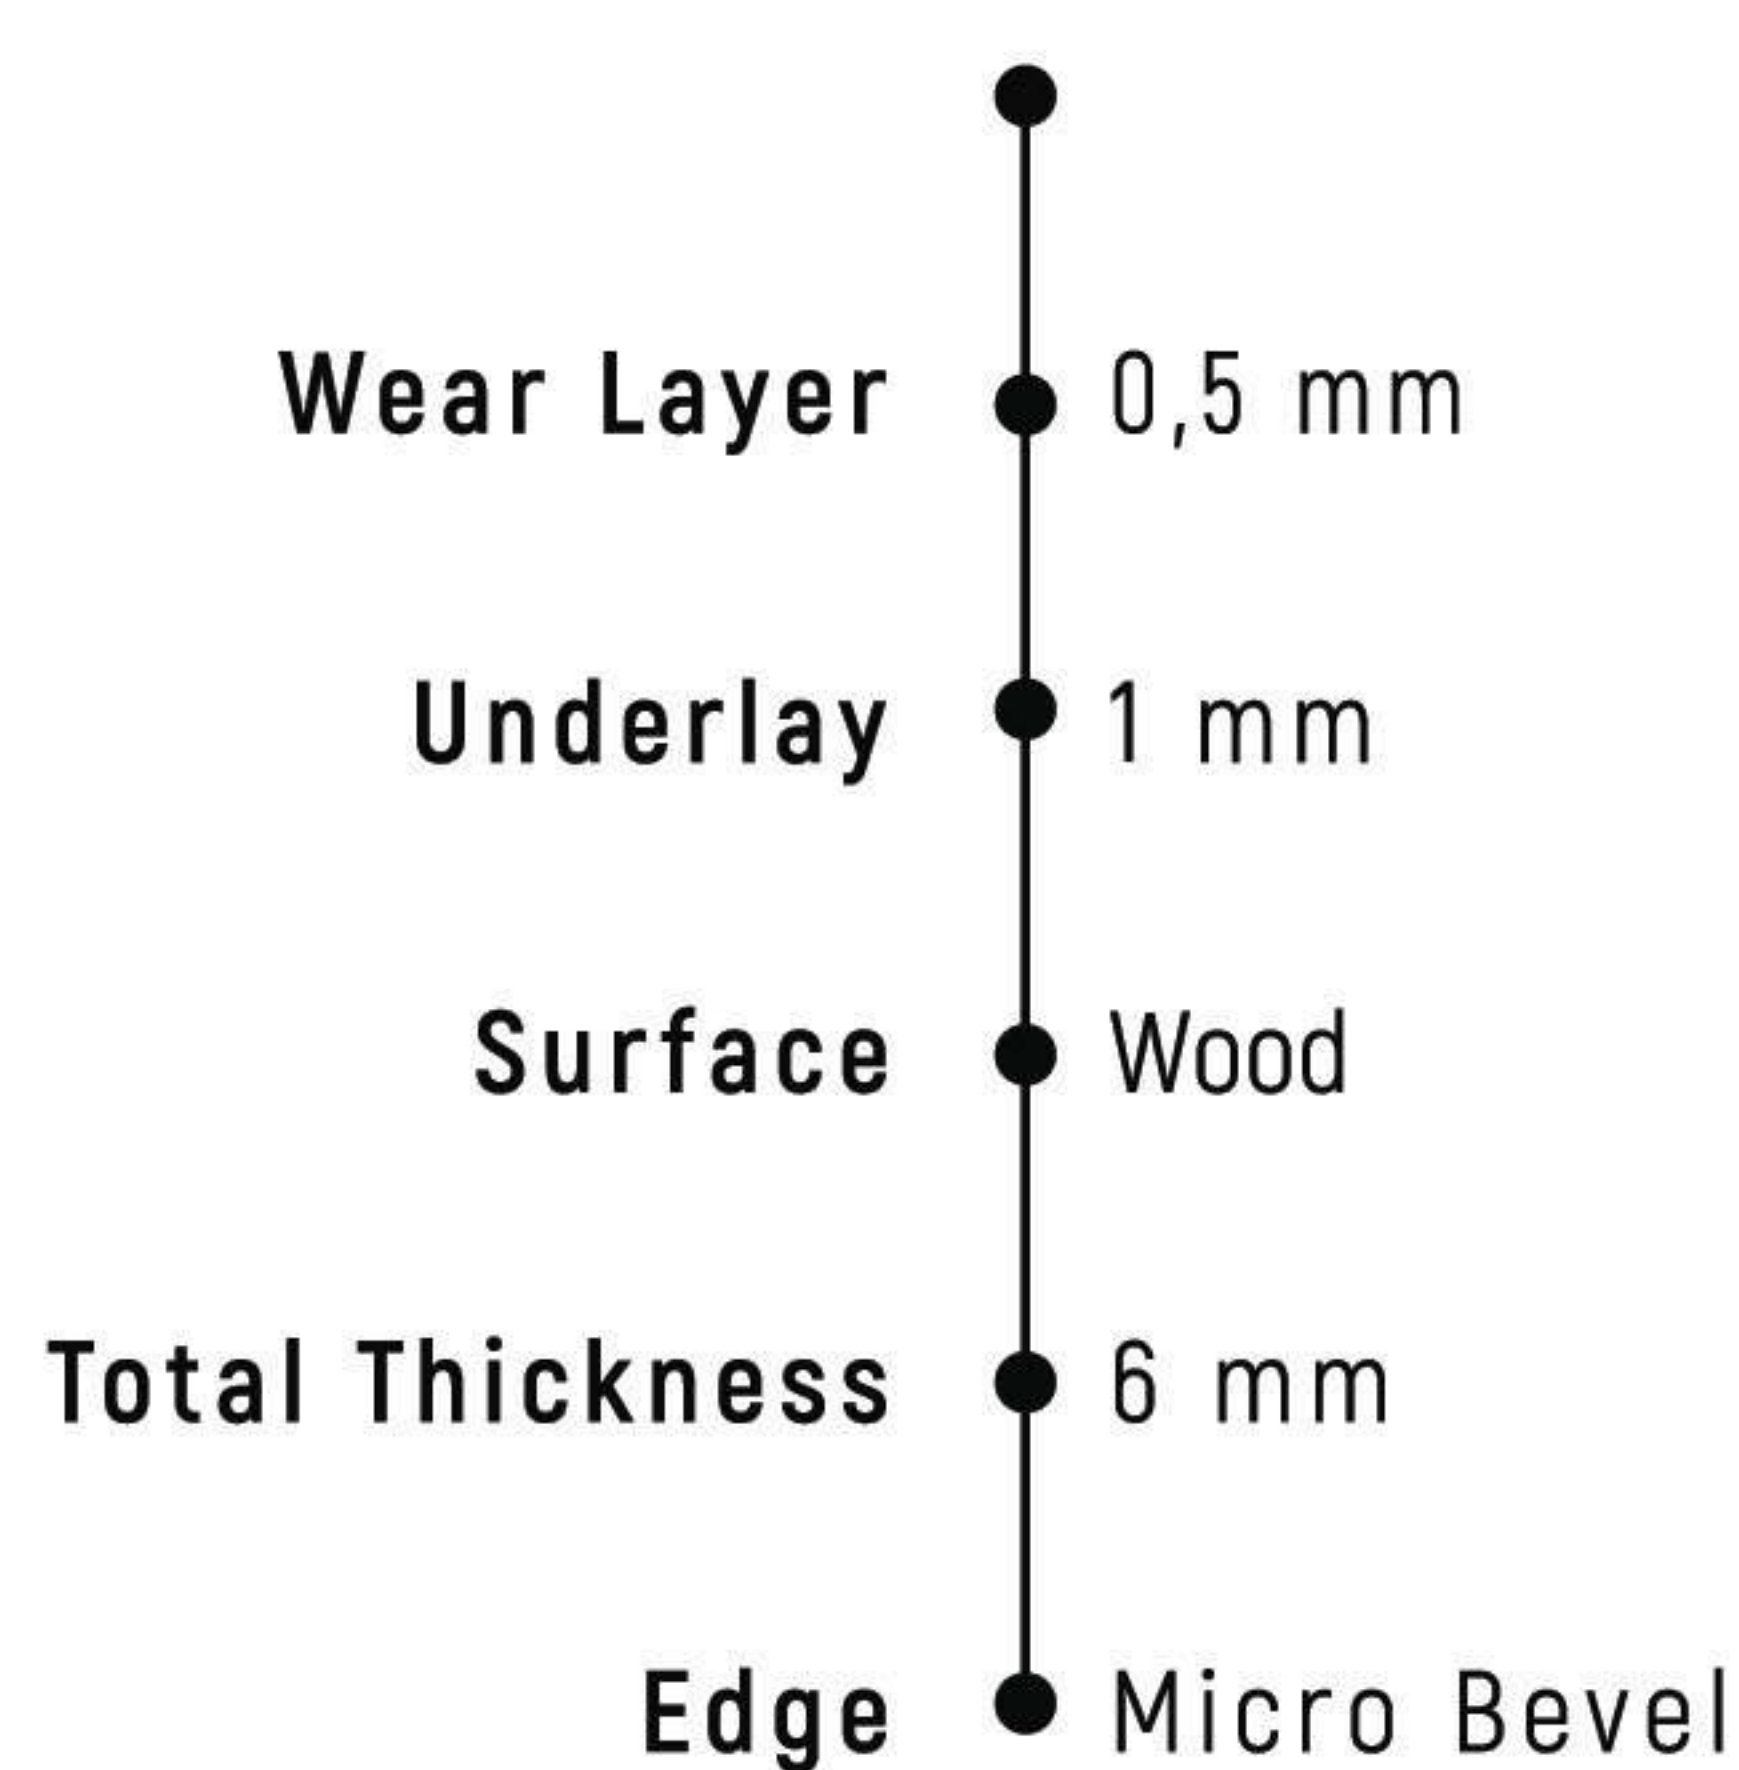

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Flim Layer

SPC Rigid Core

High Destiny
Underlayment

Timeless
Elegance

1524 mm
182 mm





203 HAVANNA OAK



EG-203-PL | PLANK
182 X 1524 X 6 mm



206 VALLEY OAK



EG-206-PL | PLANK
182 X 1524 X 6 mm




207 DESERT OAK



EG-207-PL | PLANK
182 X 1524 X 6 mm

DESERT OAK 207

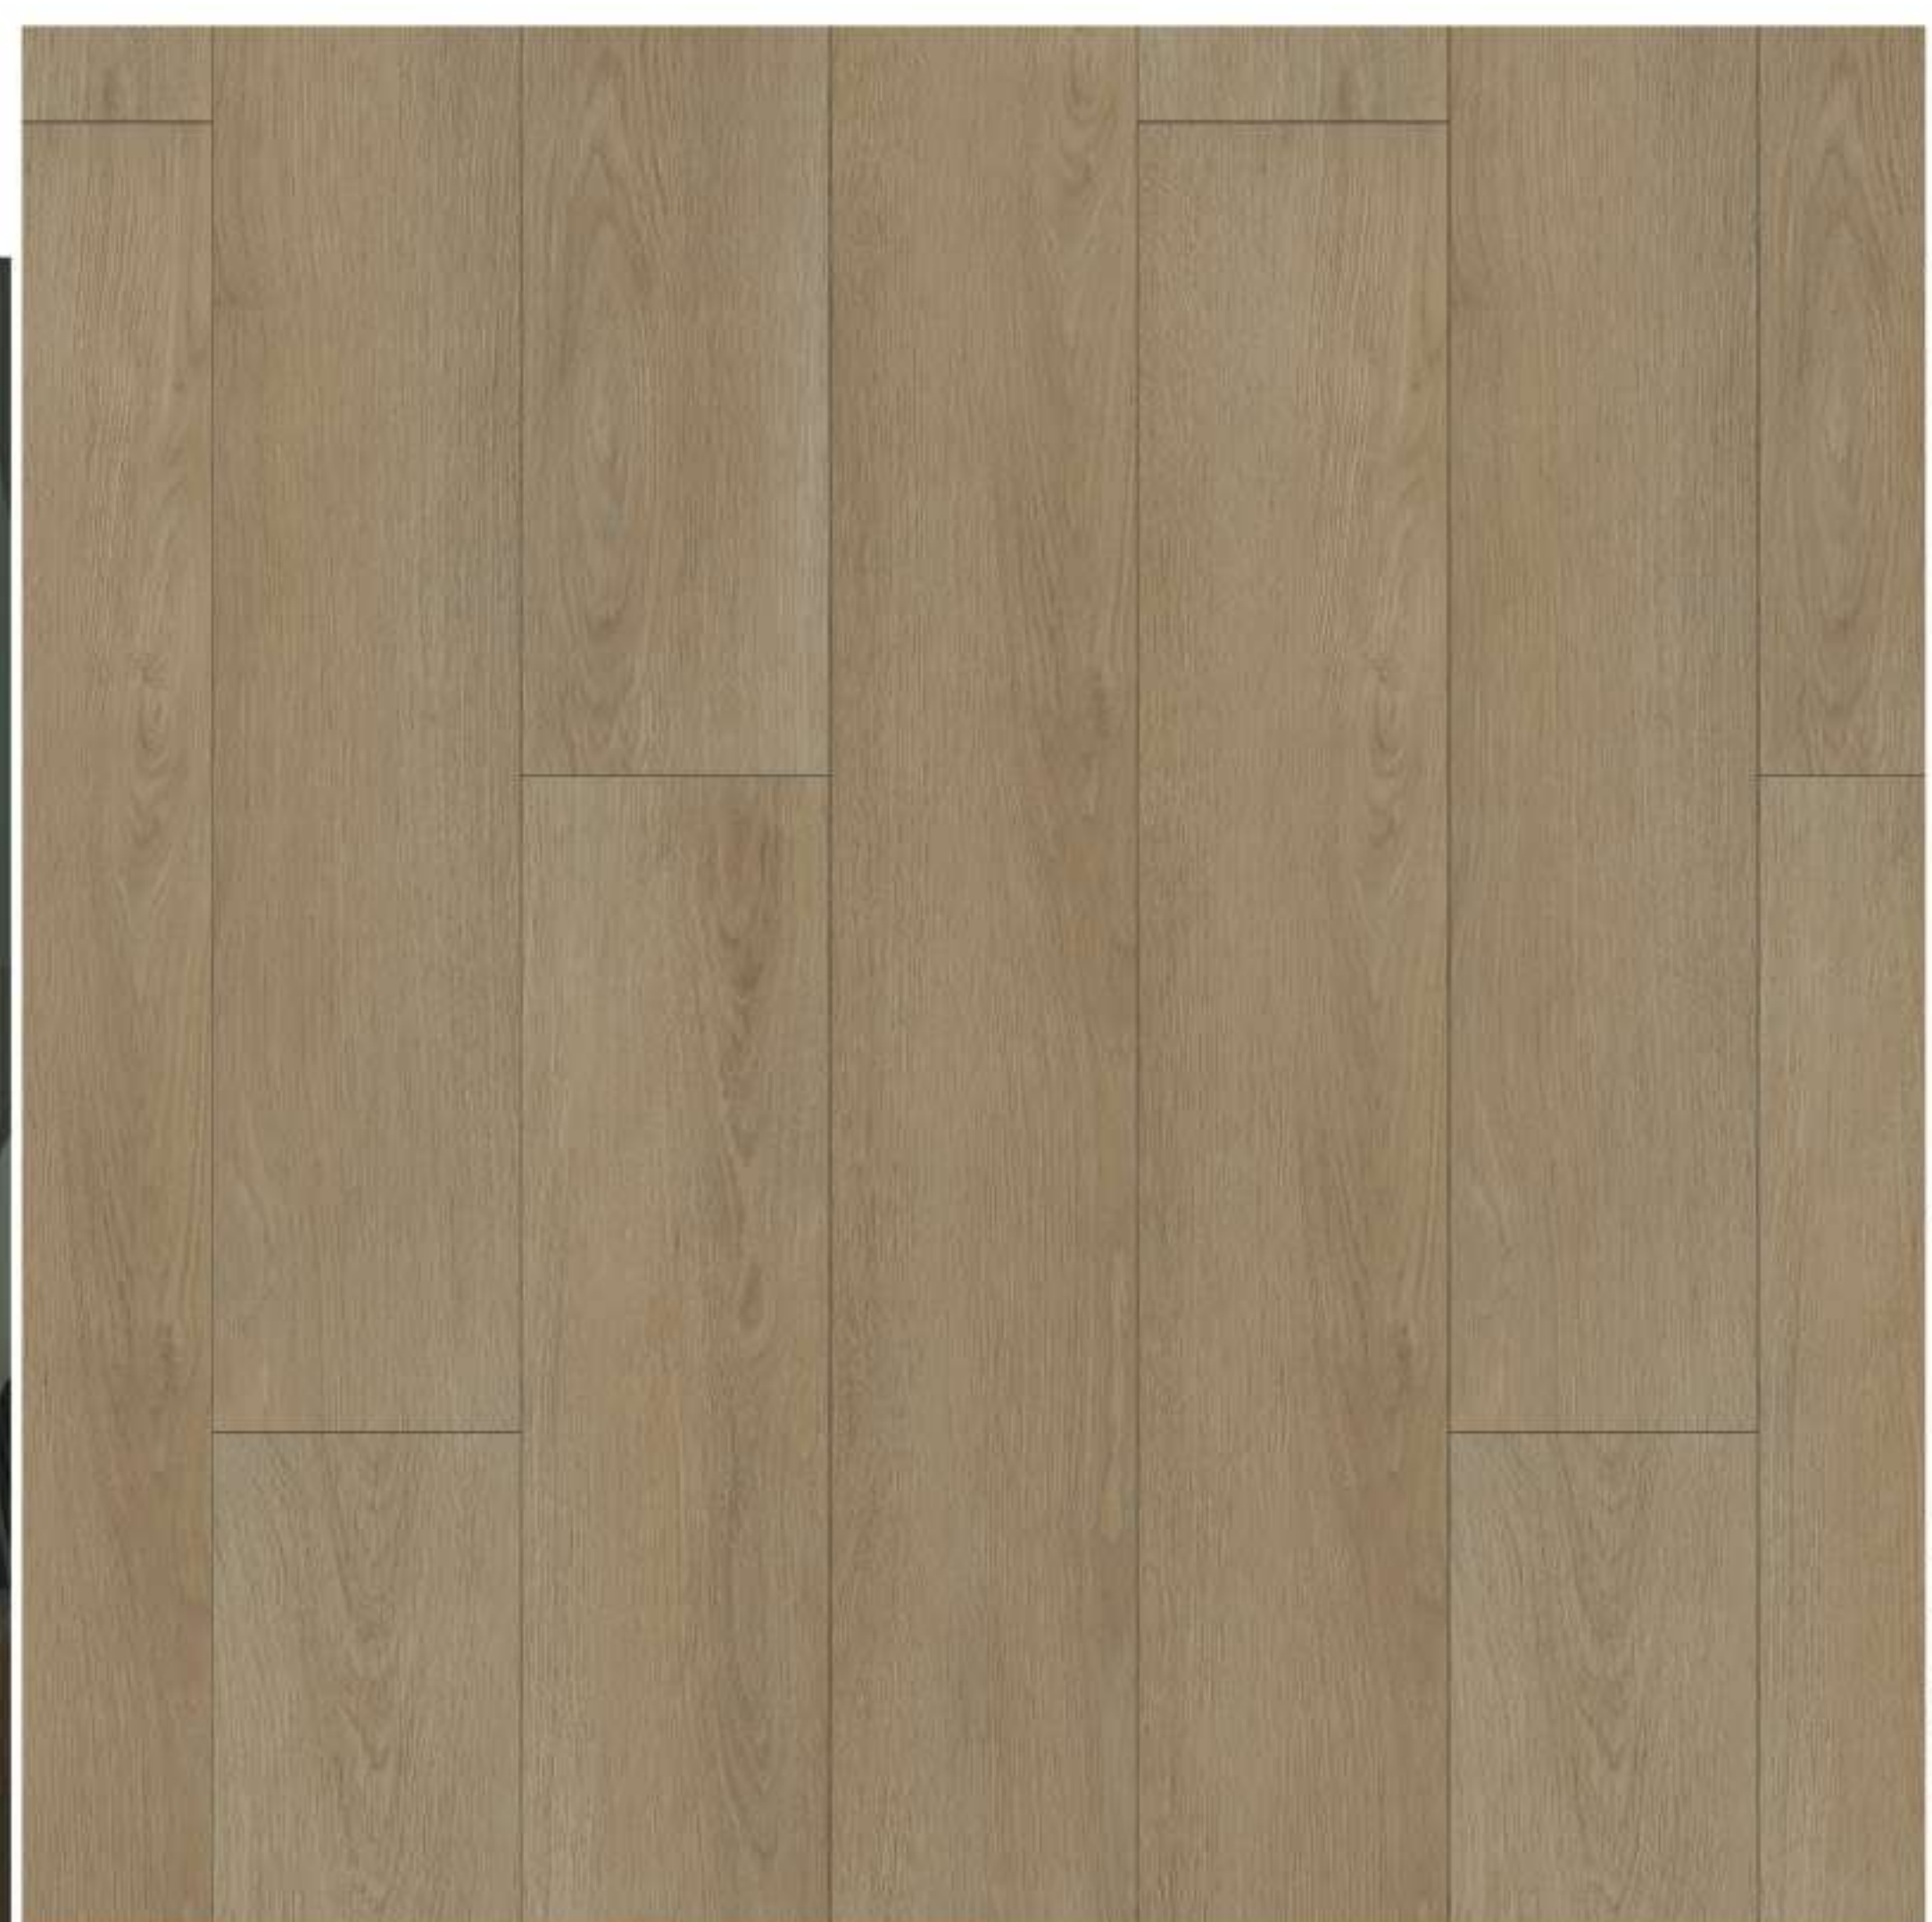



99

ELEGANT COLLECTION

208 WALNUT OAK



EG-208-PL | PLANK
182 X 1524 X 6 mm

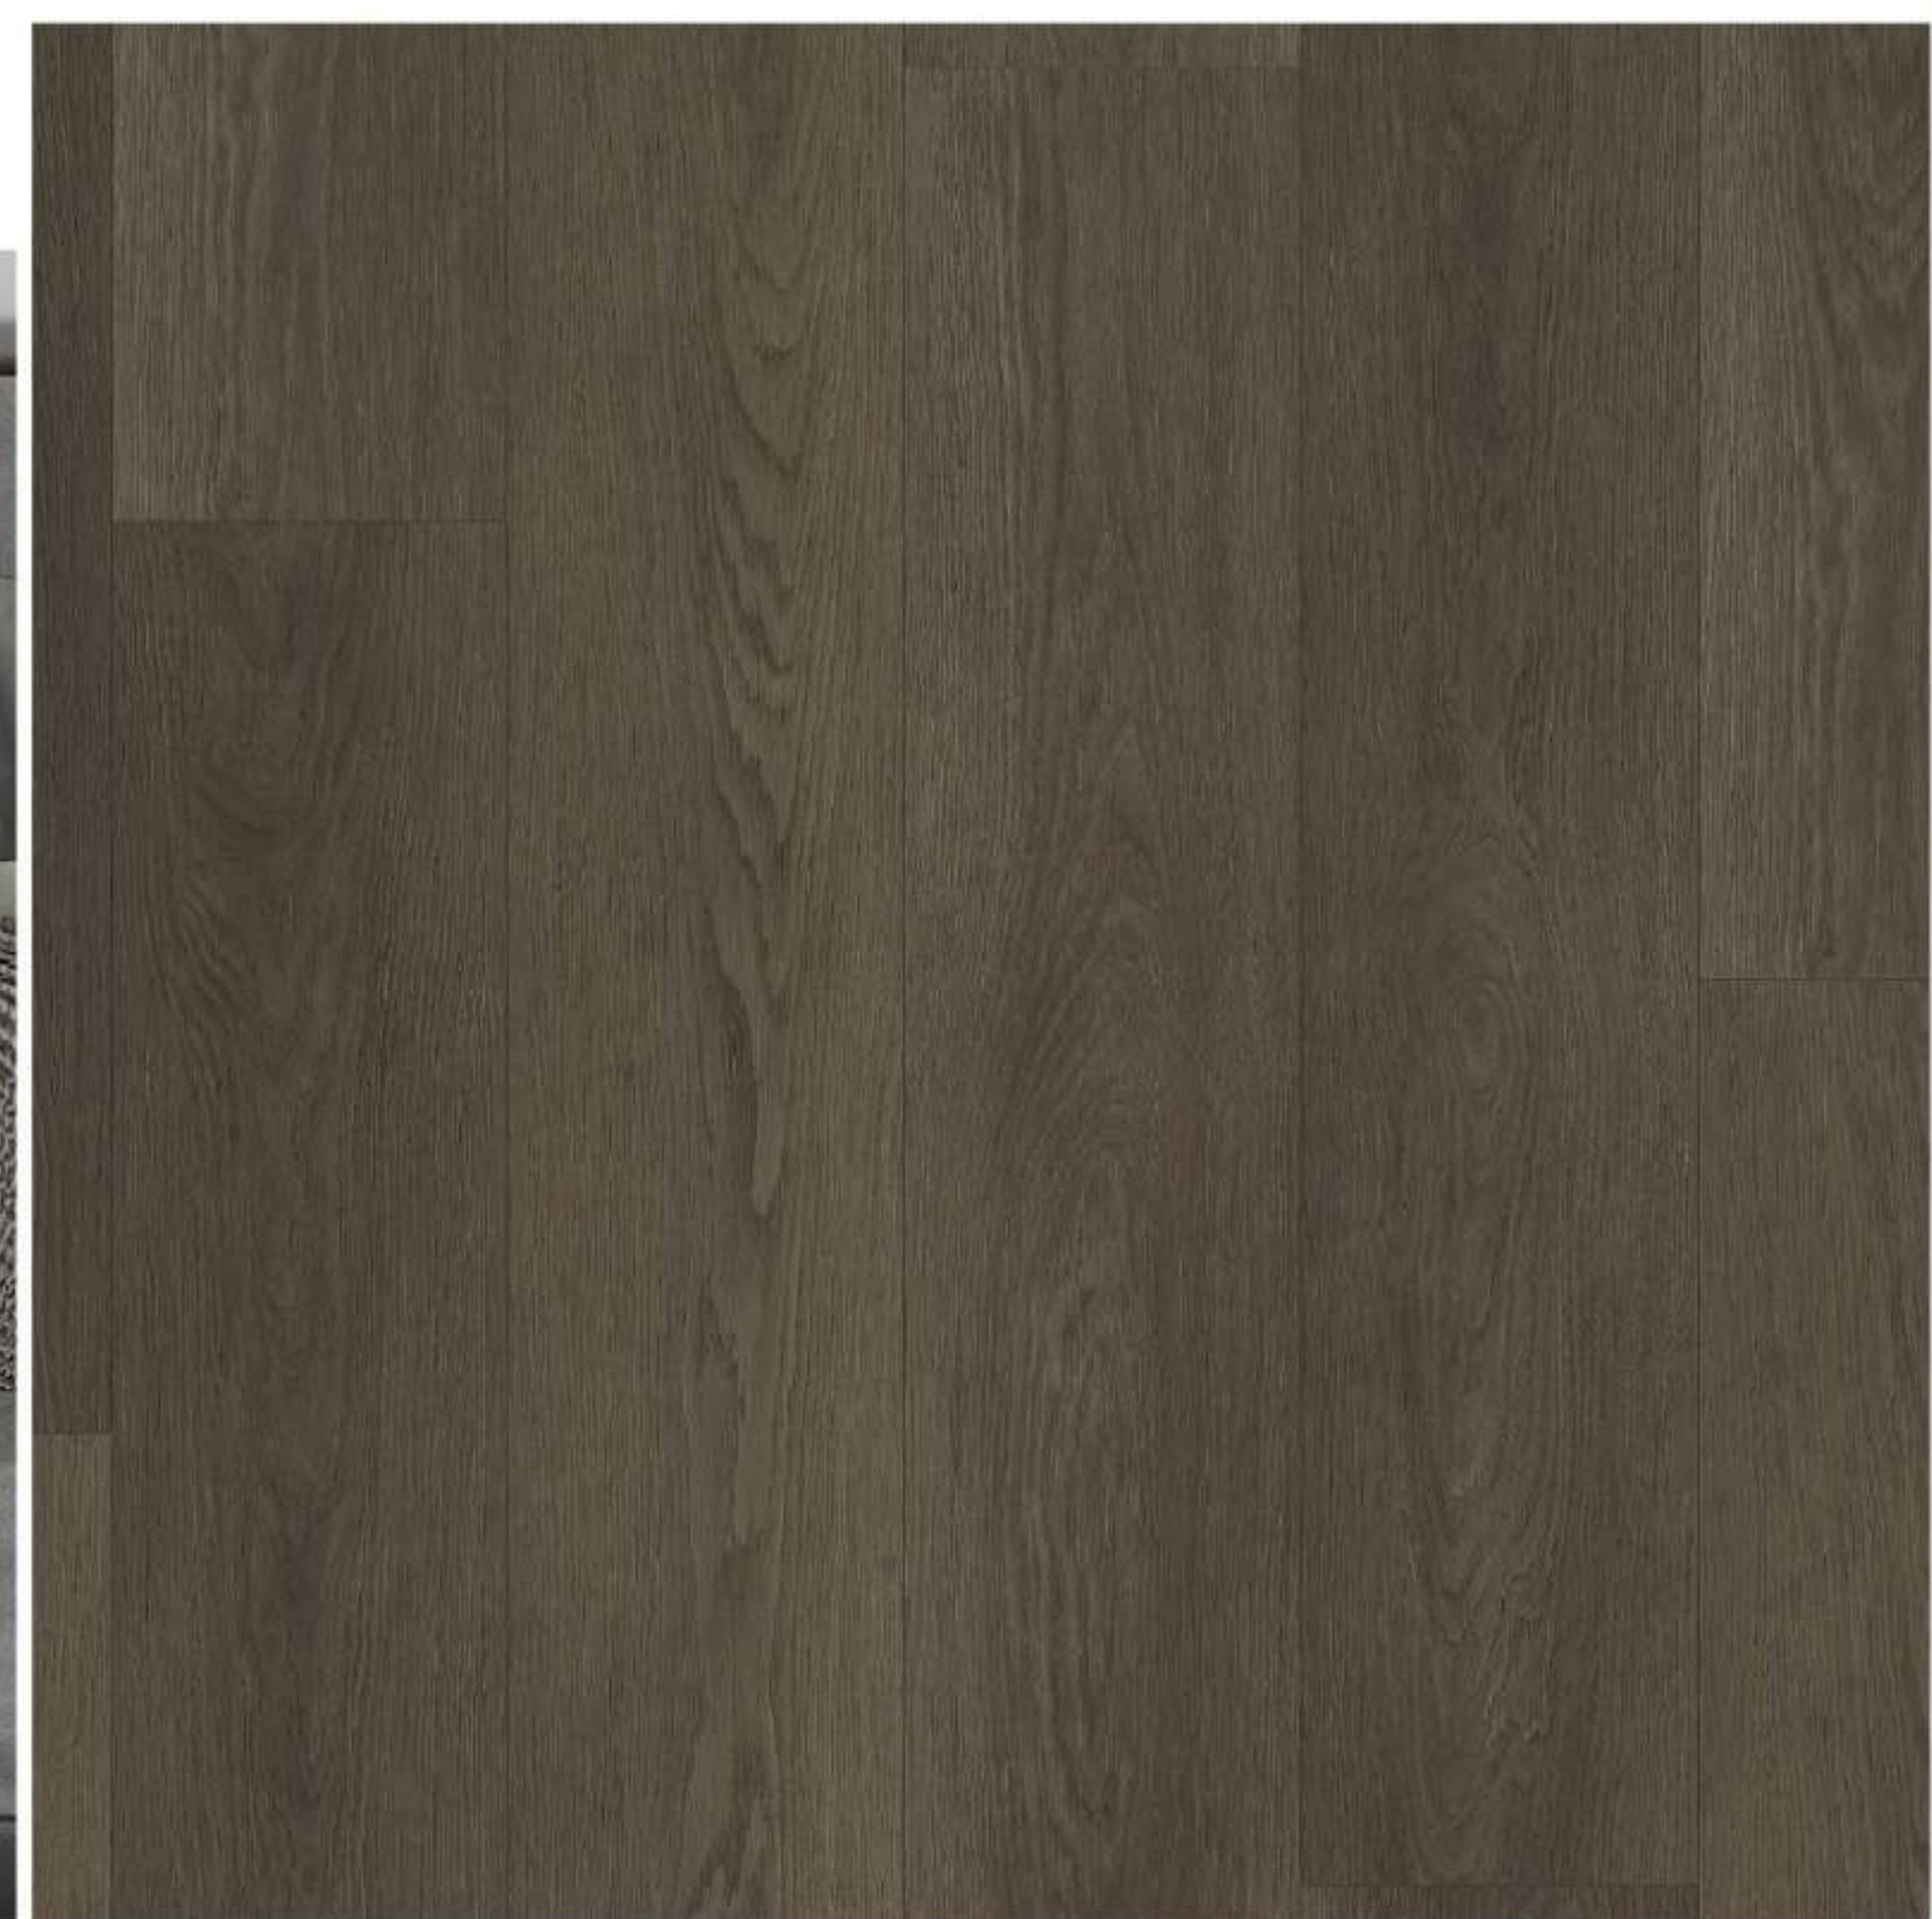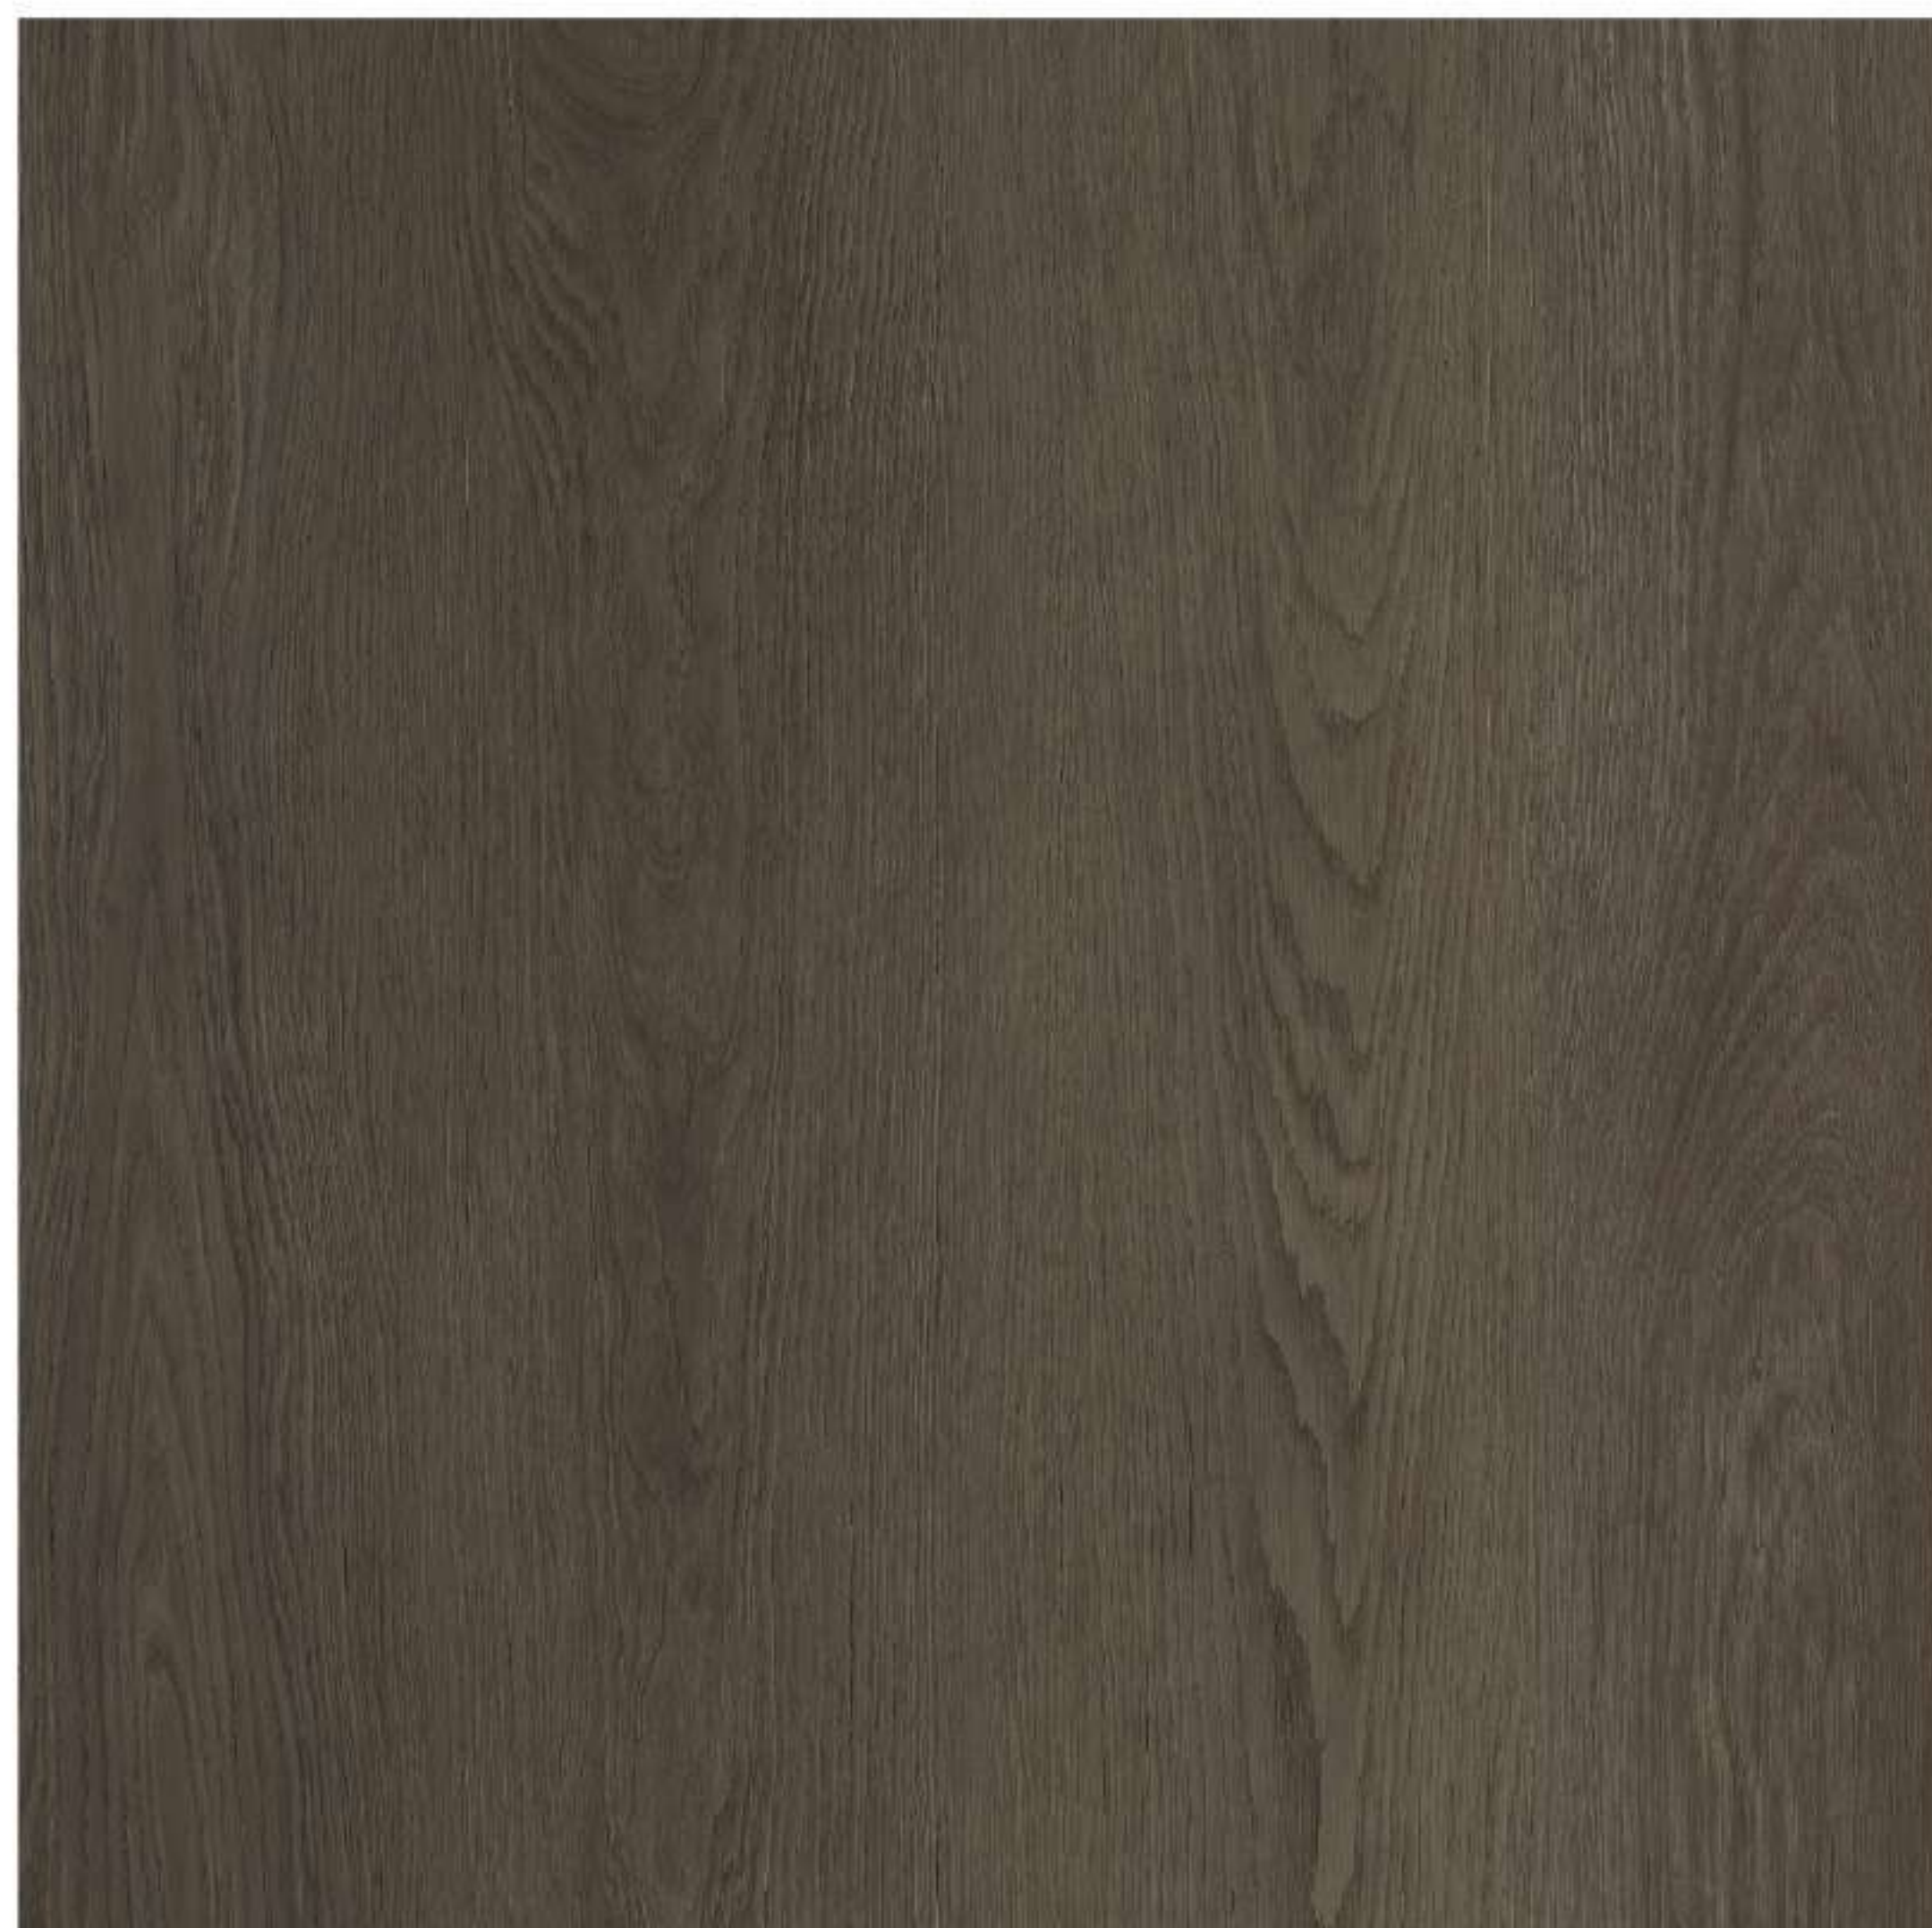




210 CAMBRIDGE OAK



EG-210-PL | PLANK
182 X 1524 X 6 mm

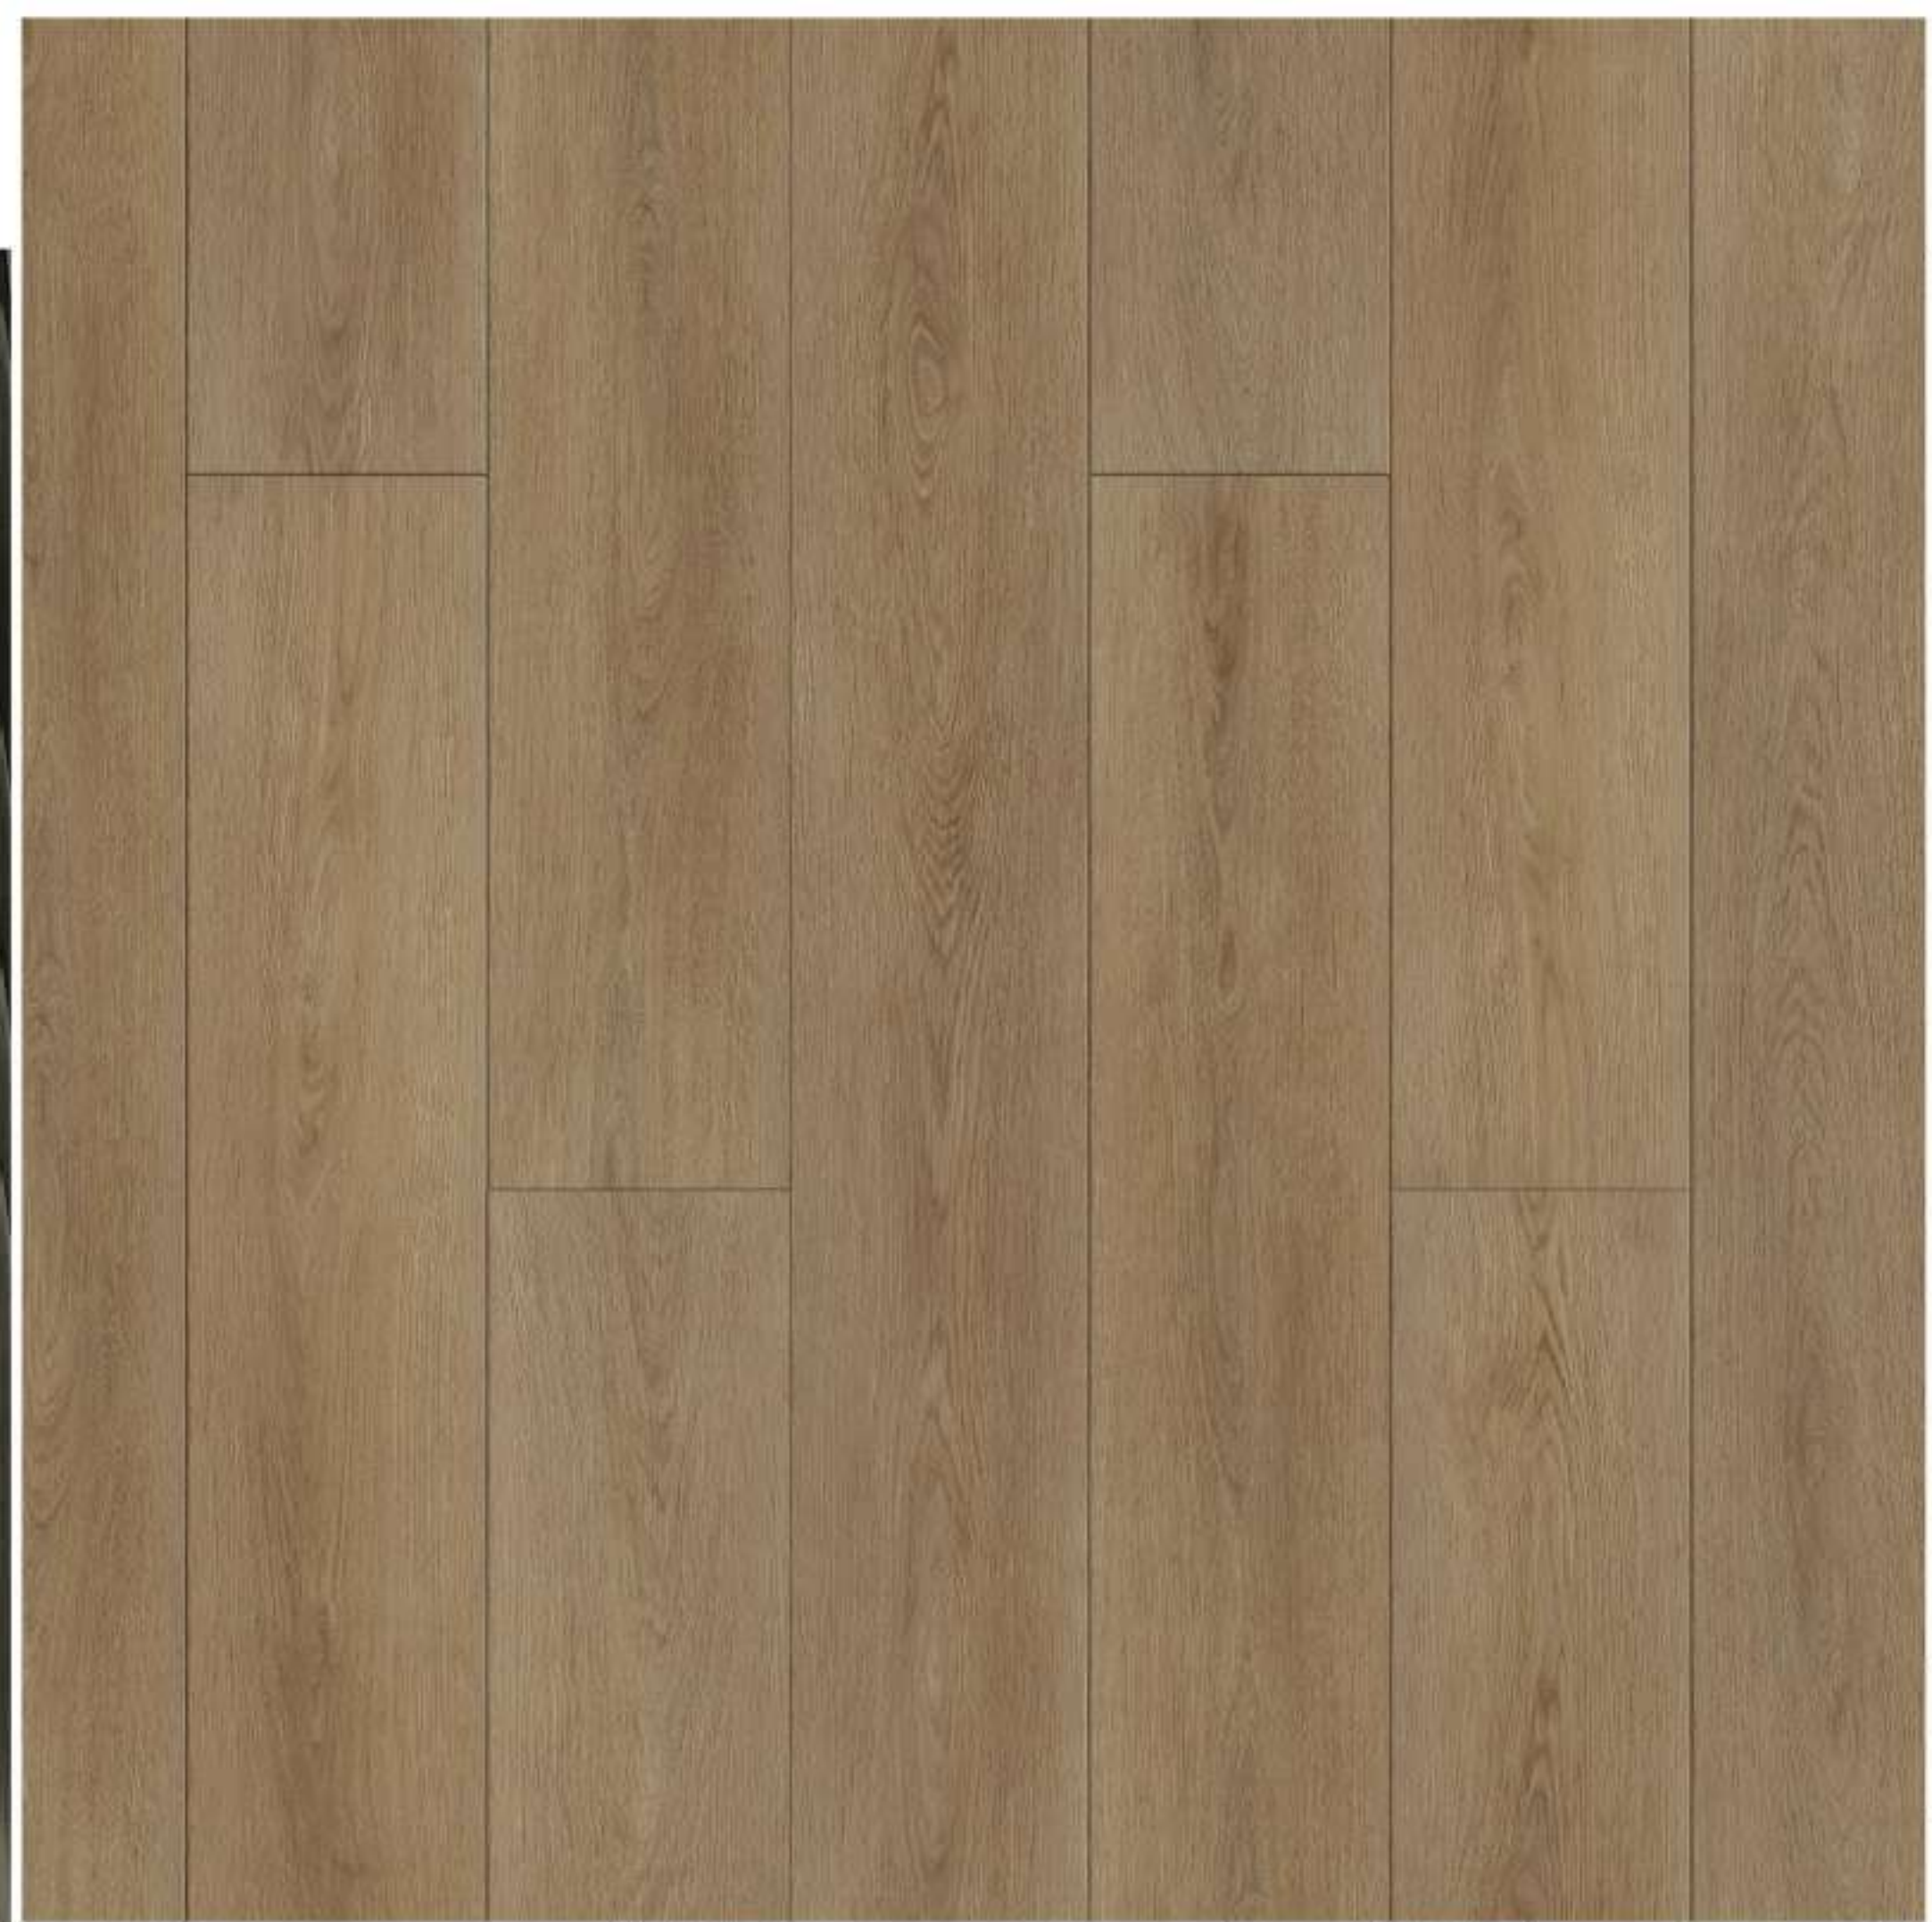

210

CAMBRIDGE OAK

101

ELEGANT COLLECTION

DECOR

DIMENSIONS

EDGE

SURFACE


CLICK

182 X 1524

MICRO BEVEL


WOOD

UNICLIC PLANK

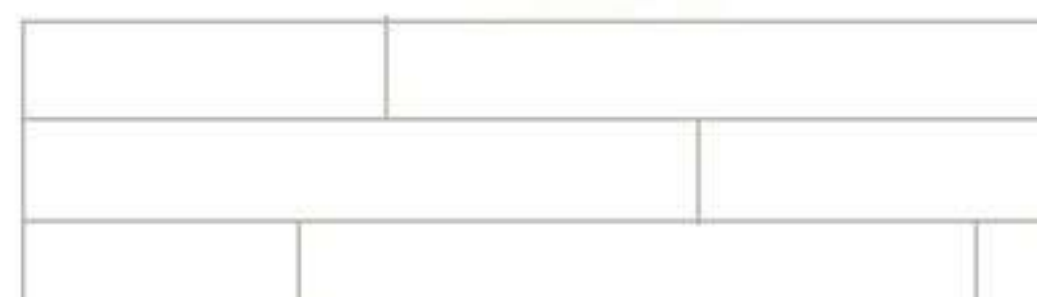

PLANK

Package[m²]

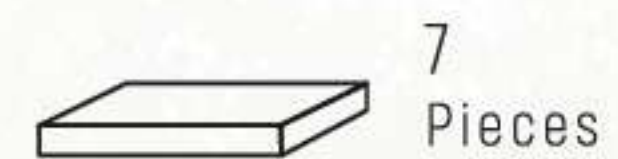

7
Pieces

= 1,942 m²
= 20,192 kg

Palette [m²]



45
Package

= 87,371 m²
= 928,658 kg

Warranty[Year]

Residential
20

Commercial
7

STONE

New Generation Flooring
www.areafloors.com.tr

A full-page background image of a rugged mountain range. In the foreground, a small, two-story cabin with a dark roof and red window shutters sits on a grassy slope. A Swiss flag flies on a pole to the right of the cabin. The background is dominated by steep, rocky mountain peaks under a clear sky. A large white diagonal shape cuts across the bottom left corner, serving as a design element for the text.

The Elegance of Stone, the Beauty of Your Home.

Stone SPC flooring products offer families the perfect choice to step into a peaceful home life. These durable floor coverings combine quality and style, enhancing every area of your home. Their stone-patterned texture delivers natural beauty and elegance, while being long-lasting and resilient. As the embodiment of peace, durability, and quality in your homes, you can trust every step with Stone SPC flooring products.

Reimagine
Your Home
With
Nature's Charm



Antislip



Pet Friendly



Antibacterial



Sound Absorbent




Wear Resistance



Ultra Matte Surface





Moisture Resistance



High Density Underlay



Suitable for Underfloor Heating

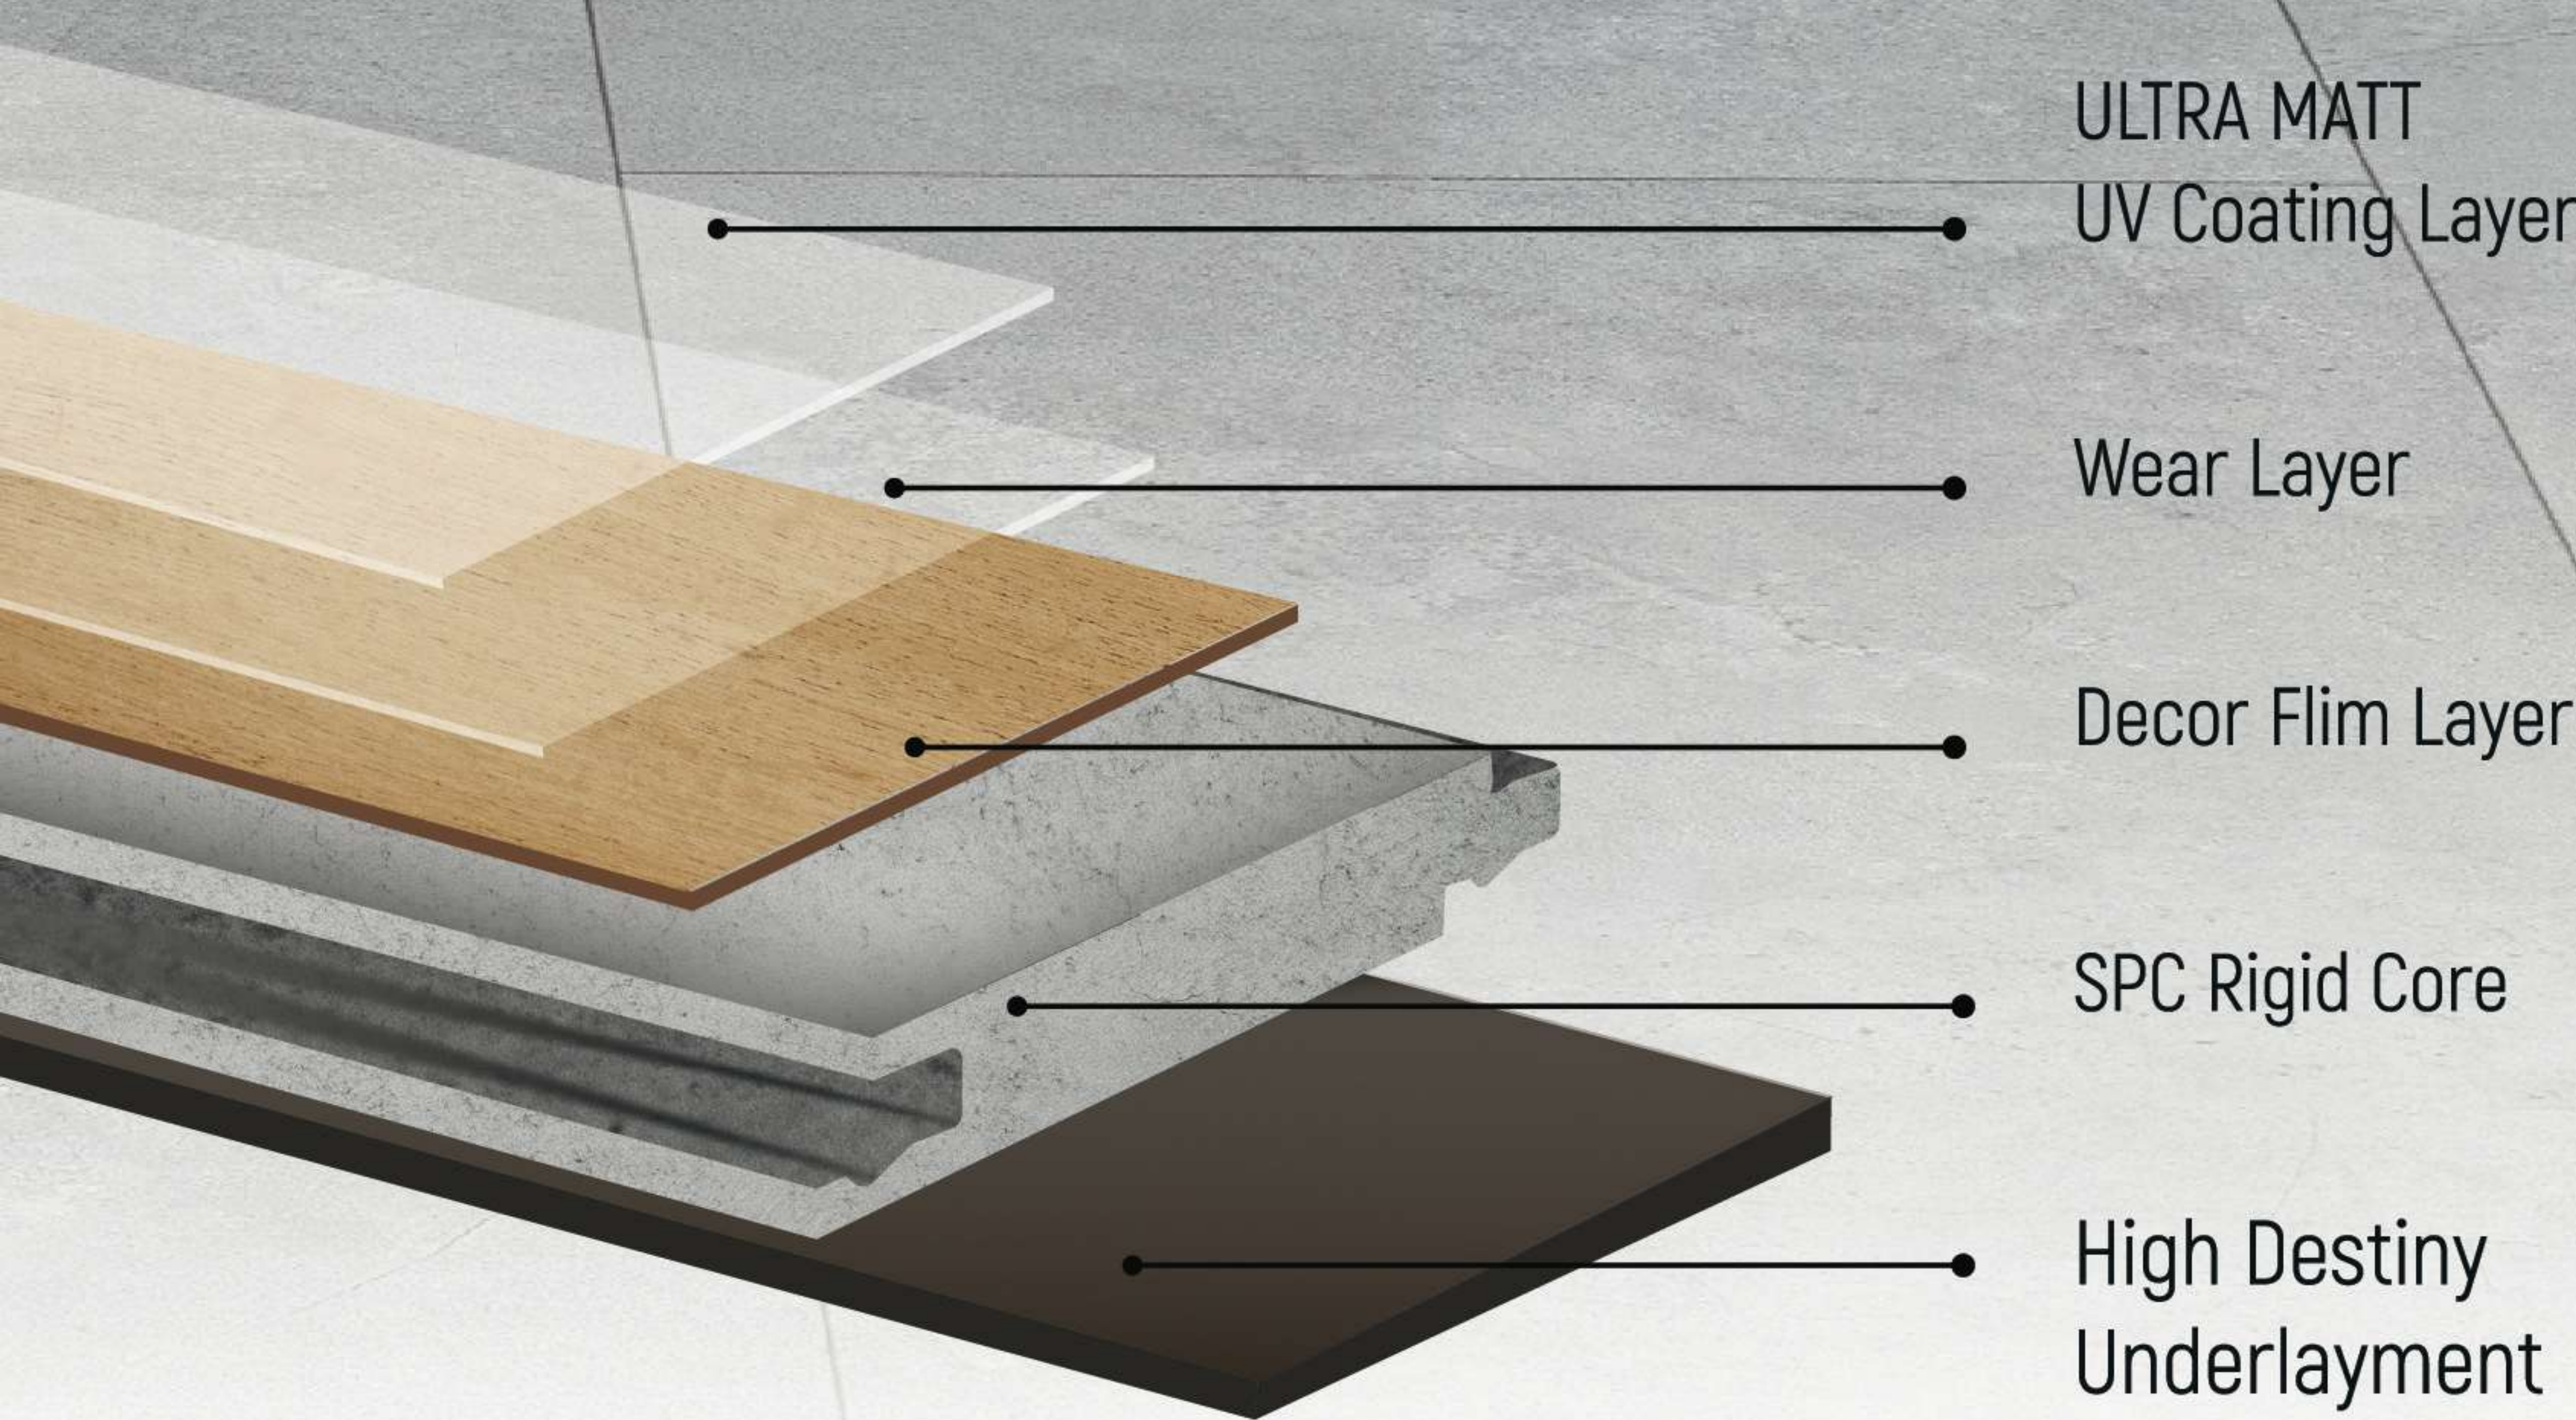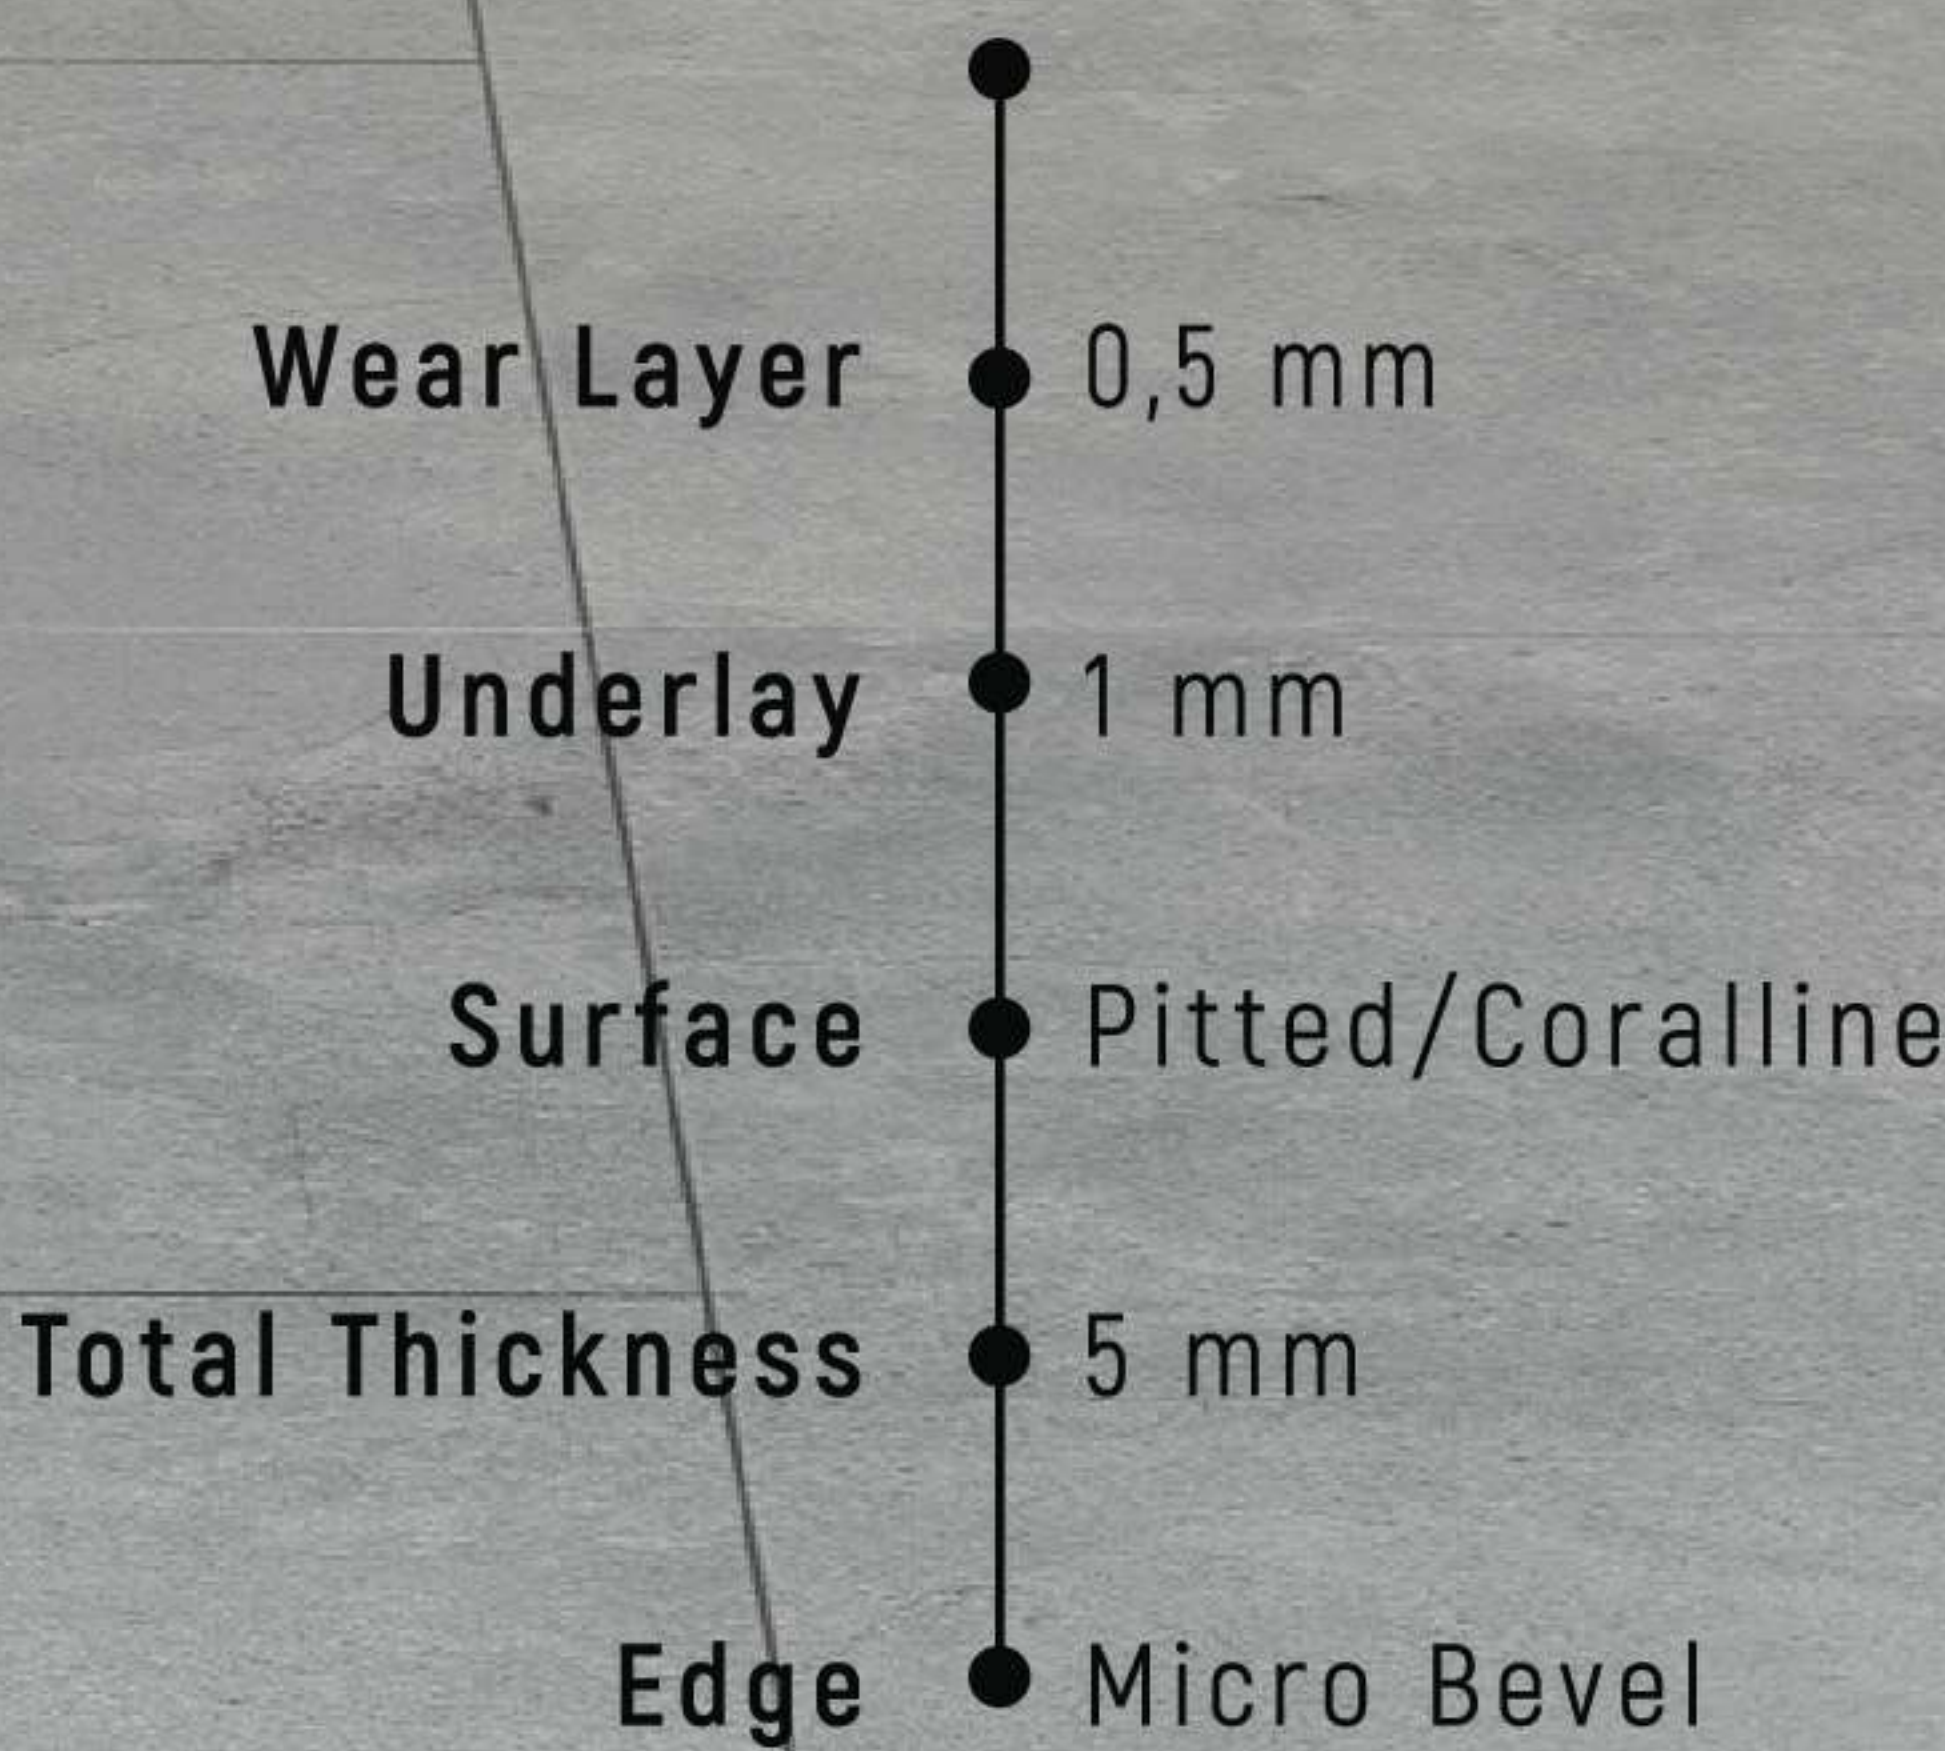

801 CONCRETE LIGHT



ST-801
305 X 600 X 5 mm



ST-801-XL
305 X 1220 X 5 mm





802 CONCRETE SAND



ST-802
305 X 600 X 5 mm



ST-802-XL
305 X 1220 X 5 mm

CONCRETE SAND 802



STONE COLLECTION

107



803 CONCRETE GREY



ST-803
305 X 600 X 5 mm



ST-803-XL
305 X 1220 X 5 mm





804 CONCRETE DARK



ST-804
305 X 600 X 5 mm



ST-804-XL
305 X 1220 X 5 mm

805 CARRARA MARMOR



ST-805
305 X 600 X 5 mm



ST-805-XL
305 X 1220 X 5 mm





806 BOTTICINO LIGHT



ST-806
305 X 600 X 5 mm



ST-806-XL
305 X 1220 X 5 mm

BOTTICINO LIGHT 806



111

STONE COLLECTION



807 MONREAL SLATE




ST-807
305 X 600 X 5 mm



ST-807-XL
305 X 1220 X 5 mm



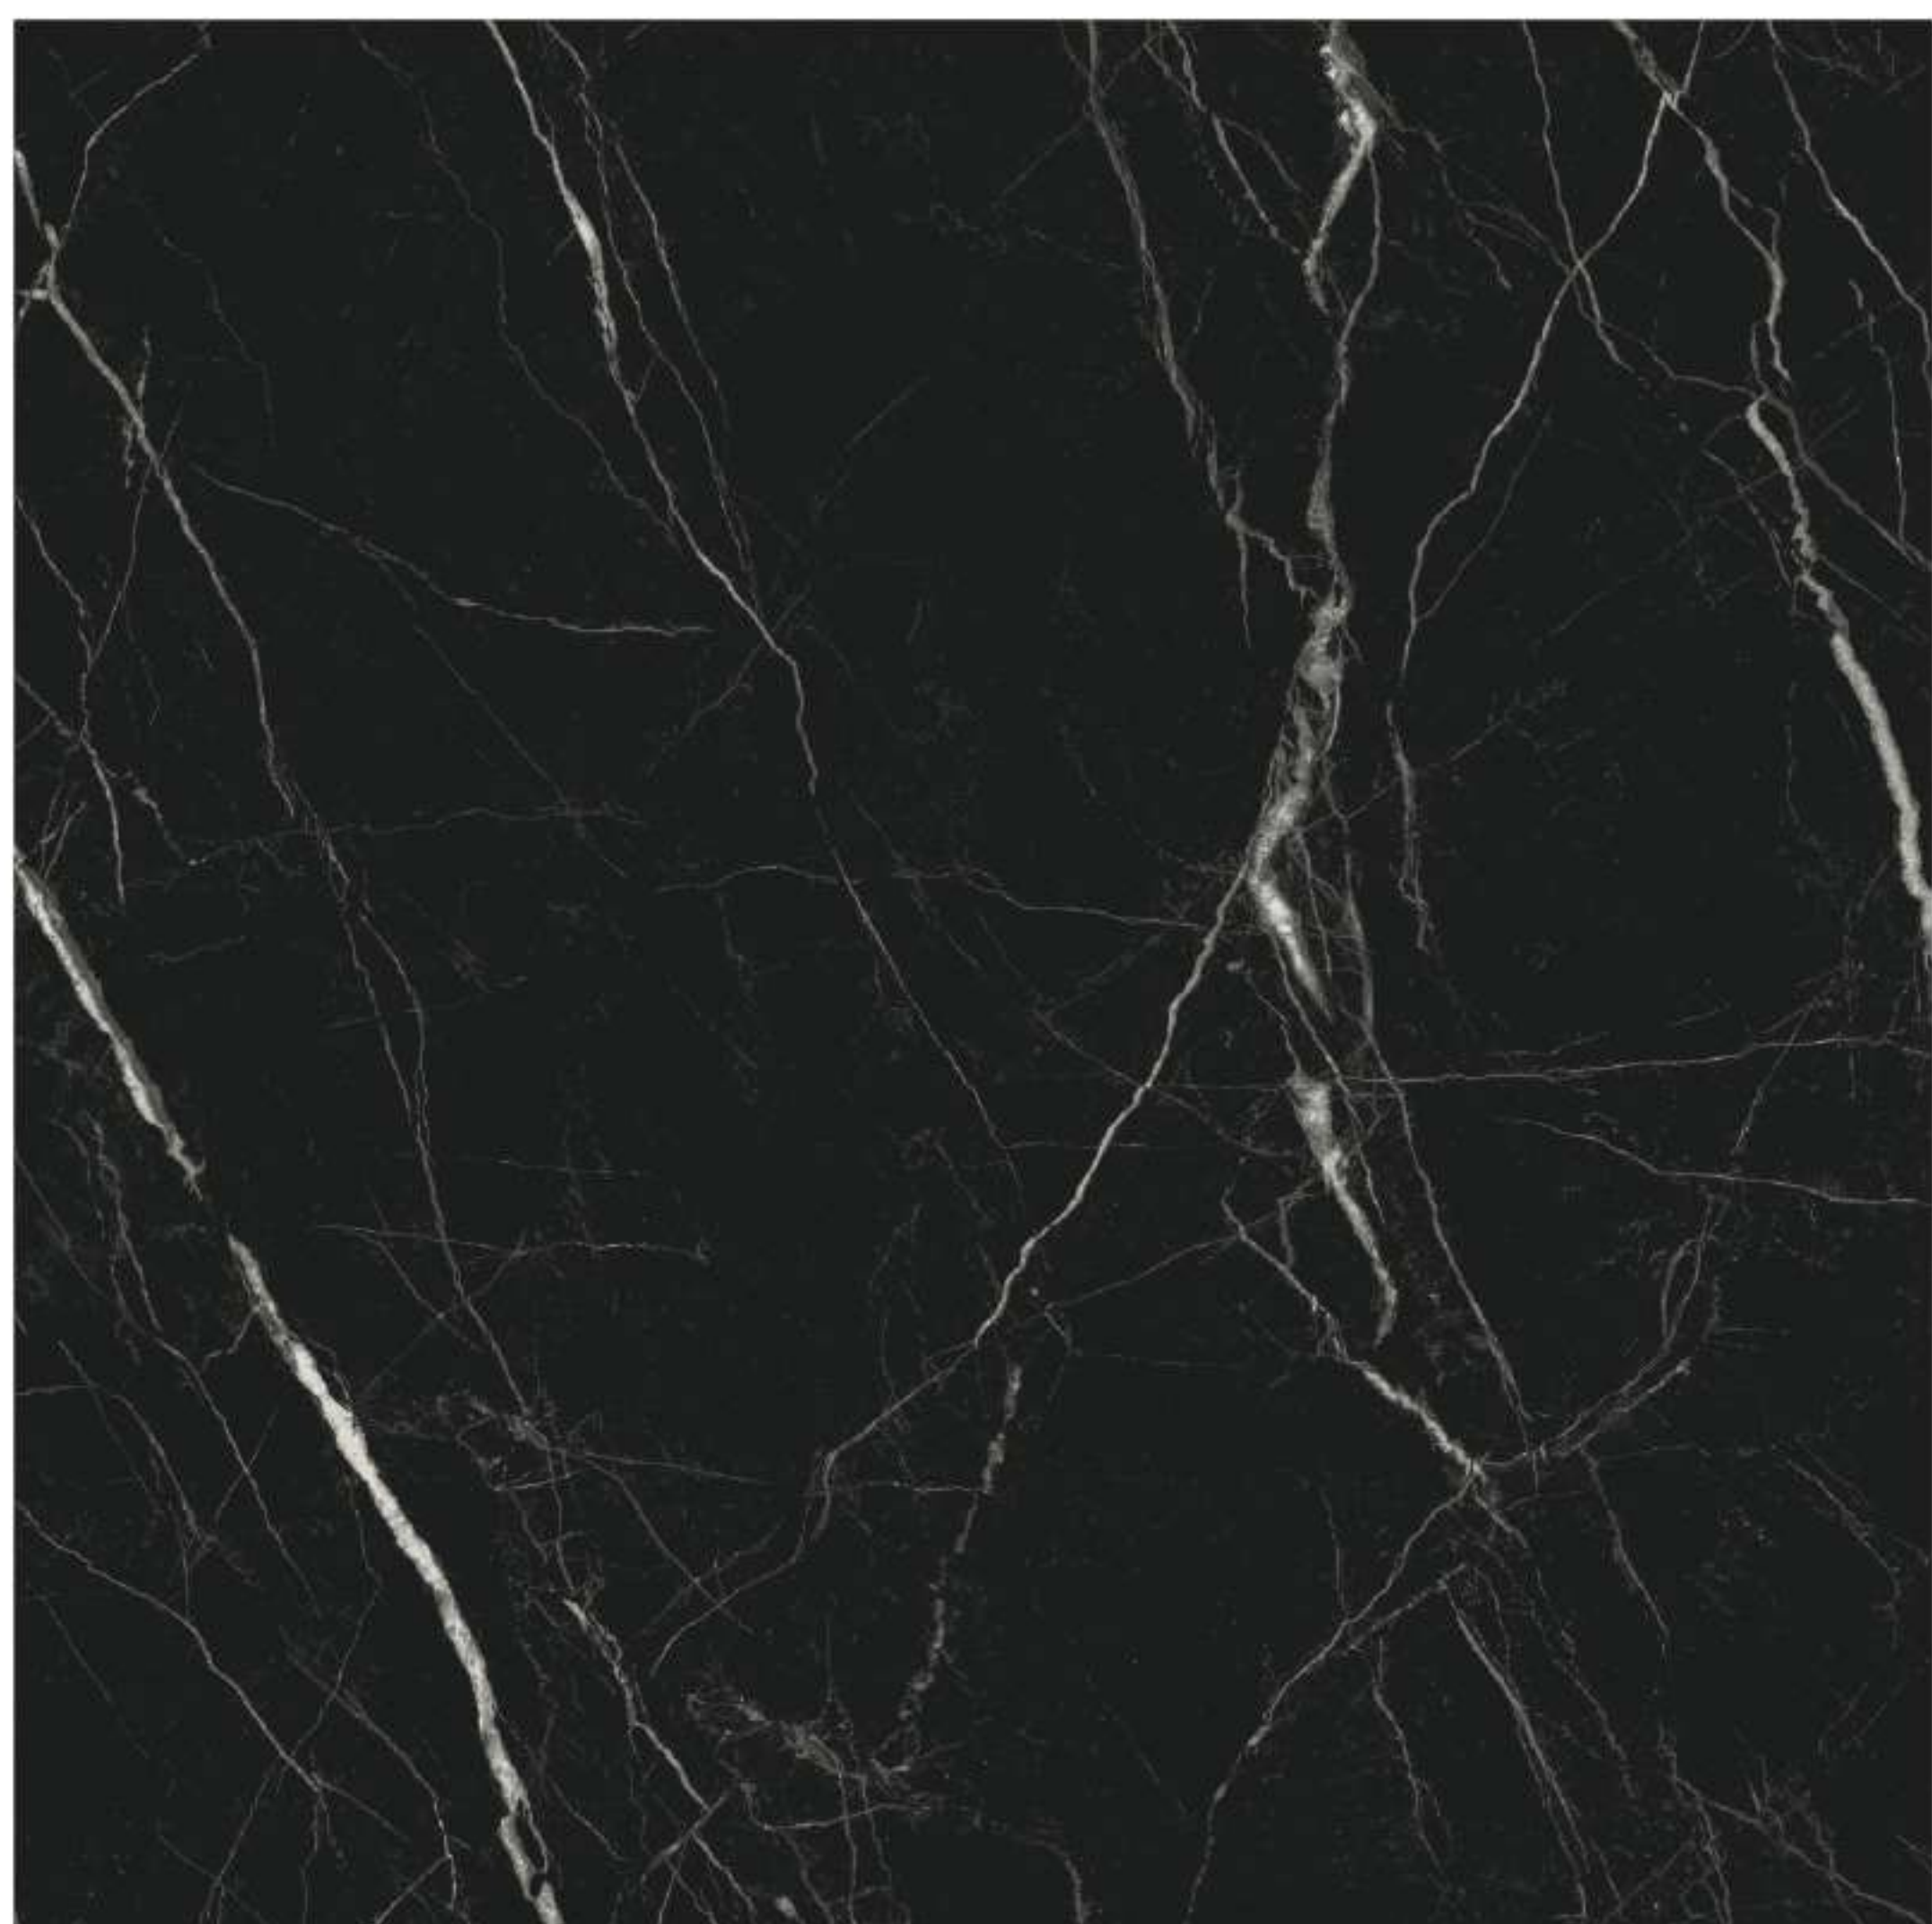

808 BOTTICINO DARK



ST-808
305 X 600 X 5 mm



ST-808-XL
305 X 1220 X 5 mm



STONE

New Generation Flooring

WEARLAYER : 0,5 mm

UNDERLAY[IXPE] : 1 mm

TOTAL THICKNESS: 5 mm

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	305 X 600	MICRO BEVEL	PITTED/CORALLINE	UNICLIC PLANK
STONE	Package(m ²)	Palette (m ²)	Warranty(Year)	
	9 Pieces = 1,647 m² = 13,835 kg	66 Package = 108,702 m² = 933,097 kg	Residential	Commercial
			20	7

DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
	305 X 1220	MICRO BEVEL	PITTED/CORALLINE	UNICLIC PLANK
STONE XL	Package(m ²)	Palette (m ²)	Warranty(Year)	
	6 Pieces = 2,233 m² = 18,754 kg	48 Package = 107,165 m² = 920,184 kg	Residential	Commercial
			20	7

WALL PANEL XL

New Generation Flooring
www.areafloors.com.tr



Elegance Meets Walls.

WALL PANEL XL

Area Floors unique Wall Panel XL collection seamlessly combines aesthetics and durability. Specifically designed for kitchens, bathrooms, and every living space, our ultra-matte panels add warmth and elegance with a variety of design options. These customizable and diverse panels allow you to freely express your design preferences. Let your walls not only define boundaries but also redefine the spirit of your space. Allow your walls to become a work of art with Area Floors.

COLLECTION OVERVIEW



Pet Friendly



Antibacterial



Sound Absorbent



Wear Resistance



Ultra Matte Surface



Moisture Resistance



2800 mm

965 mm

WALL PANEL XL

Wear Layer 0,15 mm

Surface Pitted/Coralline

Total Thickness 3 mm


Edge No

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Flim Layer

SPC Rigid Core

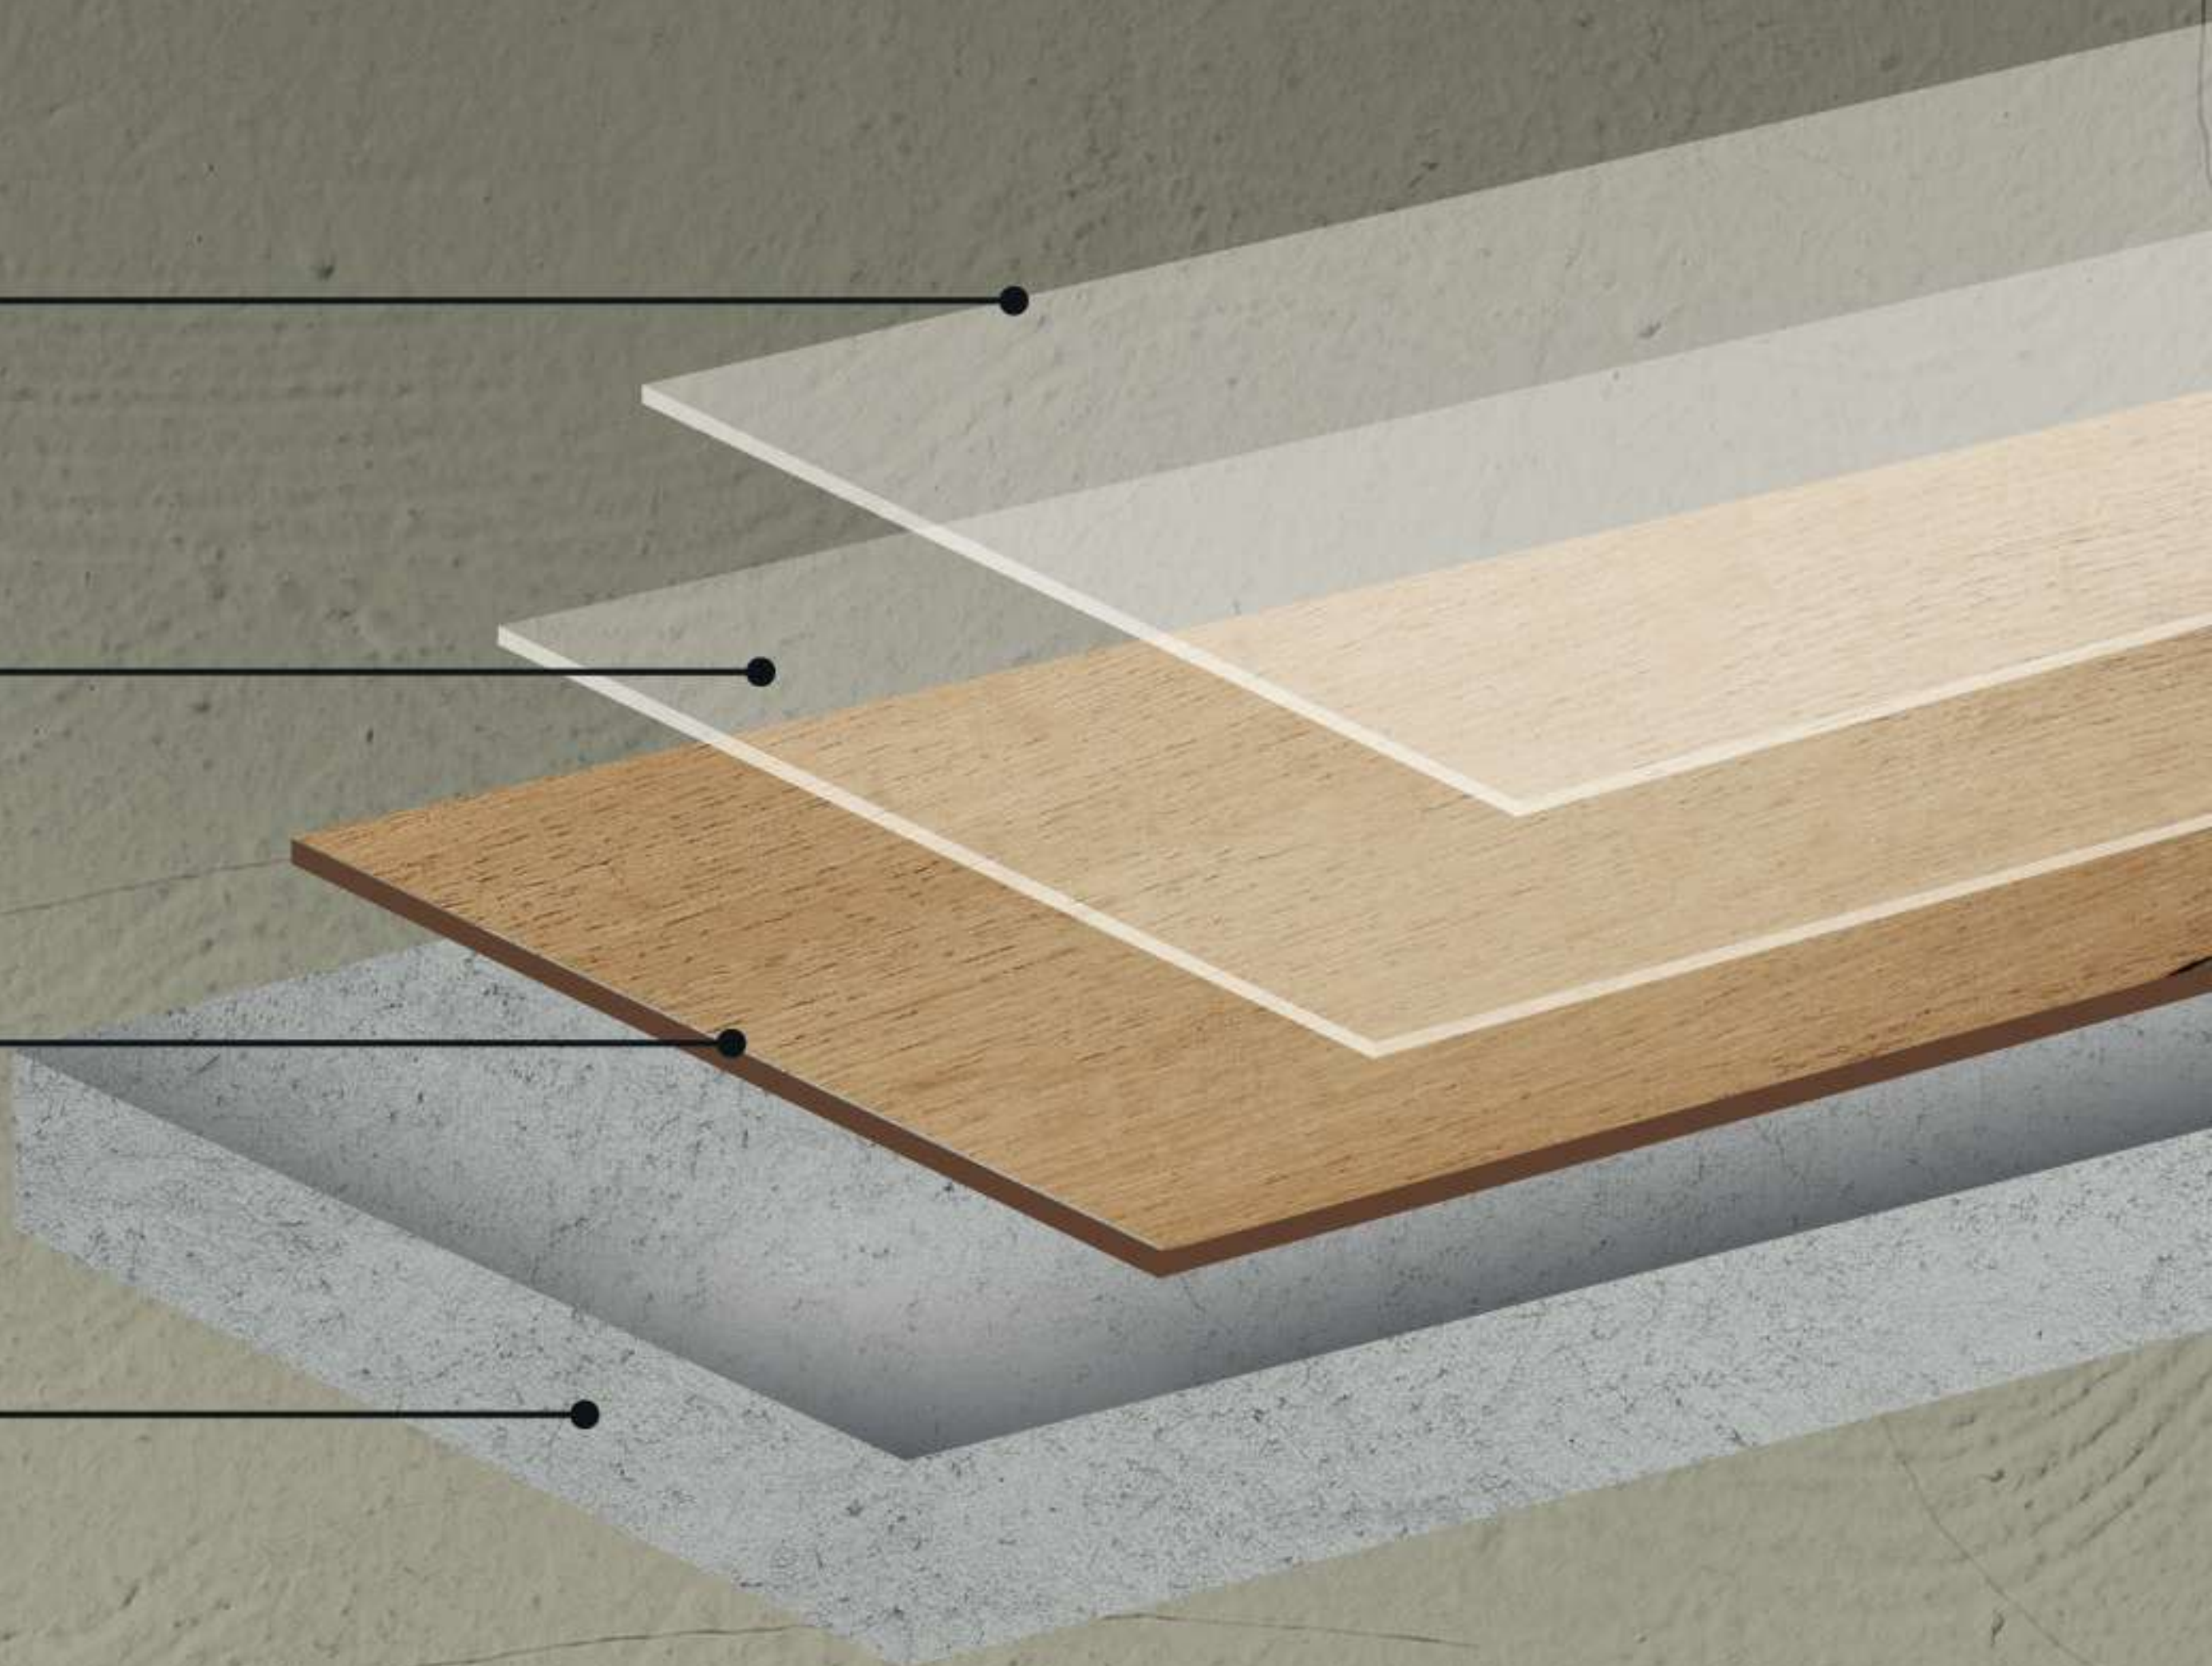

We drew inspiration from nature
for our wall panels, combining
durability and elegance.

WALL PANEL XL
New Generation Flooring

WEARLAYER : 0,15 mm
UNDERLAY(IXPE) : No
TOTAL THICKNESS: 3 mm

DECOR

DIMENSIONS

EDGE

SURFACE

CLICK

965 X 2800

NO


PITTED/CORALLINE

NO

Piece (m²)

Palette (m²)

Warranty(Year)

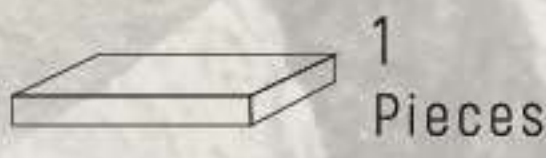

1 Pieces



60 Package

Residential

Commercial

7

3

LONG

= 2,702 m²
= 17,293 kg

= 162.120 m²
= 1057,568 kg



CONCRETE LIGHT WP-801-L

CONCRETE SAND WP-802-L

CONCRETE GREY WP-803-L

CONCRETE DARK WP-804-L

100% WATERPROOF SPC FLOORING

3 mm

WALL PANEL XL

WALL PANEL XL

120


WALL PANEL COLLECTION




CARRARA MARMOR WP-805-L



BOTTICINO LIGHT WP-806-L

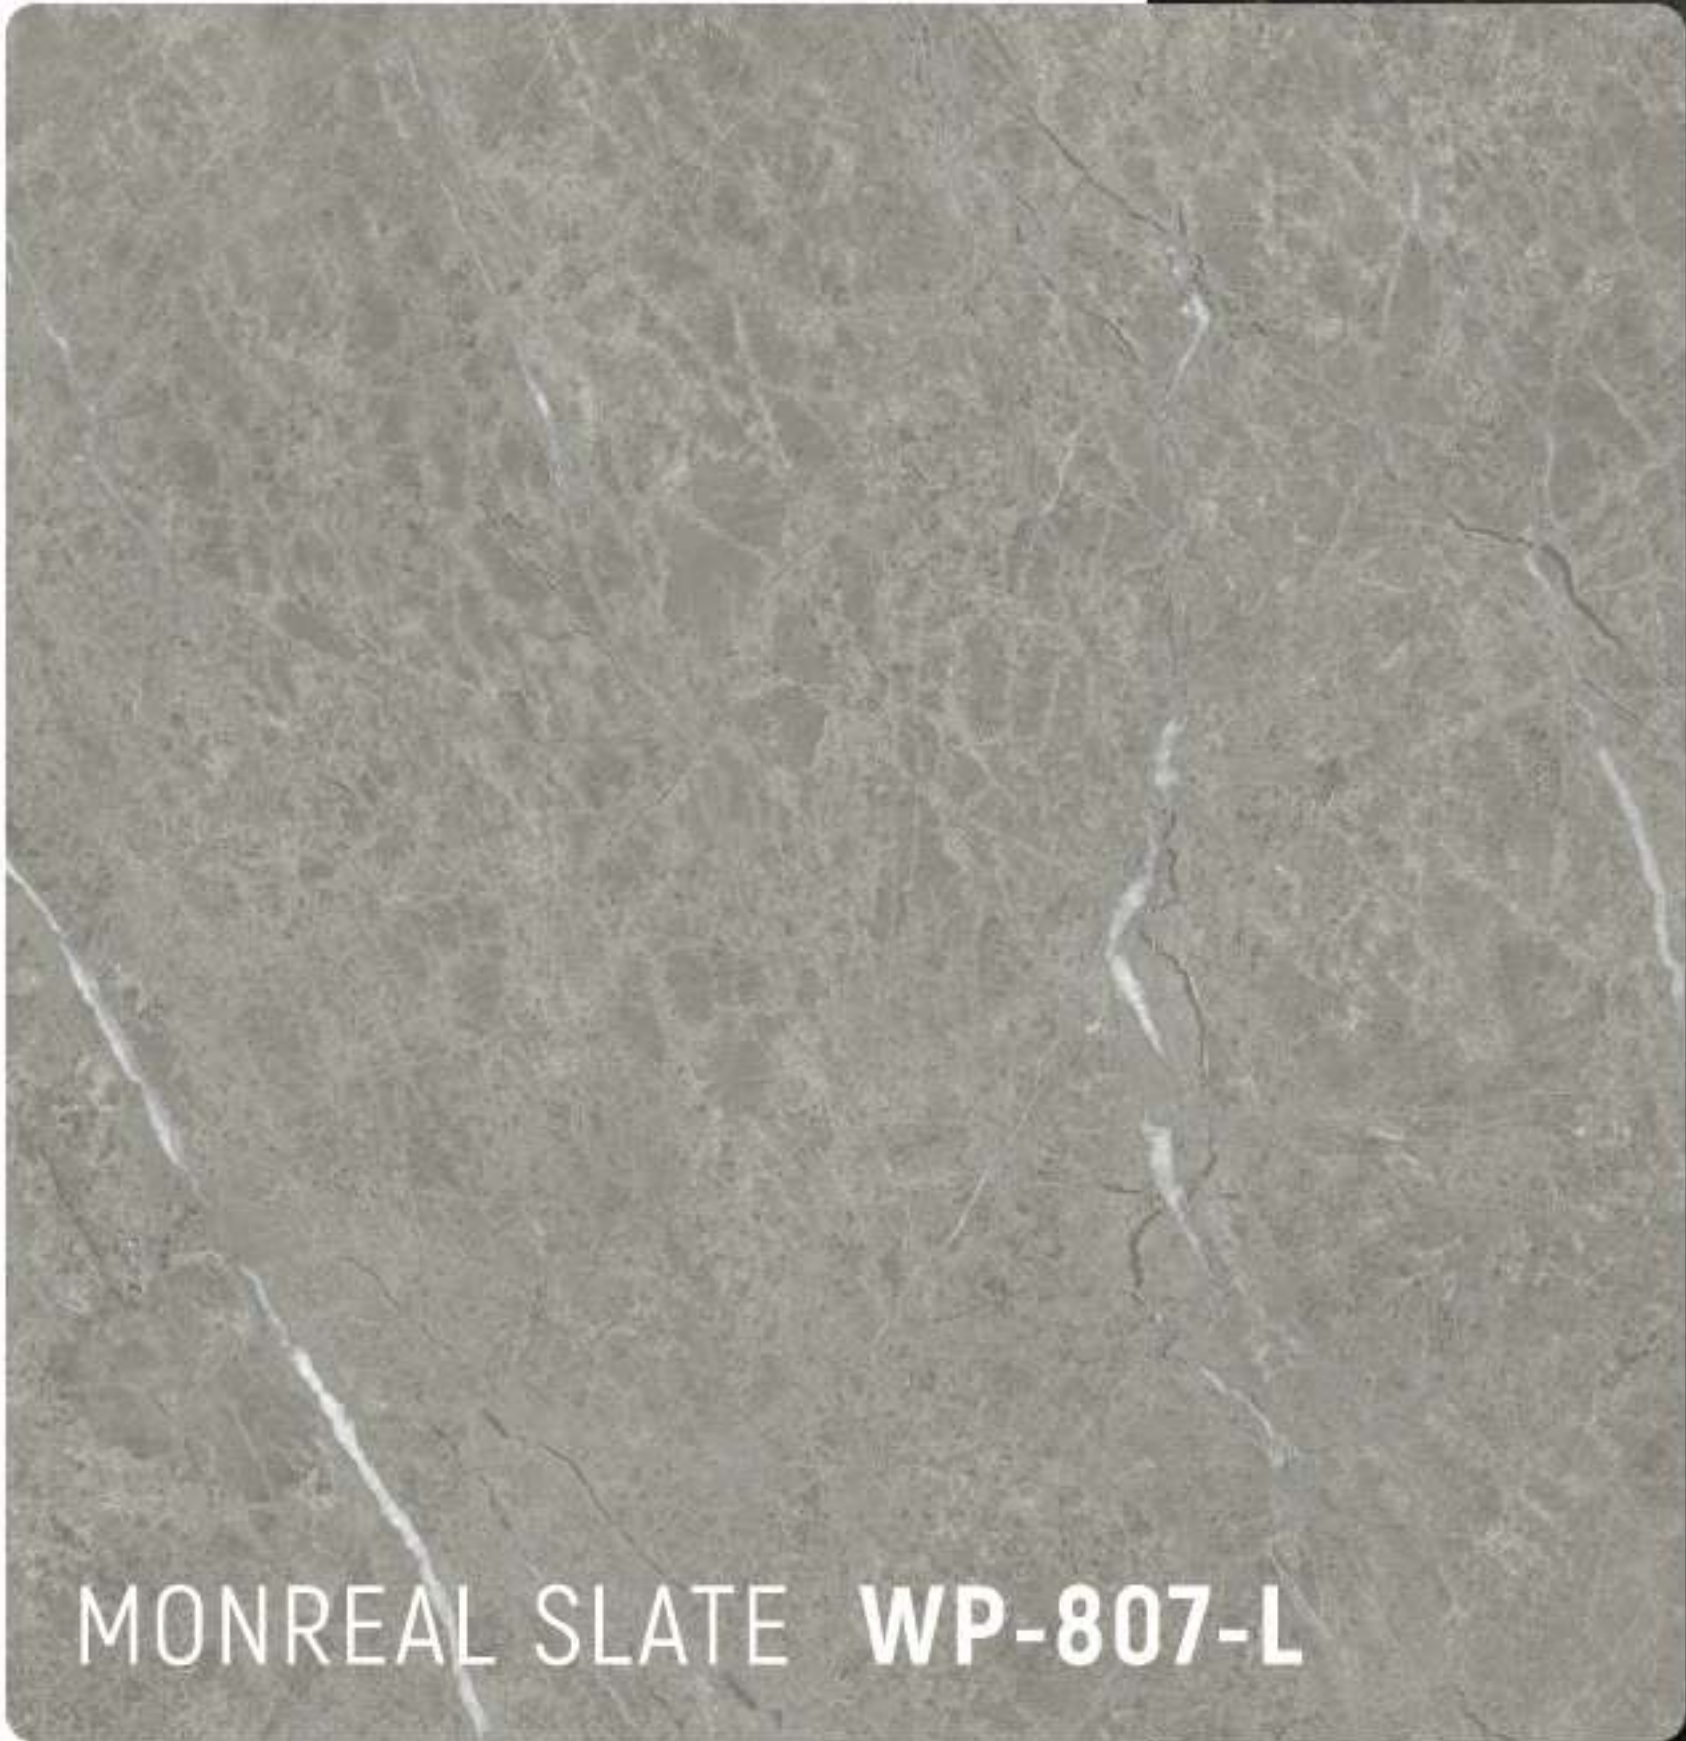

MONREAL SLATE WP-807-L

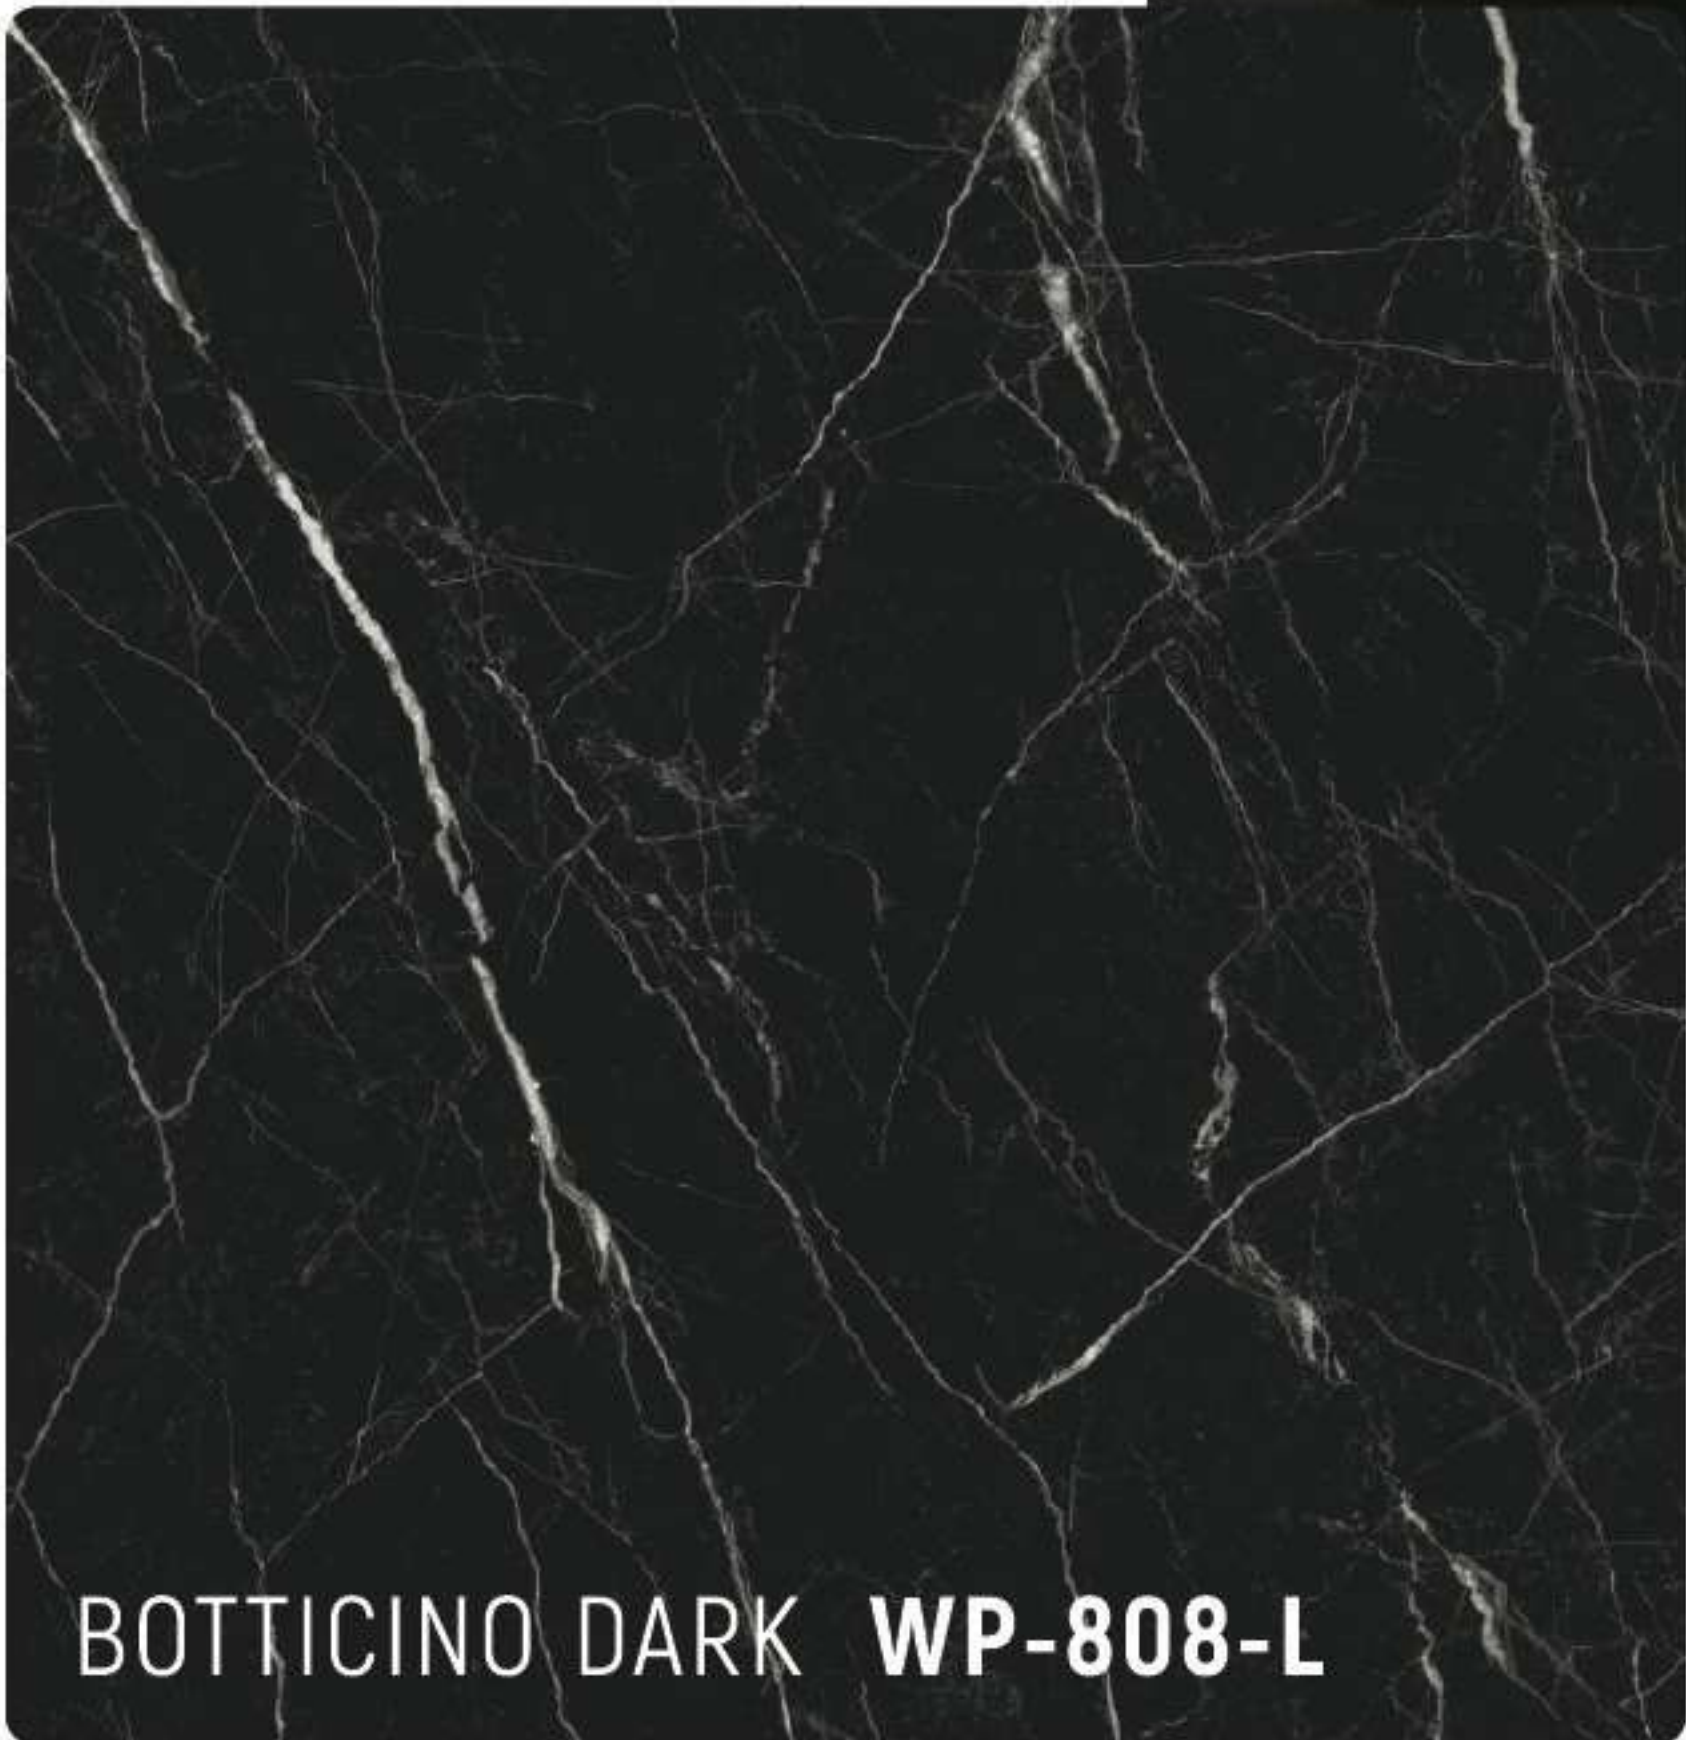

BOTTICINO DARK WP-808-L

100% WATERPROOF SPC FLOORING



3 mm

WALL TILES

New Generation Flooring
www.areafloors.com.tr



A Durable, Stylish, and Long-Lasting Cladding Solution

WALL TILES

Tiles are next-generation cladding products that combine aesthetic appeal with superior durability in modern living spaces. Thanks to their stone-plastic composite structure, they offer high resistance to moisture, water, and impact, making them ideal for high-traffic areas such as bathrooms, kitchens, and corridors. While their solid construction maintains its form for many years, their timeless design approach adds a strong and characterful touch to wall surfaces.

COLLECTION OVERVIEW



Pet Friendly



Antibacterial



Sound Absorbent



Wear Resistance



Ultra Matte Surface



Moisture Resistance



305 mm

600 mm

WALL TILES

Wear Layer

0,50 mm

Surface

Pitted/Coralline

Total Thickness

4 mm

Edge


Micro Bevel

ULTRA MATT
UV Coating Layer

Wear Layer

Decor Flim Layer

SPC Rigid Core

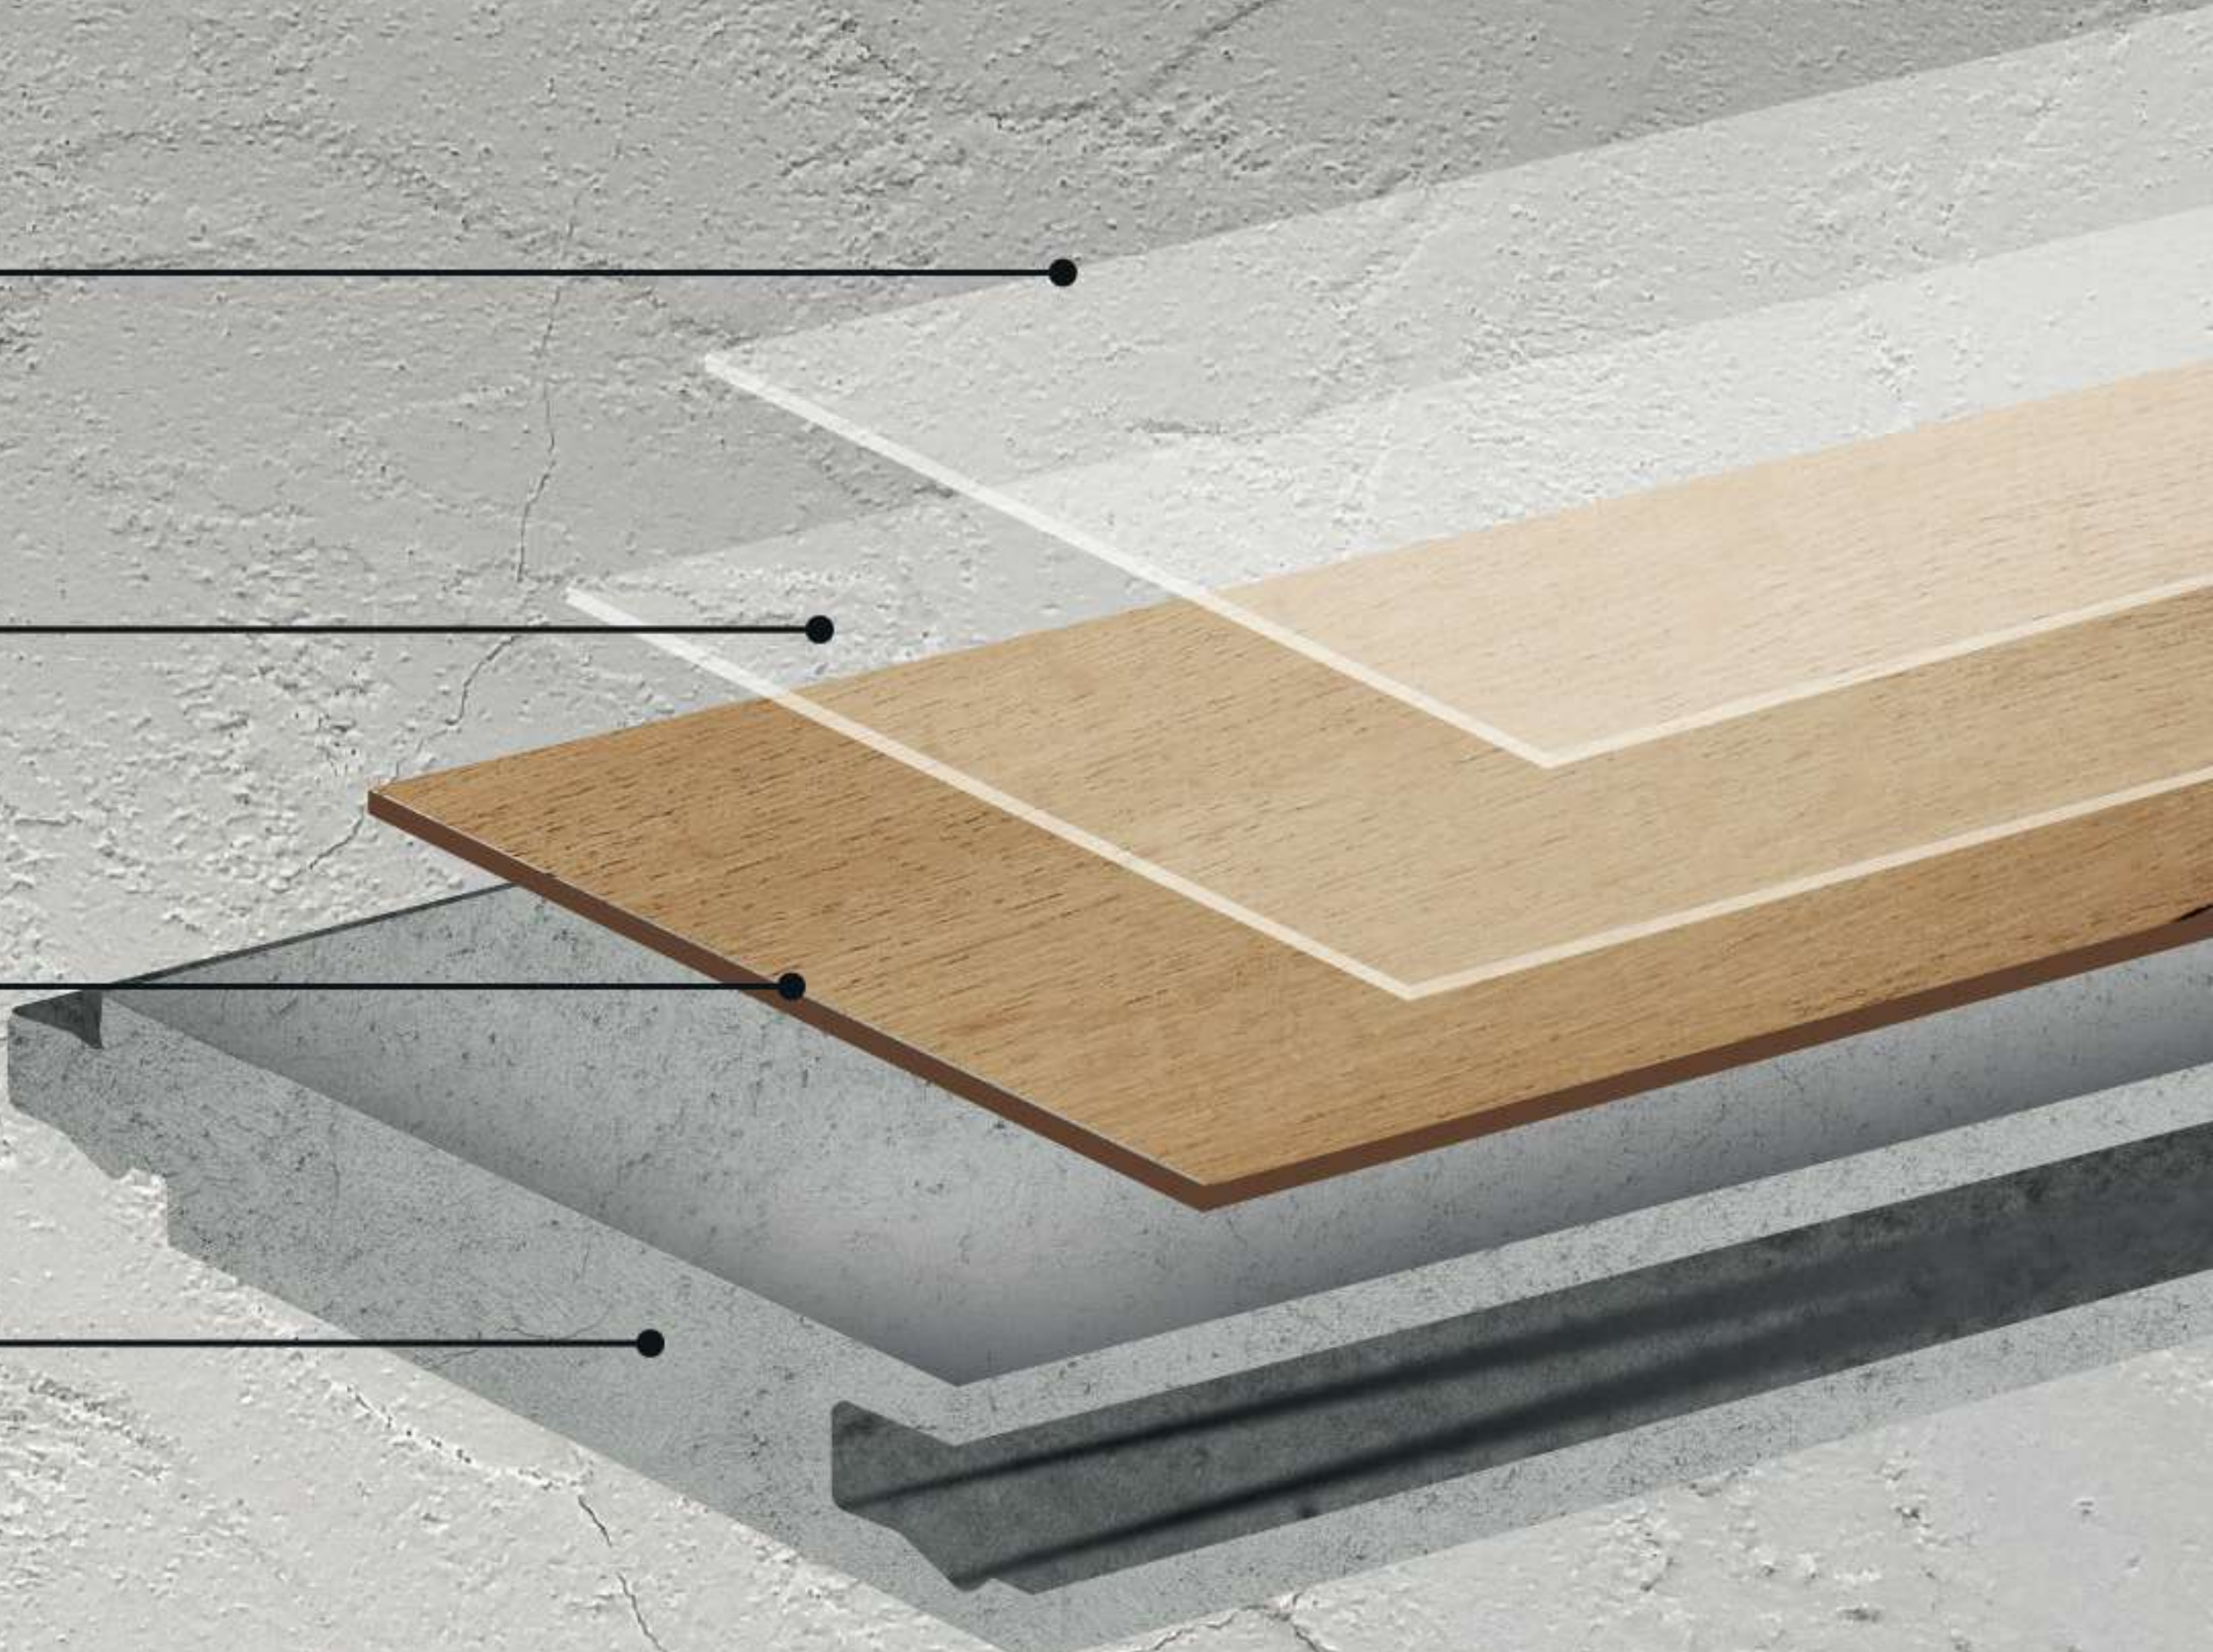

Aesthetic Appearance
in Modern
Living Spaces

WALL TILES

New Generation Flooring

WEARLAYER : 0,50 mm
UNDERLAY(IXPE) : No
TOTAL THICKNESS : 4 mm

DECOR

DIMENSIONS

EDGE

SURFACE

CLICK

305 X 600

MICRO BEVEL


PITTED/CORALLINE

T&G



STONE

Piece (m²)



11
Pieces

= 2.013 m²
= 16,909 kg

Palette (m2)



54
Package

= 108,702 m²
= 933,097 kg

Warranty(Year)

Residential
10

Commercial
4

CONCRETE LIGHT WT-801

CONCRETE SAND WT-802

CONCRETE GREY WT-803

CONCRETE DARK WT-804



100% WATERPROOF SPC FLOORING



4 mm

125

WALL TILES COLLECTION

WALL TILES


WALL TILES

126


WALL TILES COLLECTION




CARRARA MARMOR WT-805

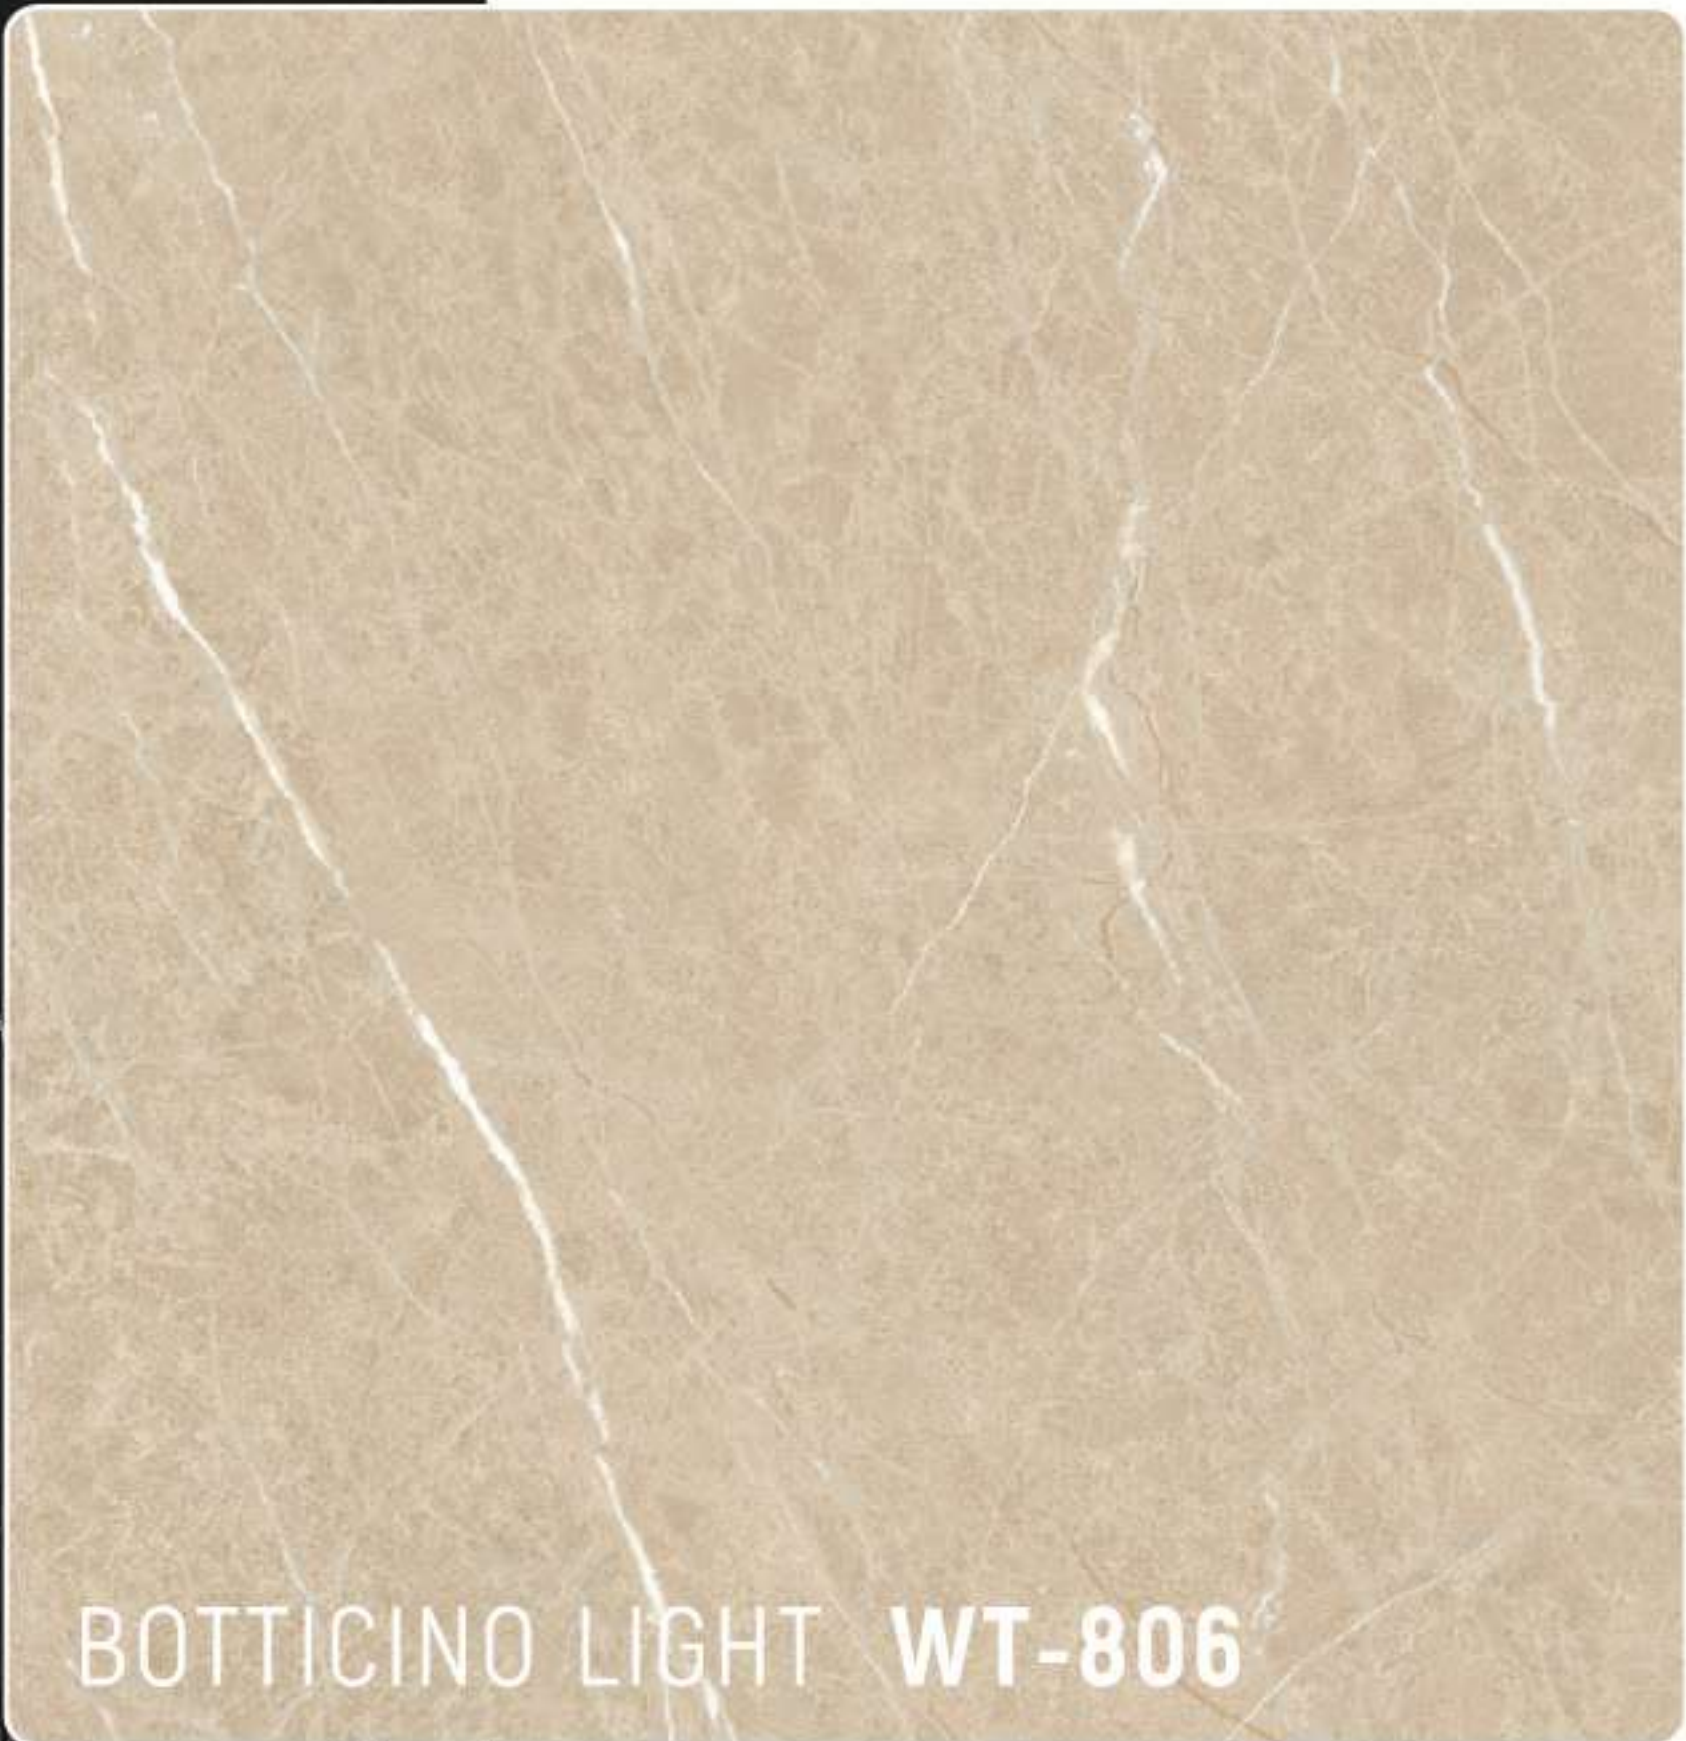

BOTTICINO LIGHT WT-806

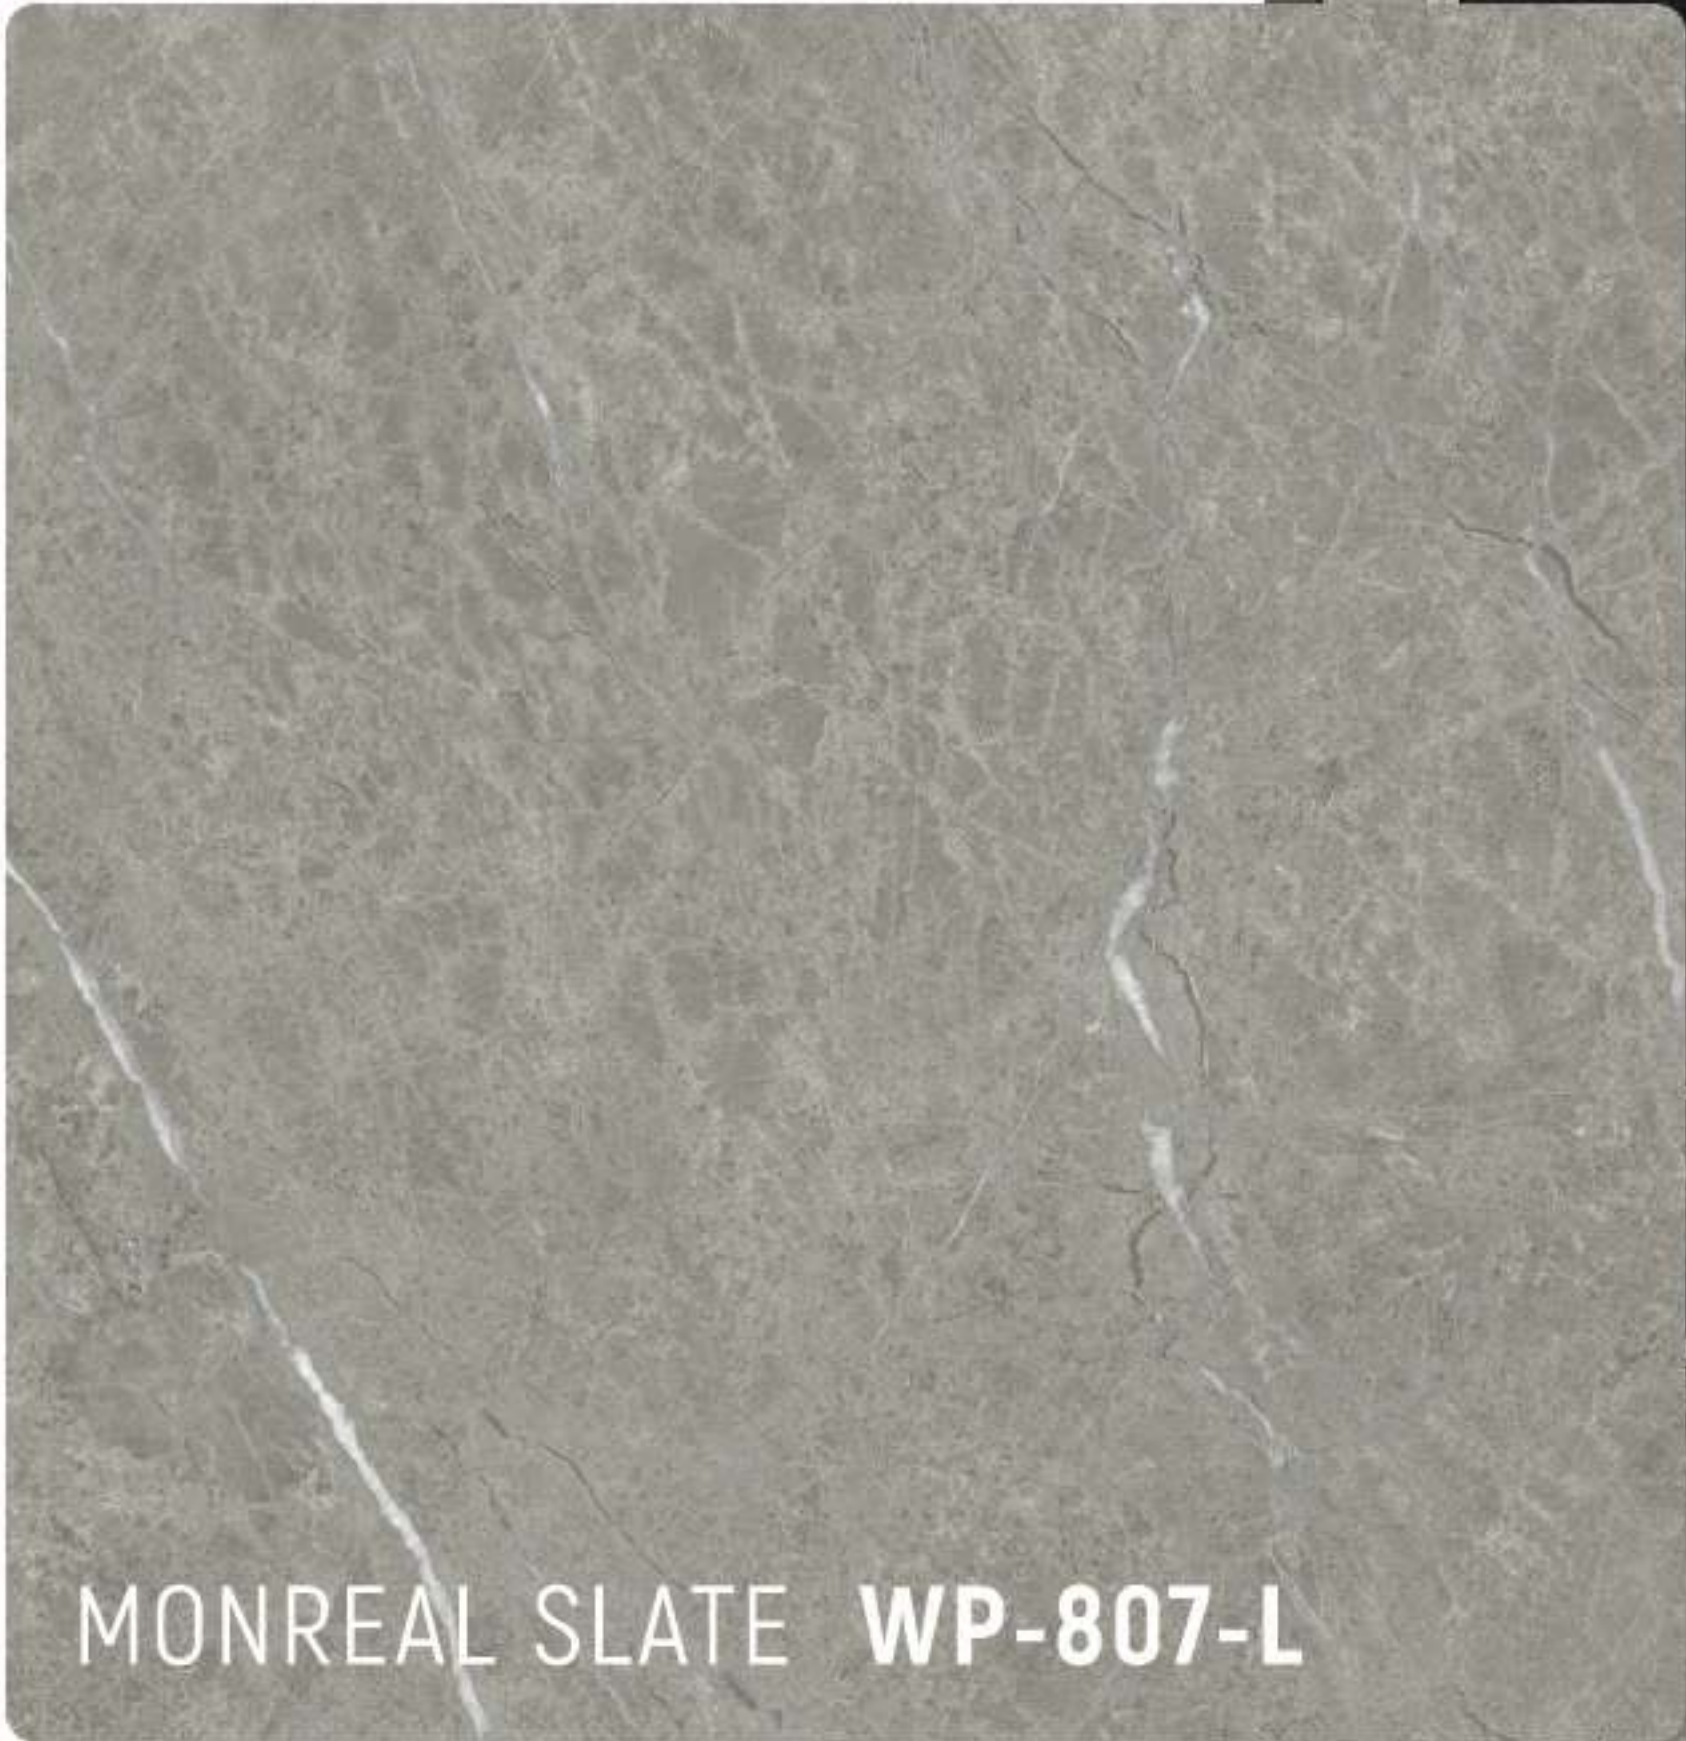

MONREAL SLATE WP-807-L

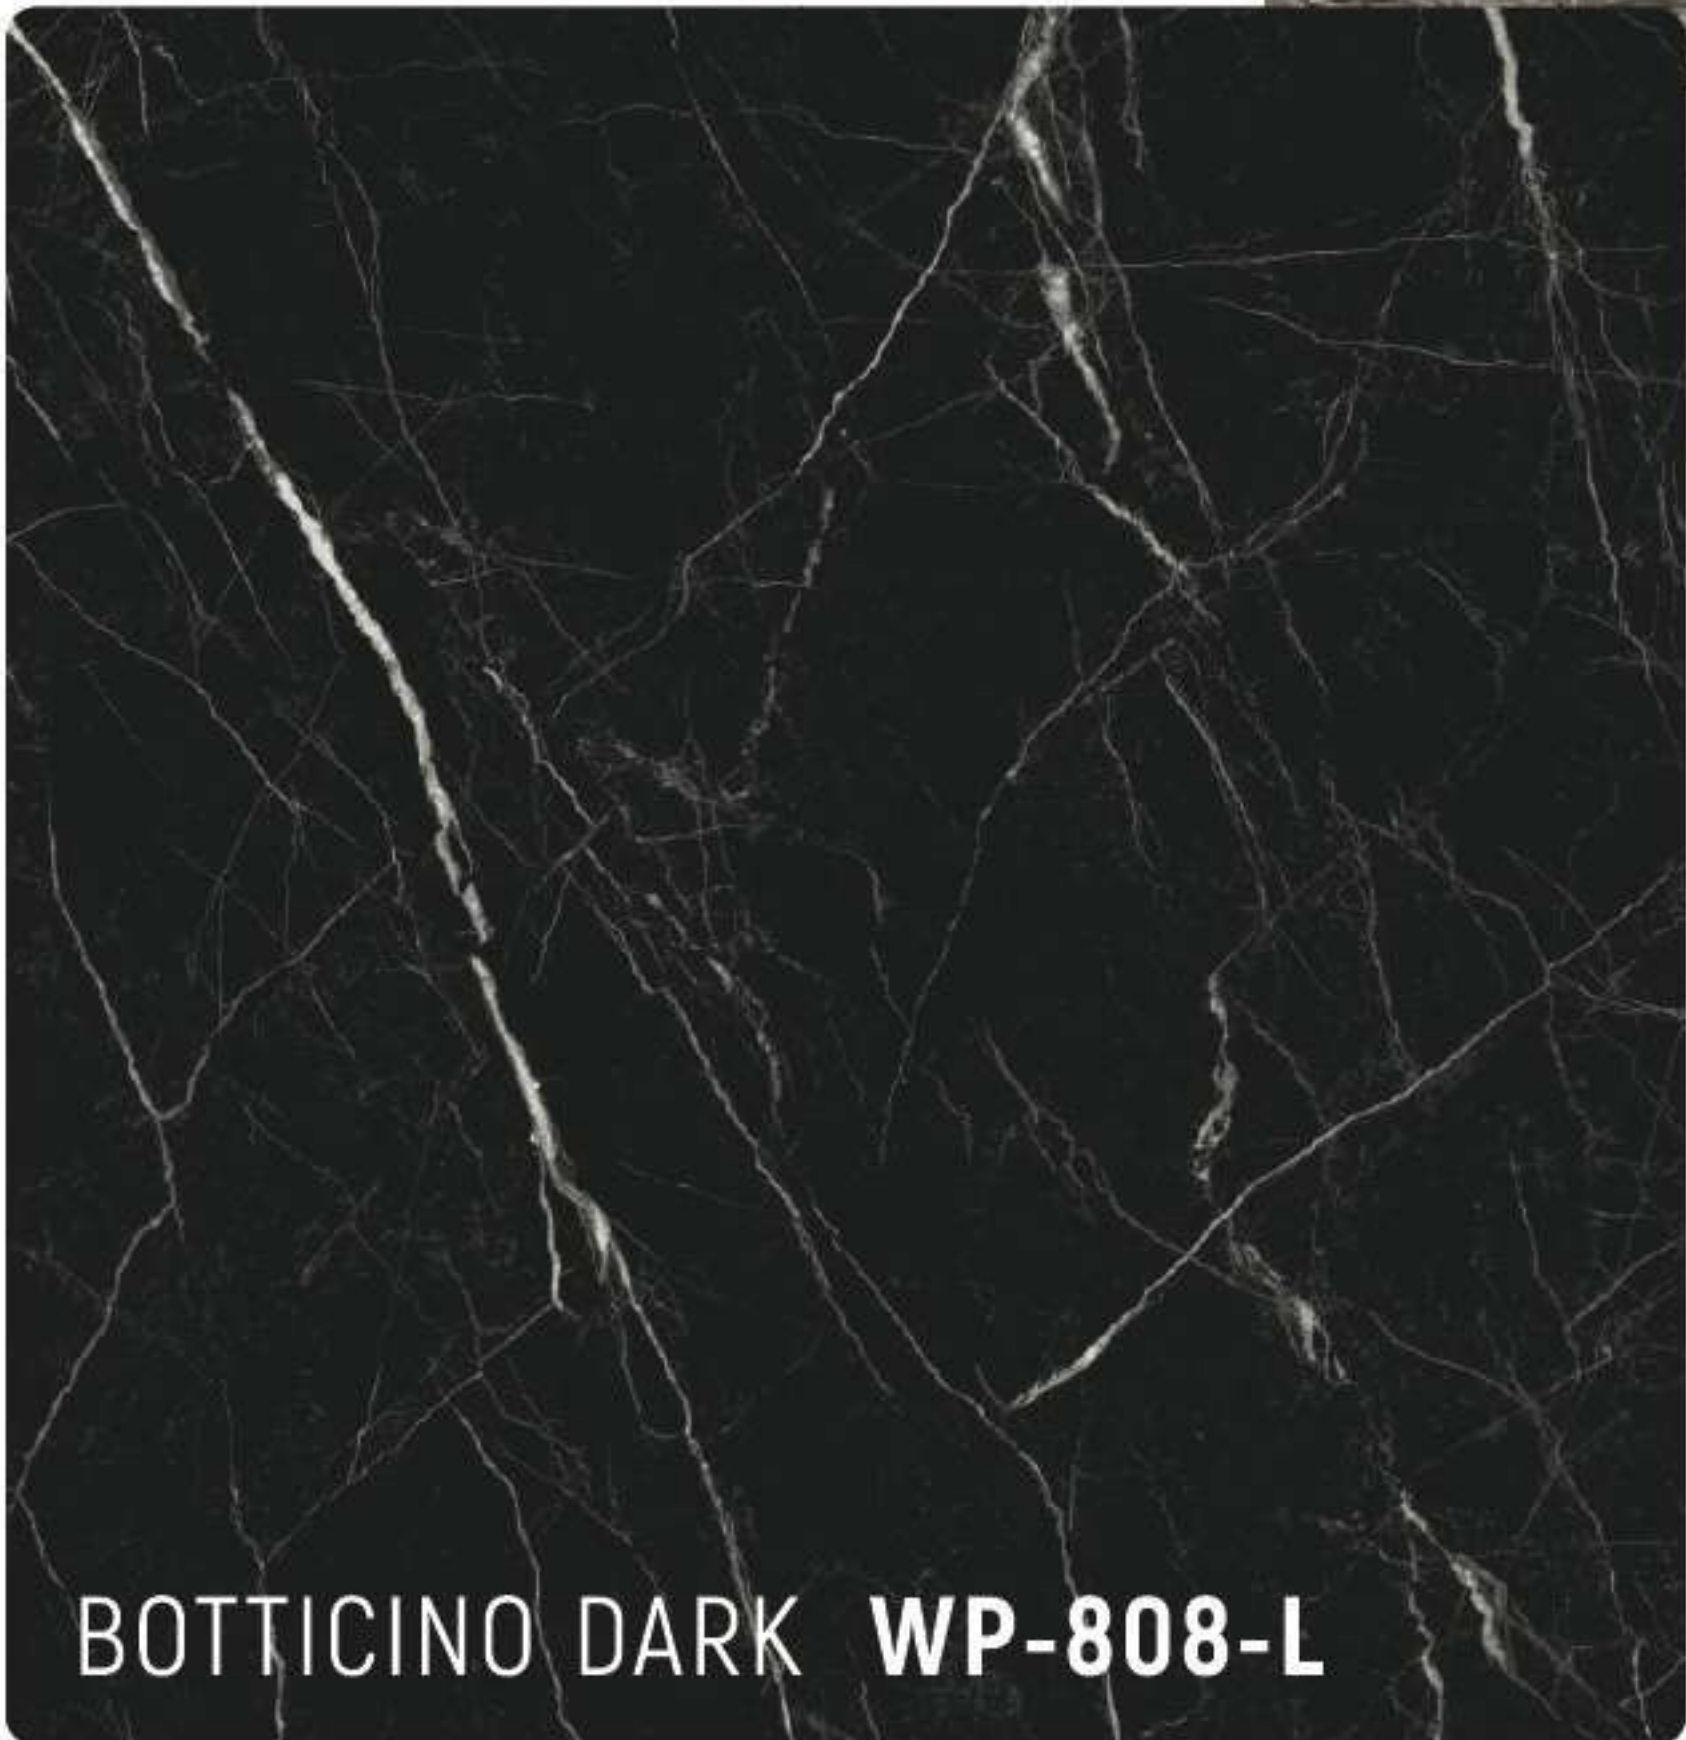

BOTTICINO DARK WP-808-L

100% WATERPROOF SPC FLOORING



4 mm


Installation guidelines angle-angle / angle-tap

HERRINGBONE INSTALLATION




Preparation Tools

WATCH THE
INSTALLATION
VIDEO

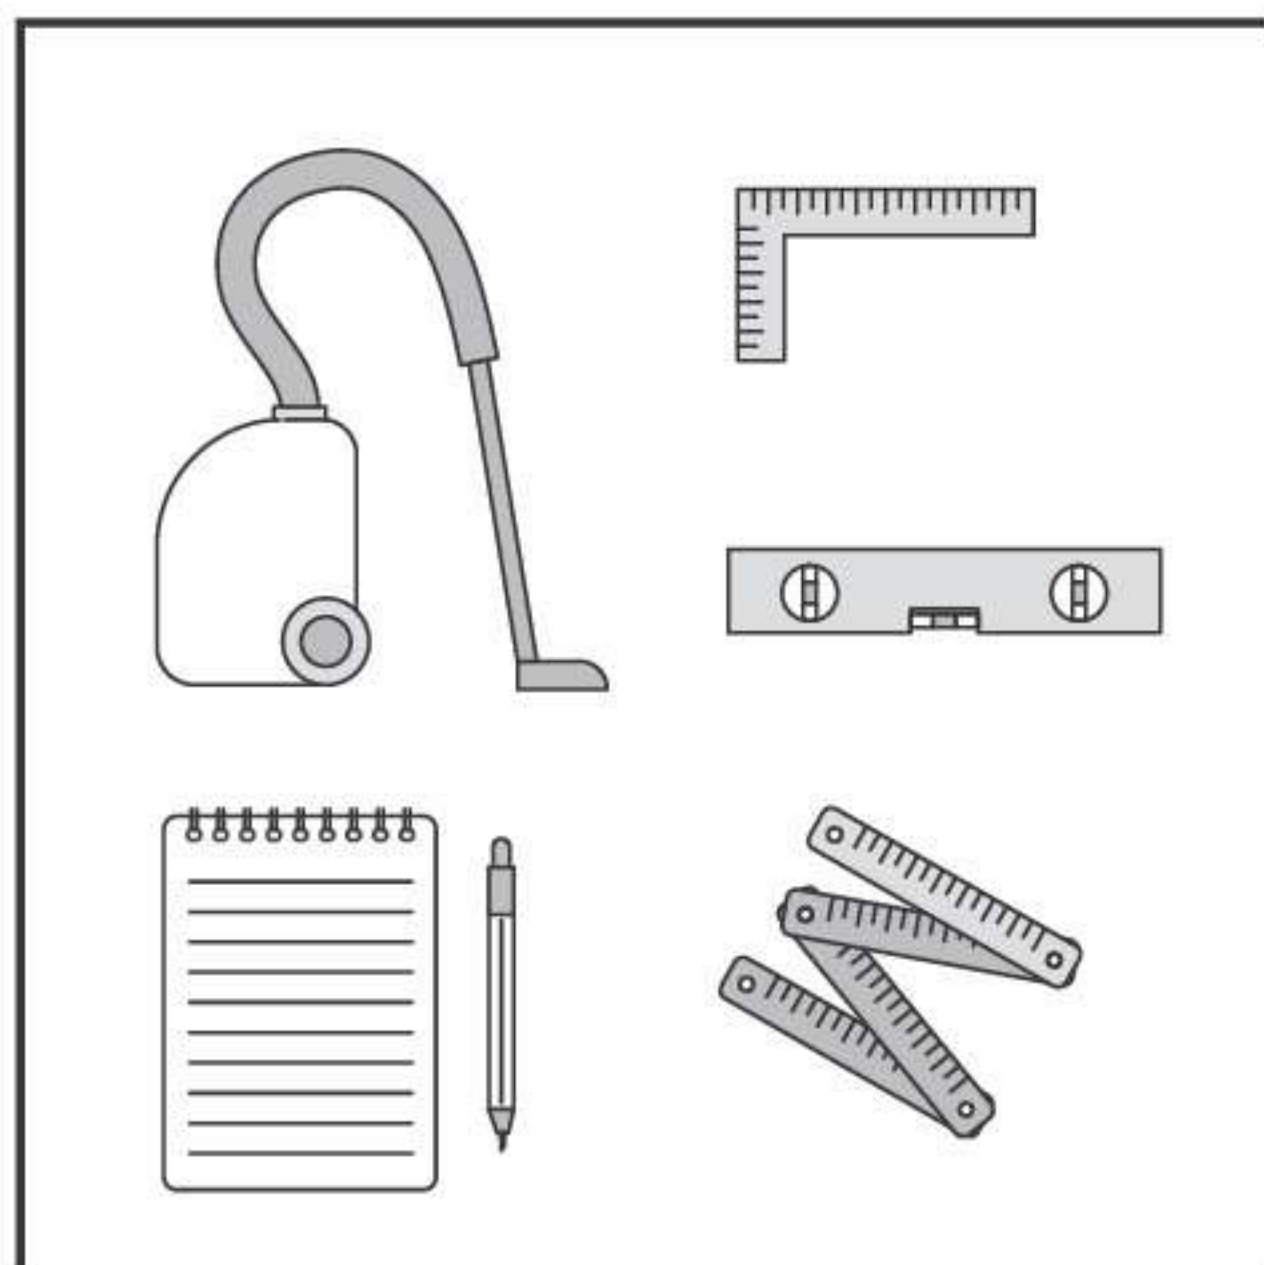

ROOM PREPARATION


- Pencil and notepad
- Tape measure / Folding rule
- Steel square / Bevel tool
- Level
- Vacuum

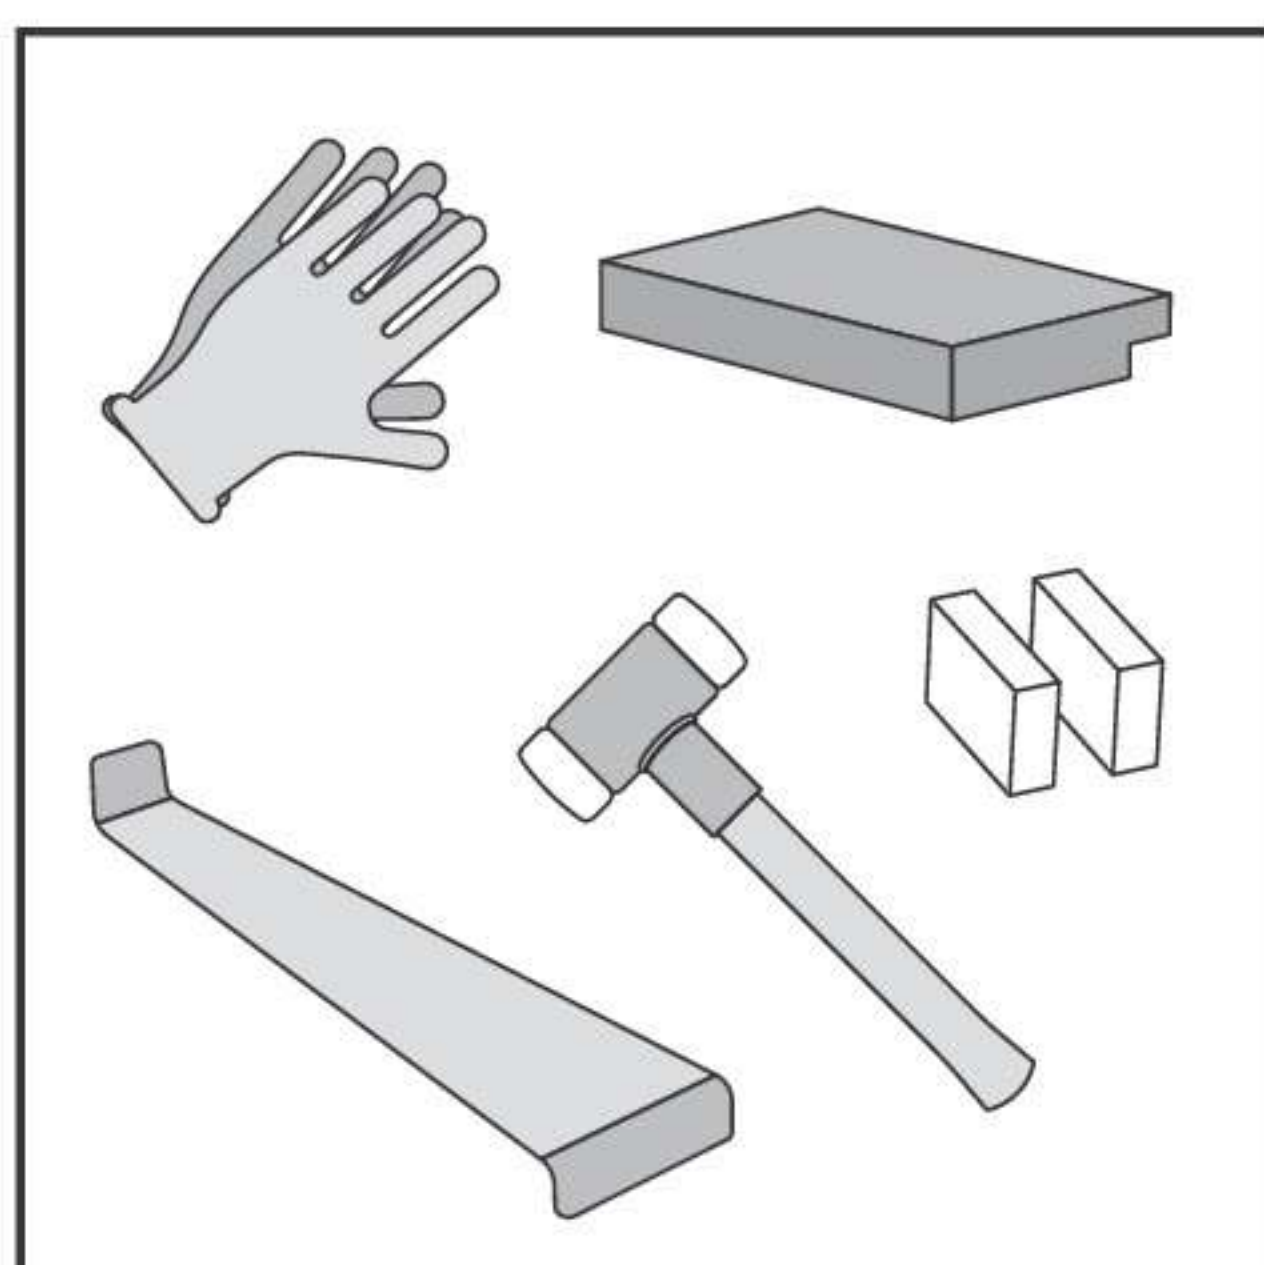

DURING INSTALLATION


- Hard mallet
- Tapping block for locking systems
- Pull bar
- Spacers
- Gloves

128

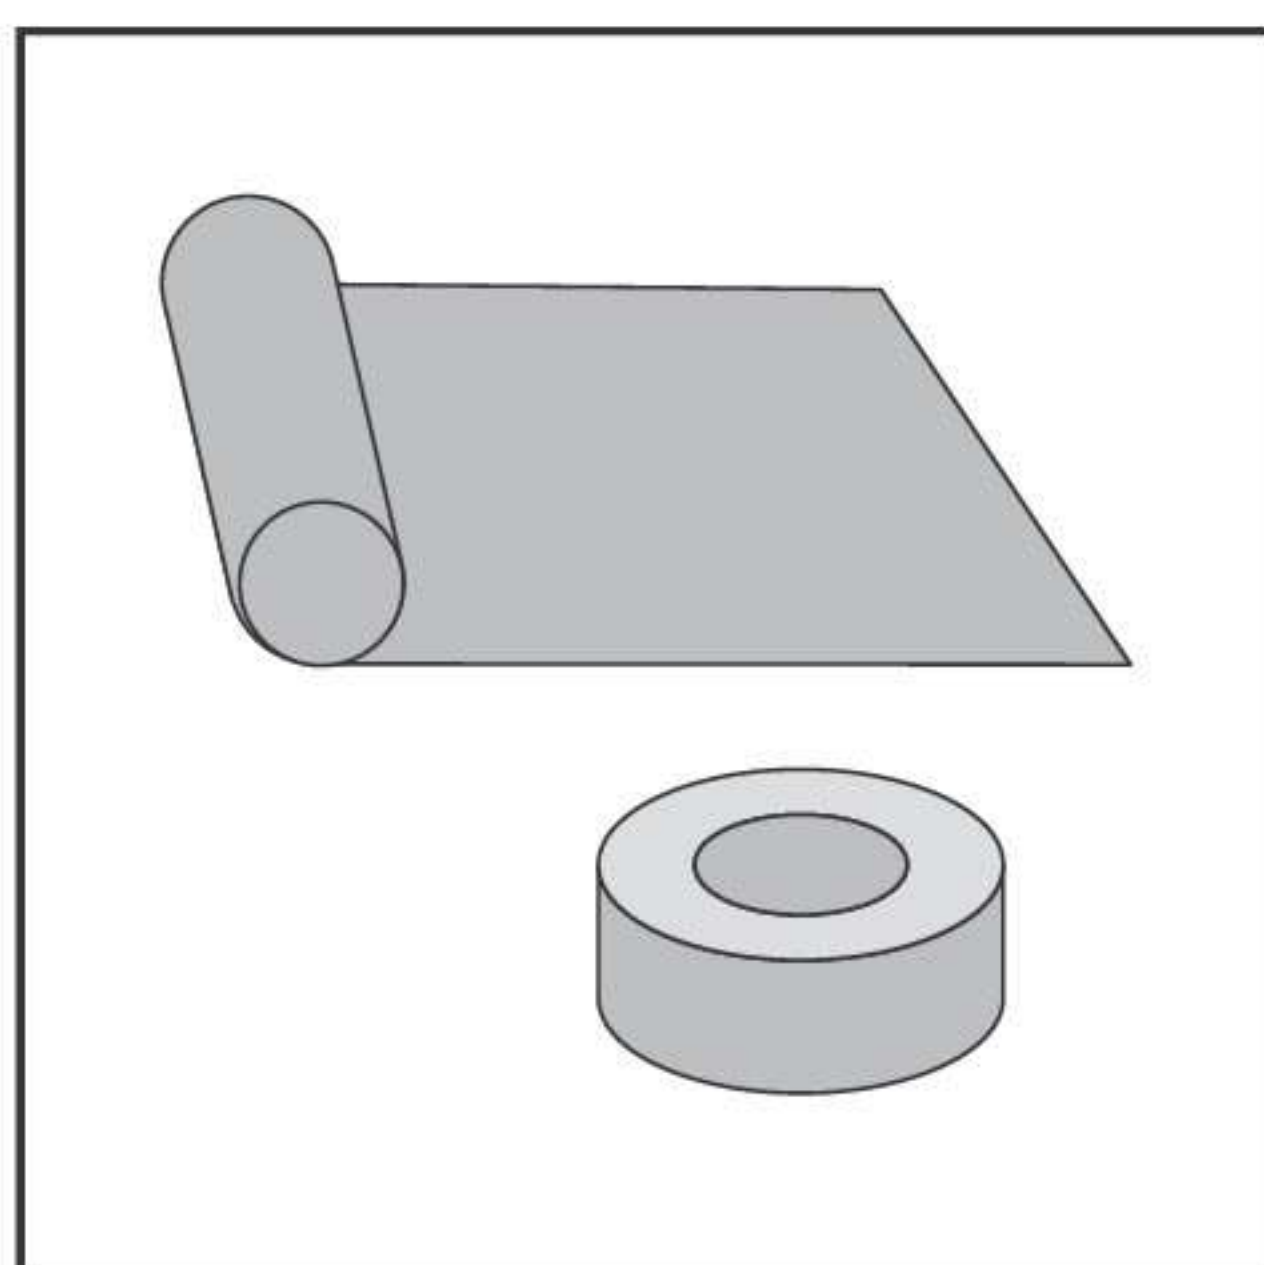


If the panels do not have a pad pre-attached:

- Underlay
- Tape (to fix your underlay)

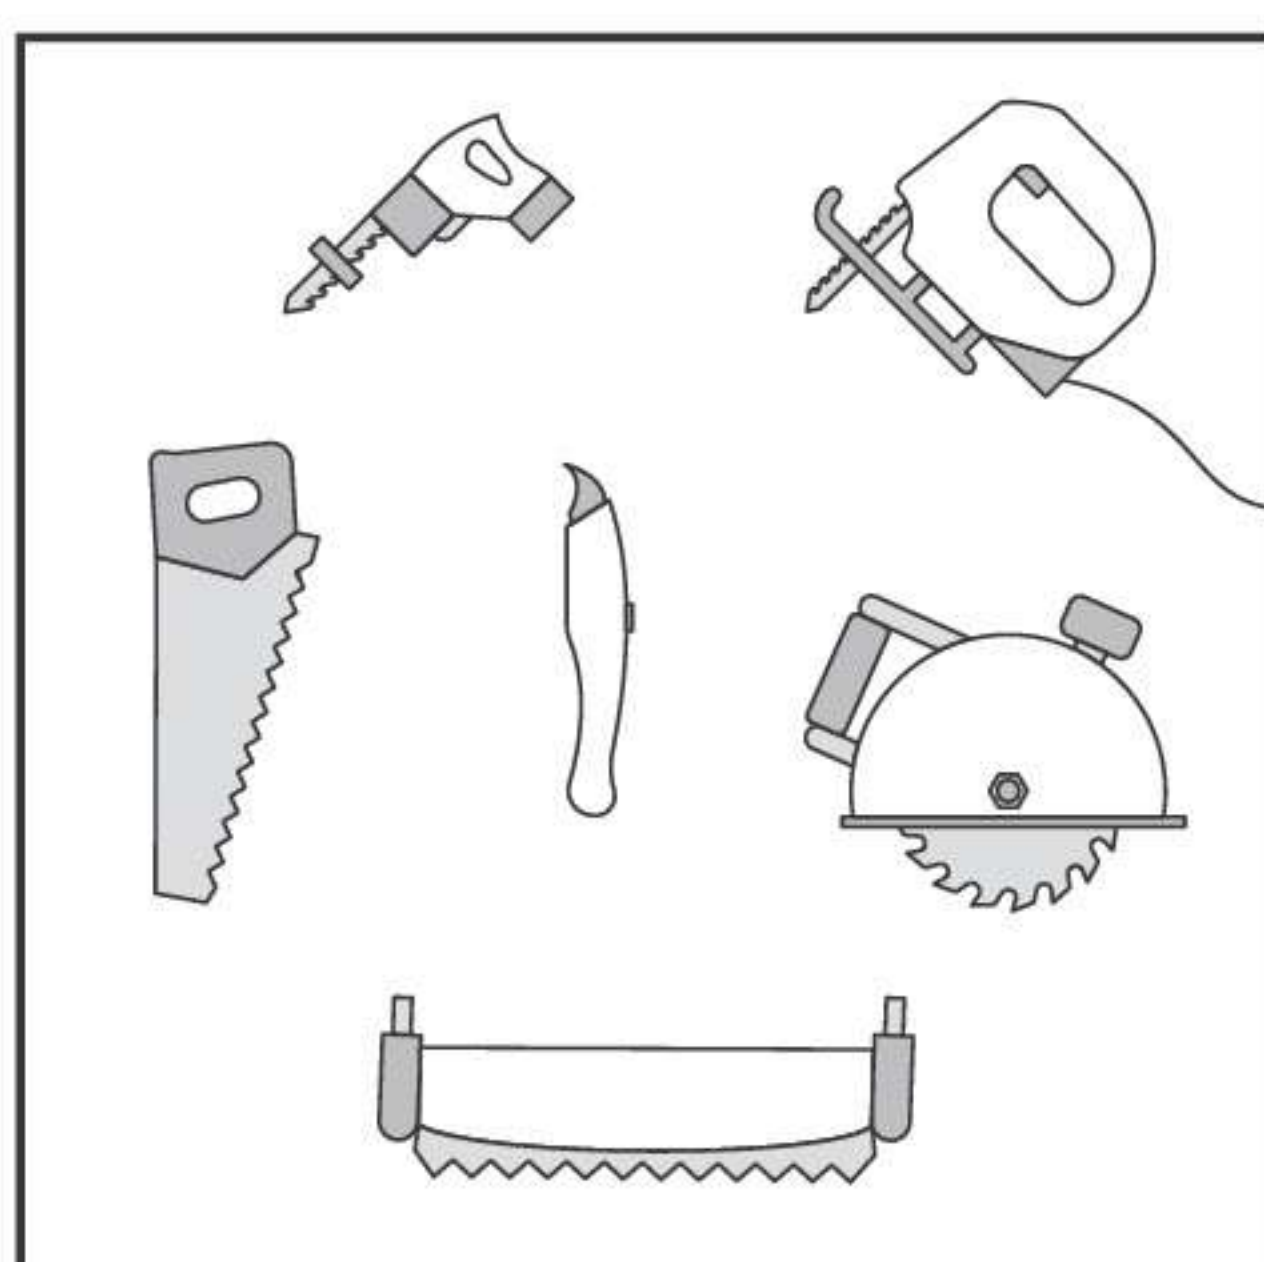

CUTTING THE PANELS

- Handsaw / jigsaw / crosscut saw / plunger saw / table saw
- Concave cutter knife

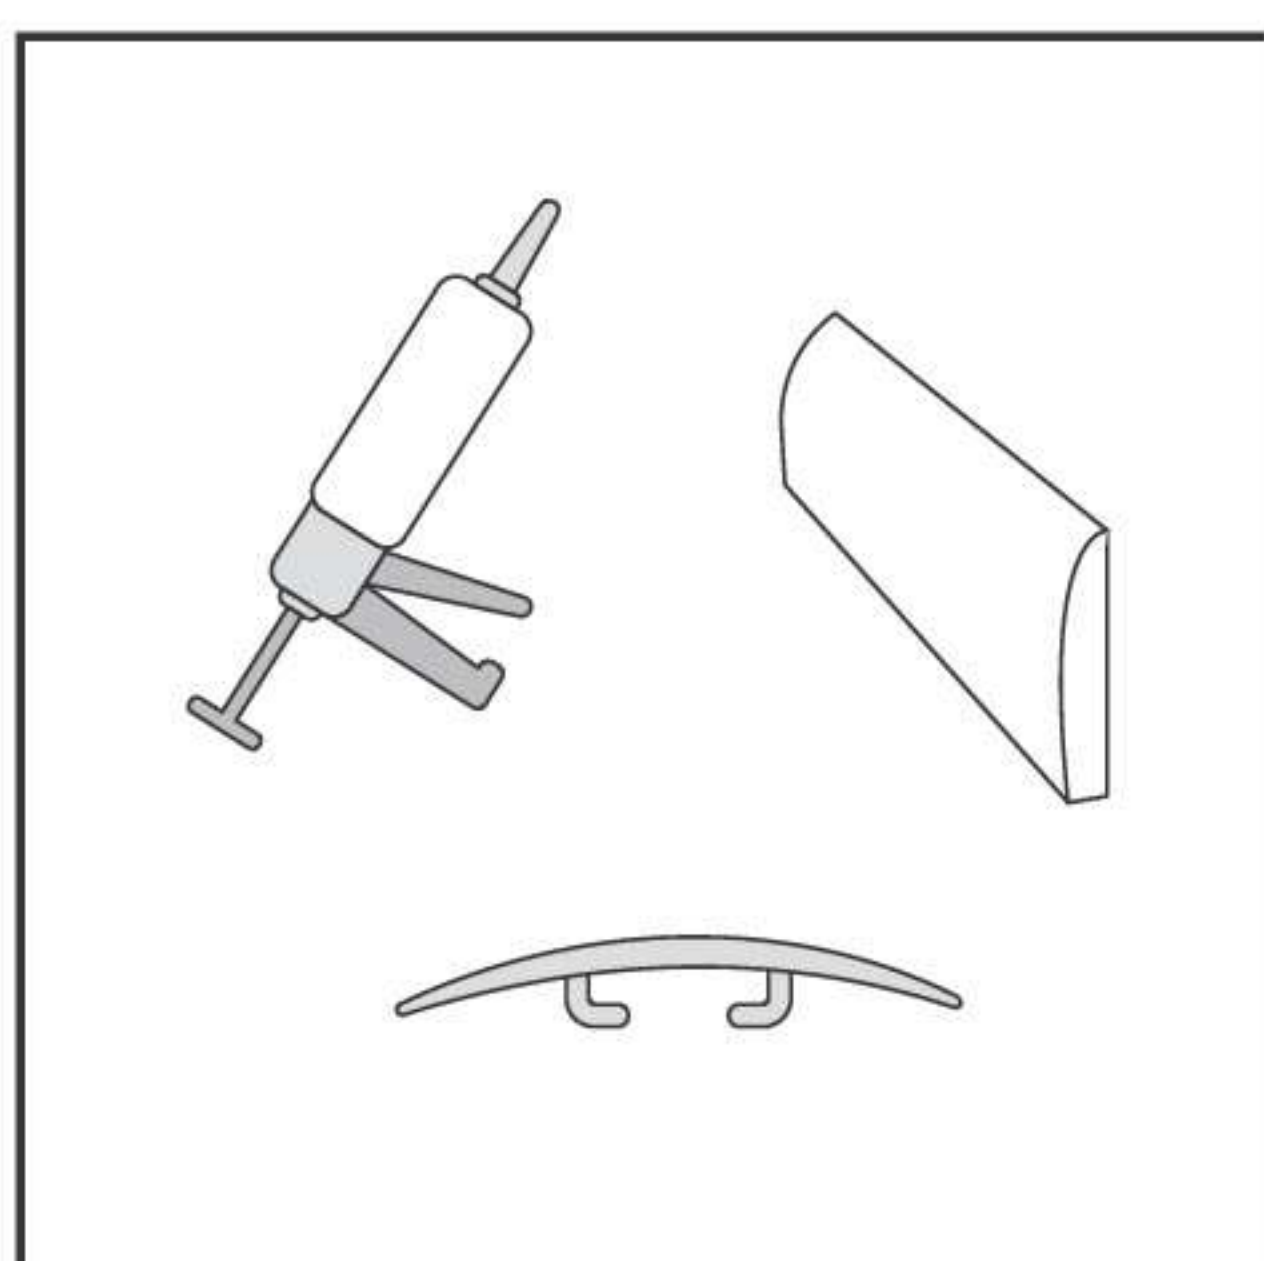


FINISHING THE ROOM

- Skirting
- Silicon kit
- Expansion / adapter / end profiles



Preparation The room

Make sure there is an equal amount of left side and right sided panels.

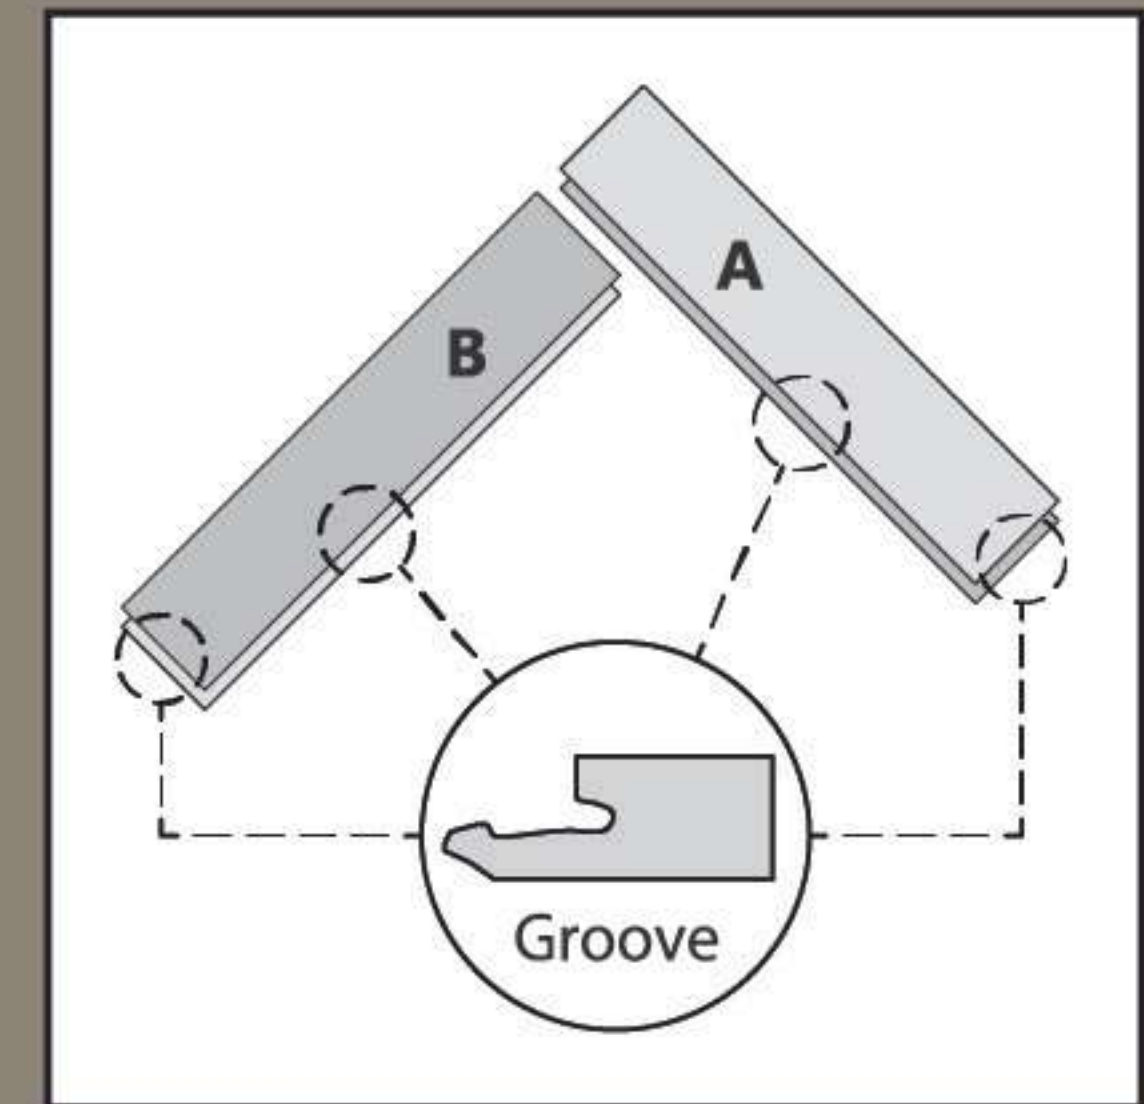



CLEAN SLATE

- Remove skirtings
- Remove all soft flooring (e.g. carpet)
- Make sure the sub-floor is dry and free of any grease, chemical residue or glue
- Ensure a level and dry surface, smooth out bumps or irregularities
- Vacuum thoroughly to remove all debris and dust

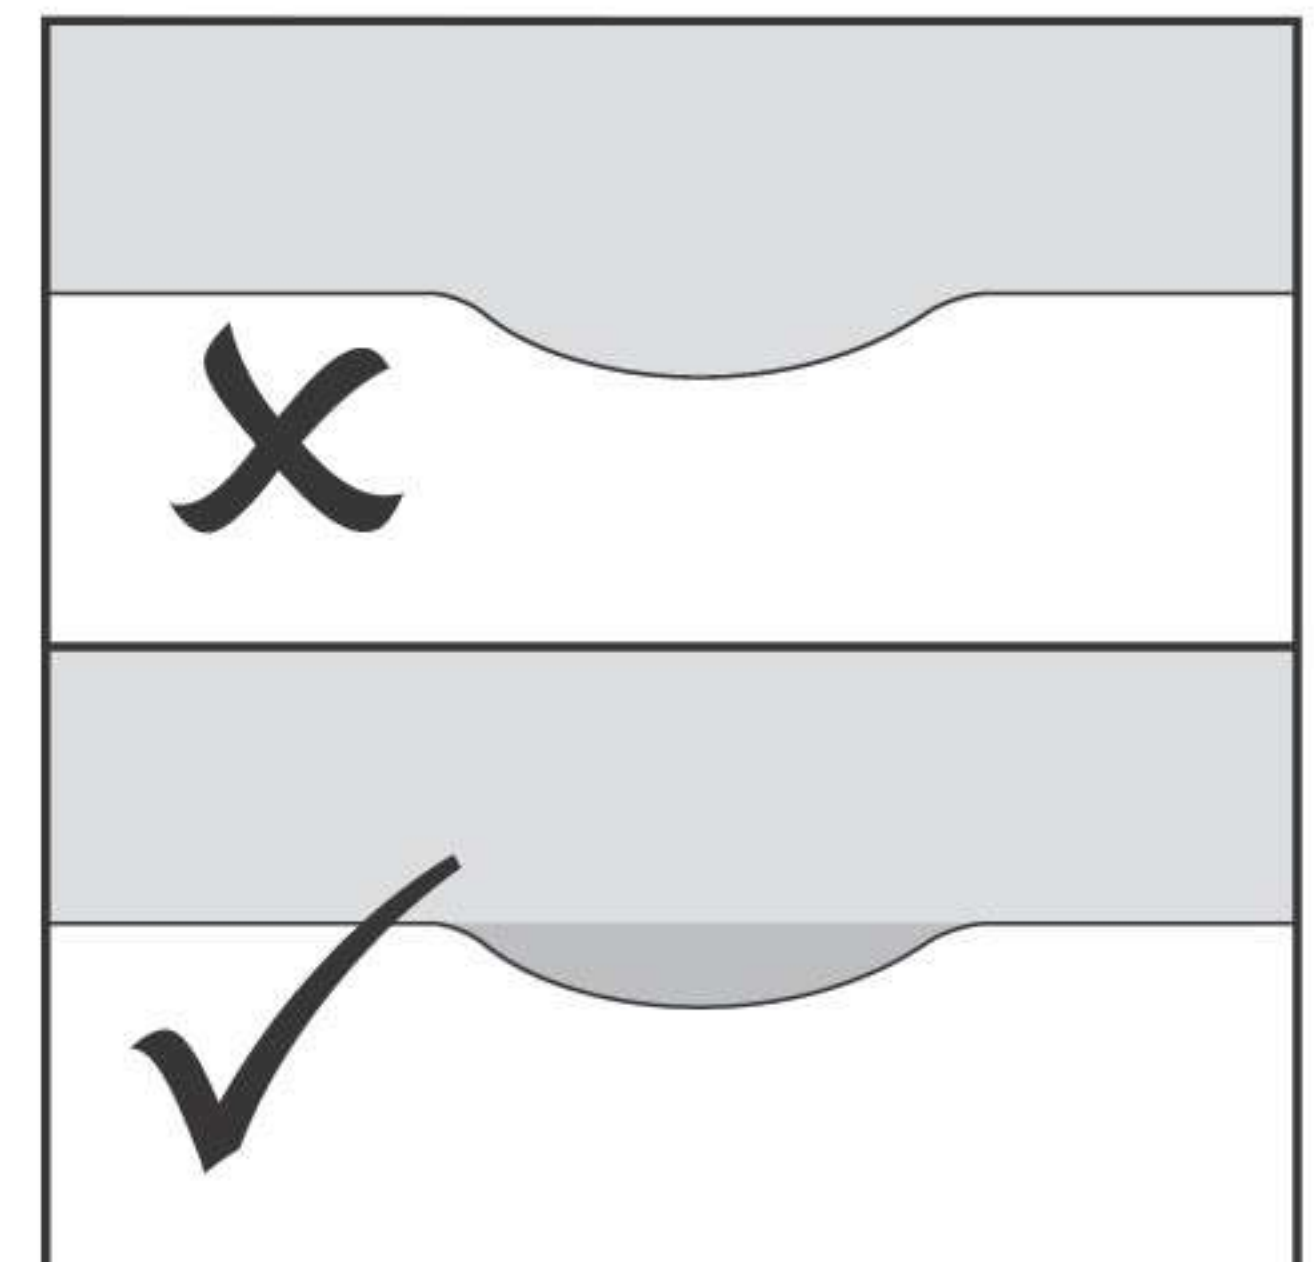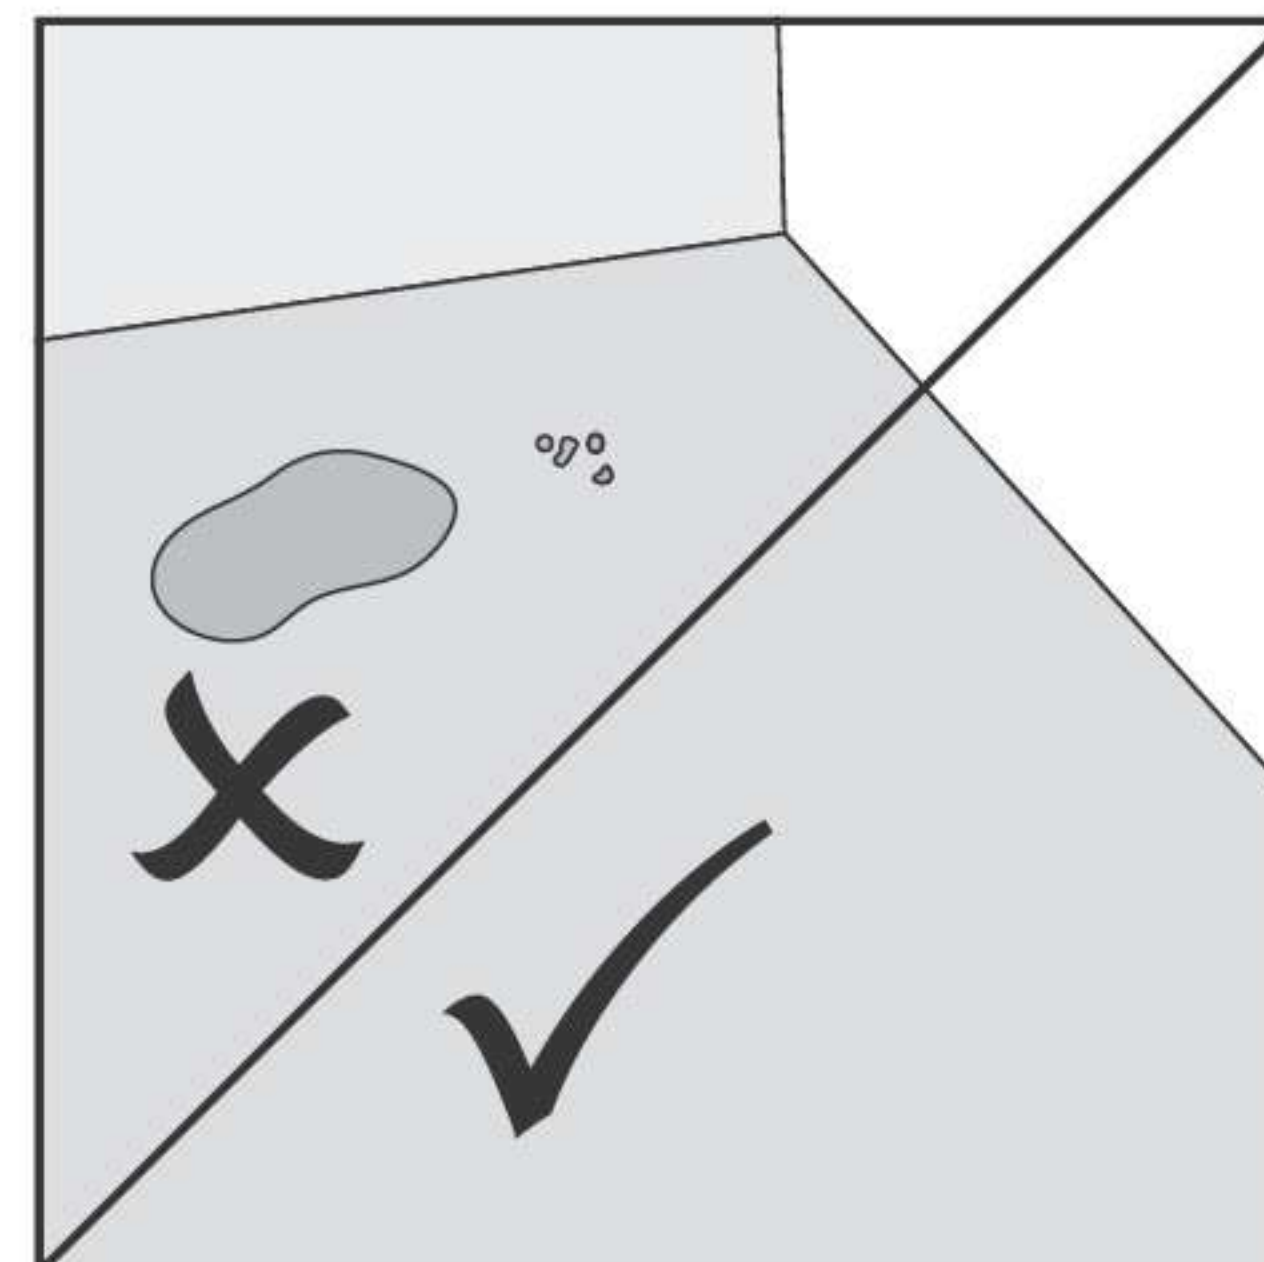



CALCULATE SURFACE AREA

- Width x Length + 10-20% cutting waste
- Make accurate measurements to ensure a smooth installation
- Take notes to avoid mistakes
- Plan the flooring along the longest wall or in the direction of the light for the most pleasing visual appeal.

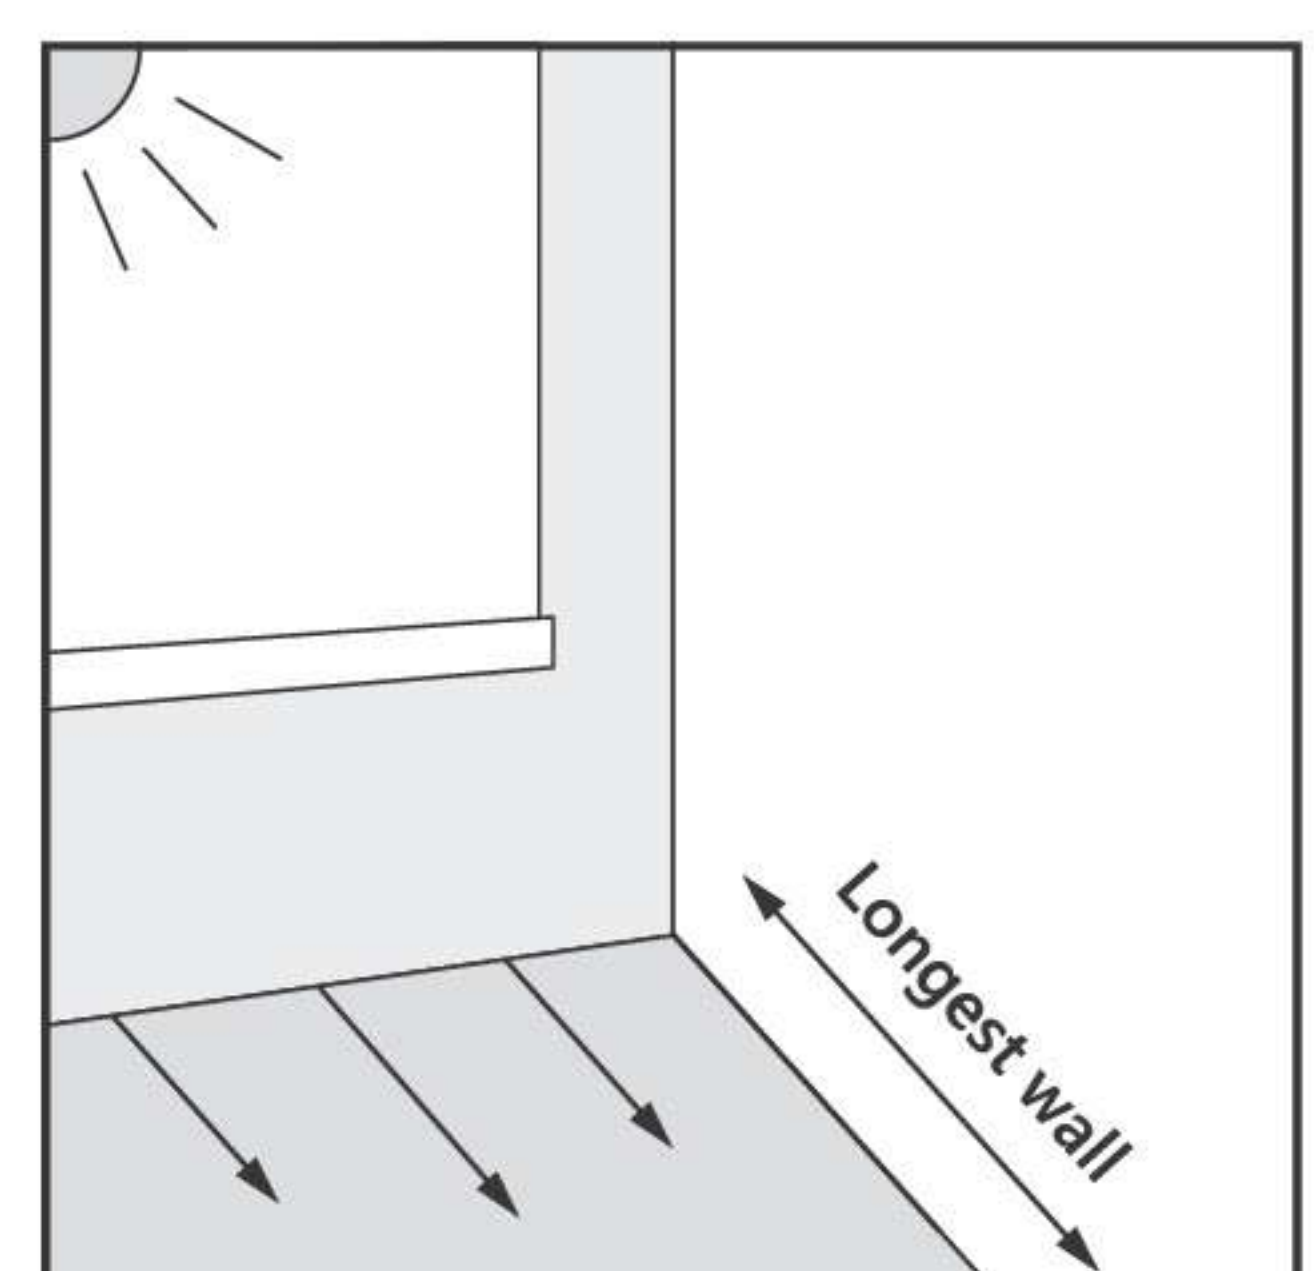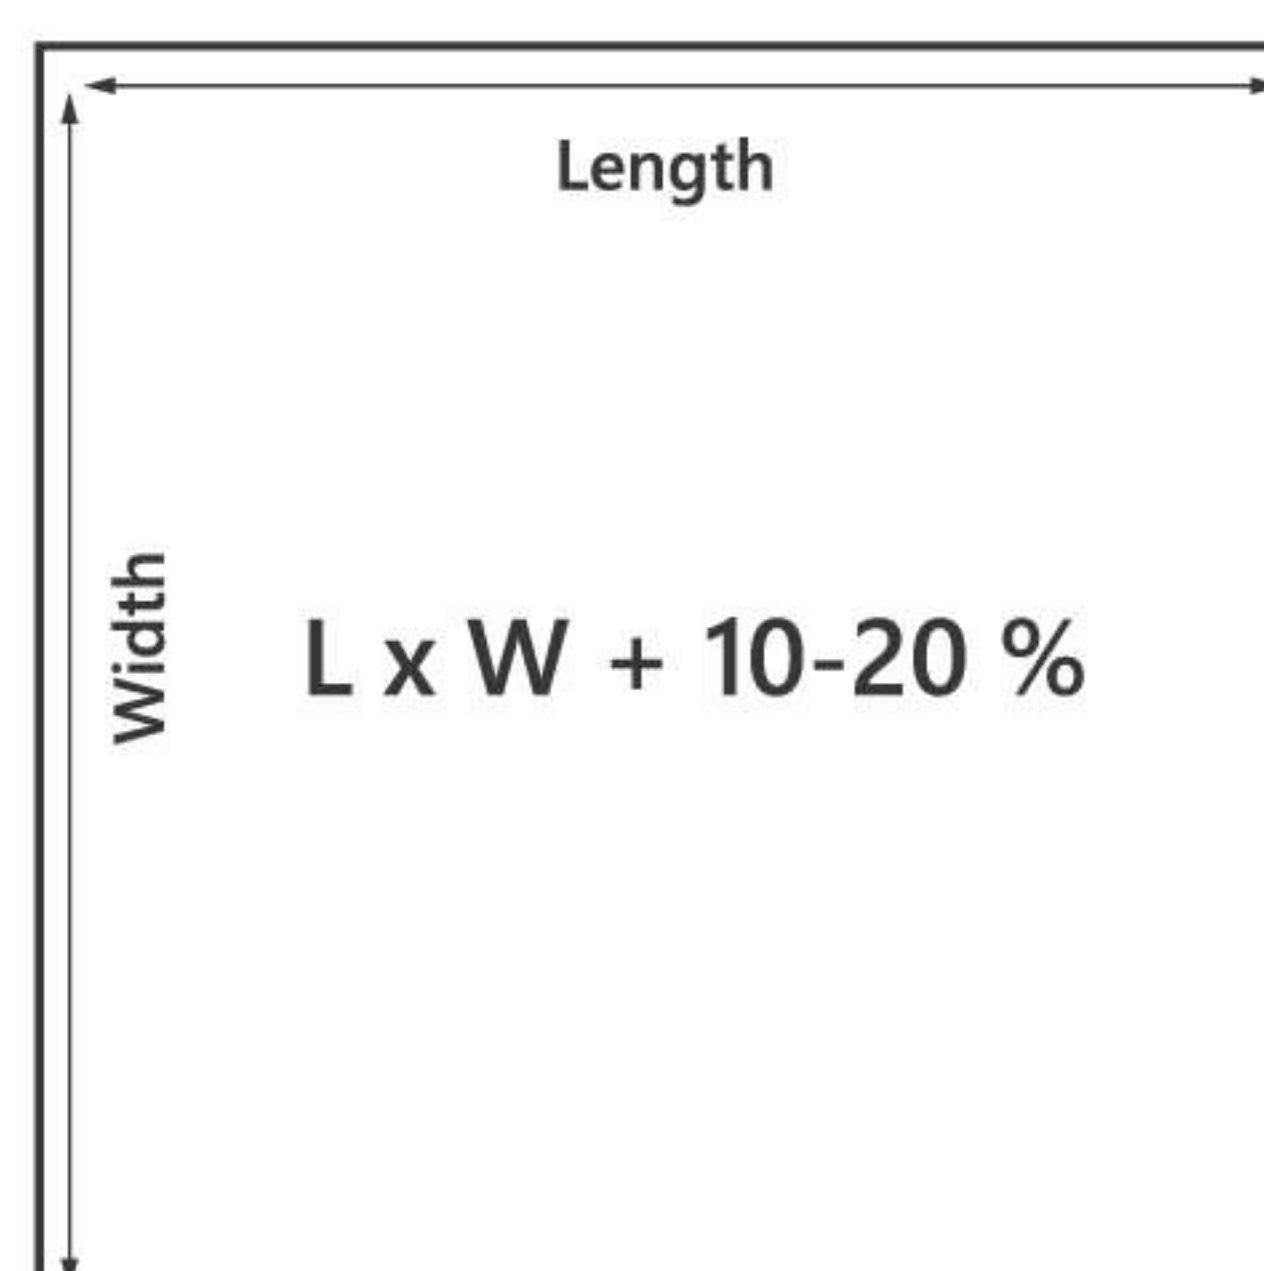



ALIGNING THE ROWS

- Indicate the middle of the starter wall to align the V-rows. Mark this line on the bottom of the wall so it will remain visible
- Plan out the different V-rows to ensure that each end piece is at least 10 cm wide
- If there are pieces that are too small, shift the middle line to the left or the right

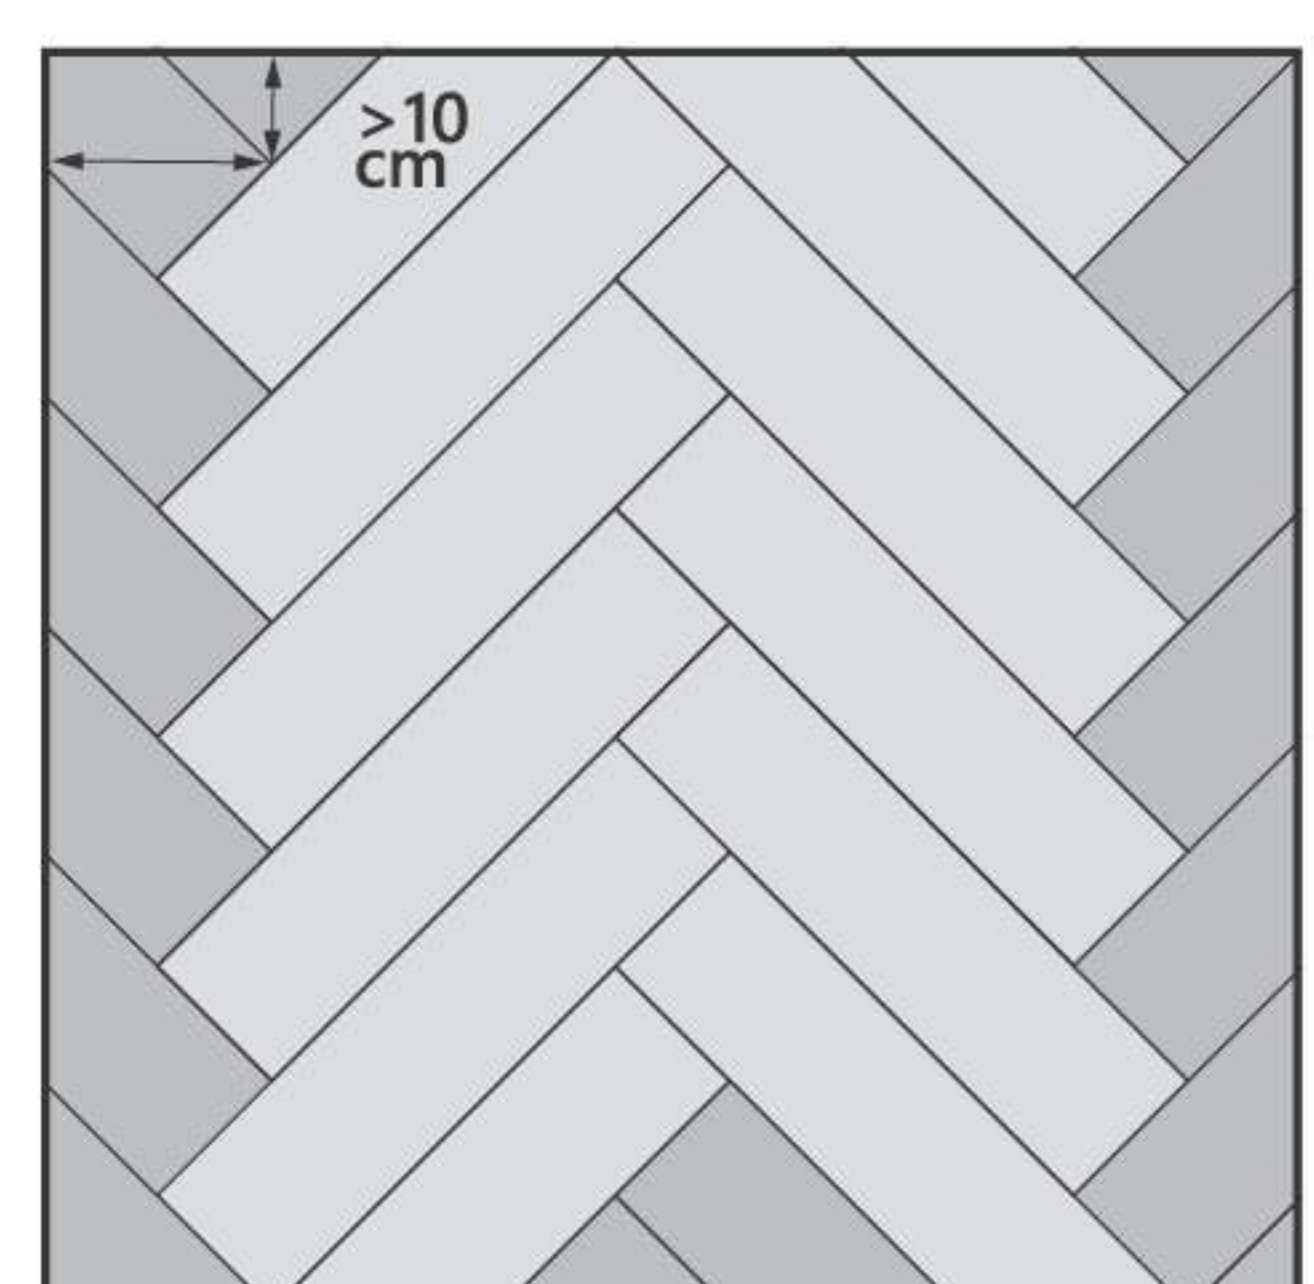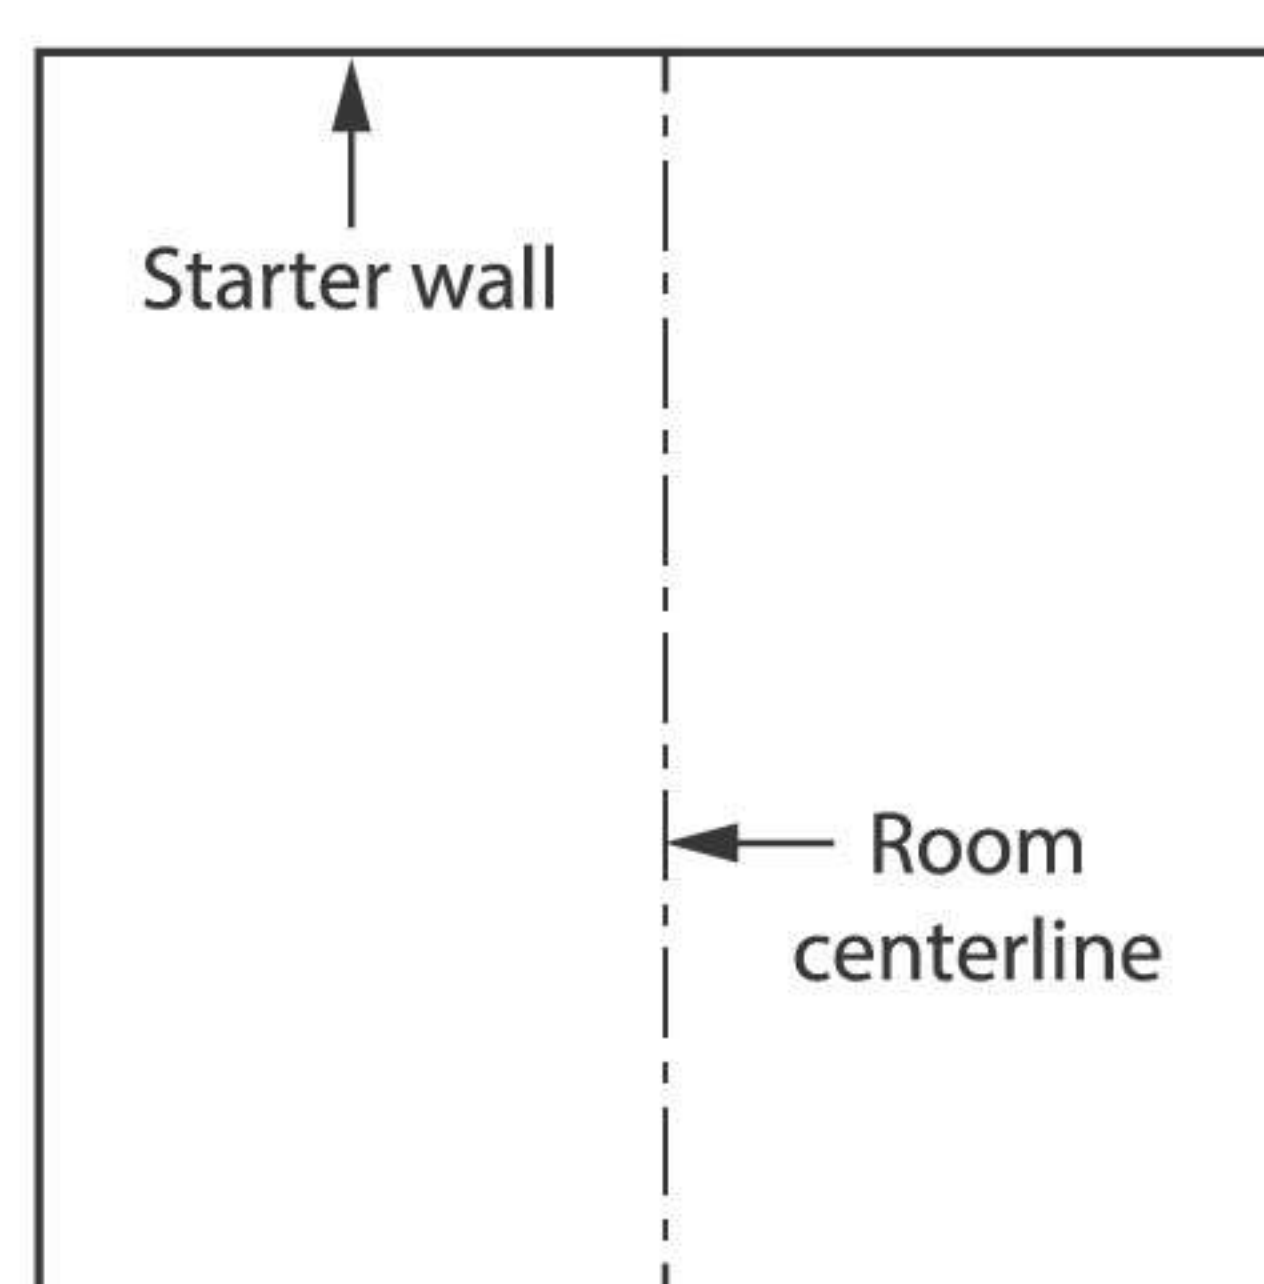

PREPARING THE PANELS

- Acclimatize the panels in the middle of the room for 48 hours in the box
- Make sure to follow the instructions on the box before beginning the installation
- Shuffle panels from different boxes to ensure an even distribution of color and pattern
- Inspect the panels for damages
- Use an underlay if there is no pad attached

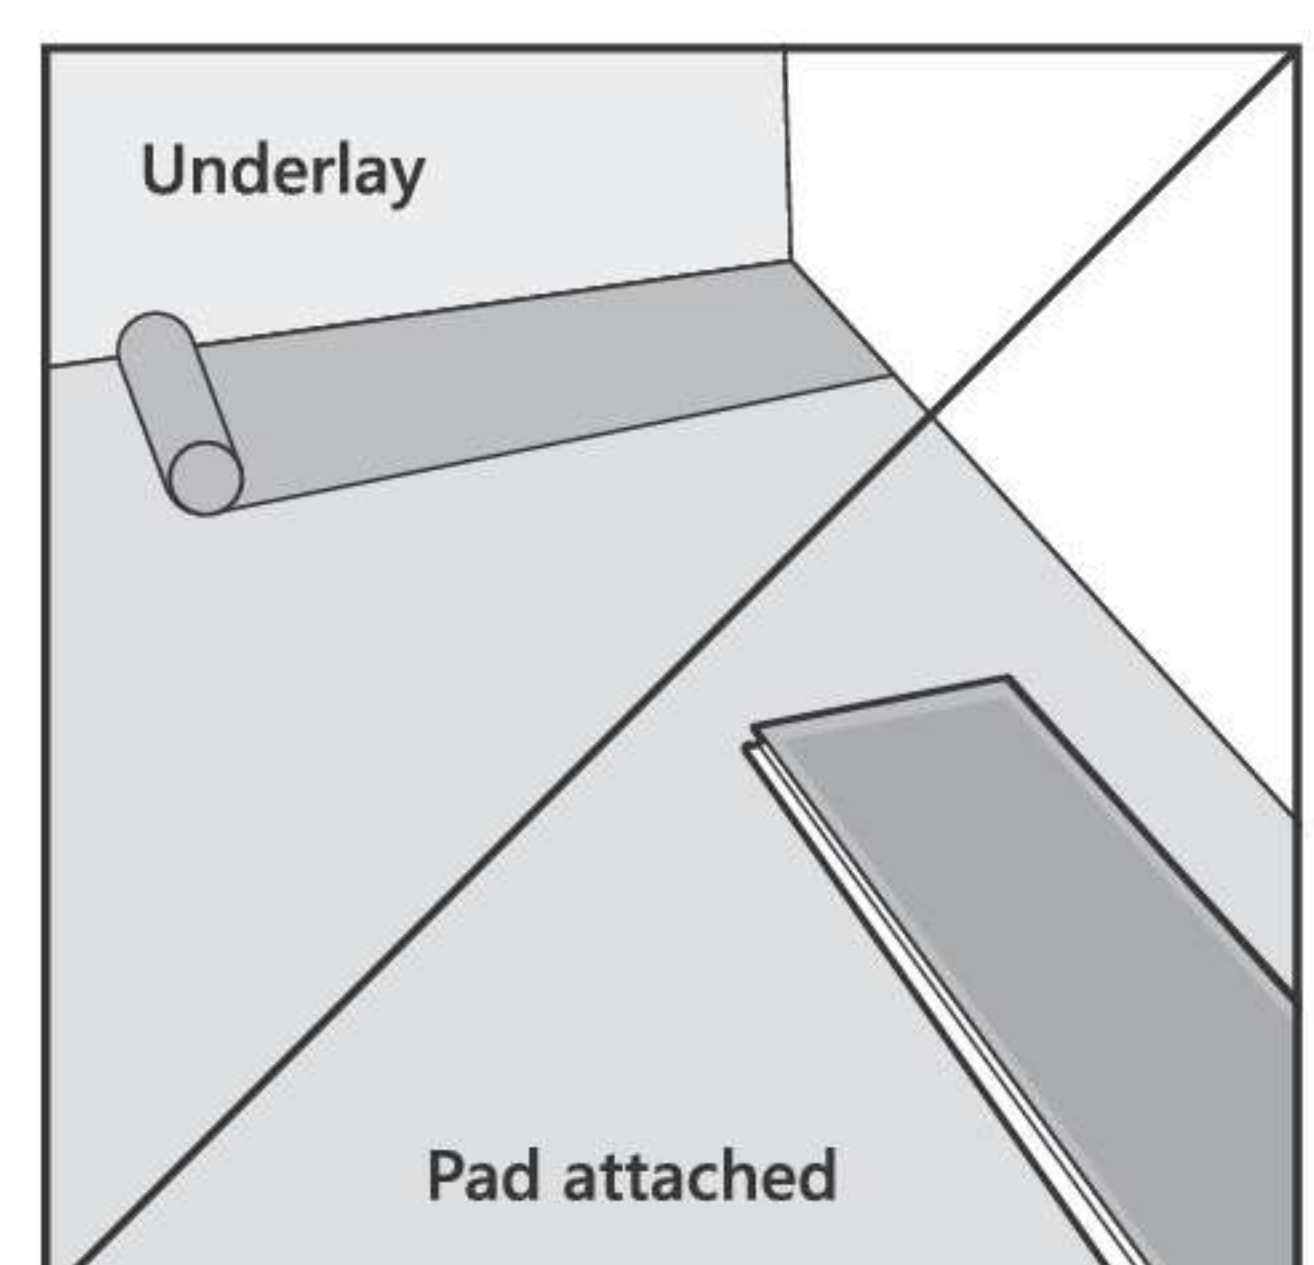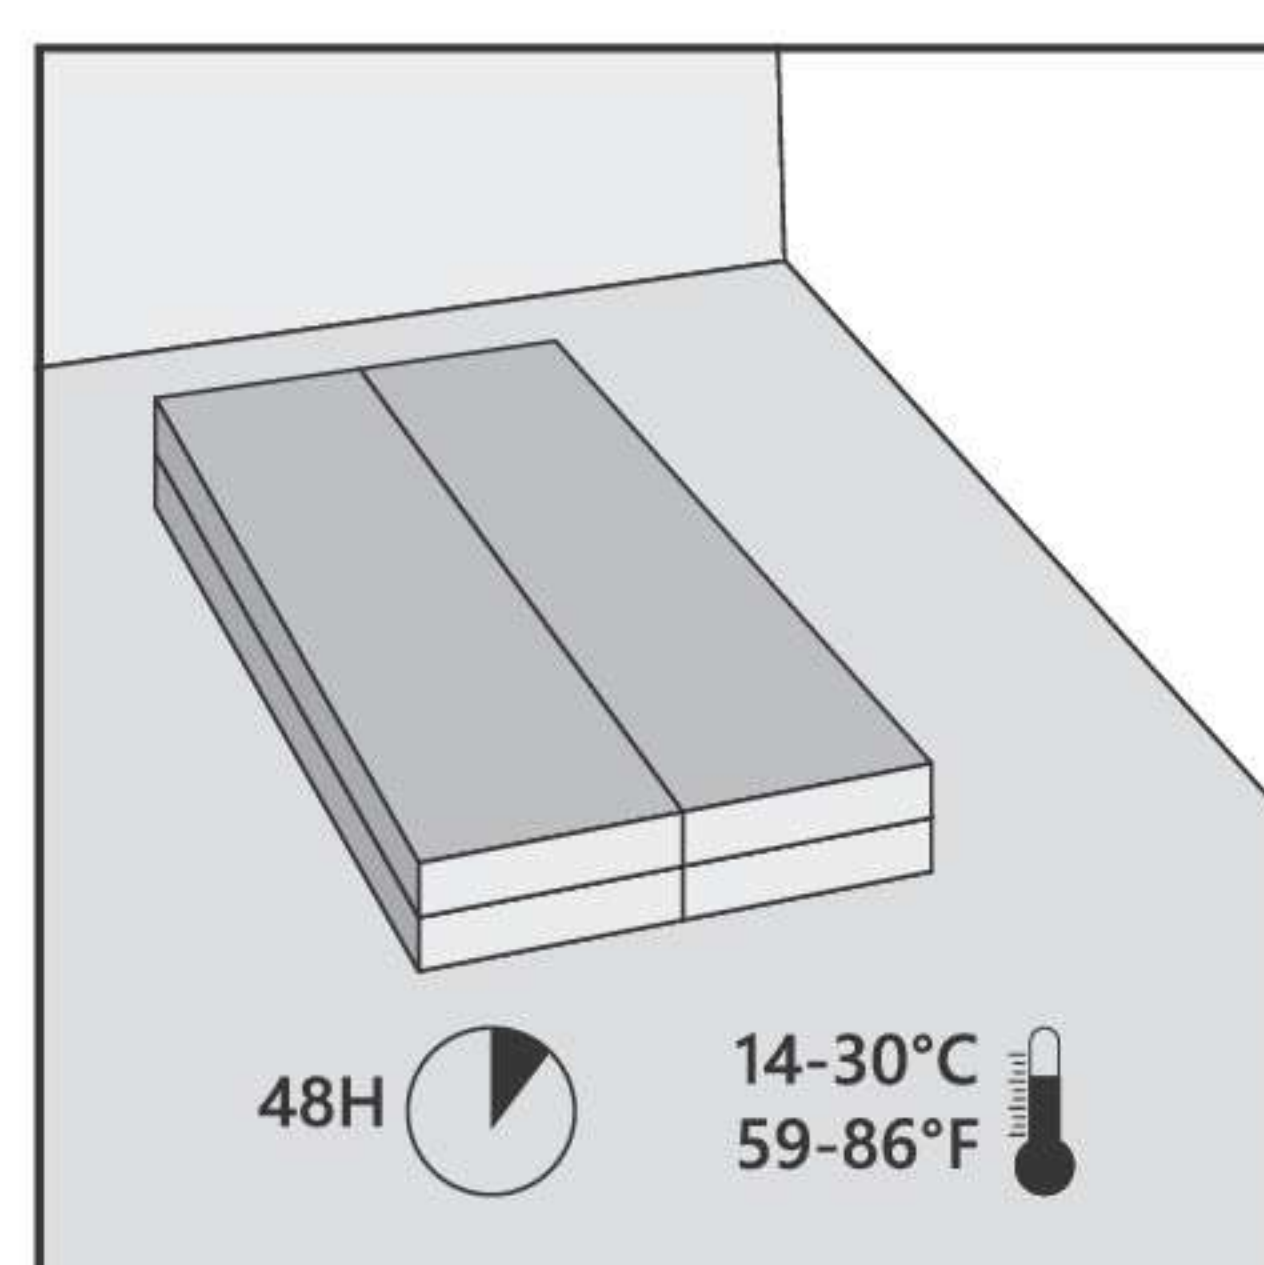


Installation Locking


WATCH THE
INSTALLATION
VIDEO



INSTALLING METHOD A: ANGLE

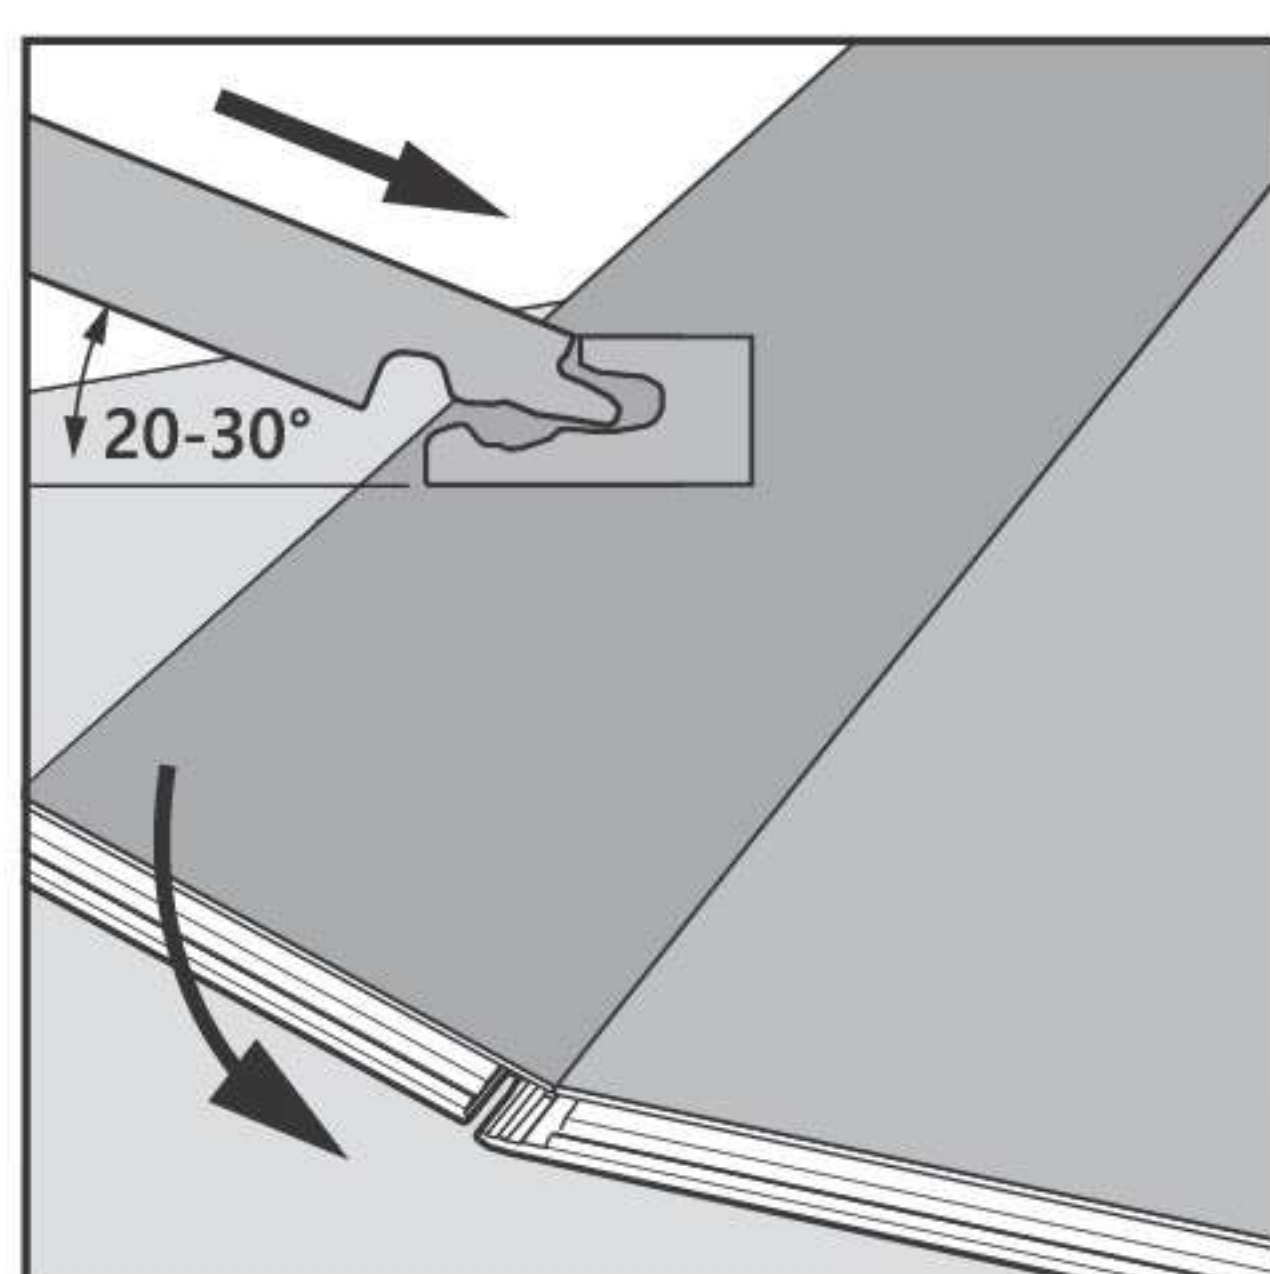


Start by locking in the long side. Position the panel at an angle of 20-30° to the panel that is already installed.

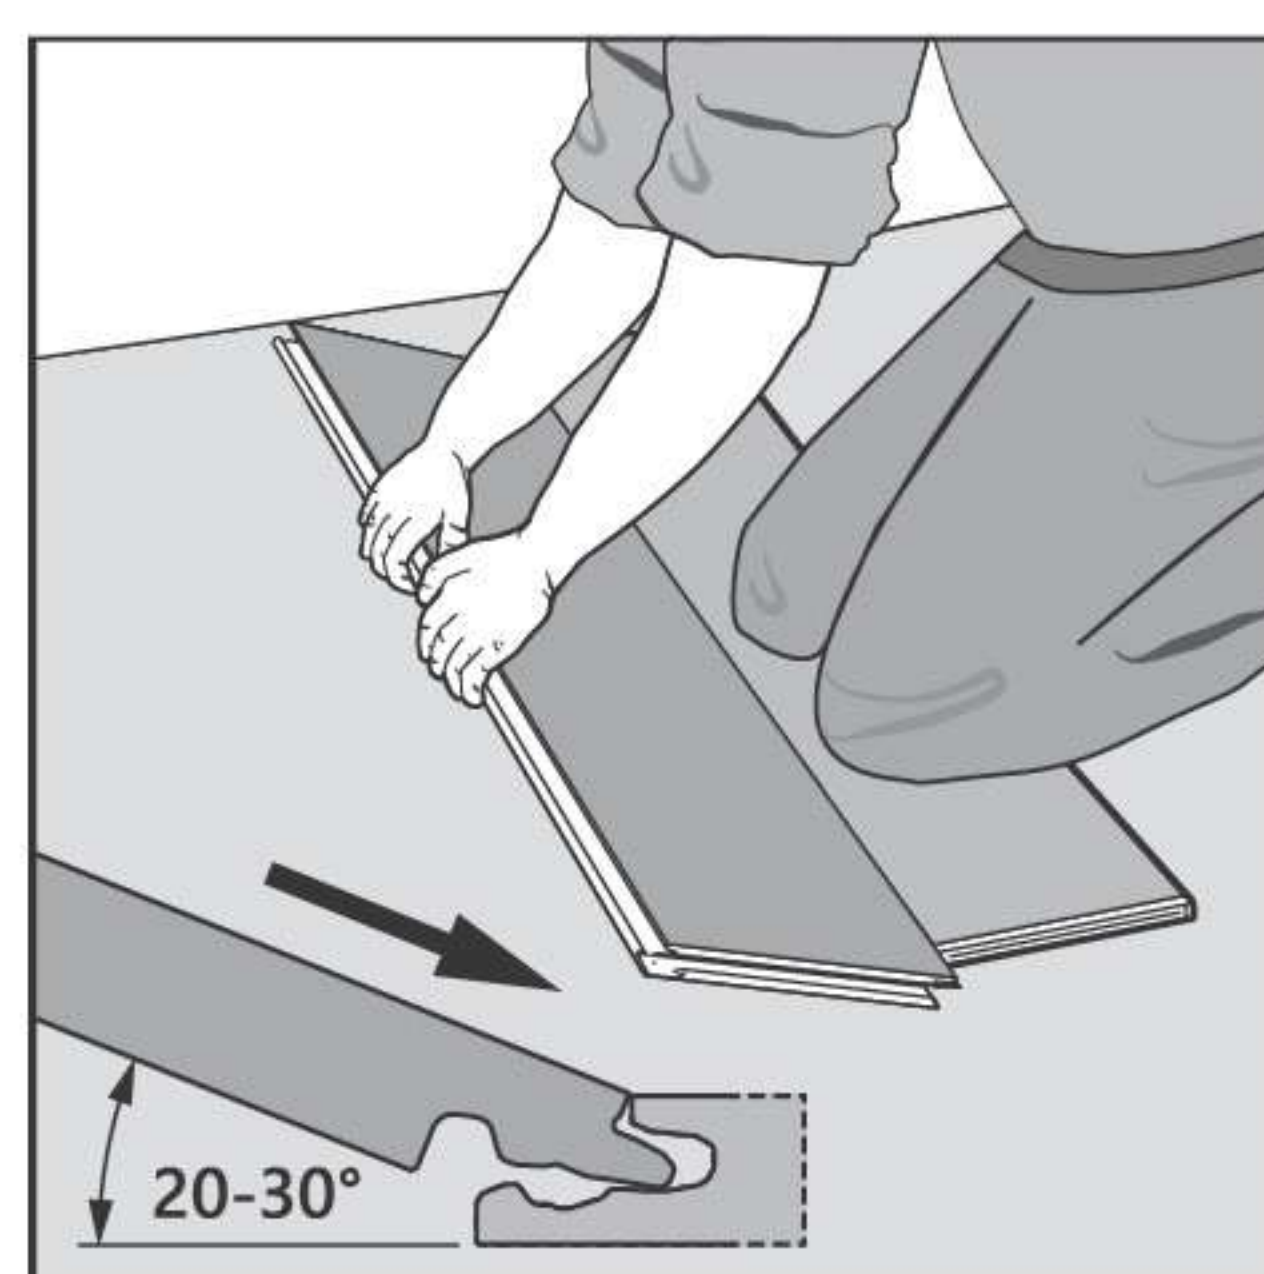


Place your hands close to the joint. Pull the panel towards the installed panels and angle down.

INSTALLING METHOD B: TAP

130

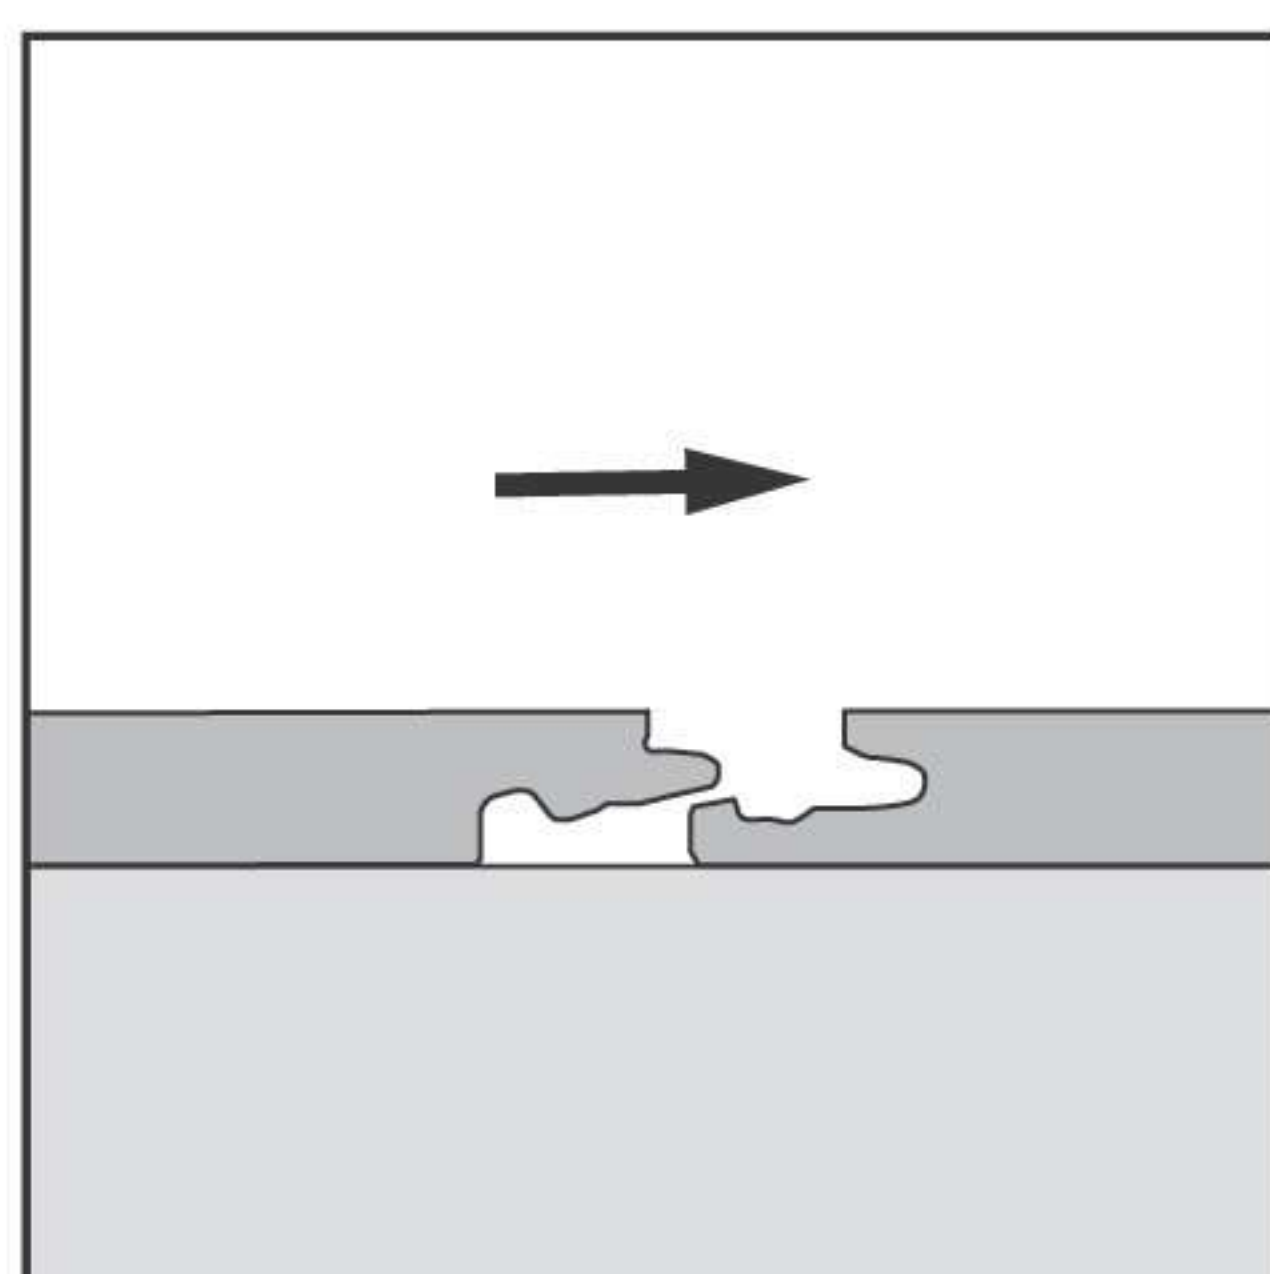


For locking in two sides or if angling is not possible, use the tapping method. If possible, angle in one side of the panel. Tapping is possible on the long and short side.

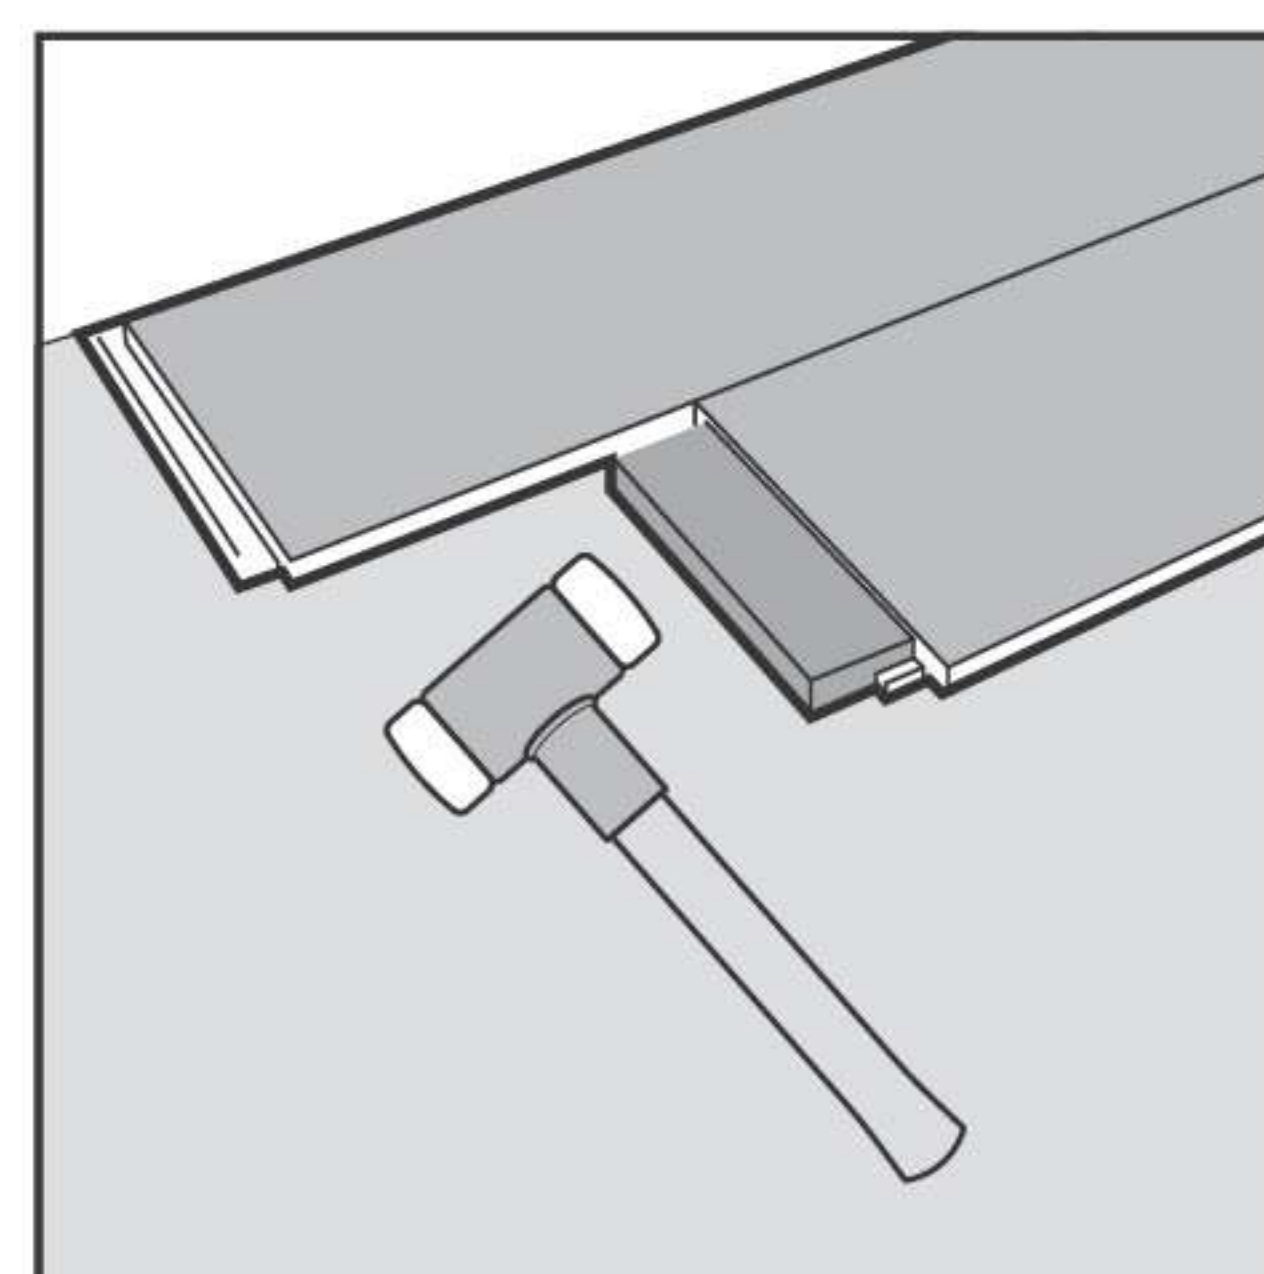


Use a tapping block and position it against the locking system. Gently tap the block with a hammer to gradually connect the panels in a few taps.

FOR HARD TO REACH AREAS

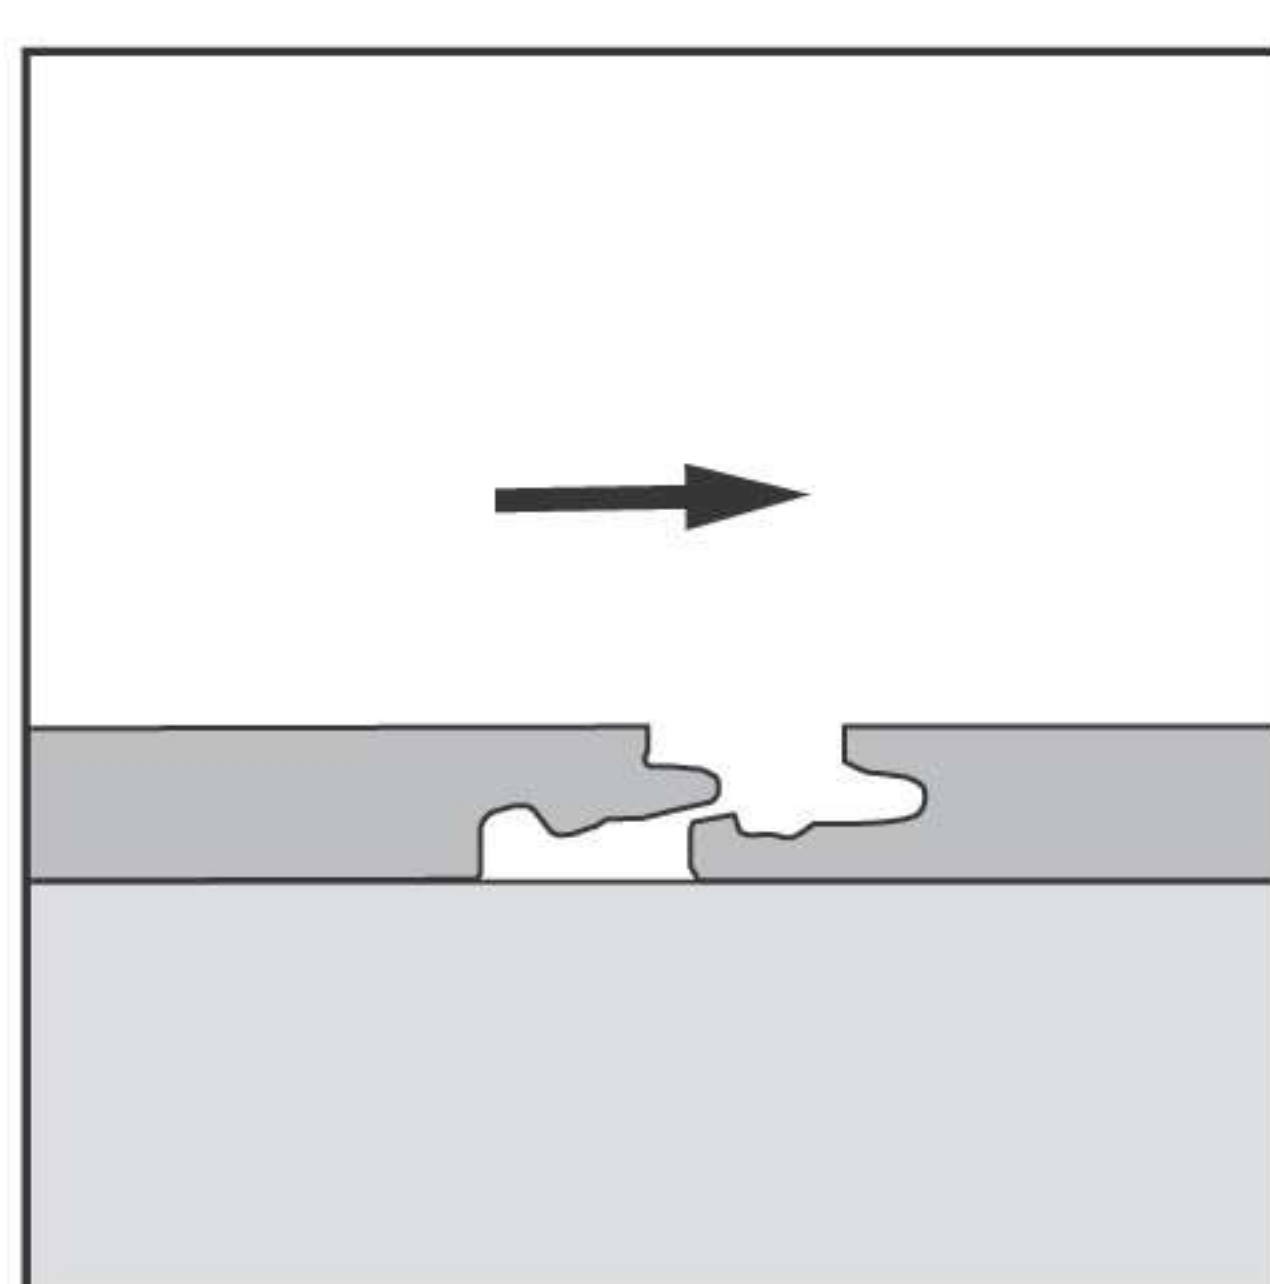


For areas where it is not possible to use angling or a tapping block, such as the end panels against the wall, use the pull bar. Start when the panels are flat on the floor.

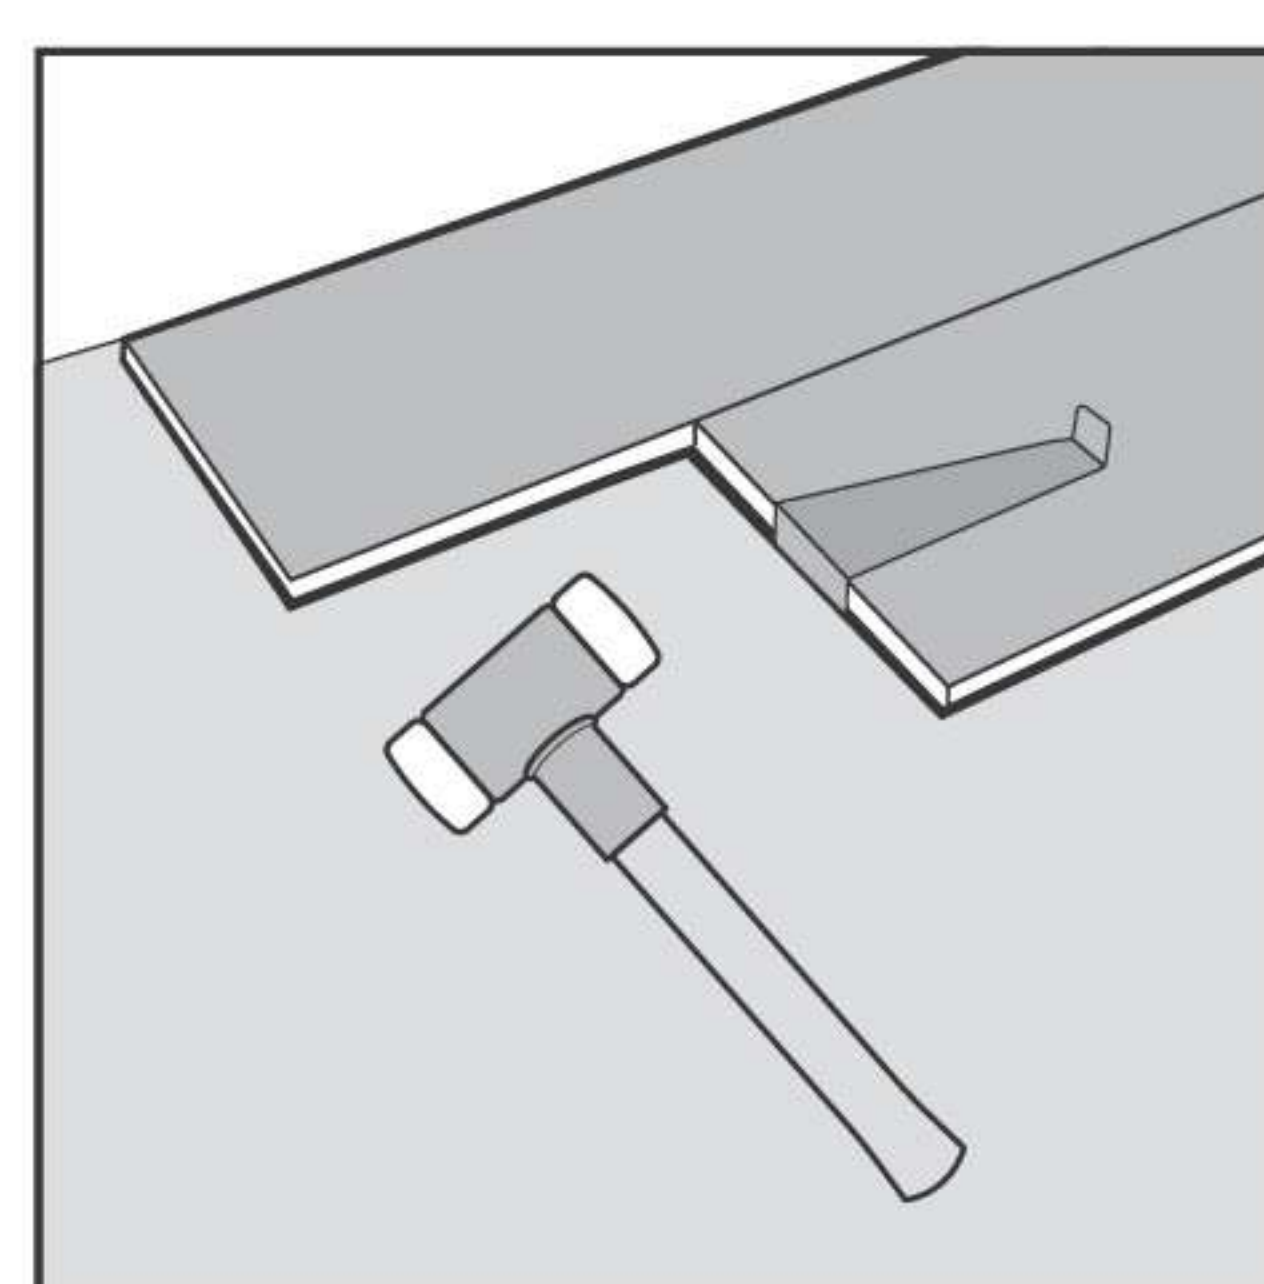


Place the pull bar against the panel. Gently tap the pull bar with a hammer to gradually connect the panels in a few taps.

DE-INSTALLING THE PANELS

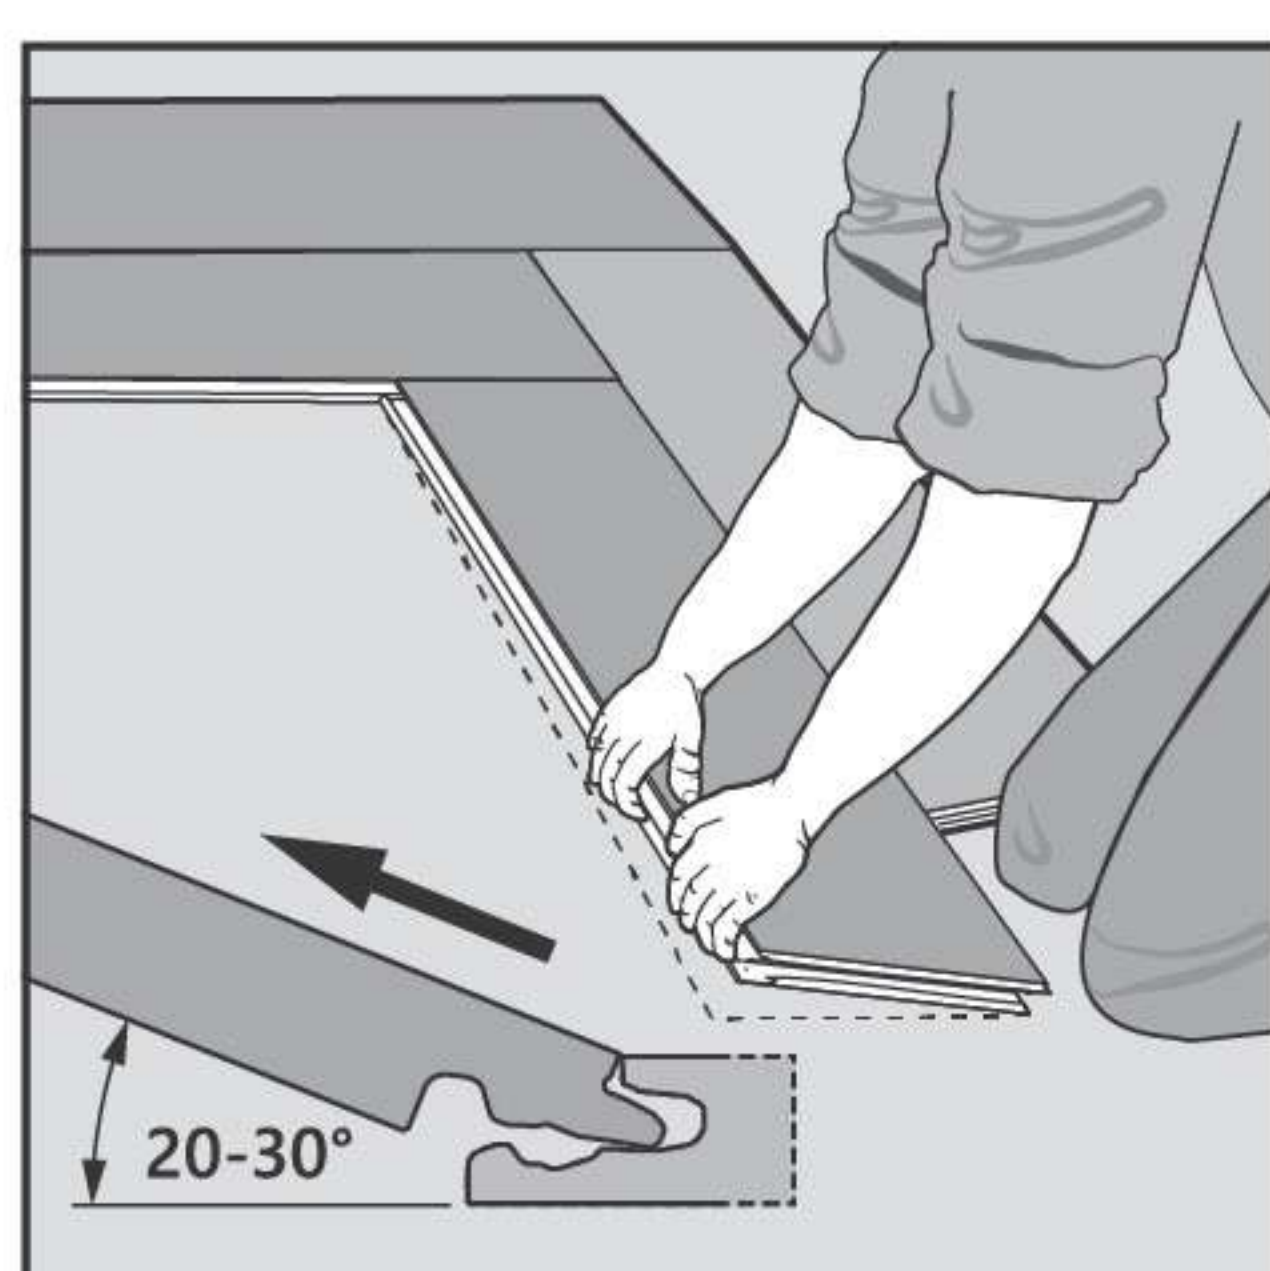


Start by angling out the panel by lifting the corner of the panel to about 20-30° and move the panel forwards and backwards until it releases.

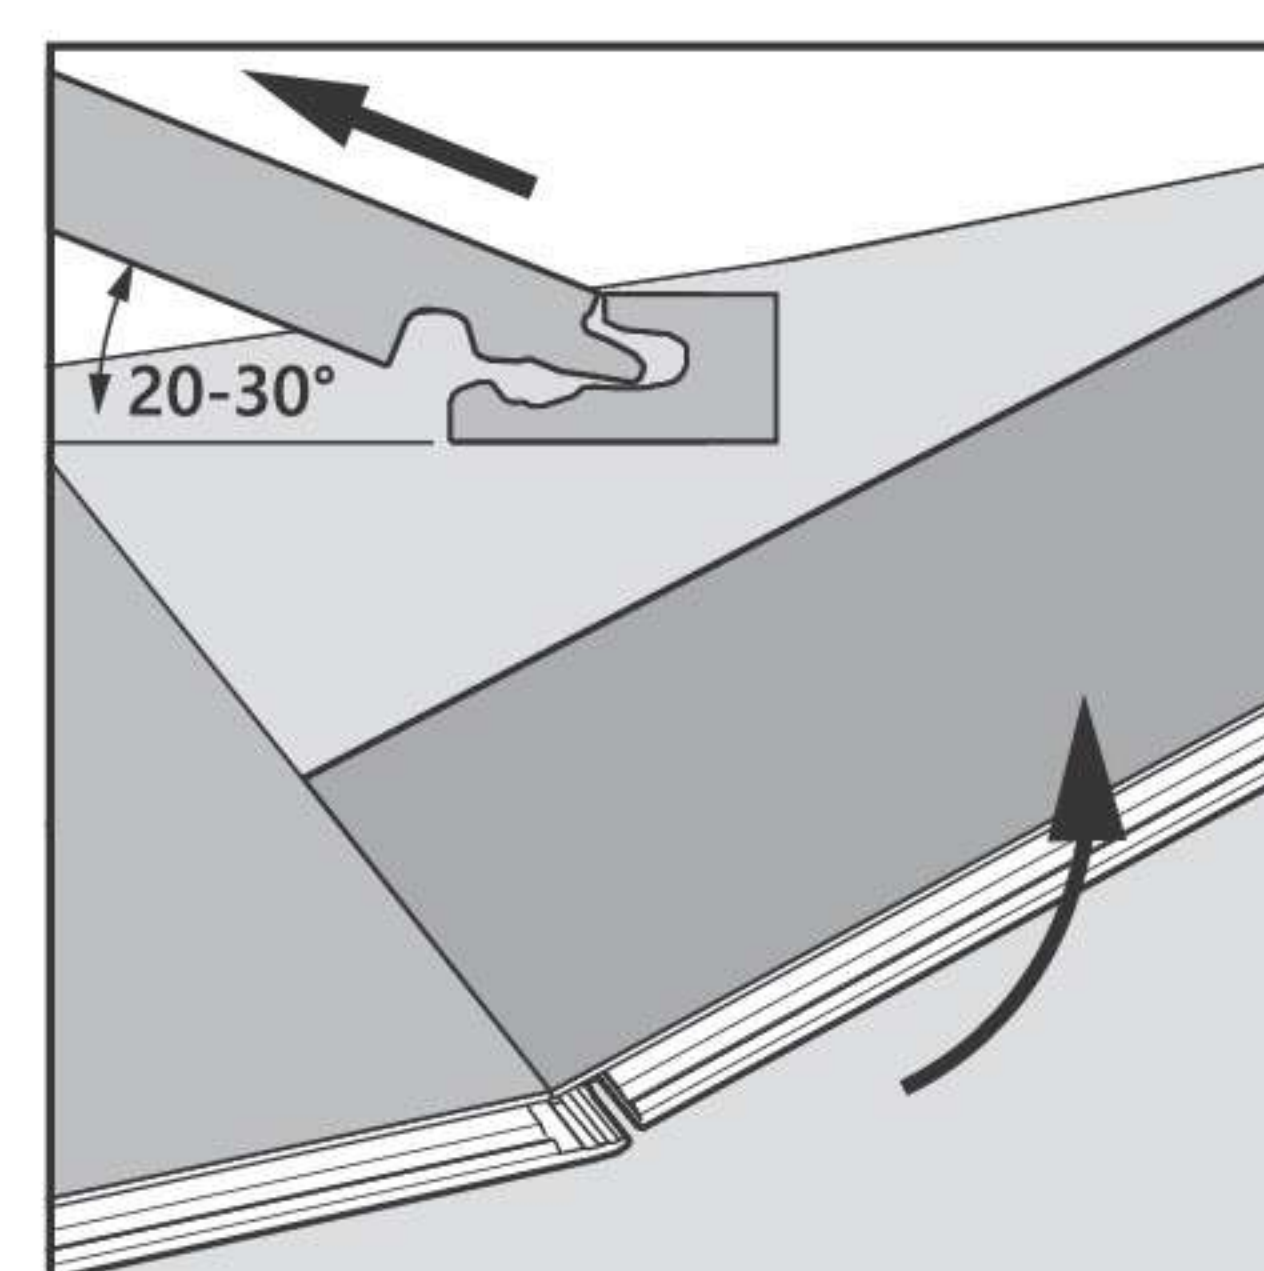


Angle up the end of the panel to angle out the short side.

Installation Pattern


Use the next panel as an alignment panel by installing it 0.5 cm (2") beyond the edge.

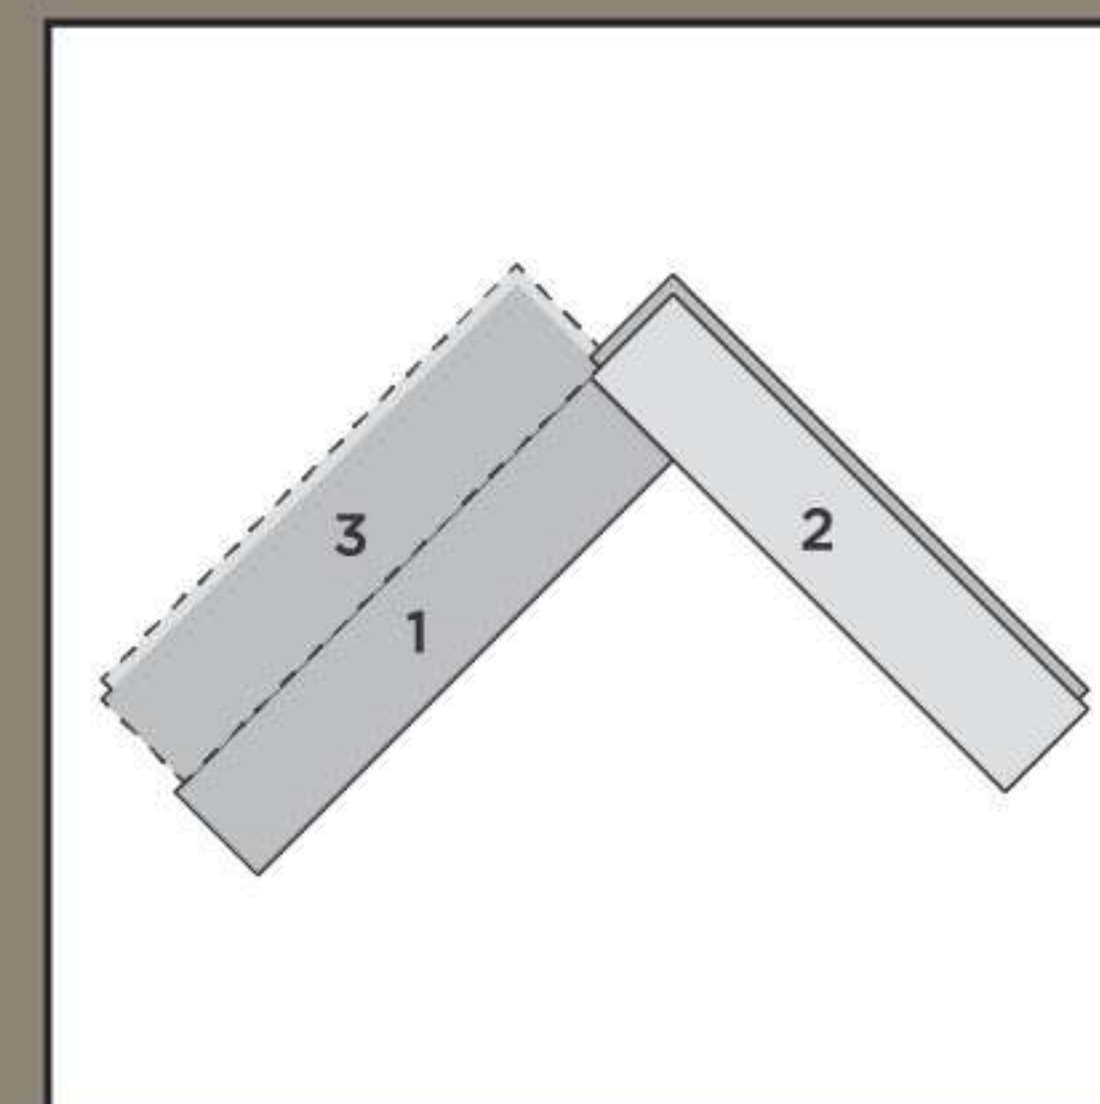

DIRECTION OF THE ROWS

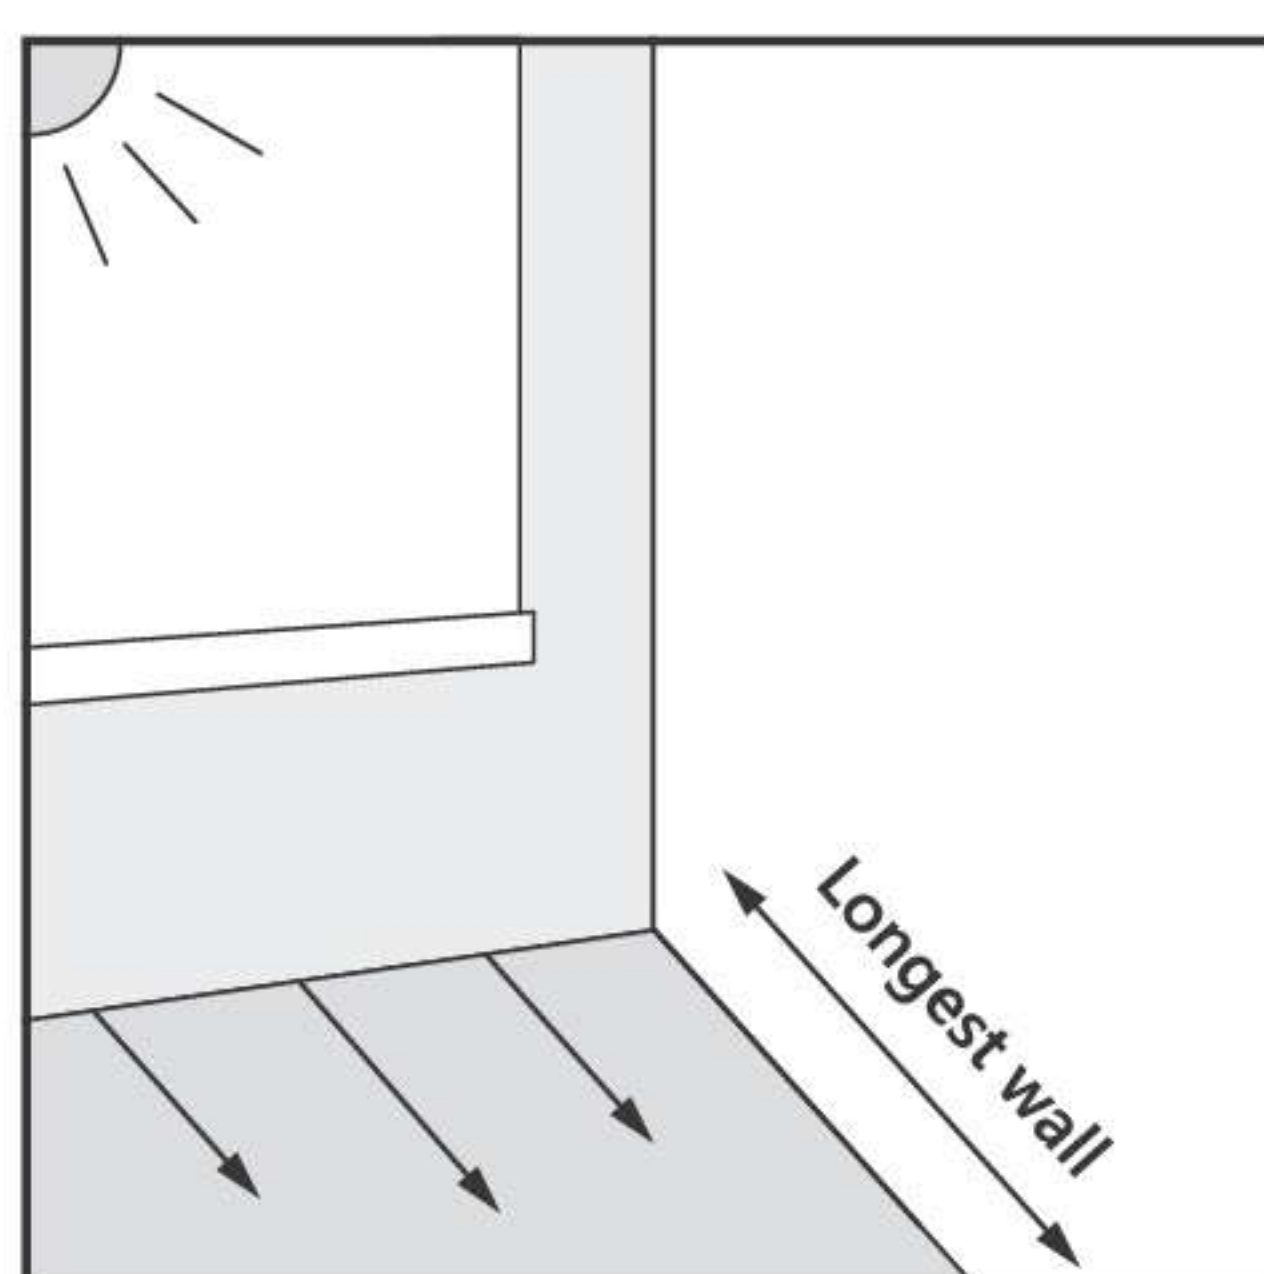


Plan the floor along the longest wall or light direction for the most pleasing visual appeal.

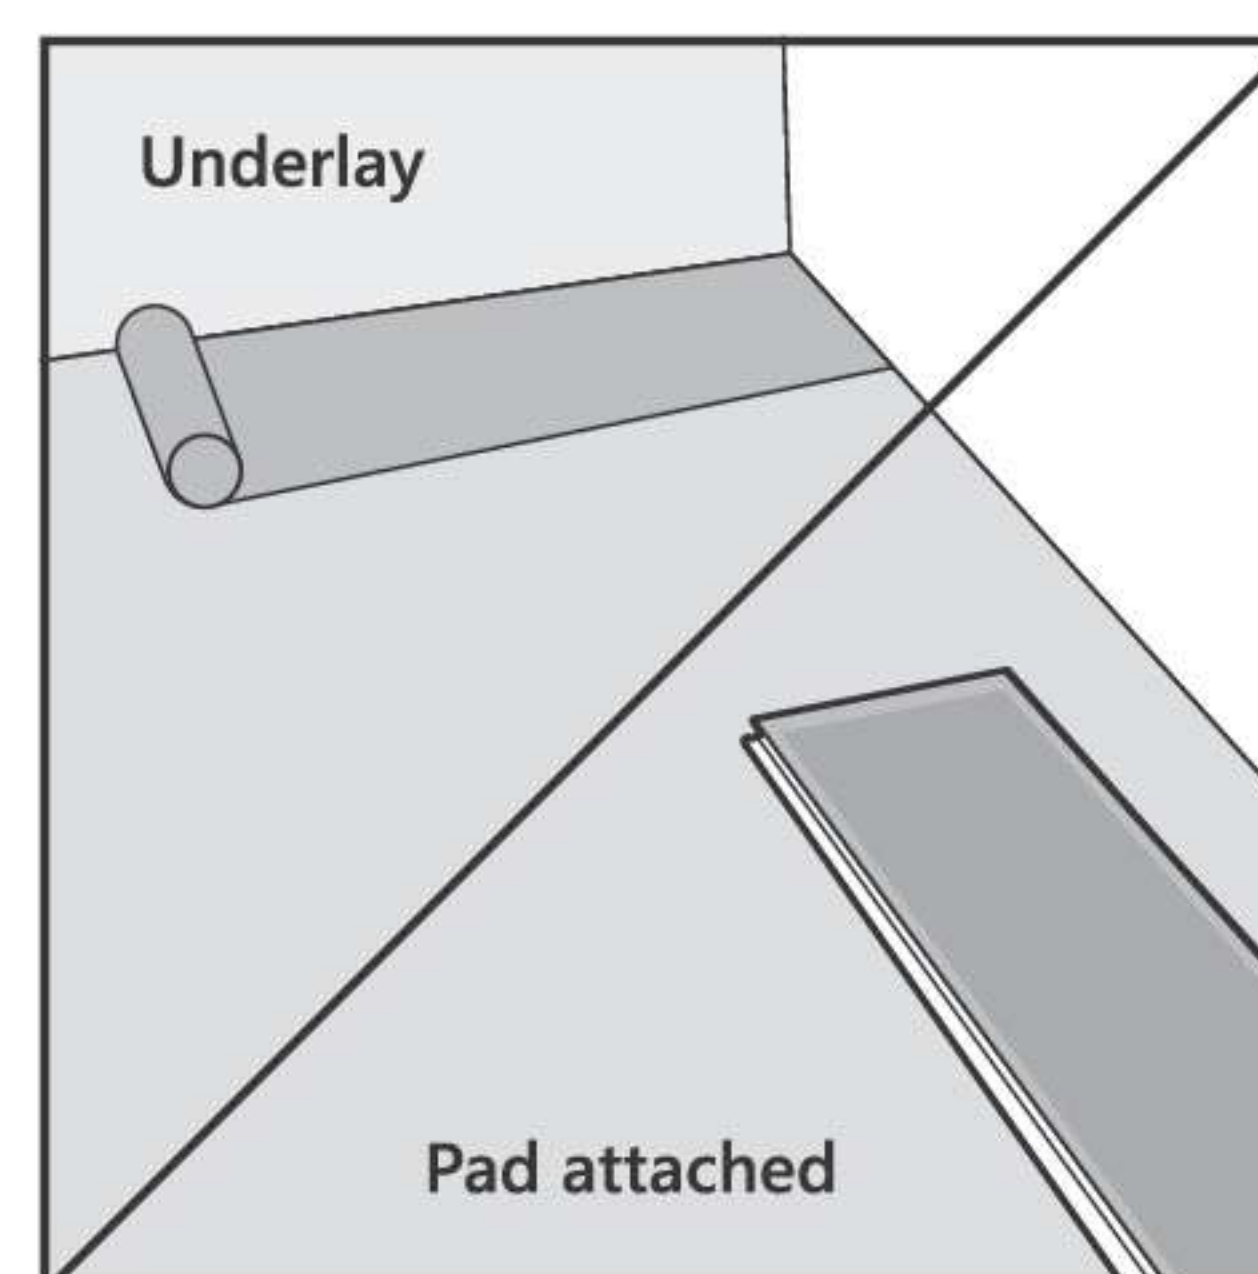


If there is no pad attached to the panels, roll out the underlay in the same direction of the floor.

DISTRIBUTE THE PANELS

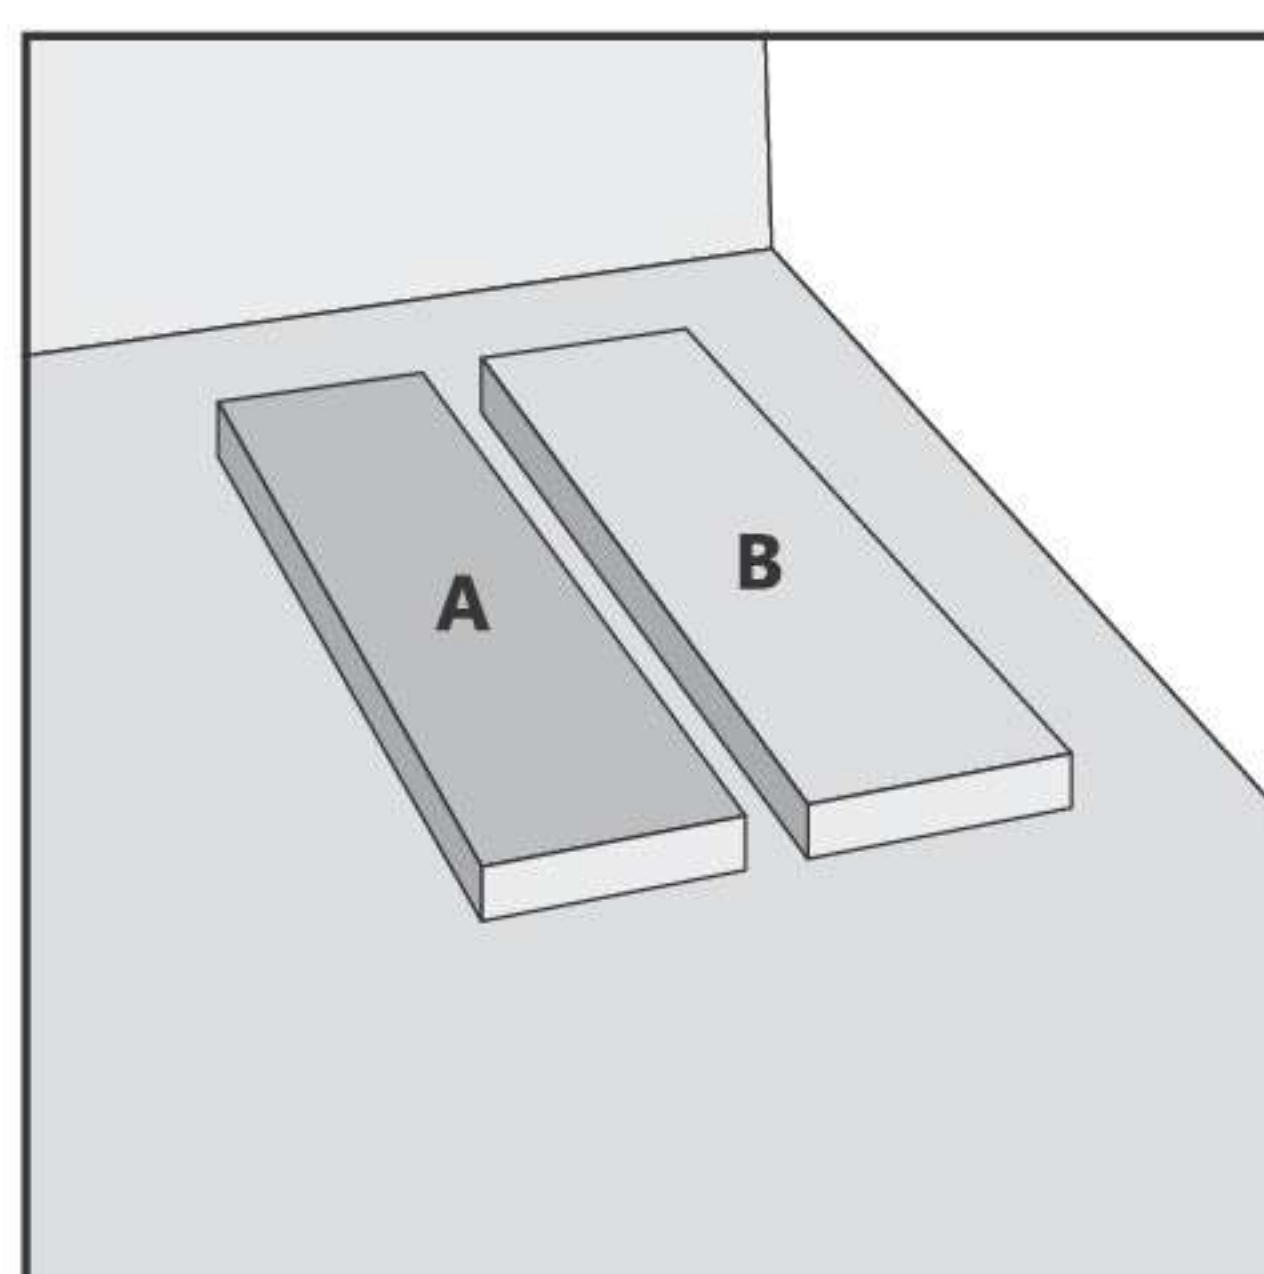


Make sure you have an equal amount of left and right panels.

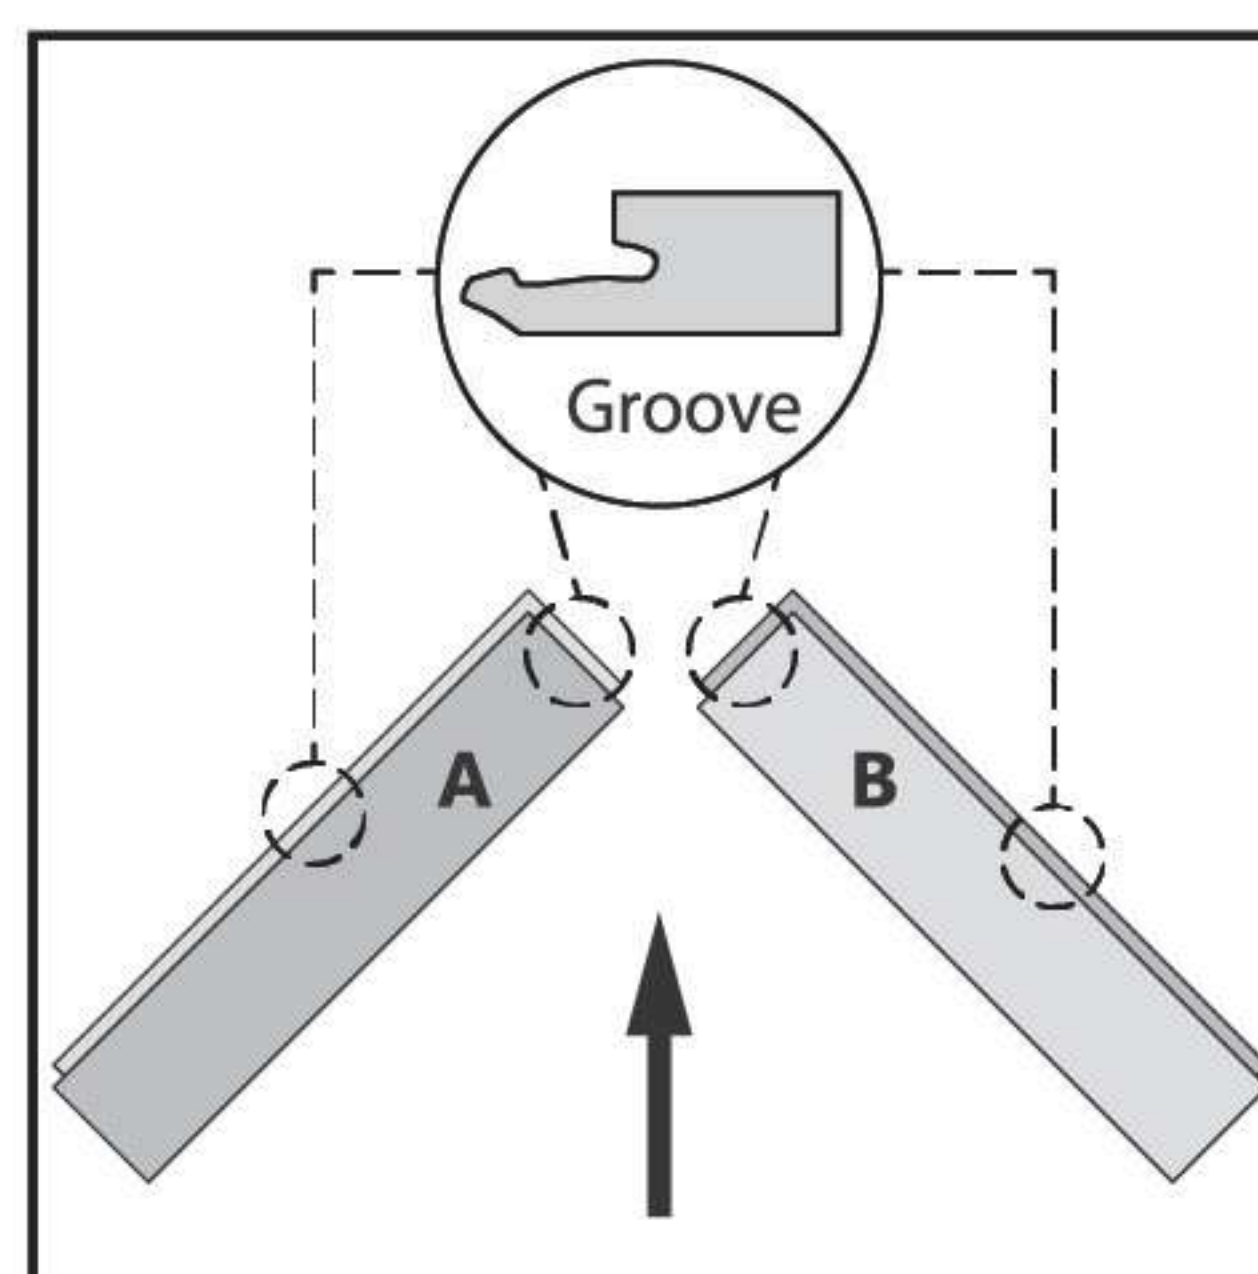


Lay down the panels in the correct start position with the groove side pointing away from the starter wall and to the outside of the V.

131

ALIGNMENT IN THE ROOM

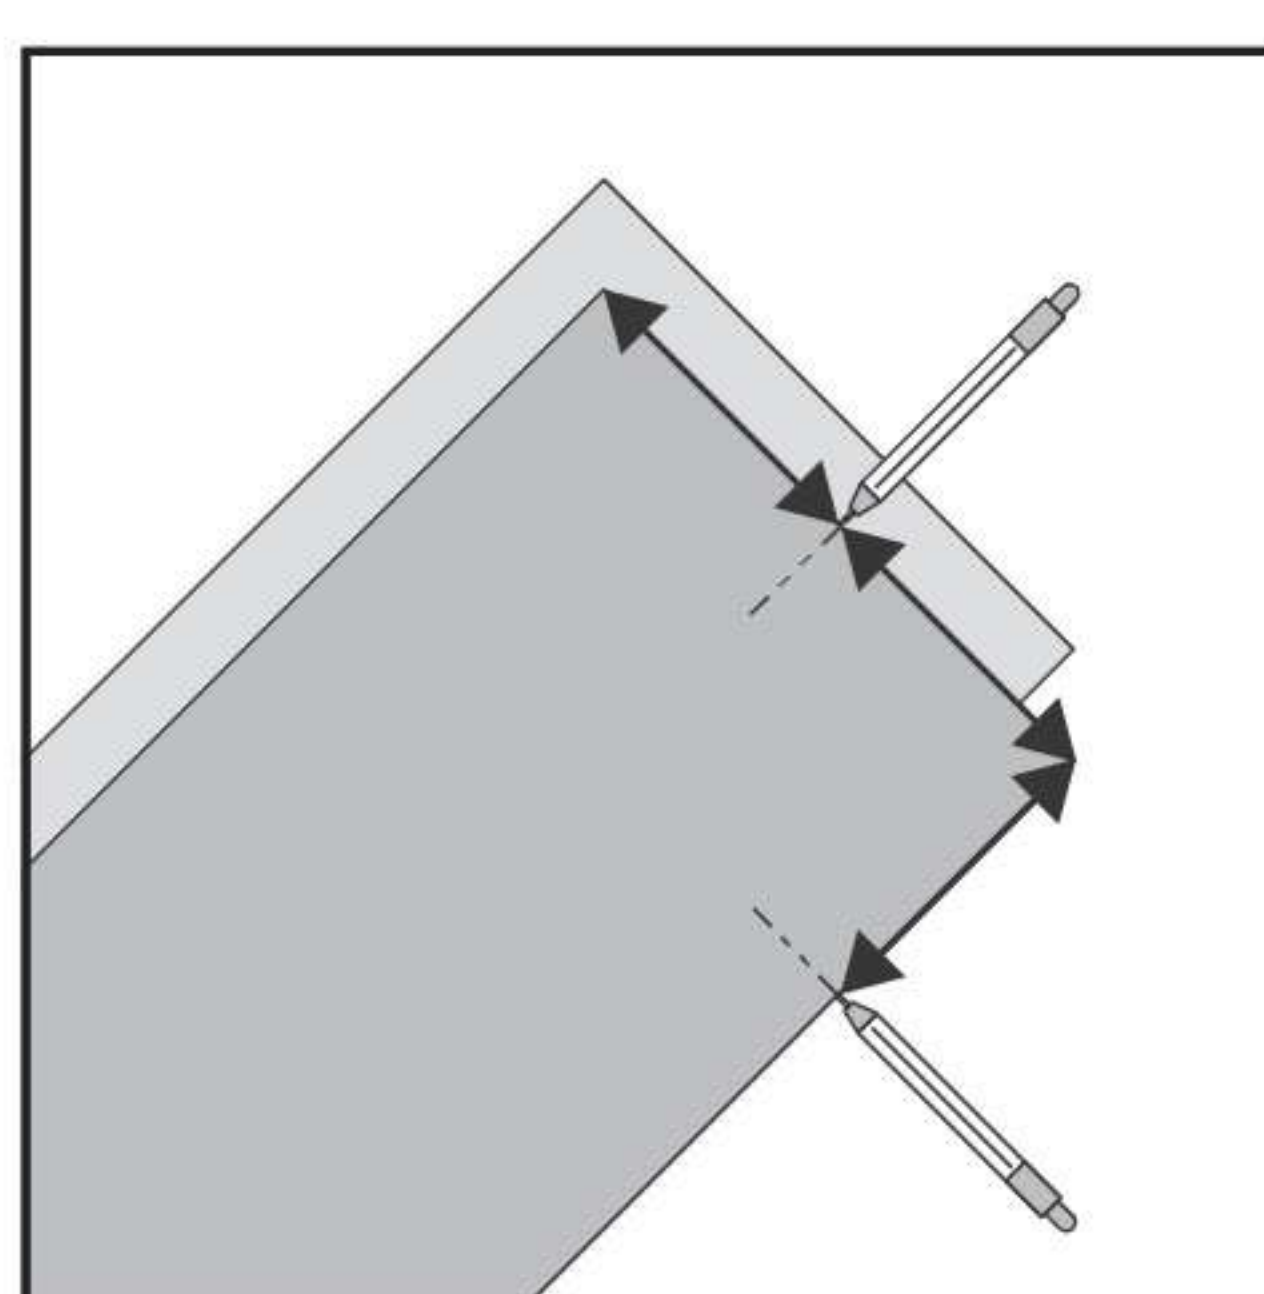


Mark the middle of the short side of the panel. Take this distance and mark it on the long side of the panel.

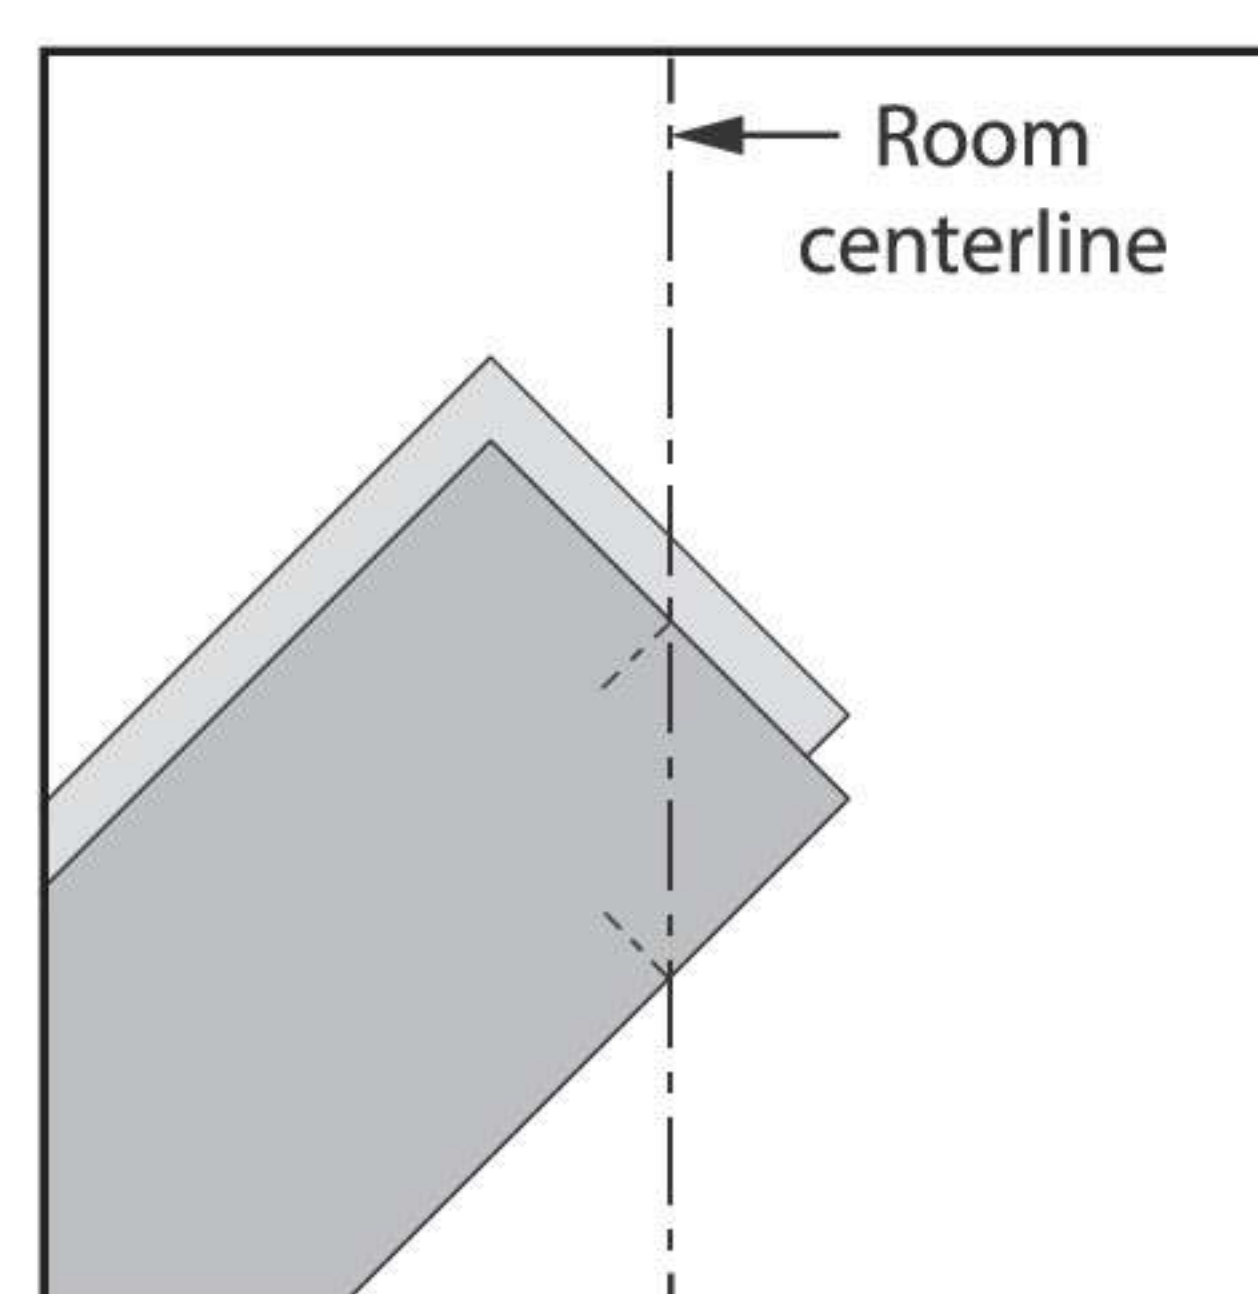


Align the markings on the panel to the center line of the room to ensure the correct angle of the panel and a straight installation.

INSTALLATION ORDER

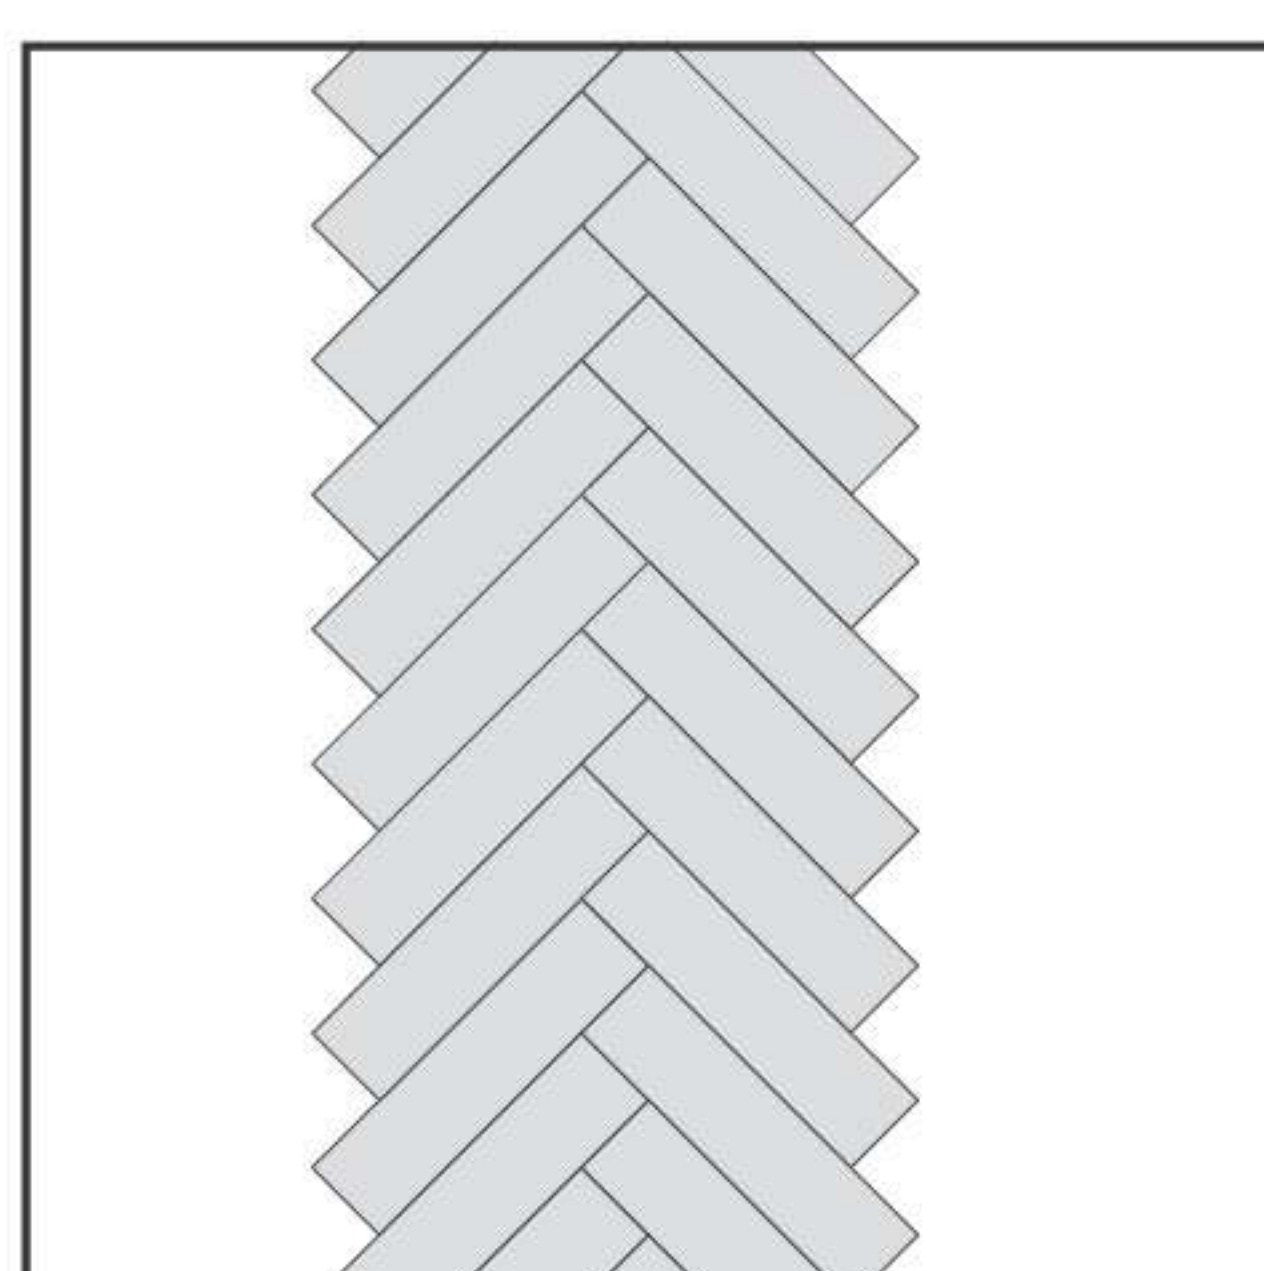

Option 1
Finish the first V row and then continue to the sides.


This is the installation method explained below.

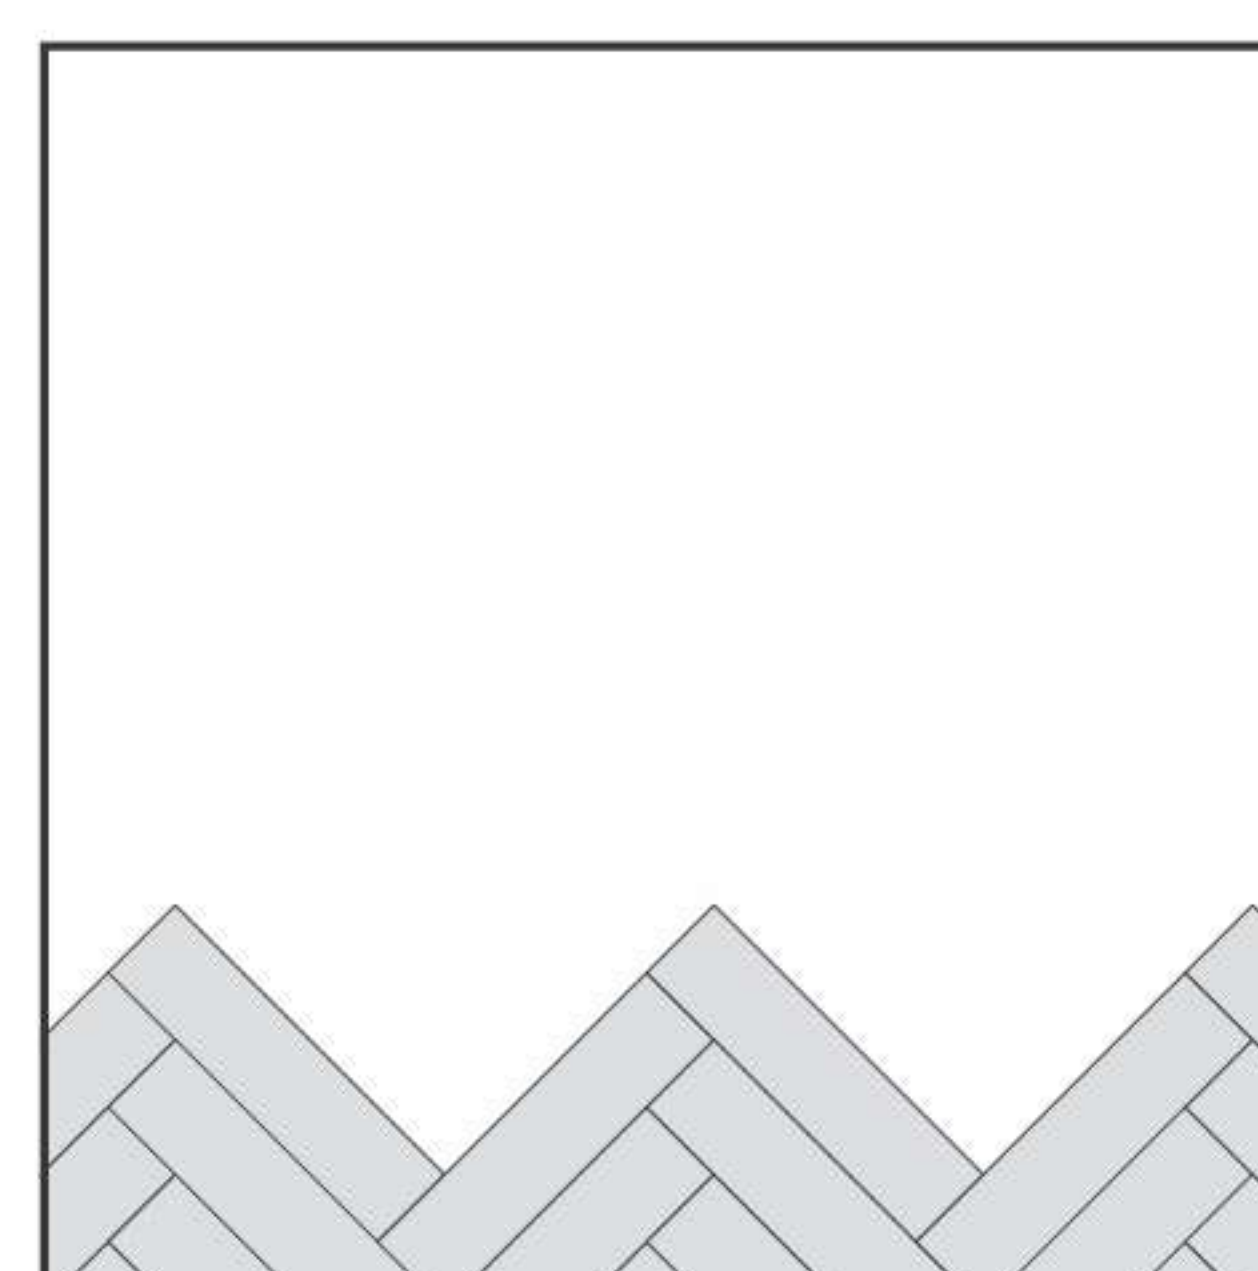


Option 2
Complete the first few rows of the complete width of the room.

Installation First rows


Check all panels before and during installation for damage or visible defects.

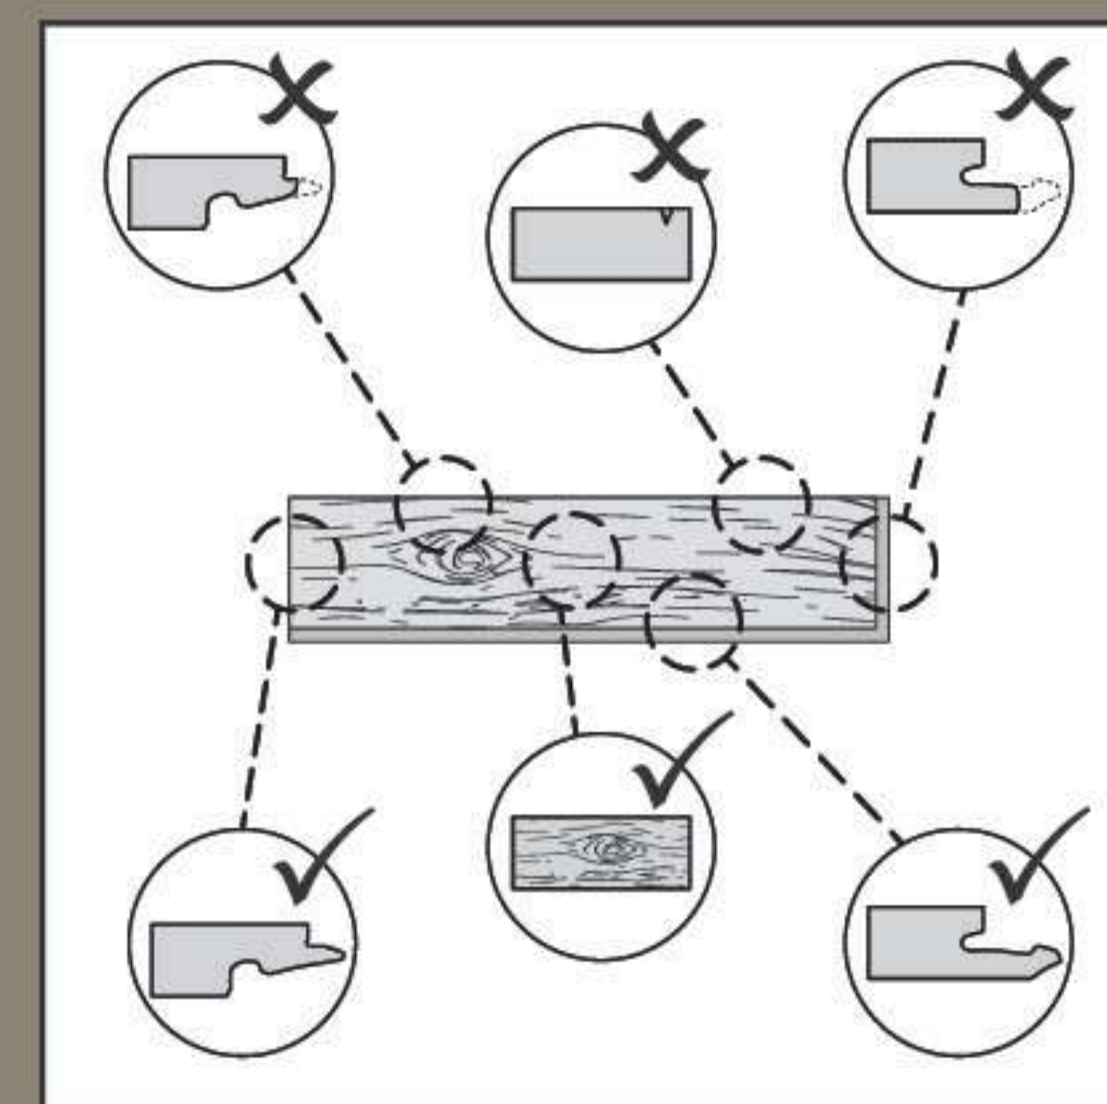

DISTANCE AND DIRECTION

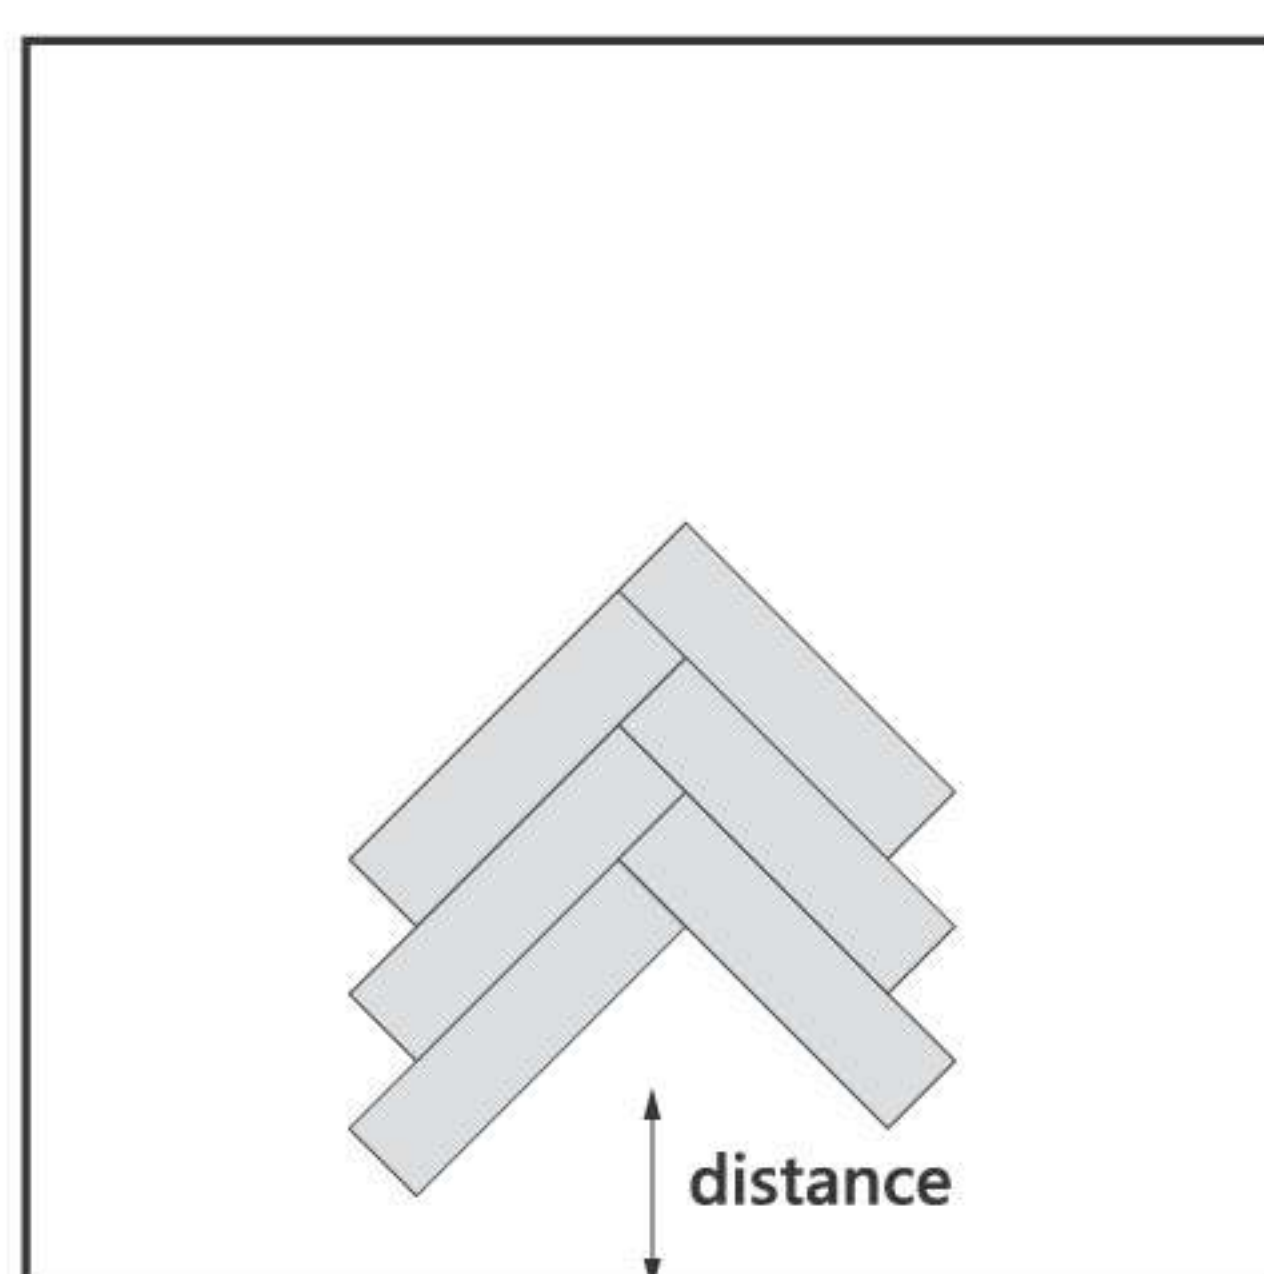


Start the installation at a distance away from the starter wall for easier installation.

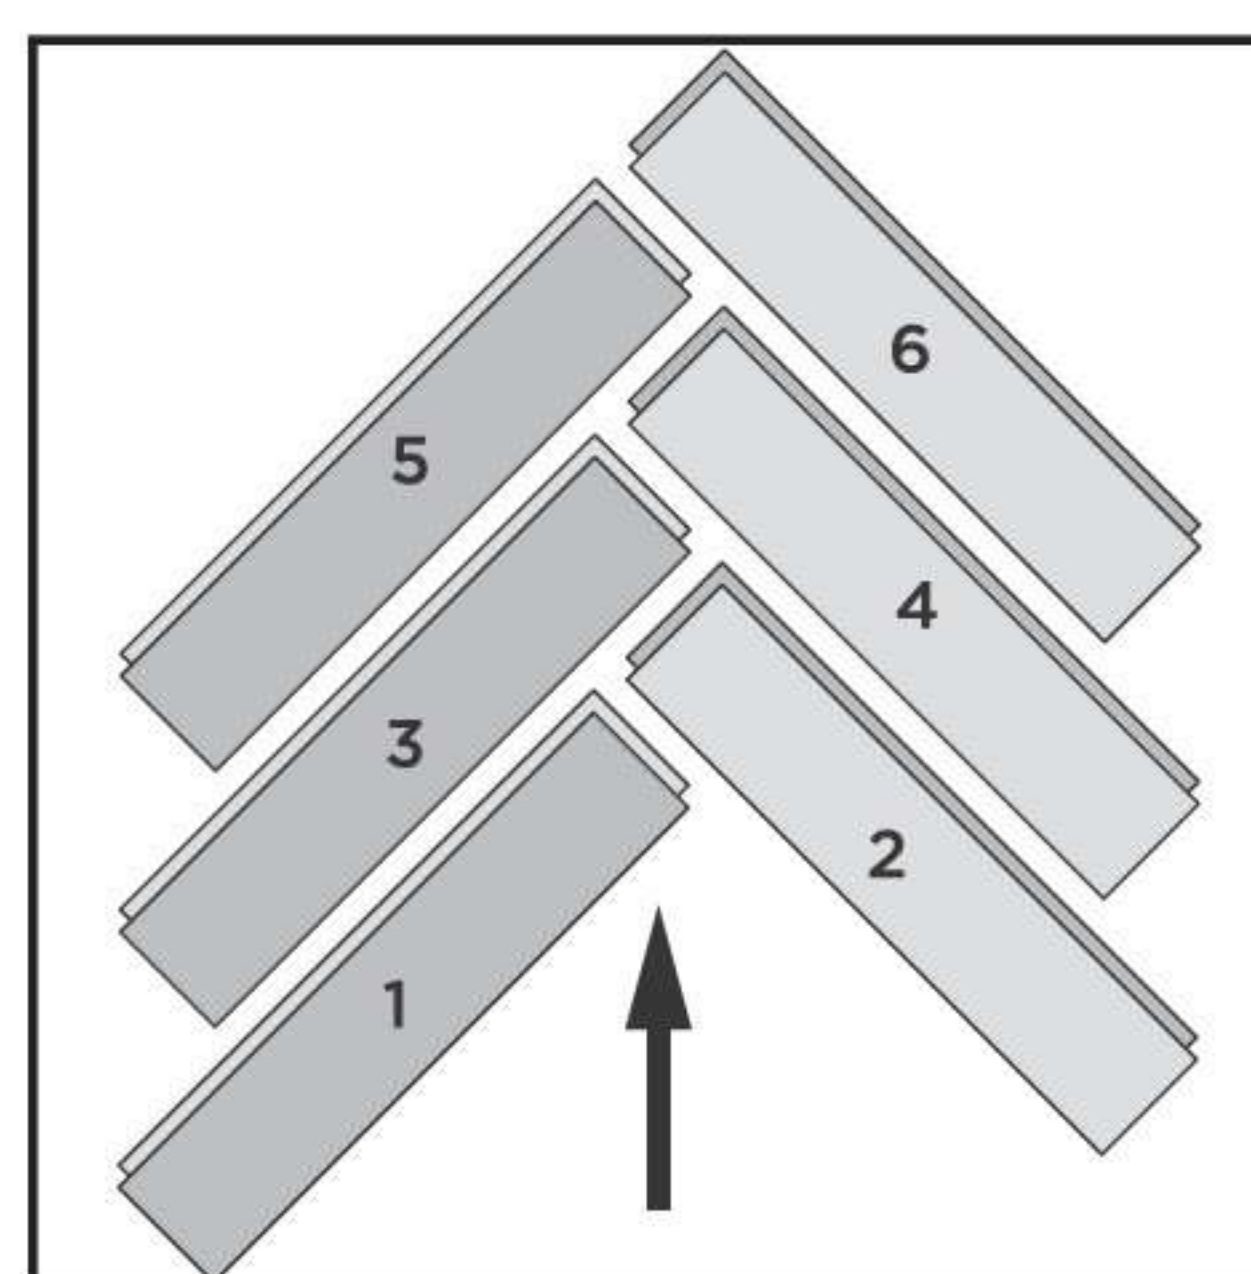


Work in the direction away from the starter wall, with the V pointing away from the wall.

ALIGN THE SECOND PANEL

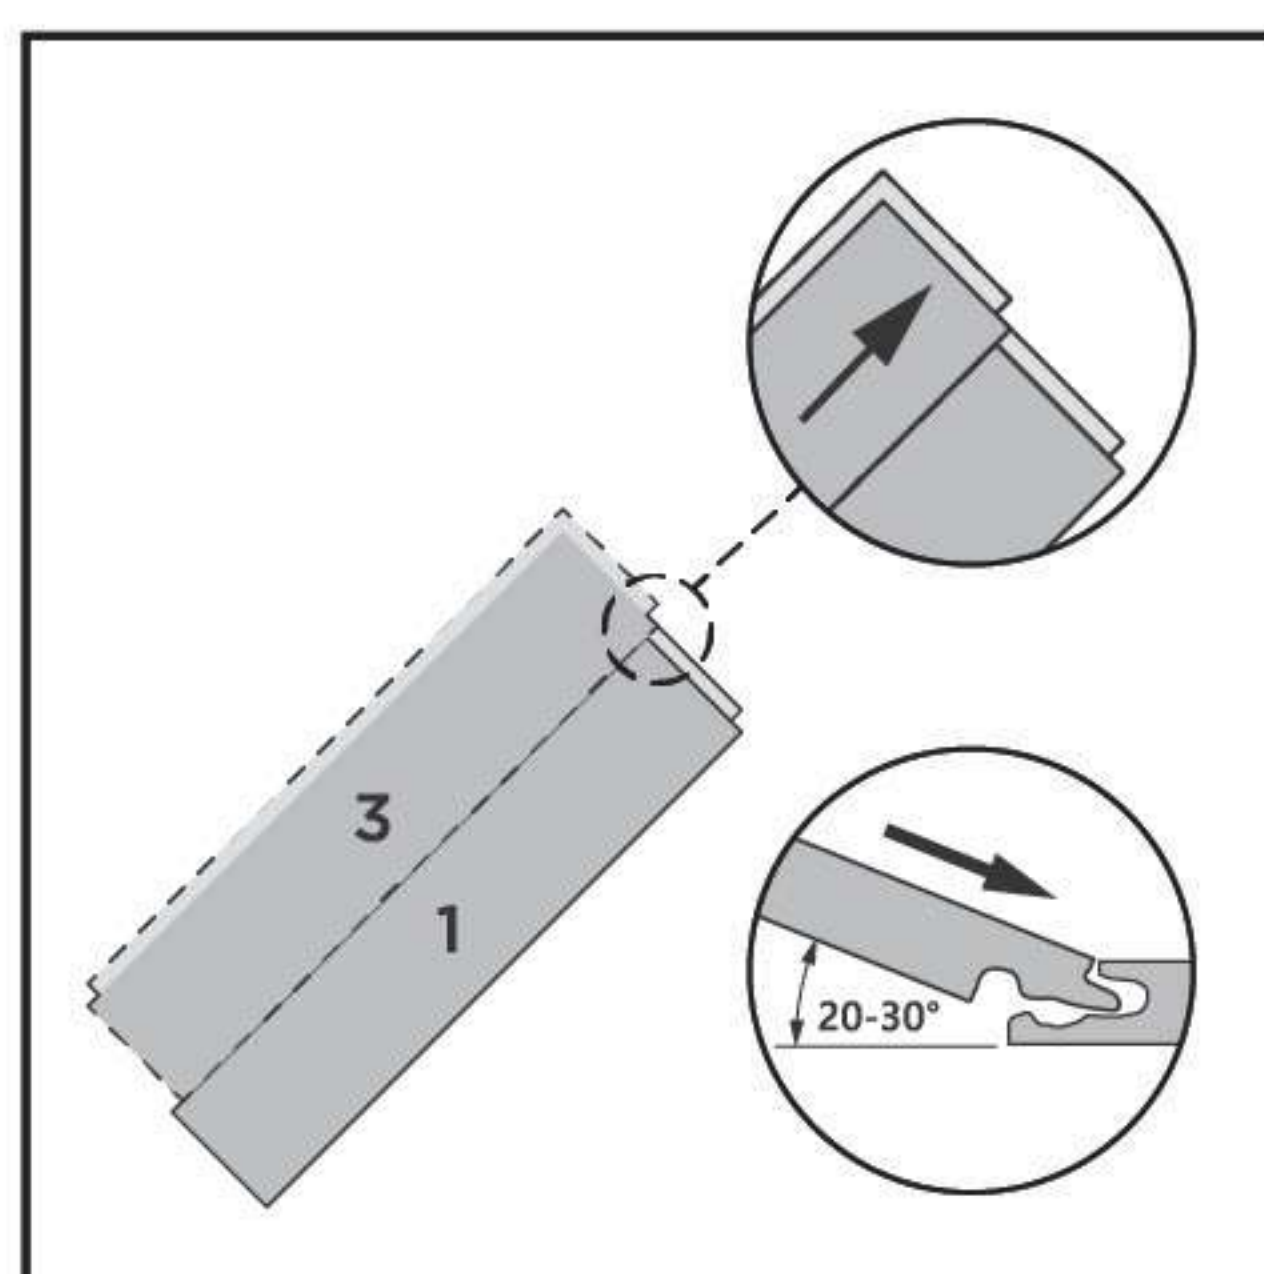


Use an alignment panel (3) to help align panel 2 by installing it 0,5 cm beyond the edge of panel 1.

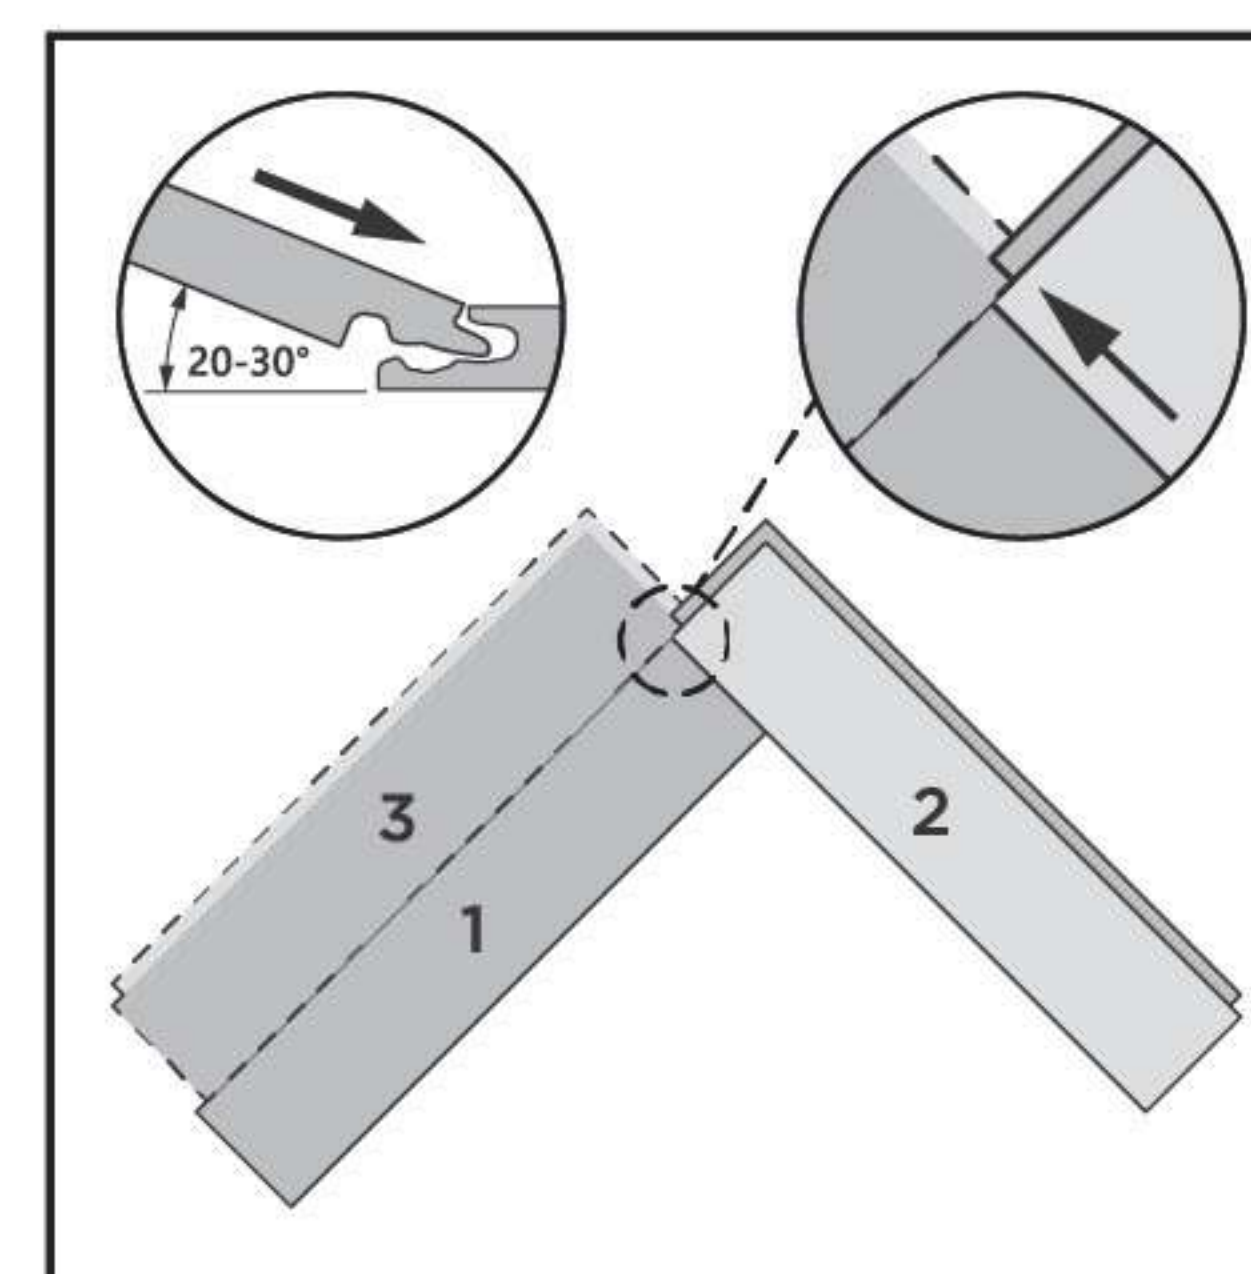


Angle the long side of panel 2 into the short side of panel 1 at 20-30°, slide it towards panel 3 until it reaches the corner of panel 3 and angle down.

MOVE TO THE B SIDE

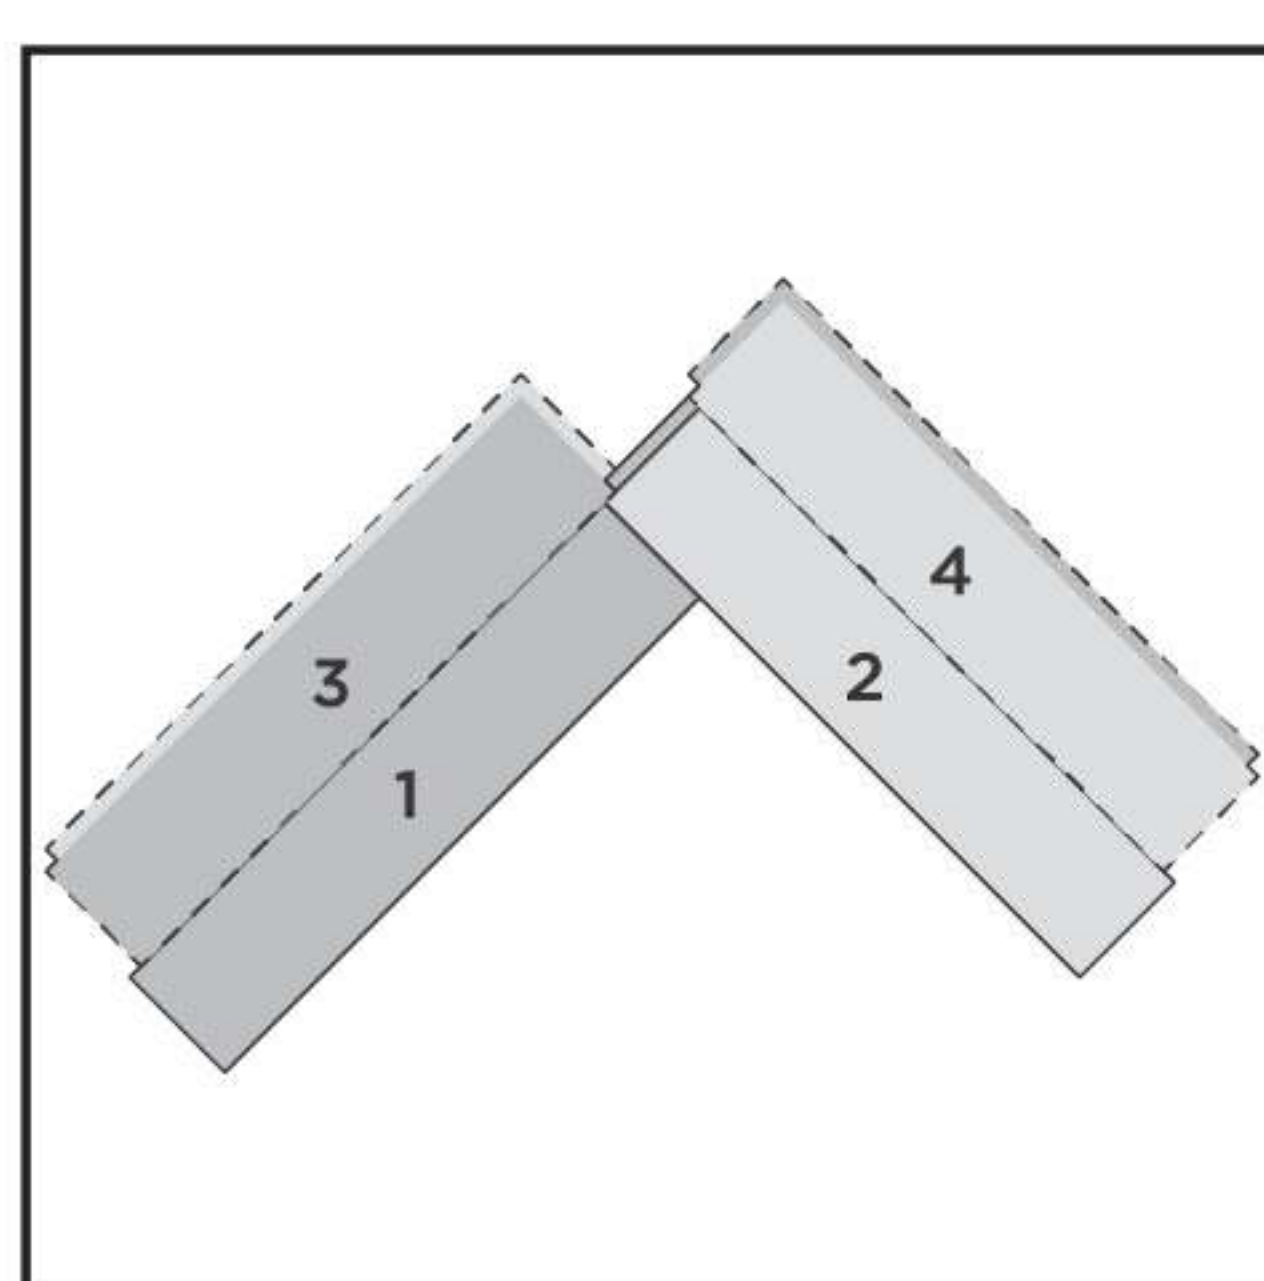


Use another alignment panel (4) to help align panel 3 by installing it 0,5 cm beyond the edge of panel 2.

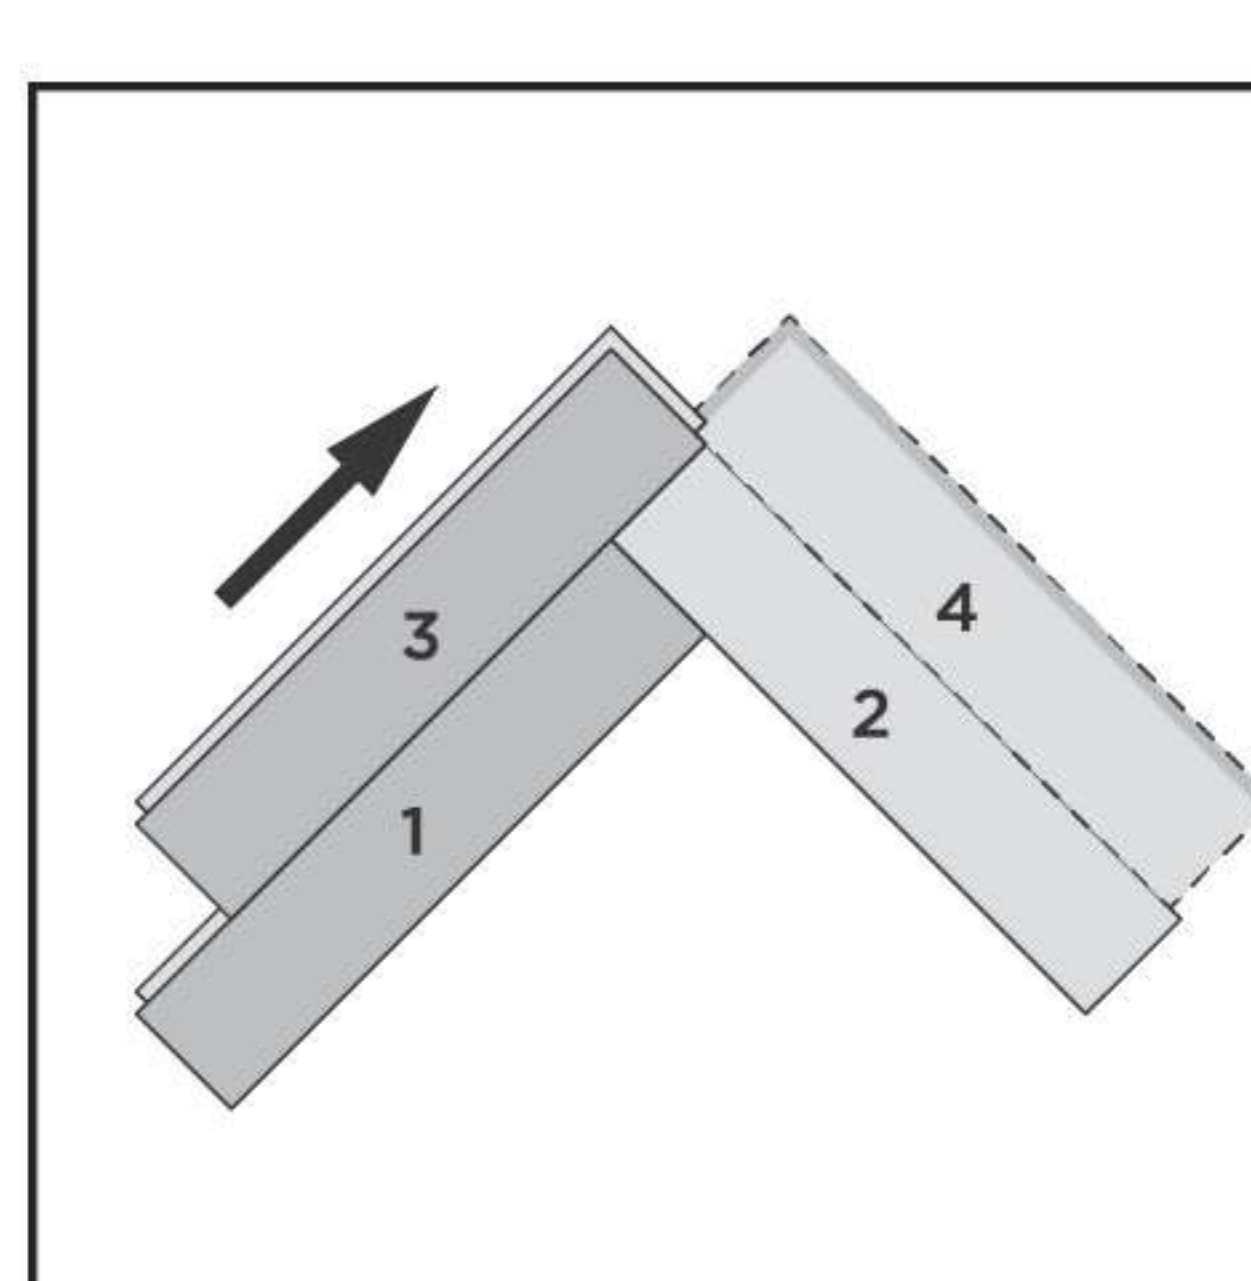


Angle up the long side of panel 3 into the long side of panel 2 at 20-30°, slide it towards panel 4 until it reaches the corner of panel 4 and angle down.

MIND THE GAP

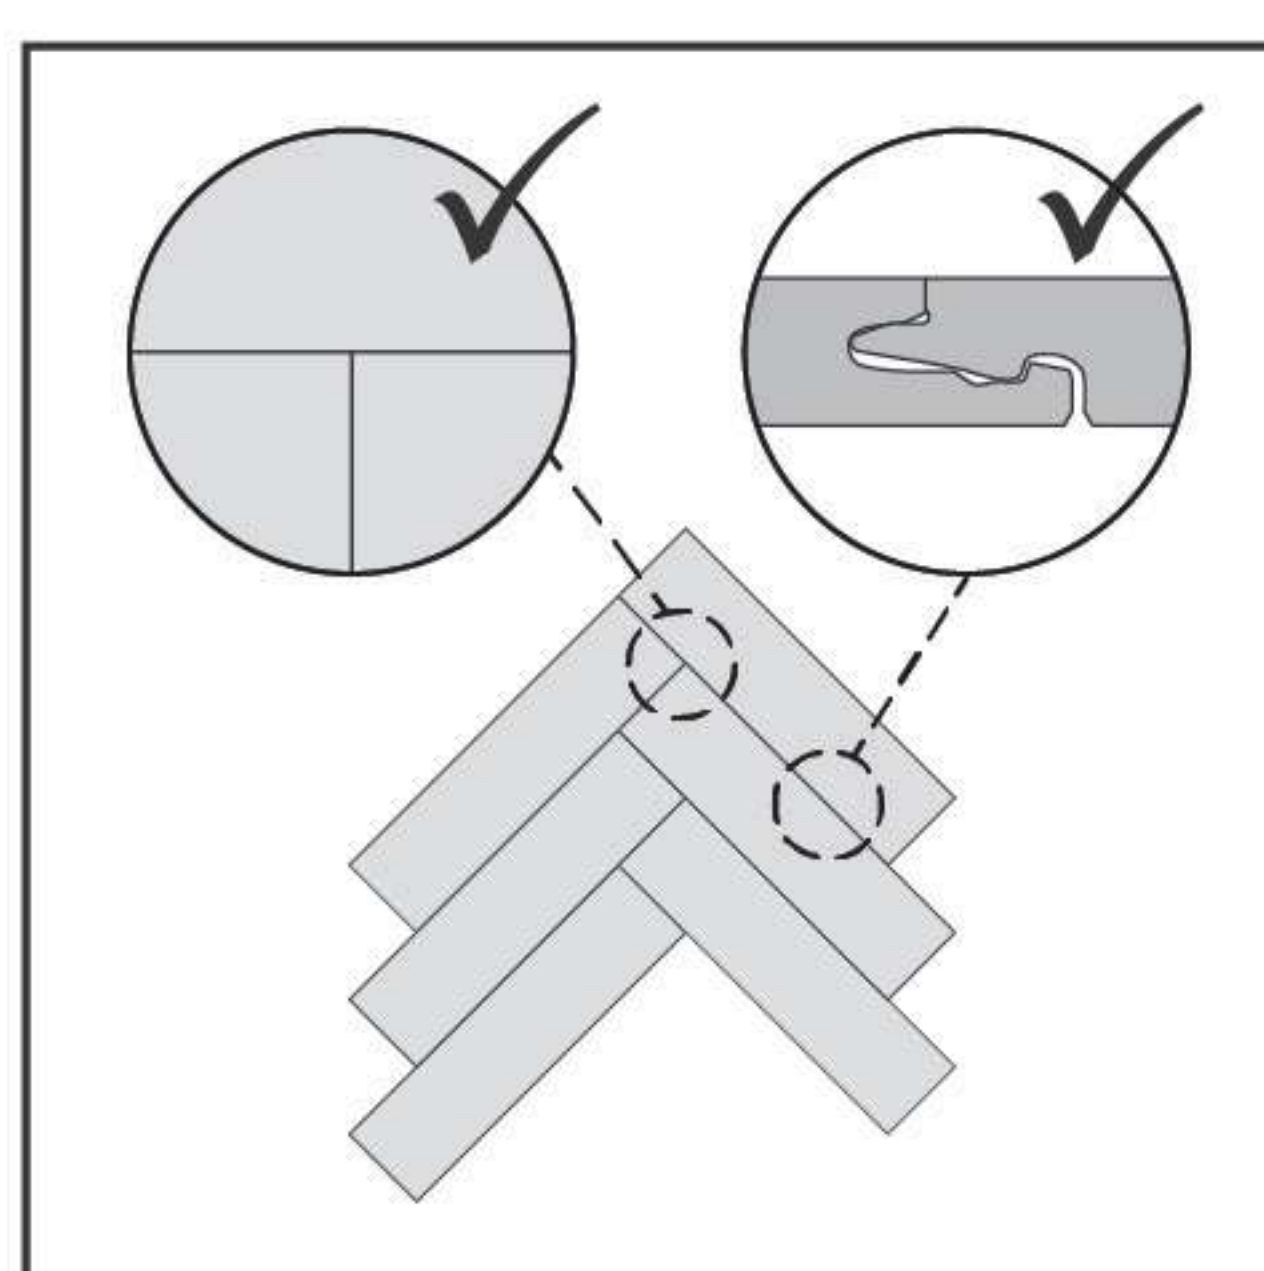

After installing a panel, check all joints to see if they are fully connected and there are no gaps or height differences.

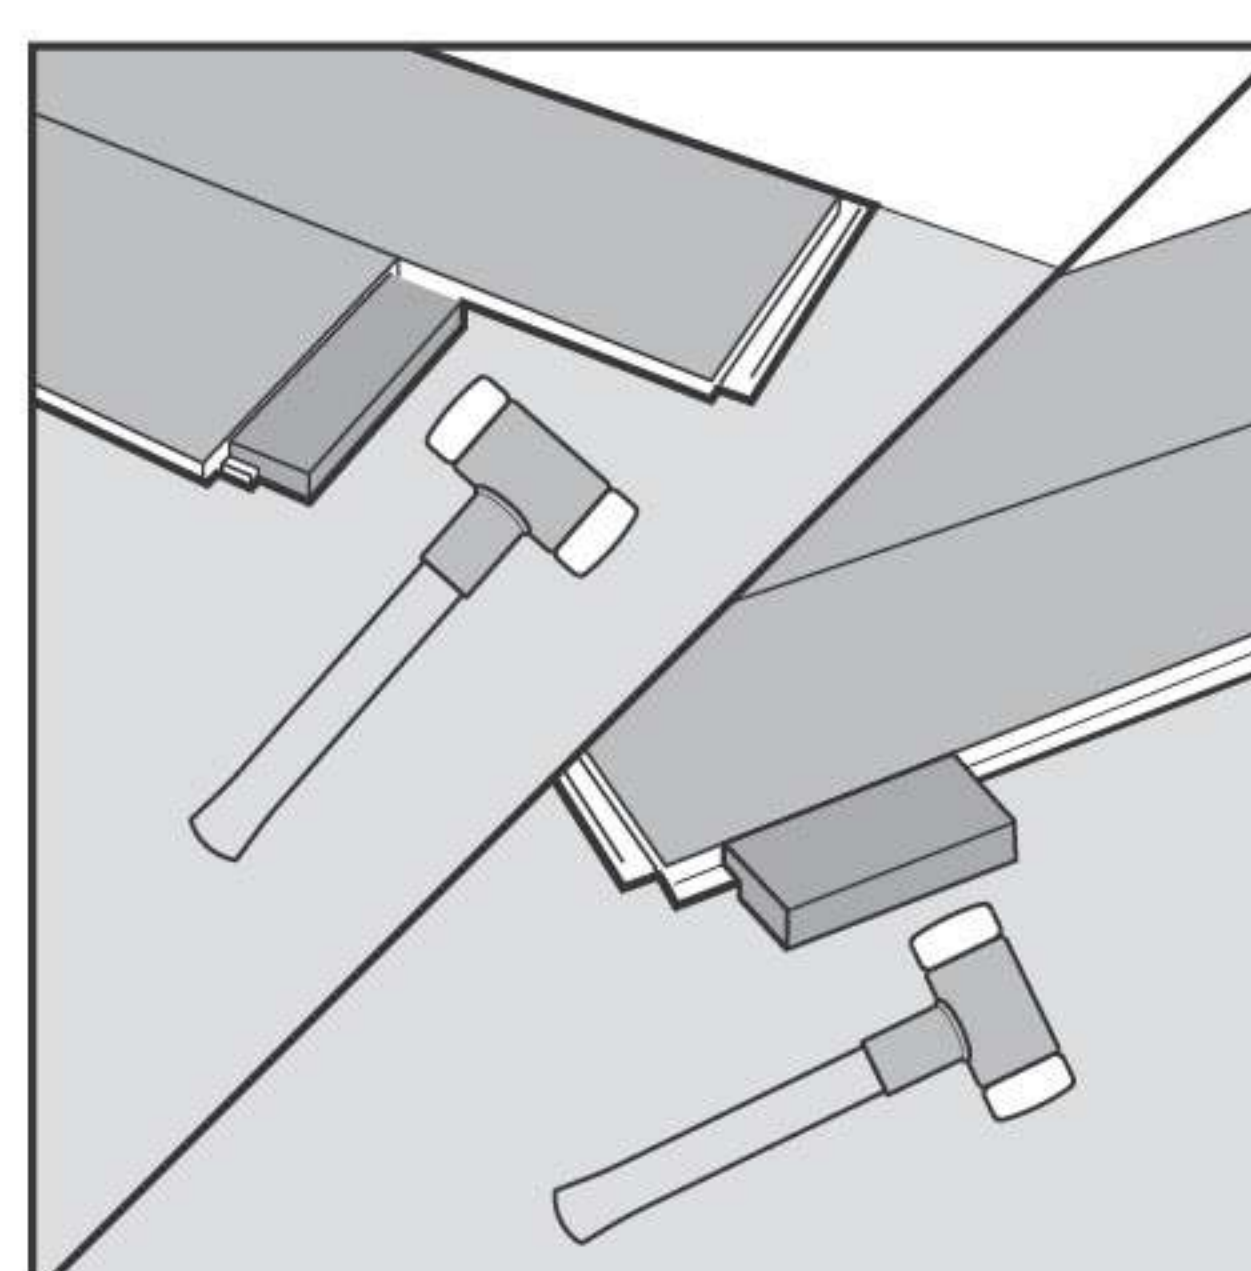


To ensure all gaps are closed, gently tap the tapping block with a hammer to completely close the joints.

Installation Continue


WATCH THE
INSTALLATION
VIDEO



MOVE TO THE STARTER WALL

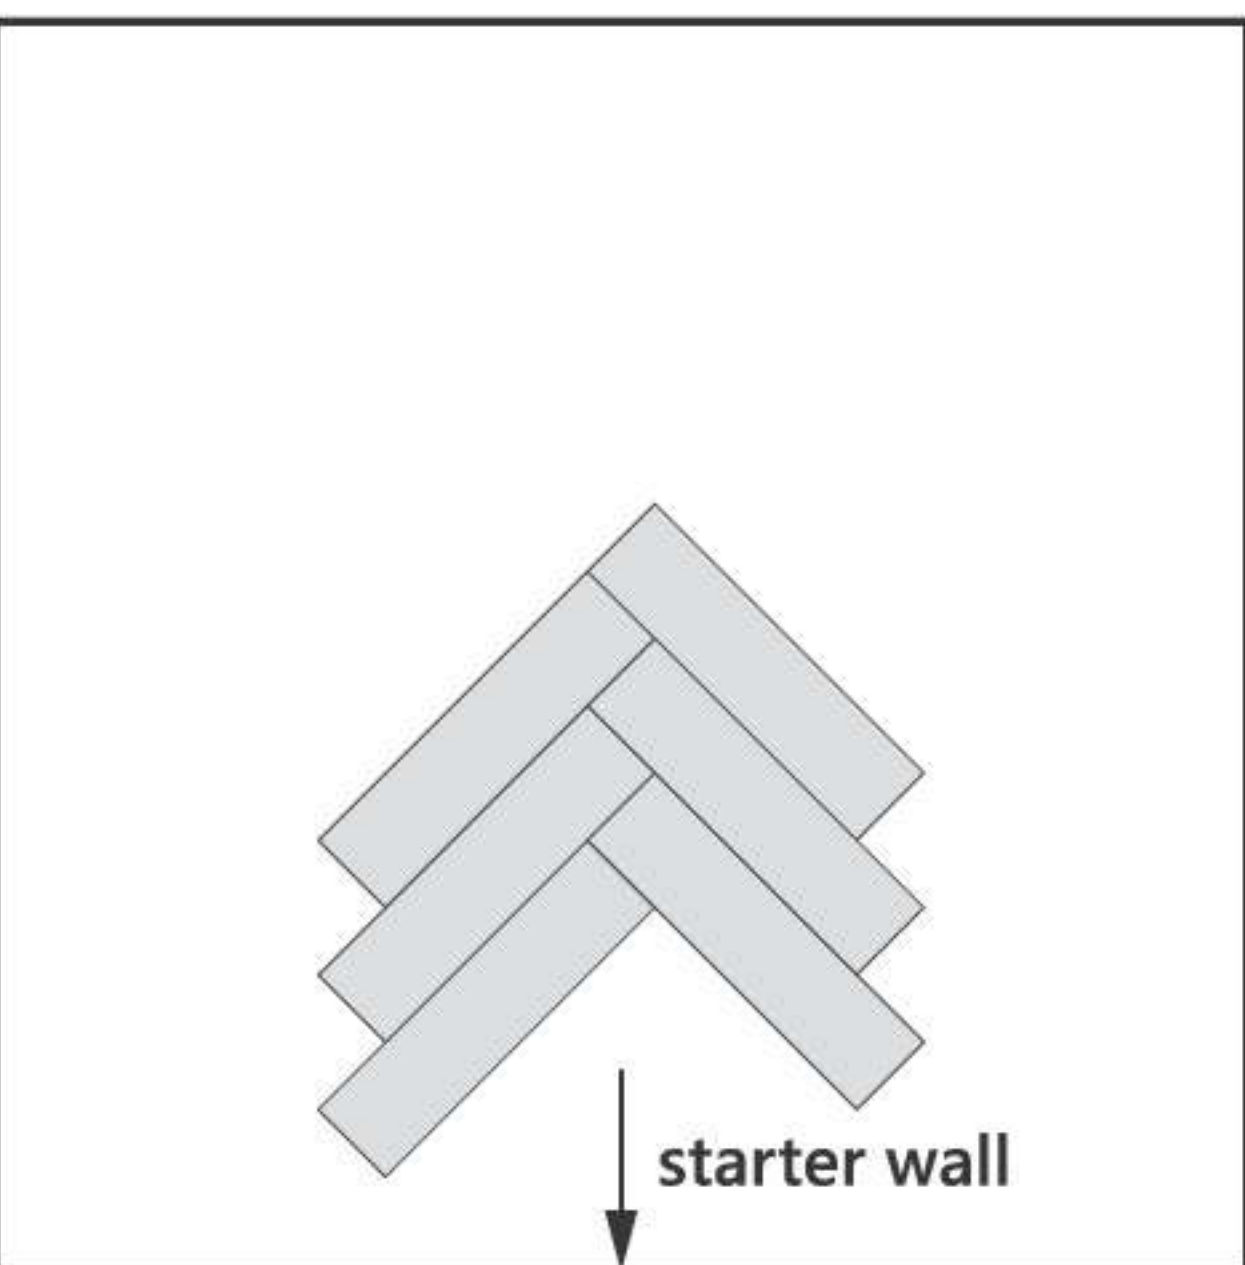


After a few panels, slide the row towards the starter wall, aligned with the center line of the room. Leave enough room for the expansion gaps.

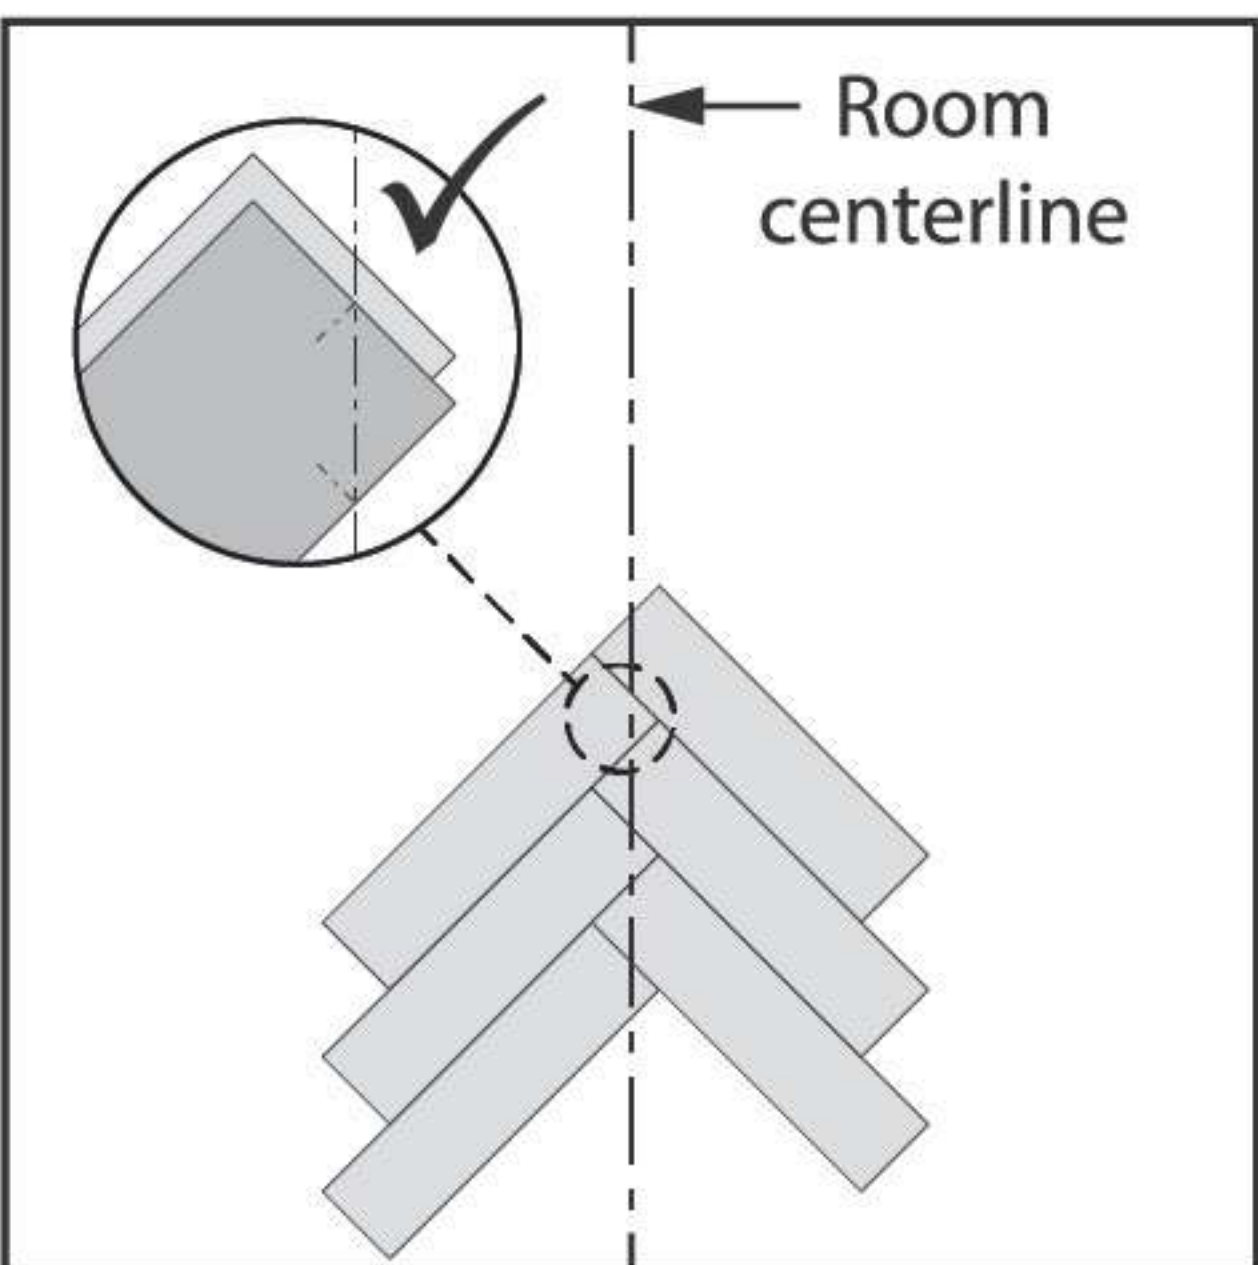


Align the rows to the middle line of the room, using the markings on the panel as a guide.

CONTINUE THE INSTALLATION

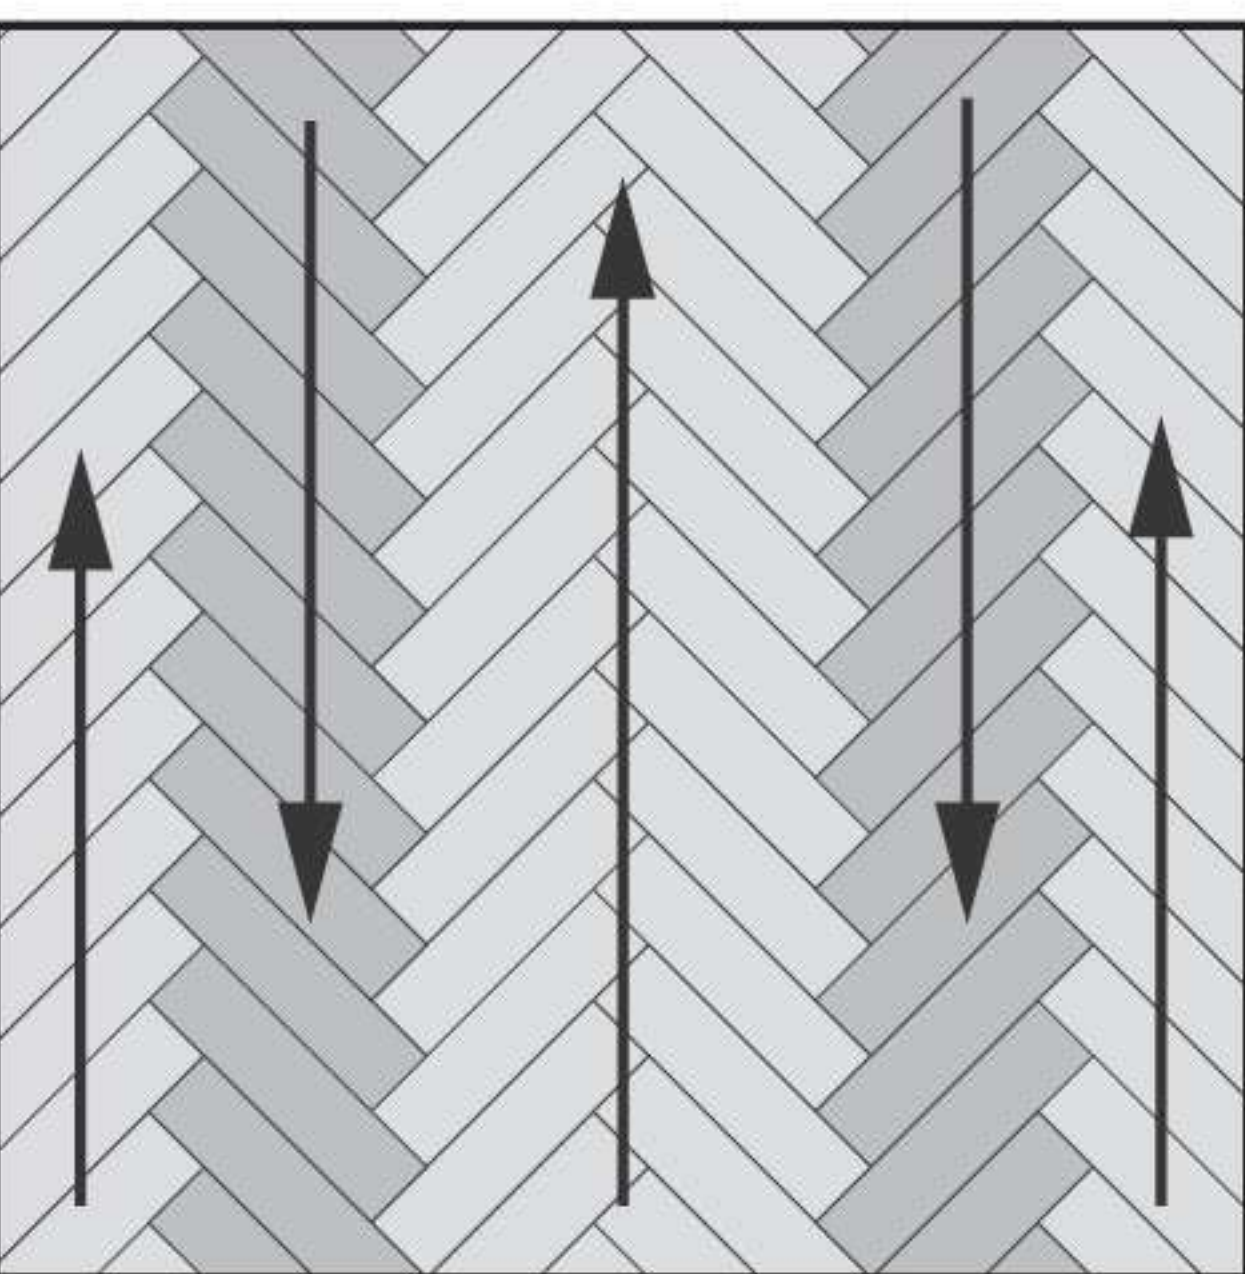


Complete the first V row with complete panels. Make sure to keep it aligned to the center line. Then continue on the sides, working in the opposite direction.

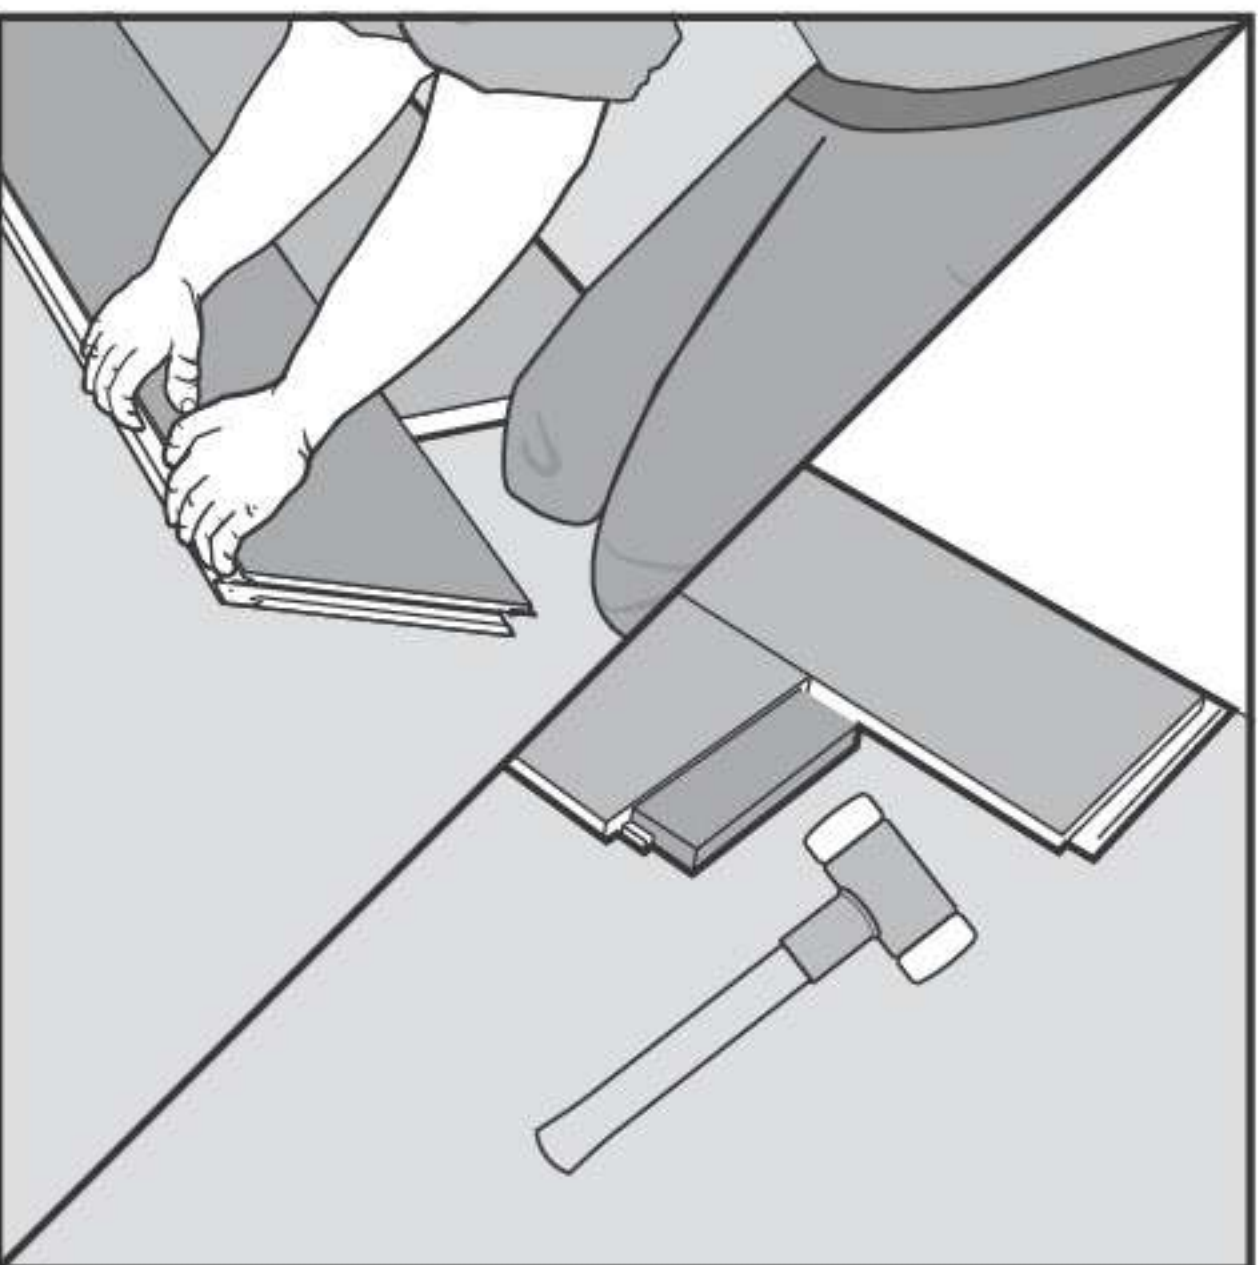


To install the next row, always connect the long side of the new panel into the installed panels. Use a tapping block to close the short side of the panel.

133

FINISH THE SIDES

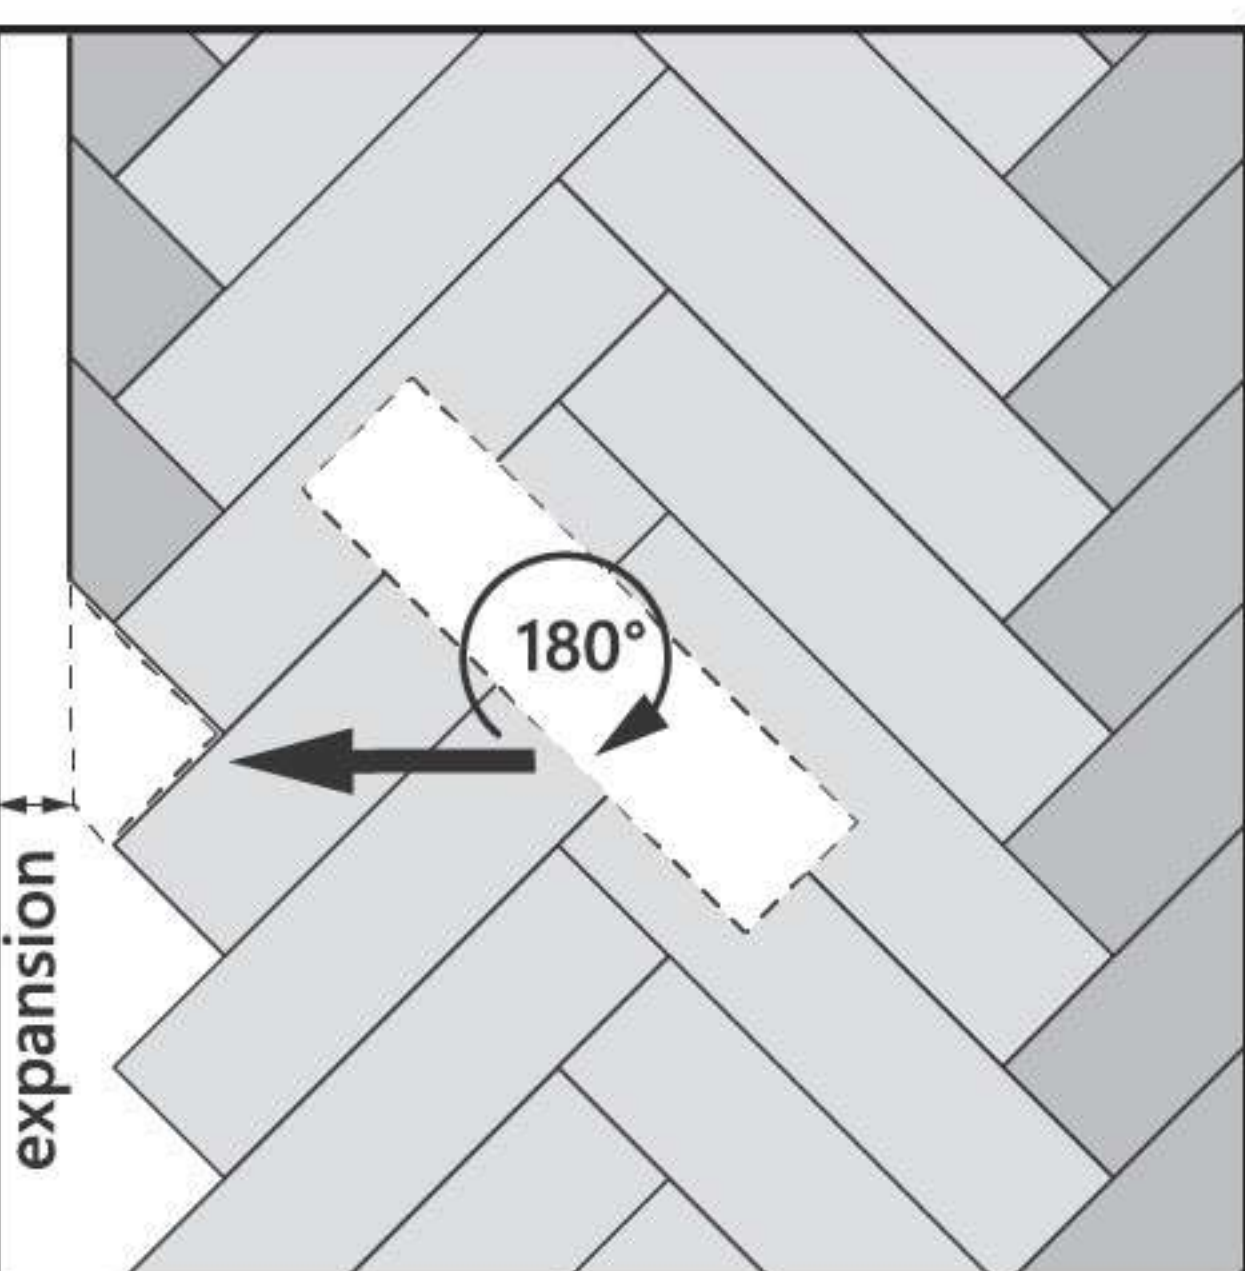


Position the panel in the correct position to be installed. Rotate the panel 180° and position it where it needs to be installed, while leaving space for the expansion gap.

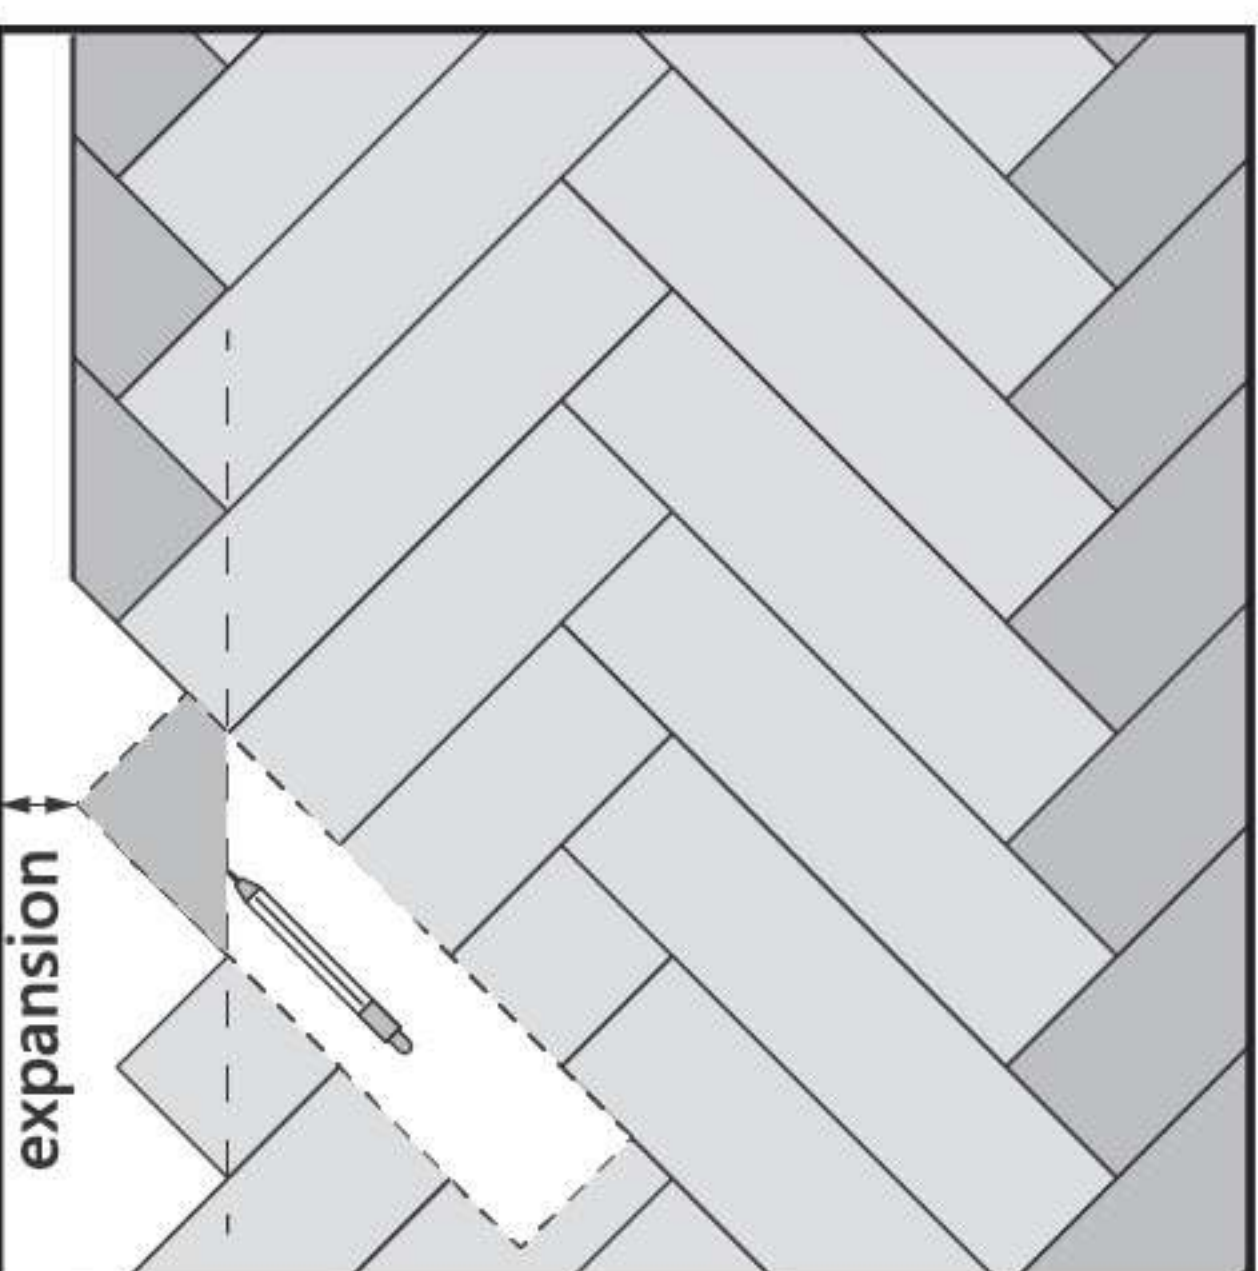


Draw a line by connecting the edges of the installed panels and cut along this line. Rotate the panel back 180° and install it by angling and using the pull bar.

EDGE PIECES

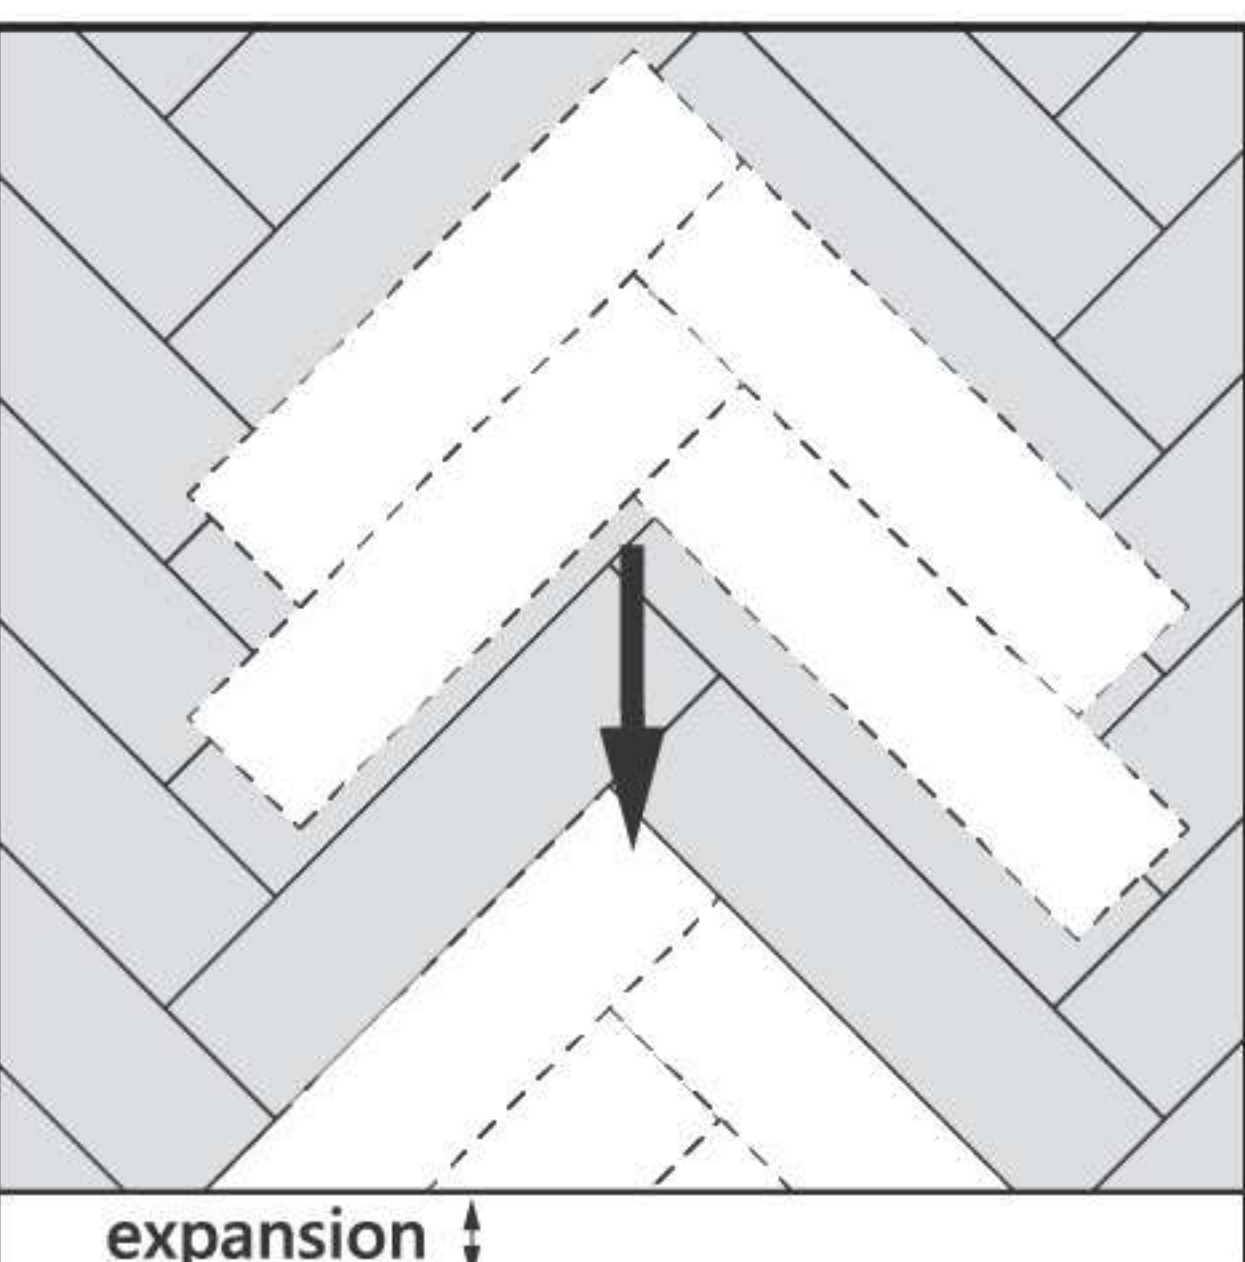

Pre-build the edge pieces with enough panels to cover the gaps. Measure the edges of the remaining floor, taking the expansion gap into account.

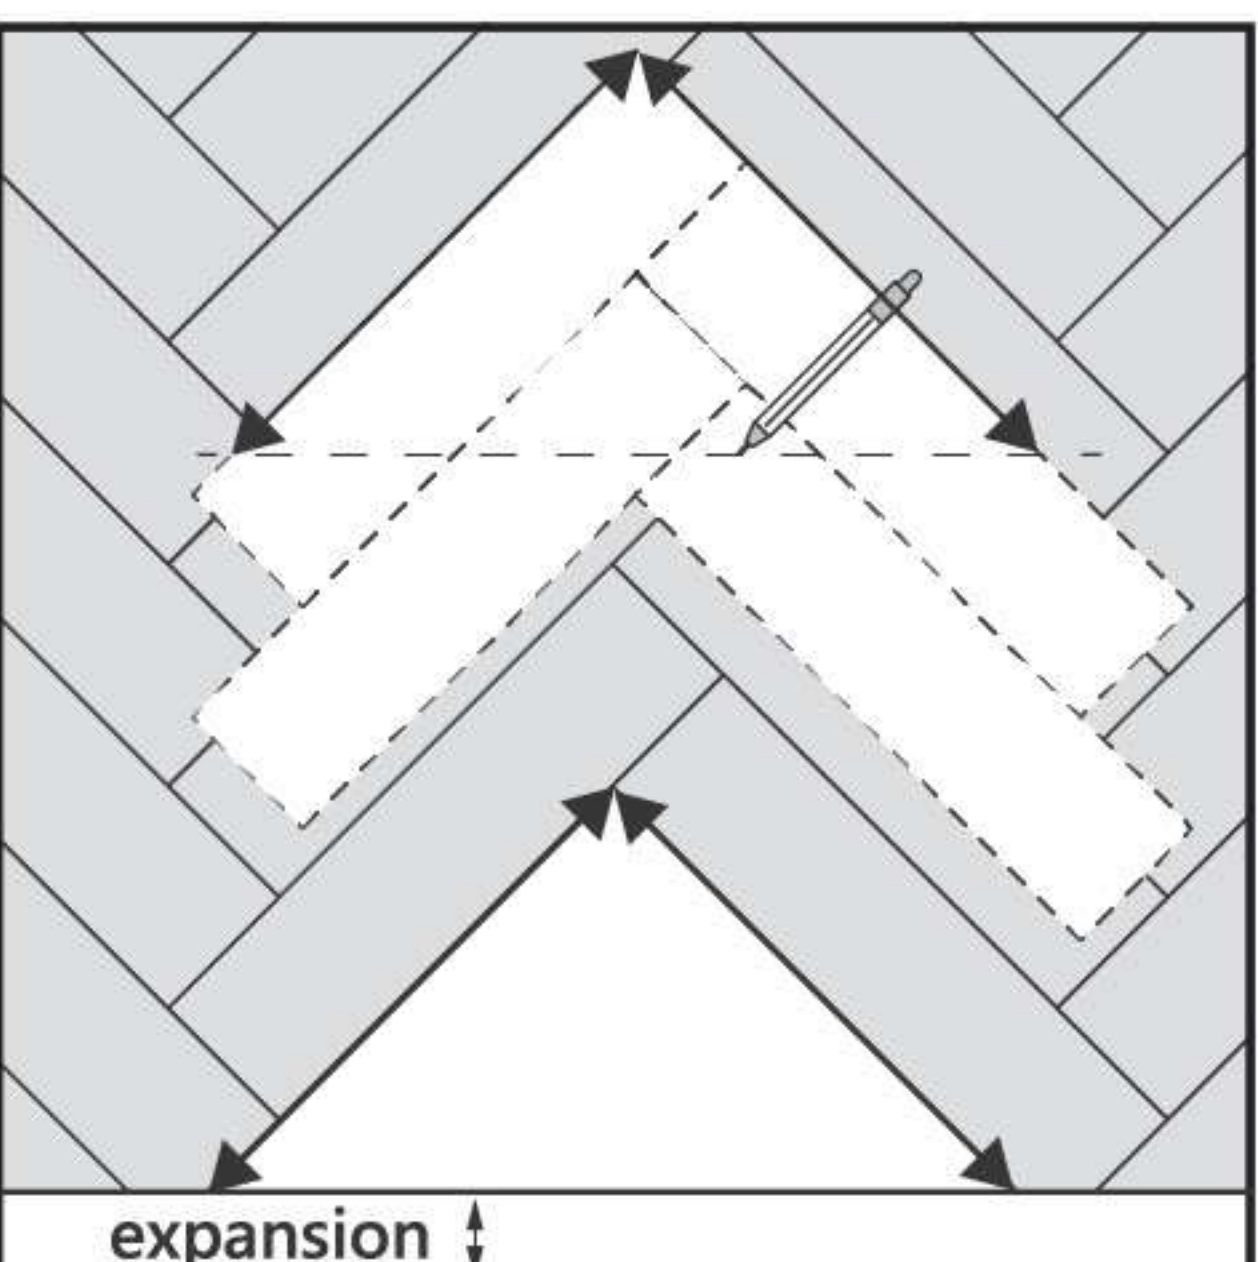

Mark the dimensions on the pre-build panels and cut to size. Install the remaining pieces one by one. Use a pull bar if necessary.


Installation

Correct size


WATCH THE
INSTALLATION
VIDEO



EDGE PANELS

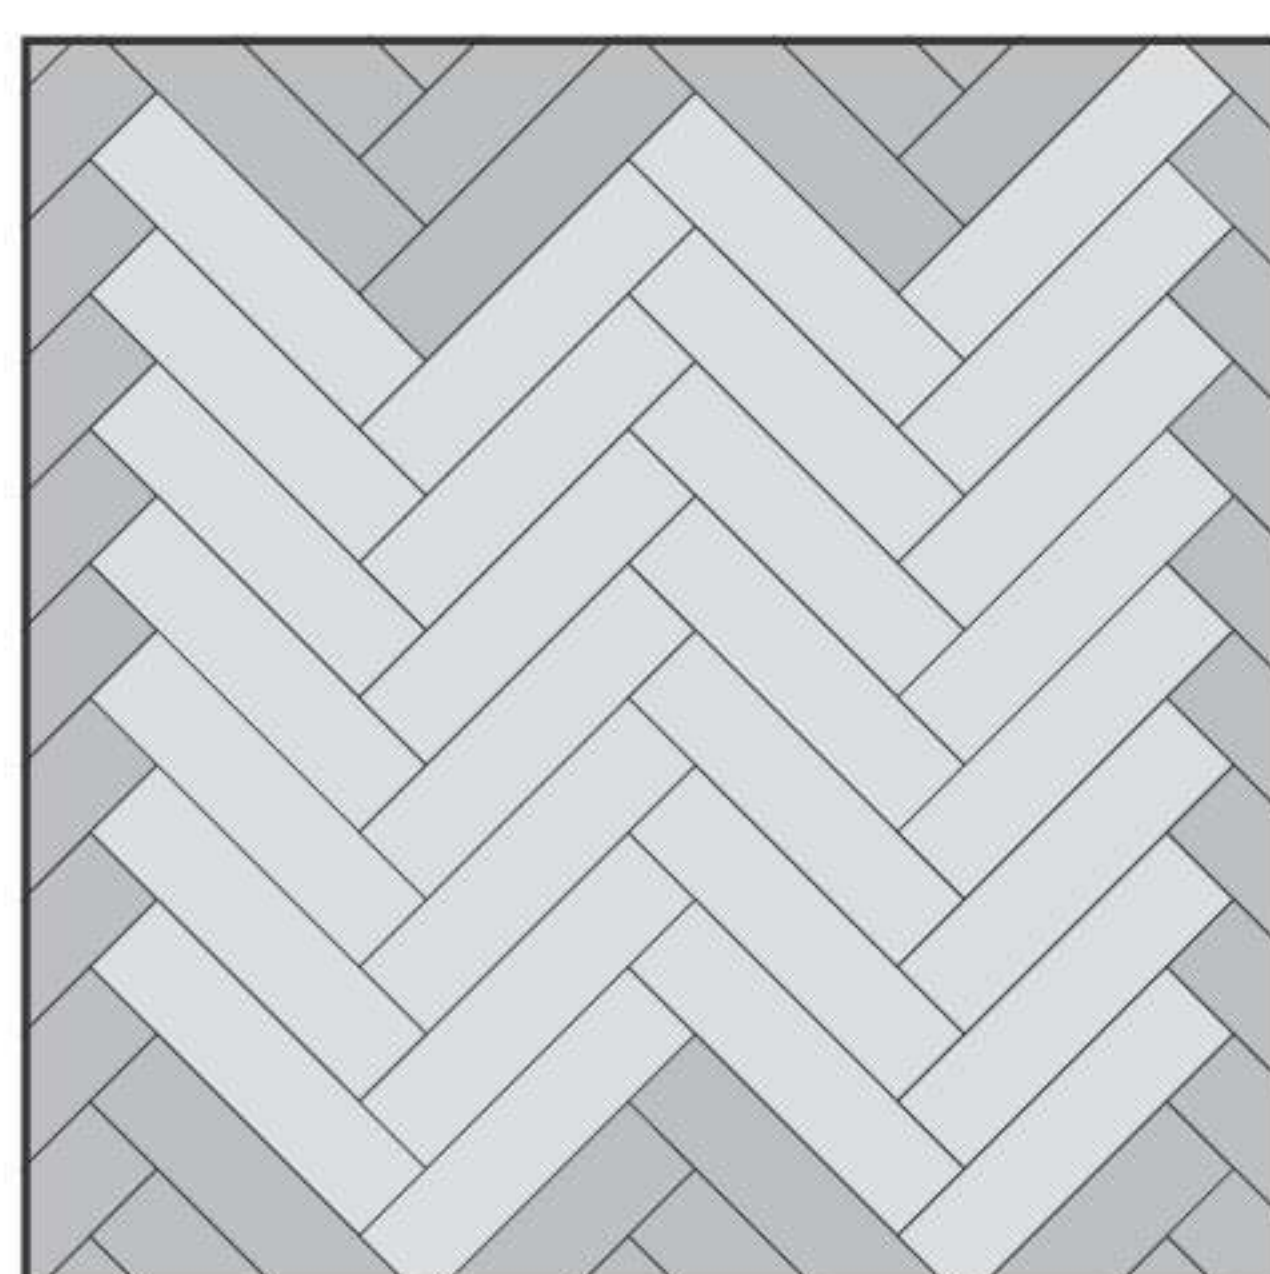


- Measure the edge piece as explained on the previous page
- Keep the expansion gaps into account

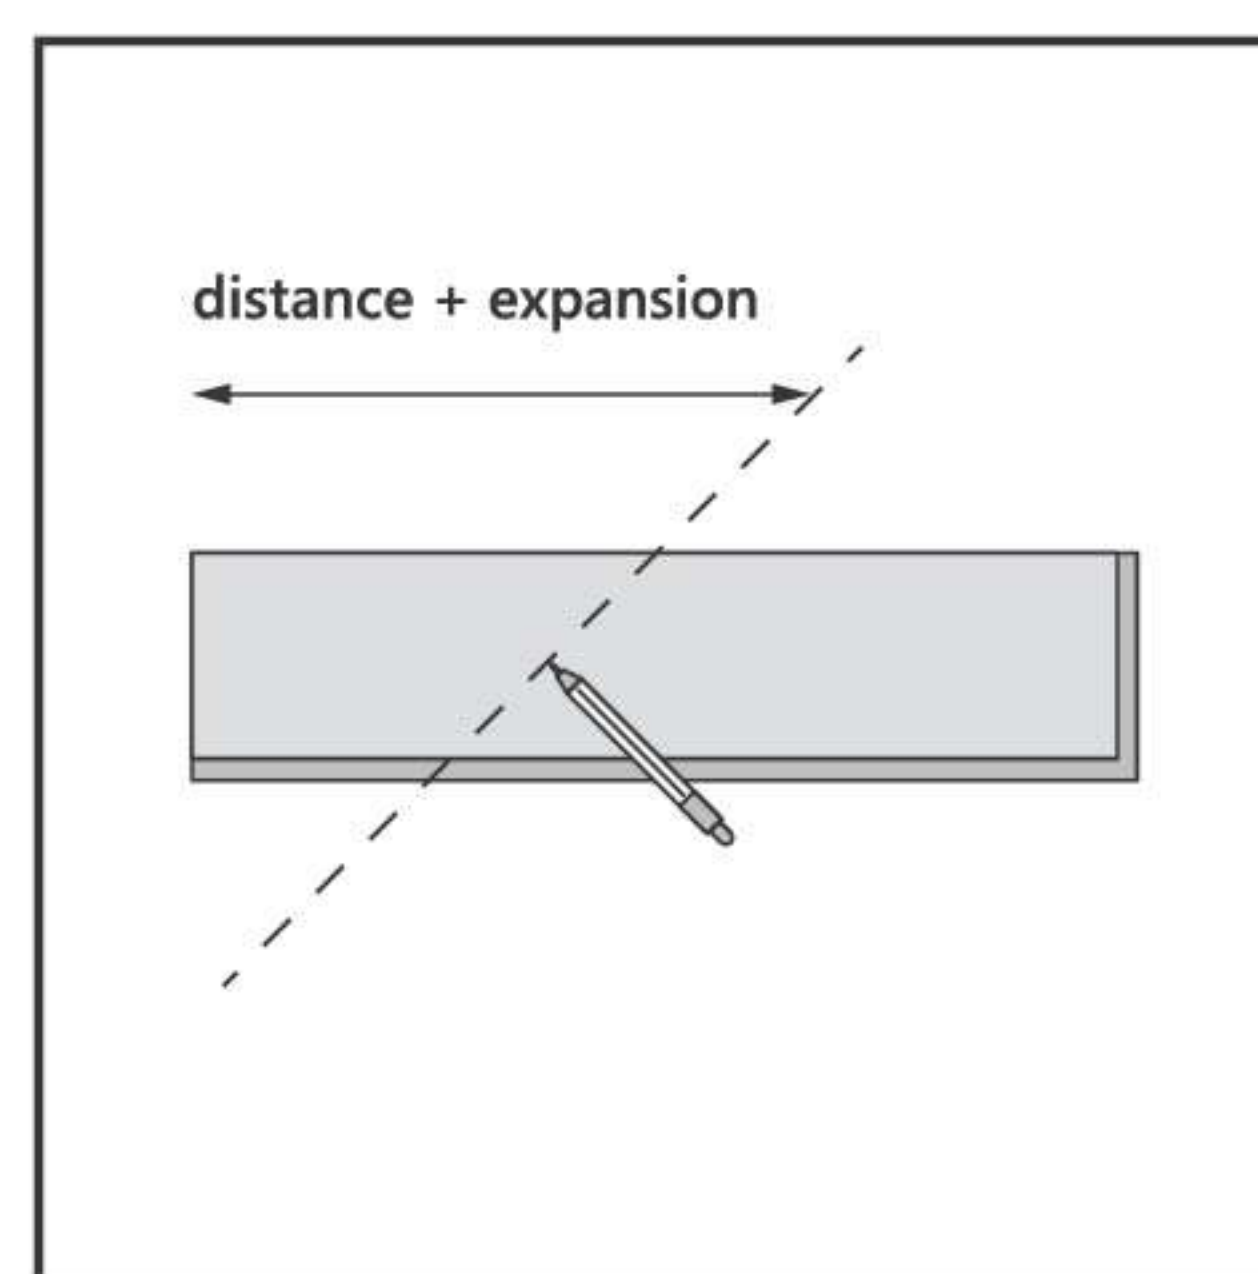

- Pencil the cutting line on your panel
- Use a ruler or another floor panel to ensure a straight line


VINYL

134

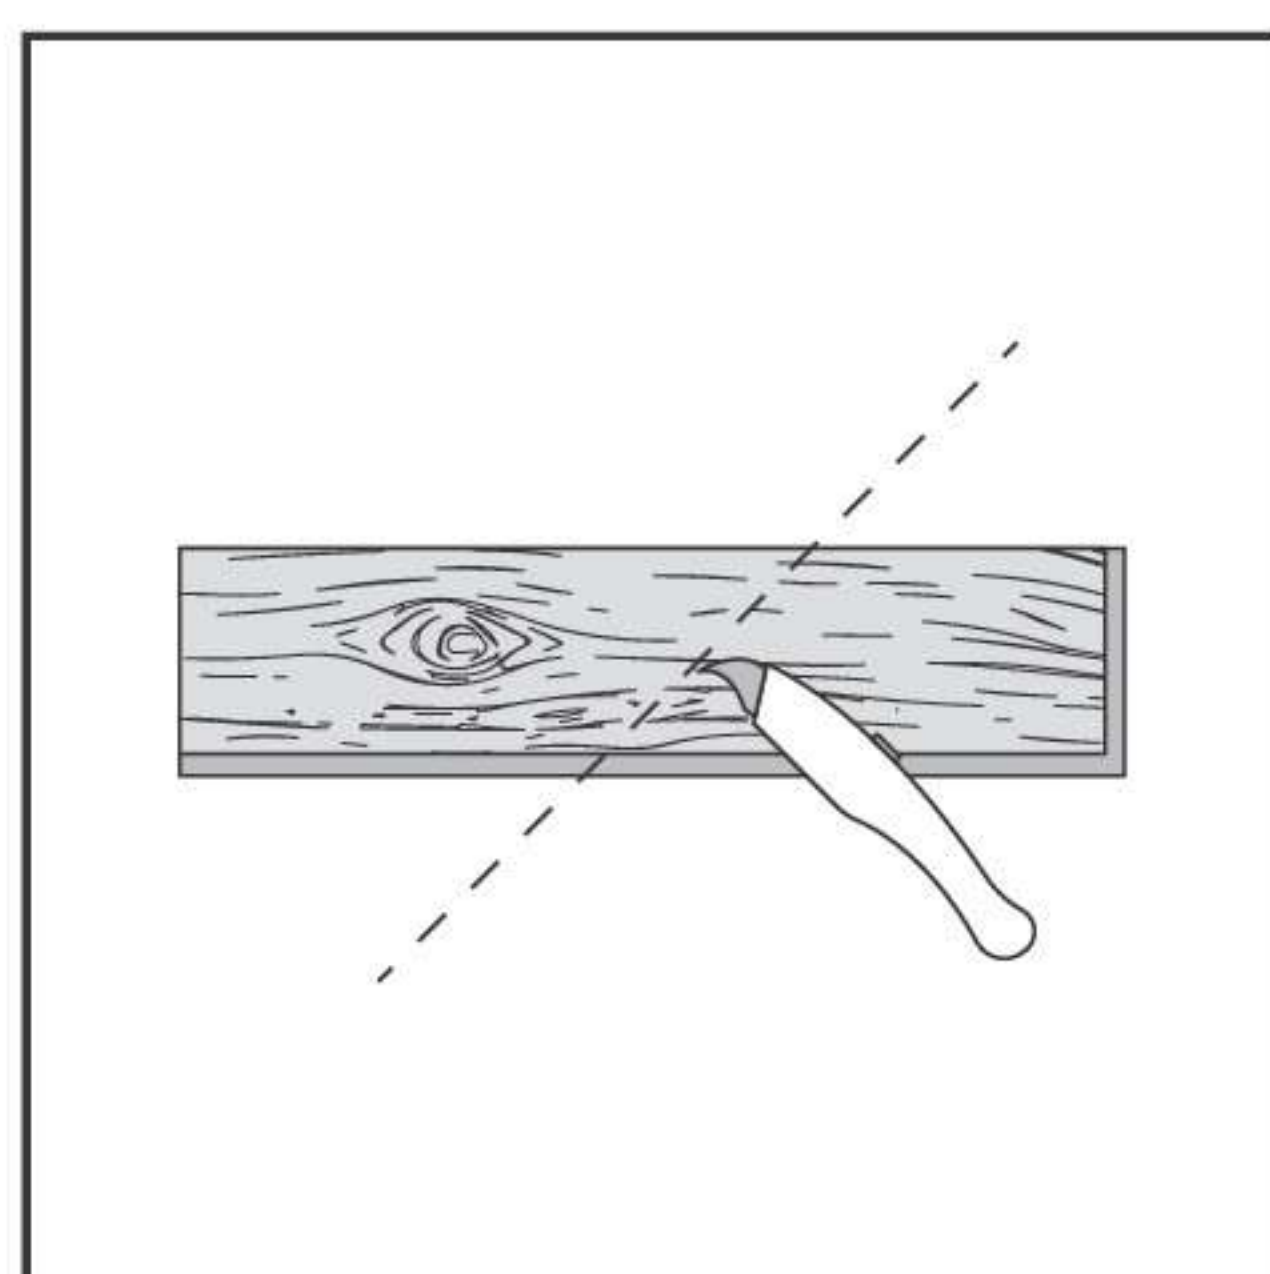


For straight cuts

- Cut the panel with a sharp concave cutter knife
- Always cut with the design facing upwards

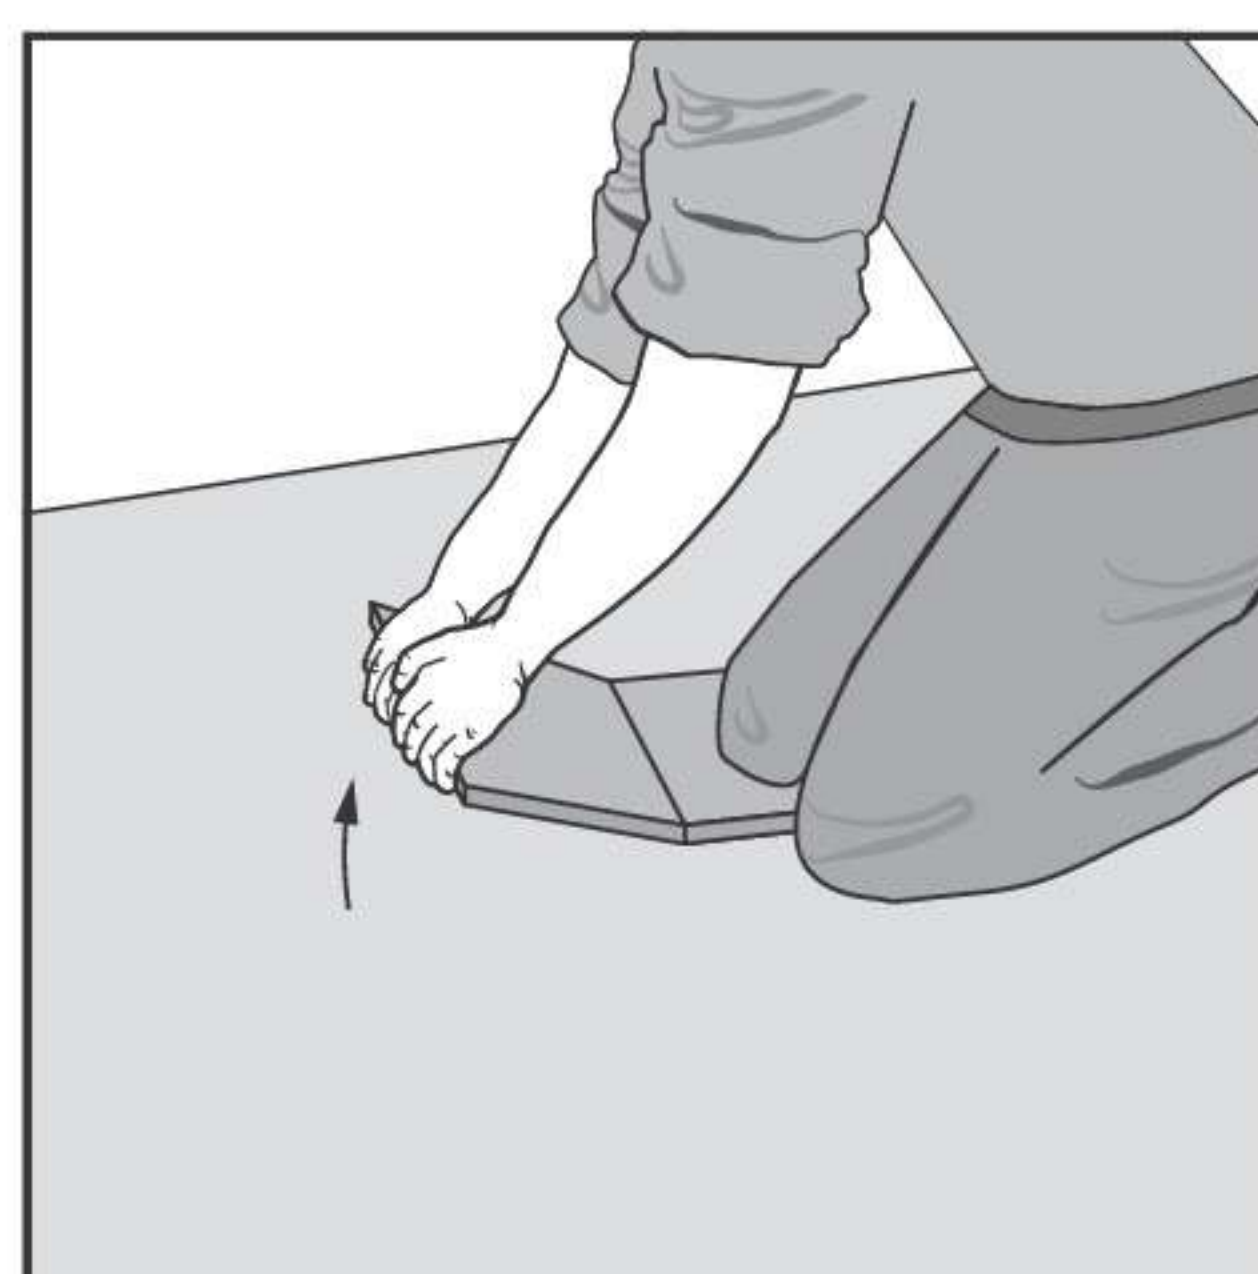


- Lay the panel with the design facing downwards
- Snap the plank in two
- Use your knees to hold the panel

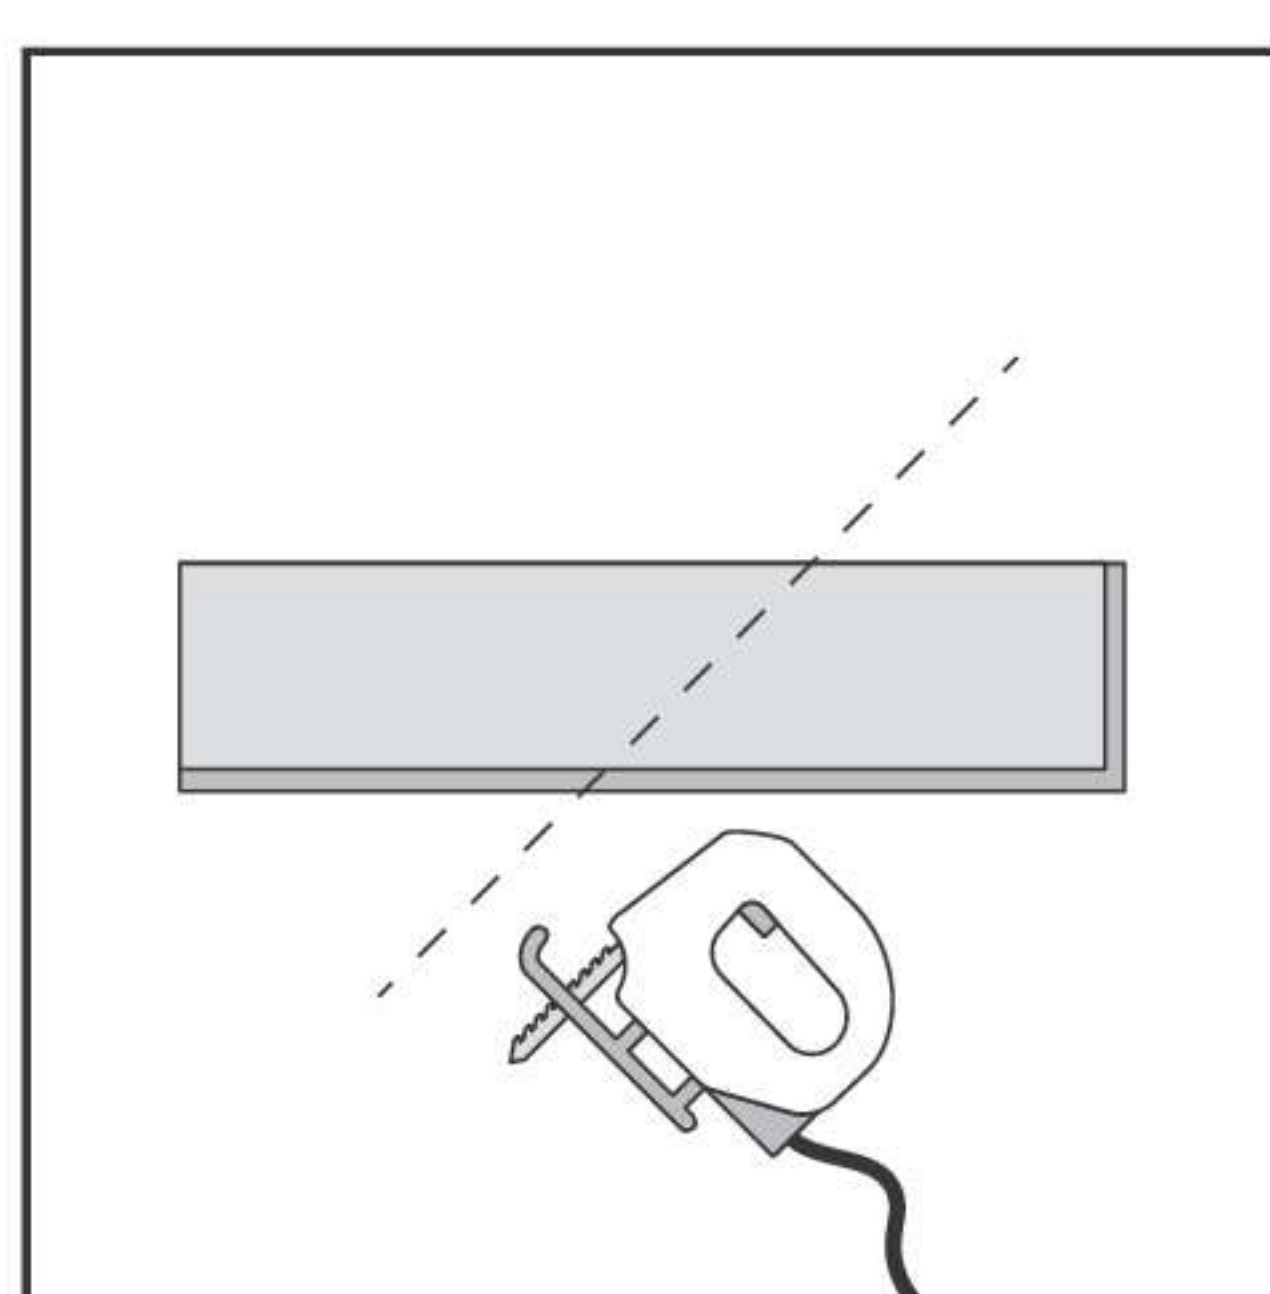

For other shapes


Use a saw to cut the panel to size

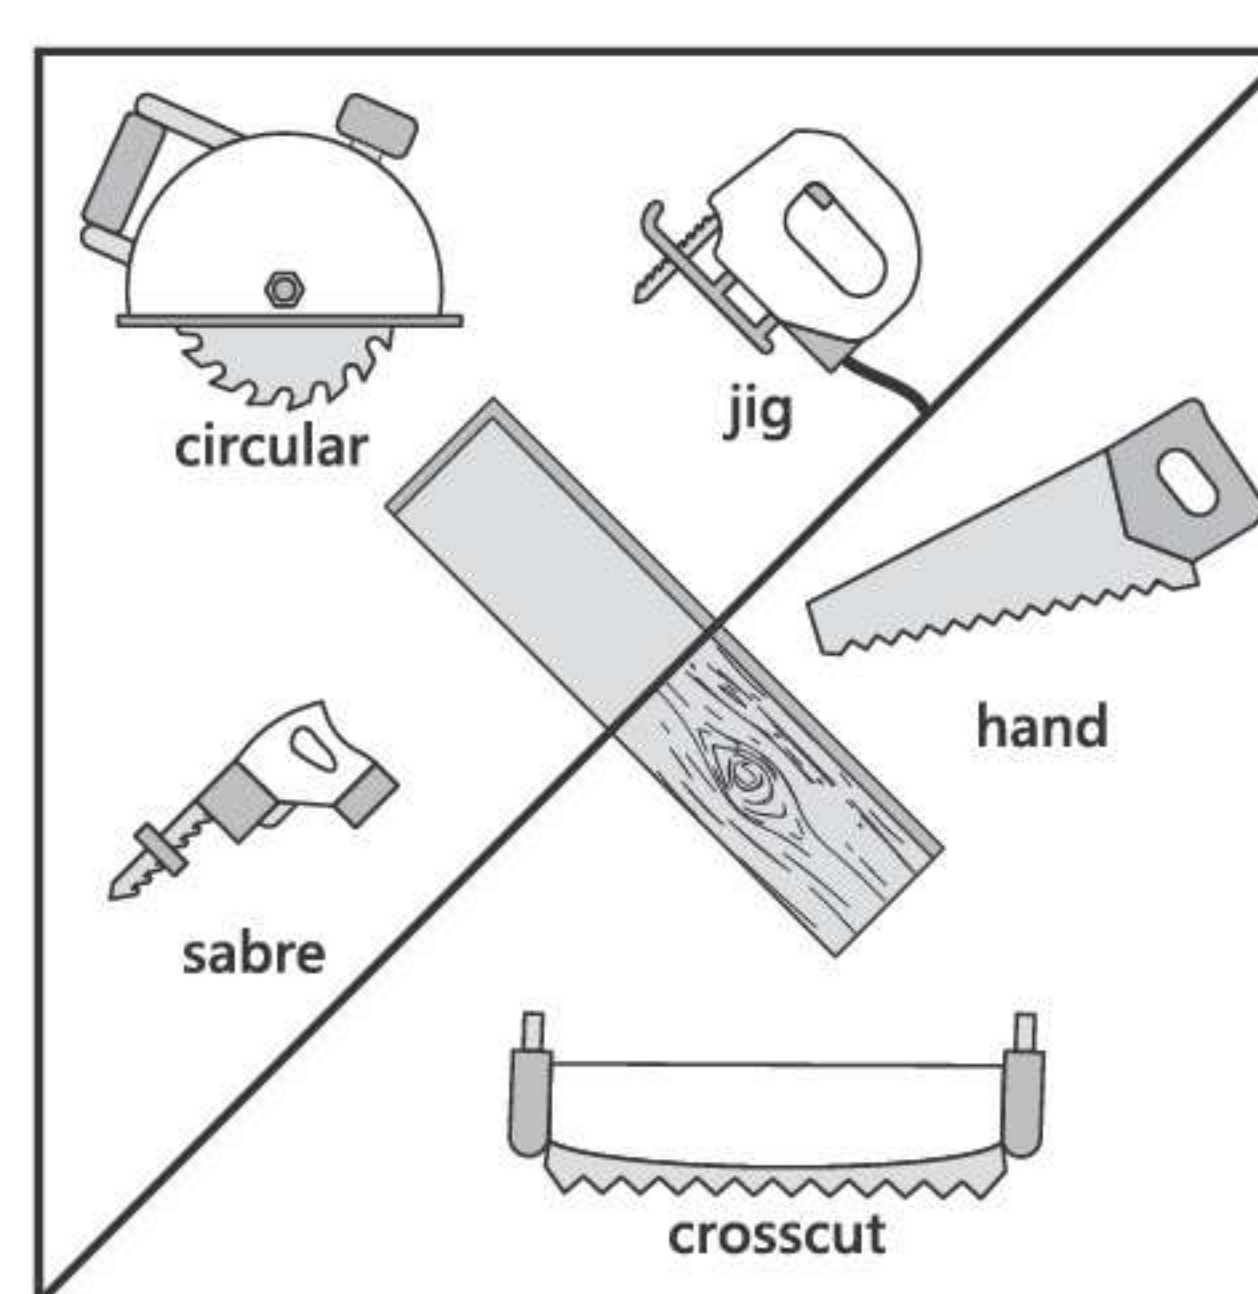

Design facing down:
jigsaw, saber saw or circular handsaw


Design facing up:
handsaw or crosscut saw

LAMINATE

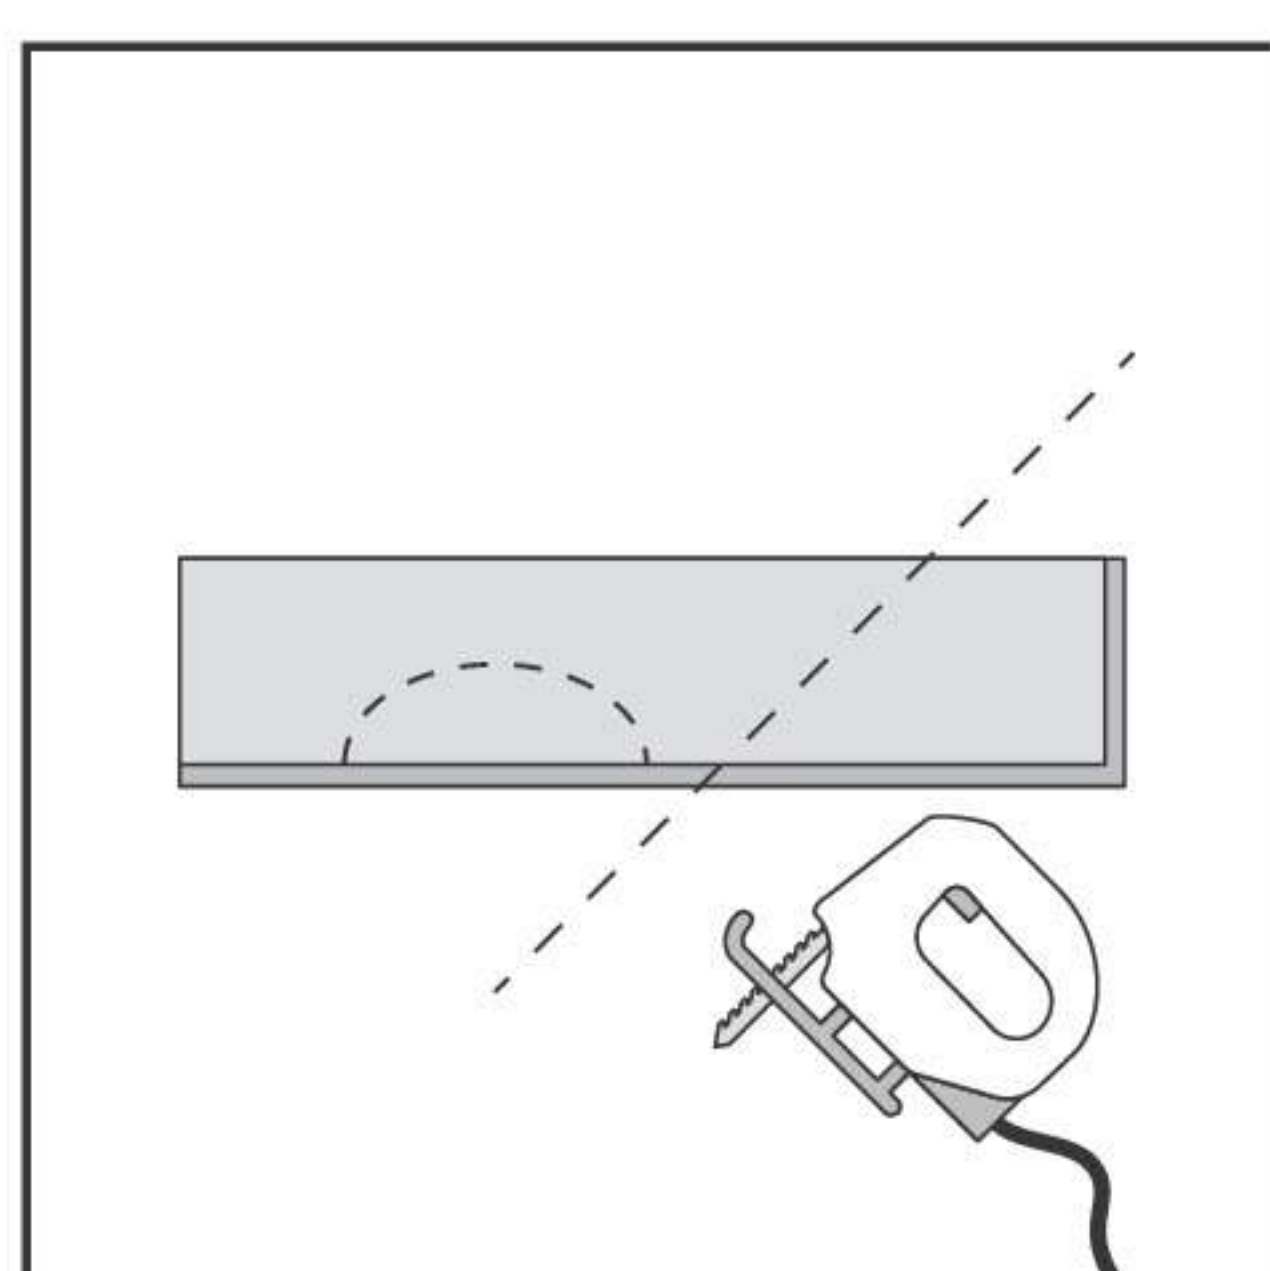

For all cuts

Use a saw to cut the panel to size

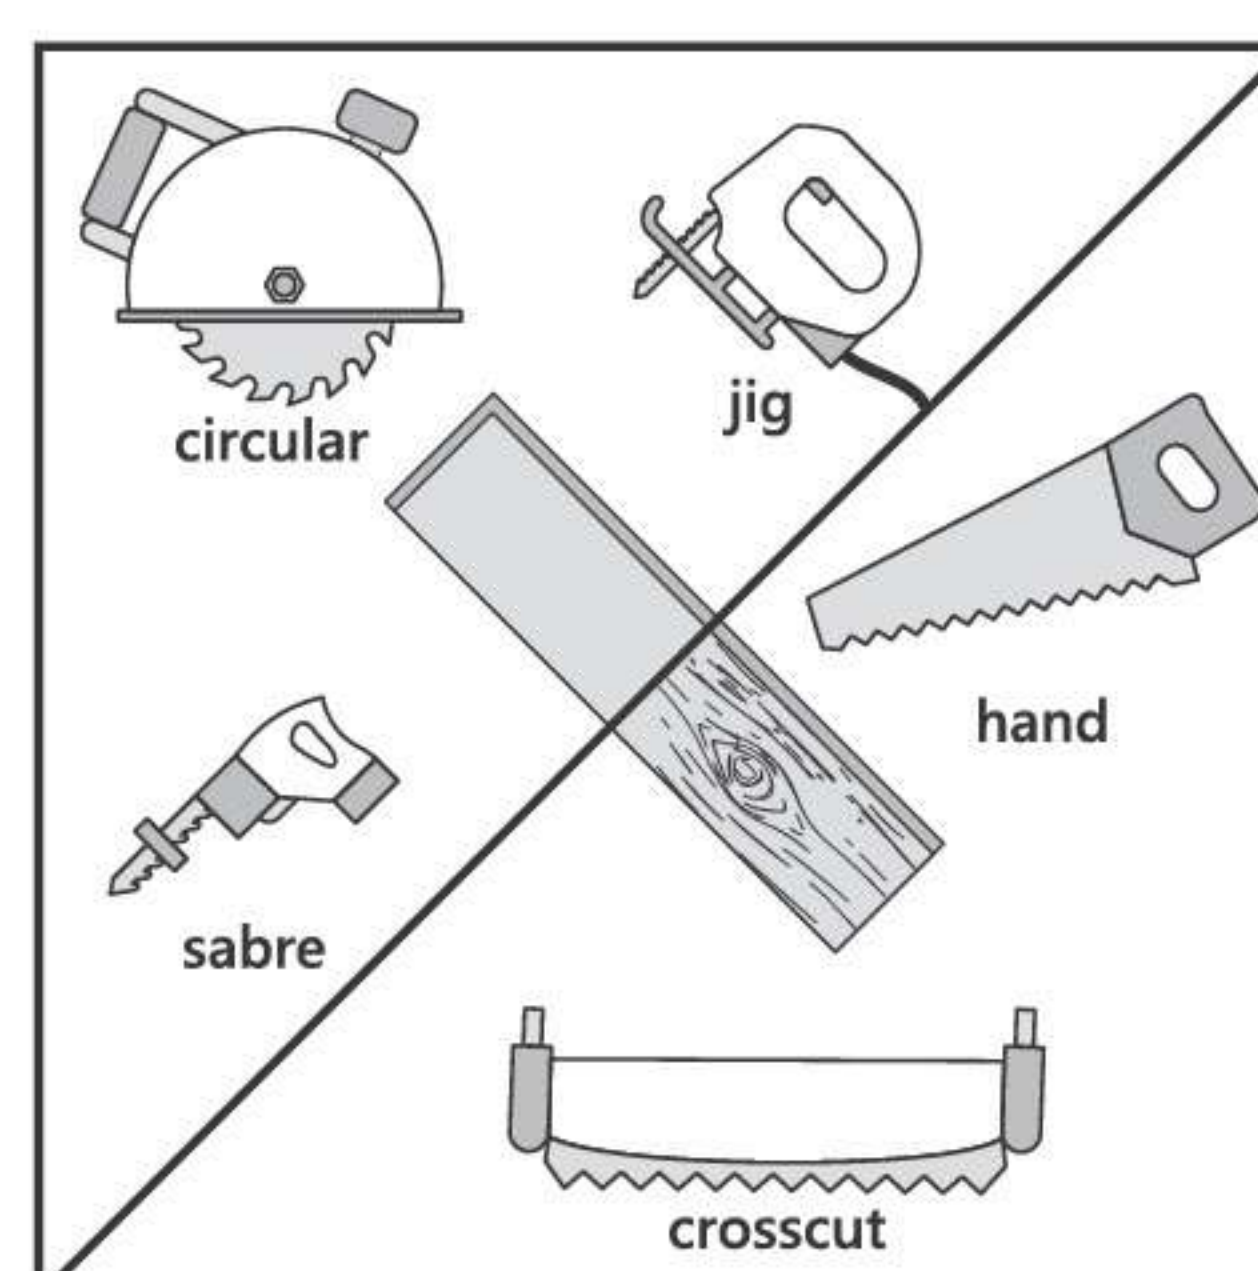


Design facing down:
jigsaw, saber saw or circular handsaw


Design facing up:
handsaw or crosscut saw

Installation Finishing


Undercut the doorframes or moldings to enable the expansion of the panels.

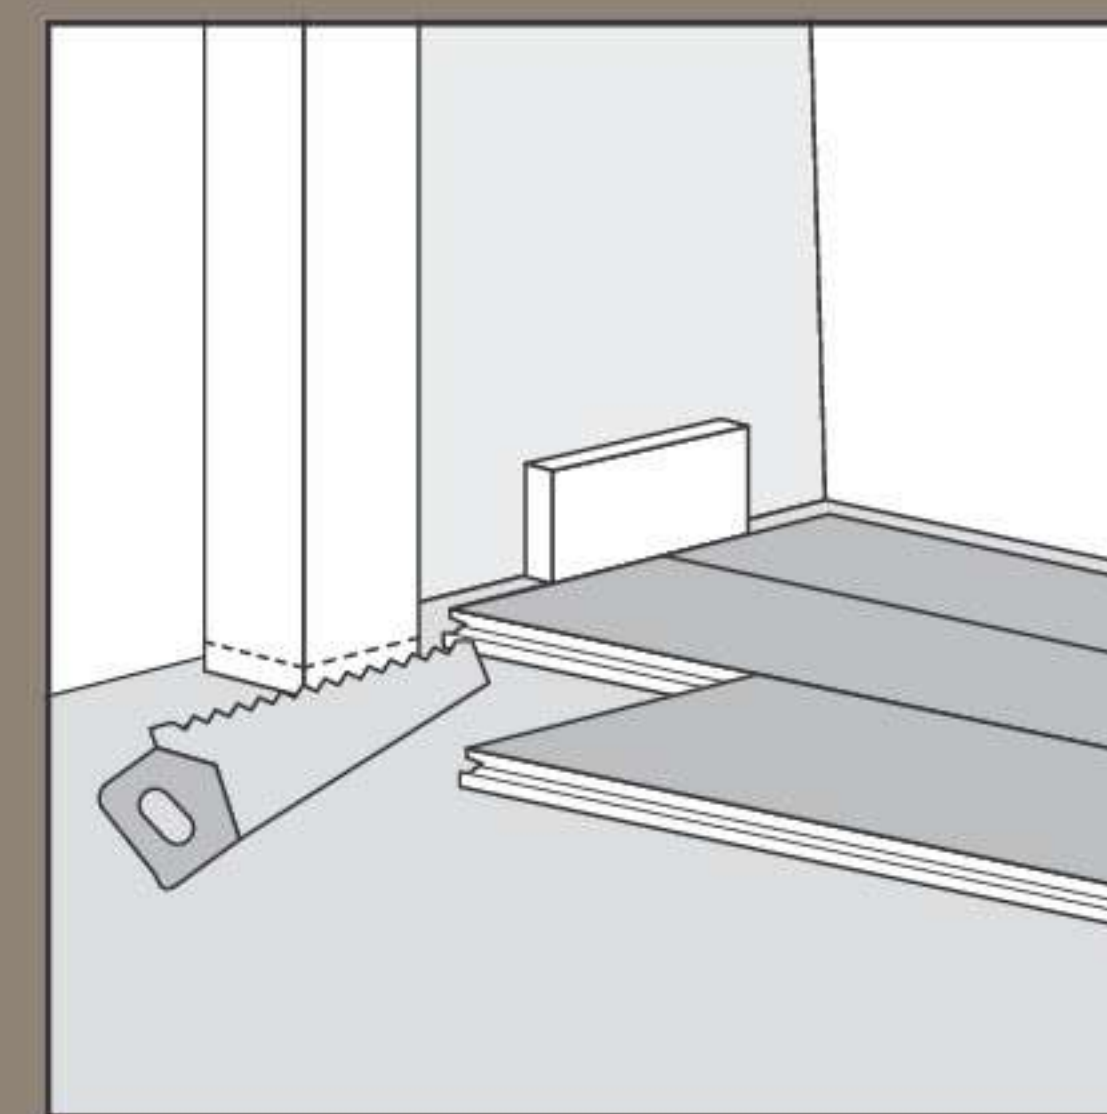

UNDER DOORFRAMES

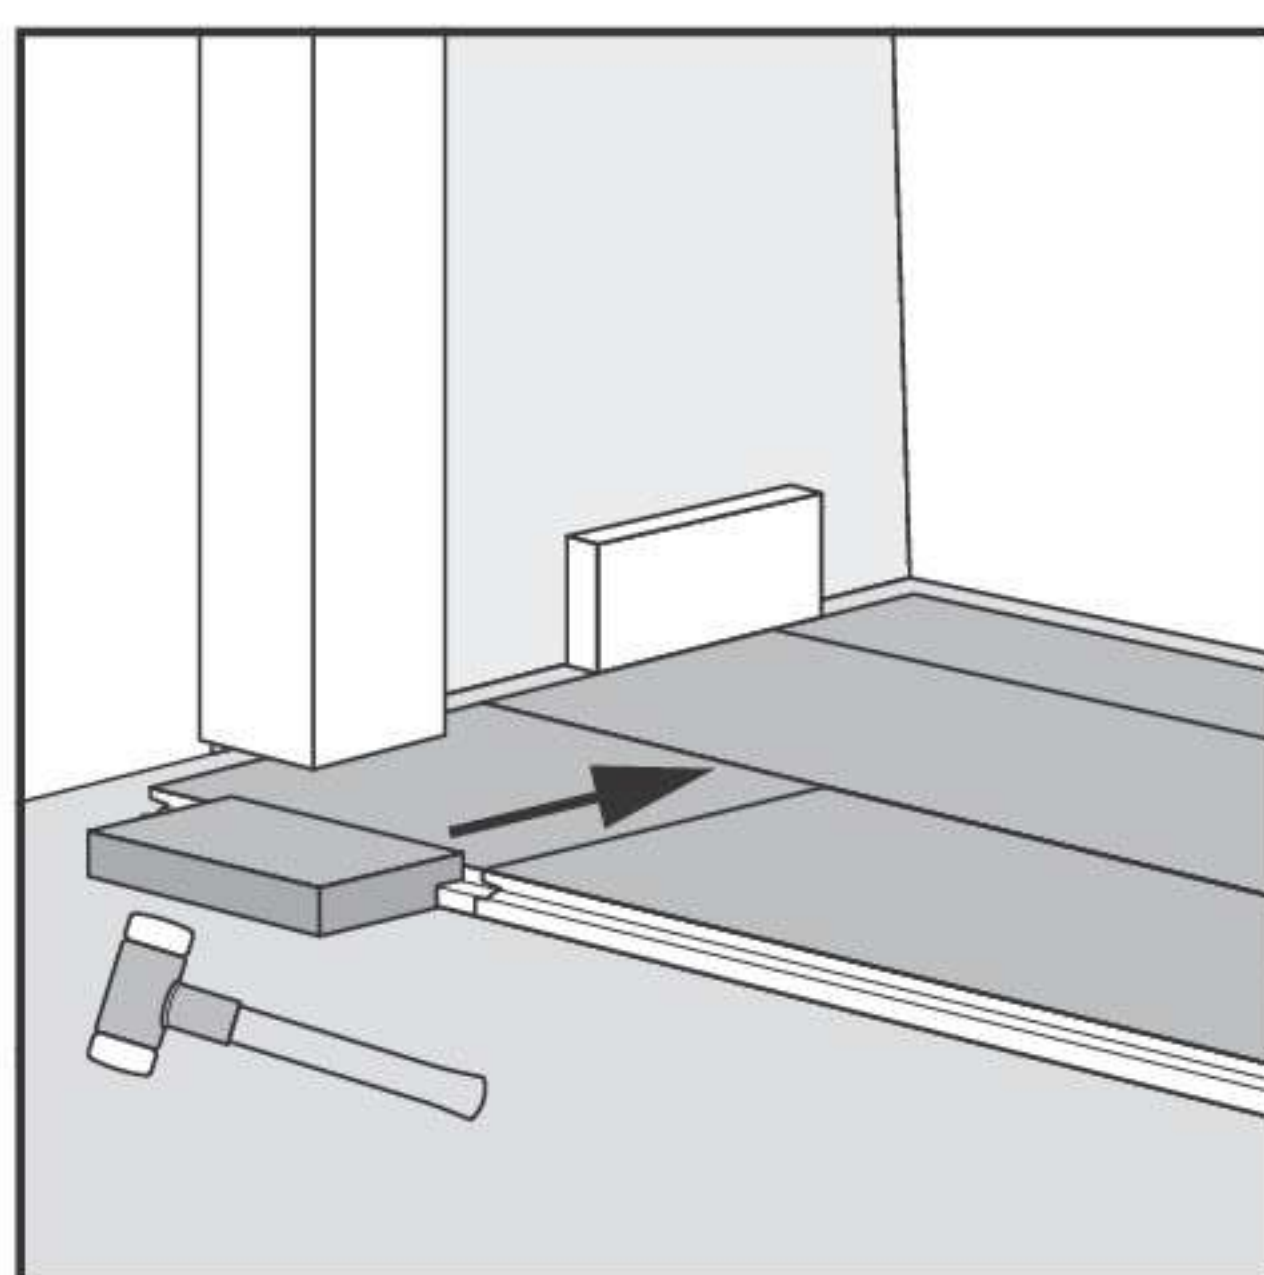


Install the panel on the long side with a tapping block or pull bar. Gently tap with a hammer to gradually connect the panels in a few taps.

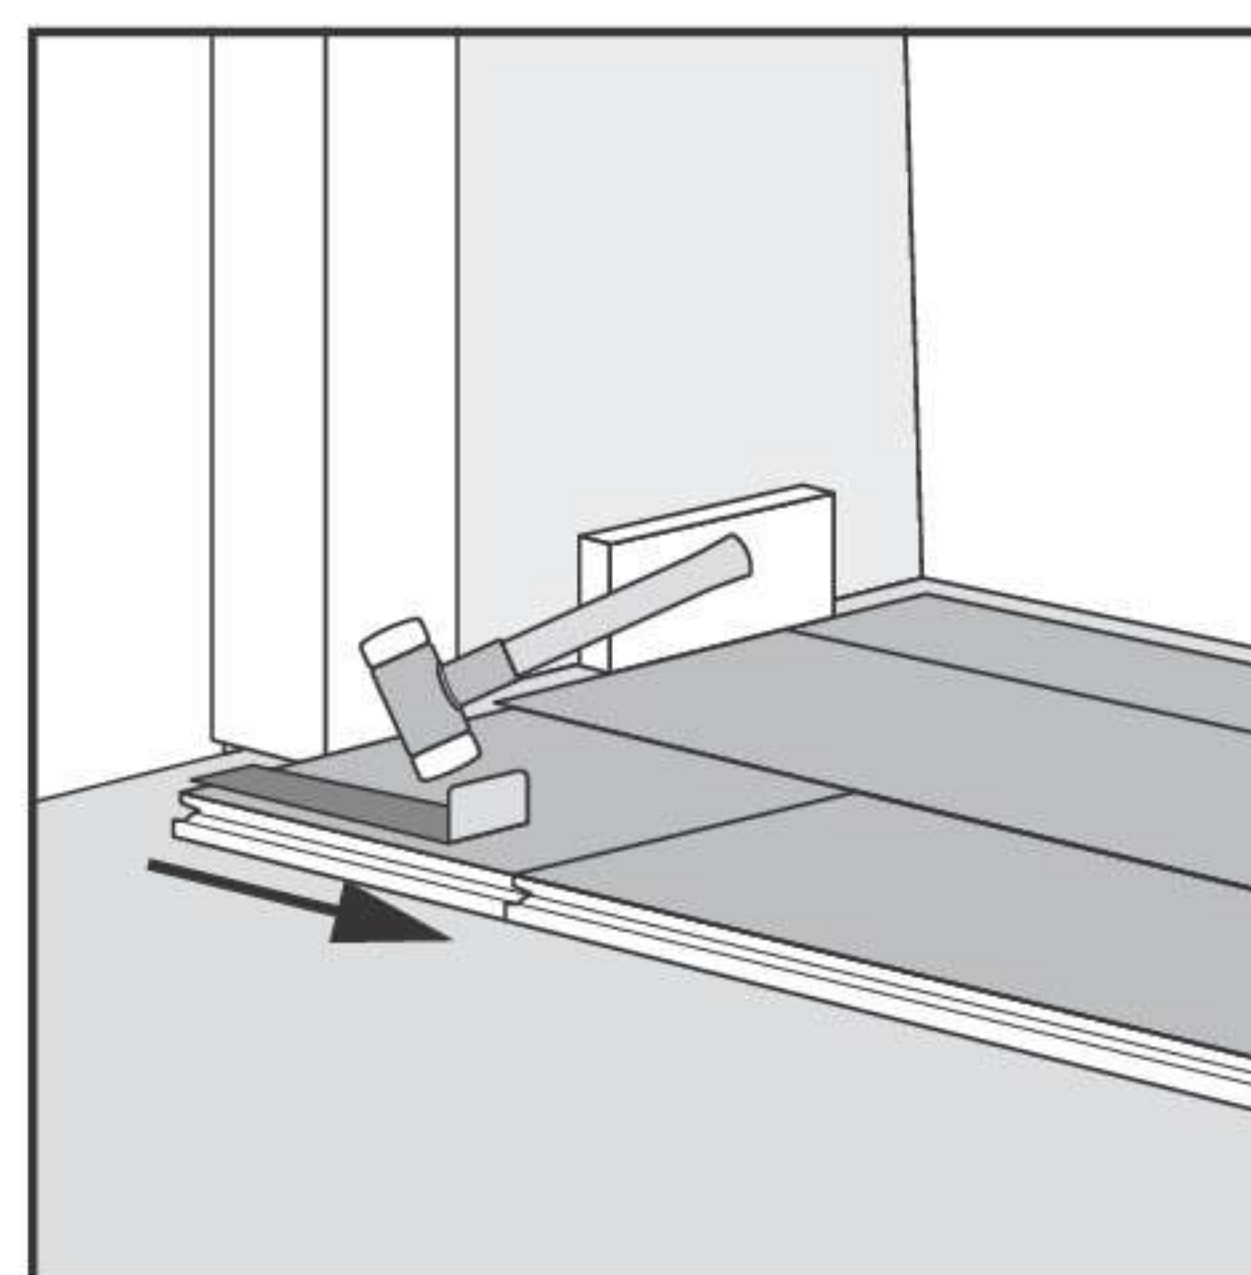


Slide the panel towards the already installed panels and gradually lock the short side of the panel with a tapping block or pull bar and hammer in a few taps.

PIPES

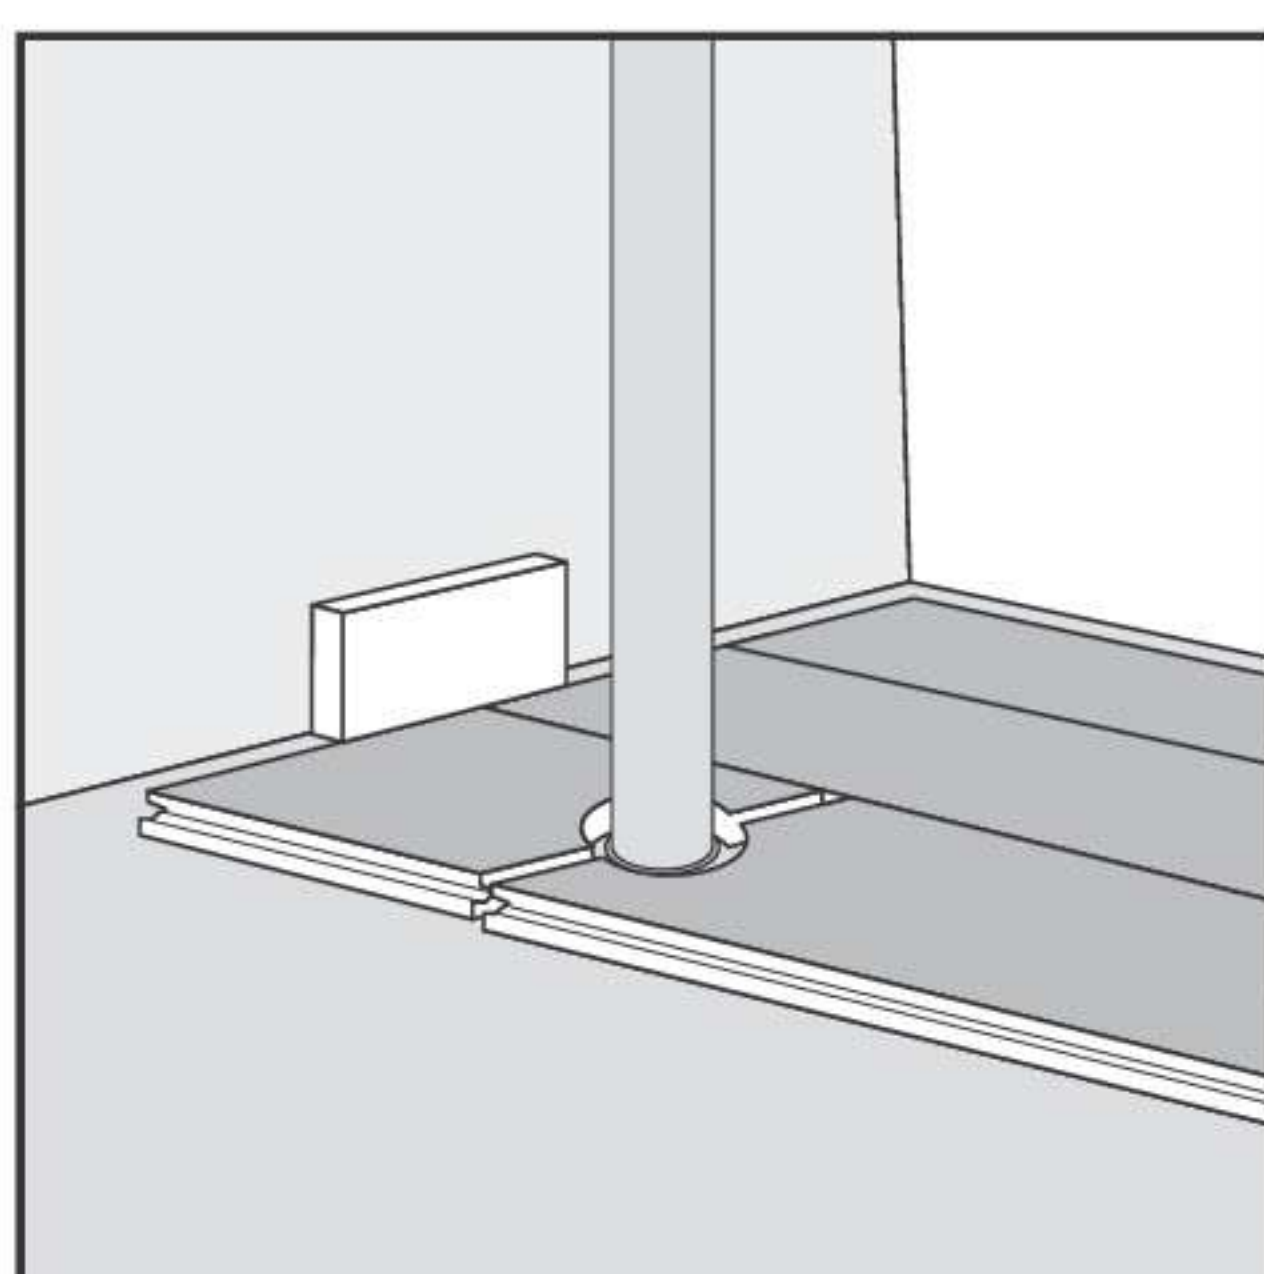


In rows where the flooring meets a pipe, ensure the pipe aligns exactly with the short sides of two panels.

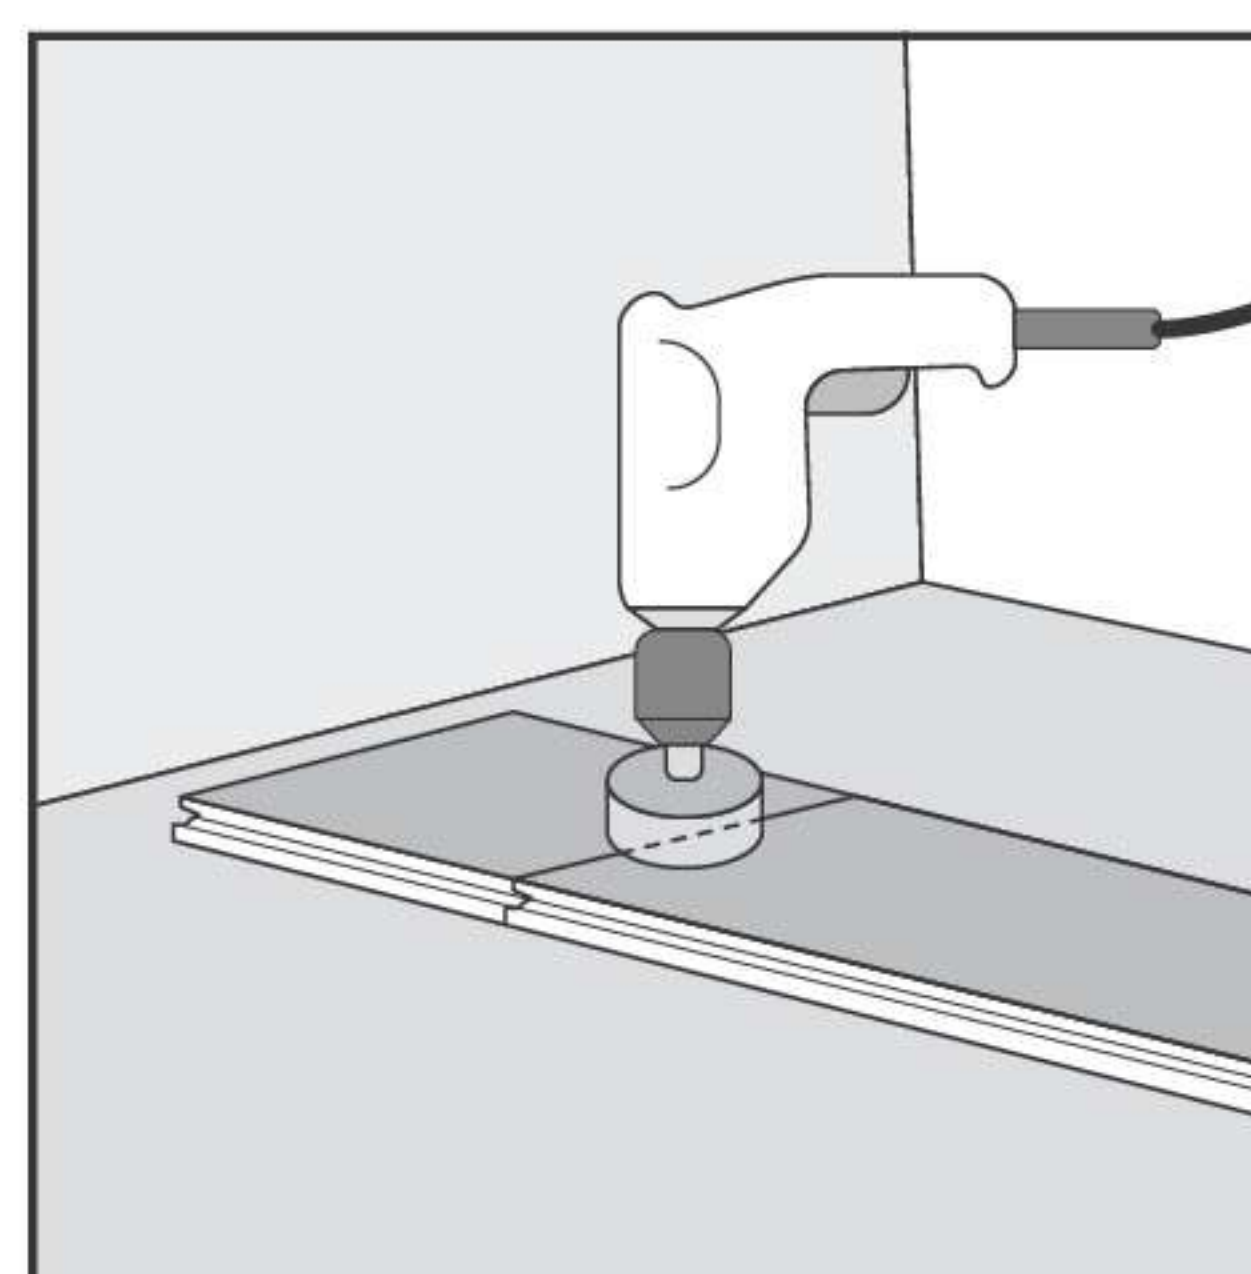


Click the panels together on the short side. Drill a hole centered on the joint between the two panels of the same diameter as the pipe plus 20 mm (3/4").

135

ROOM FOR EXPANSION

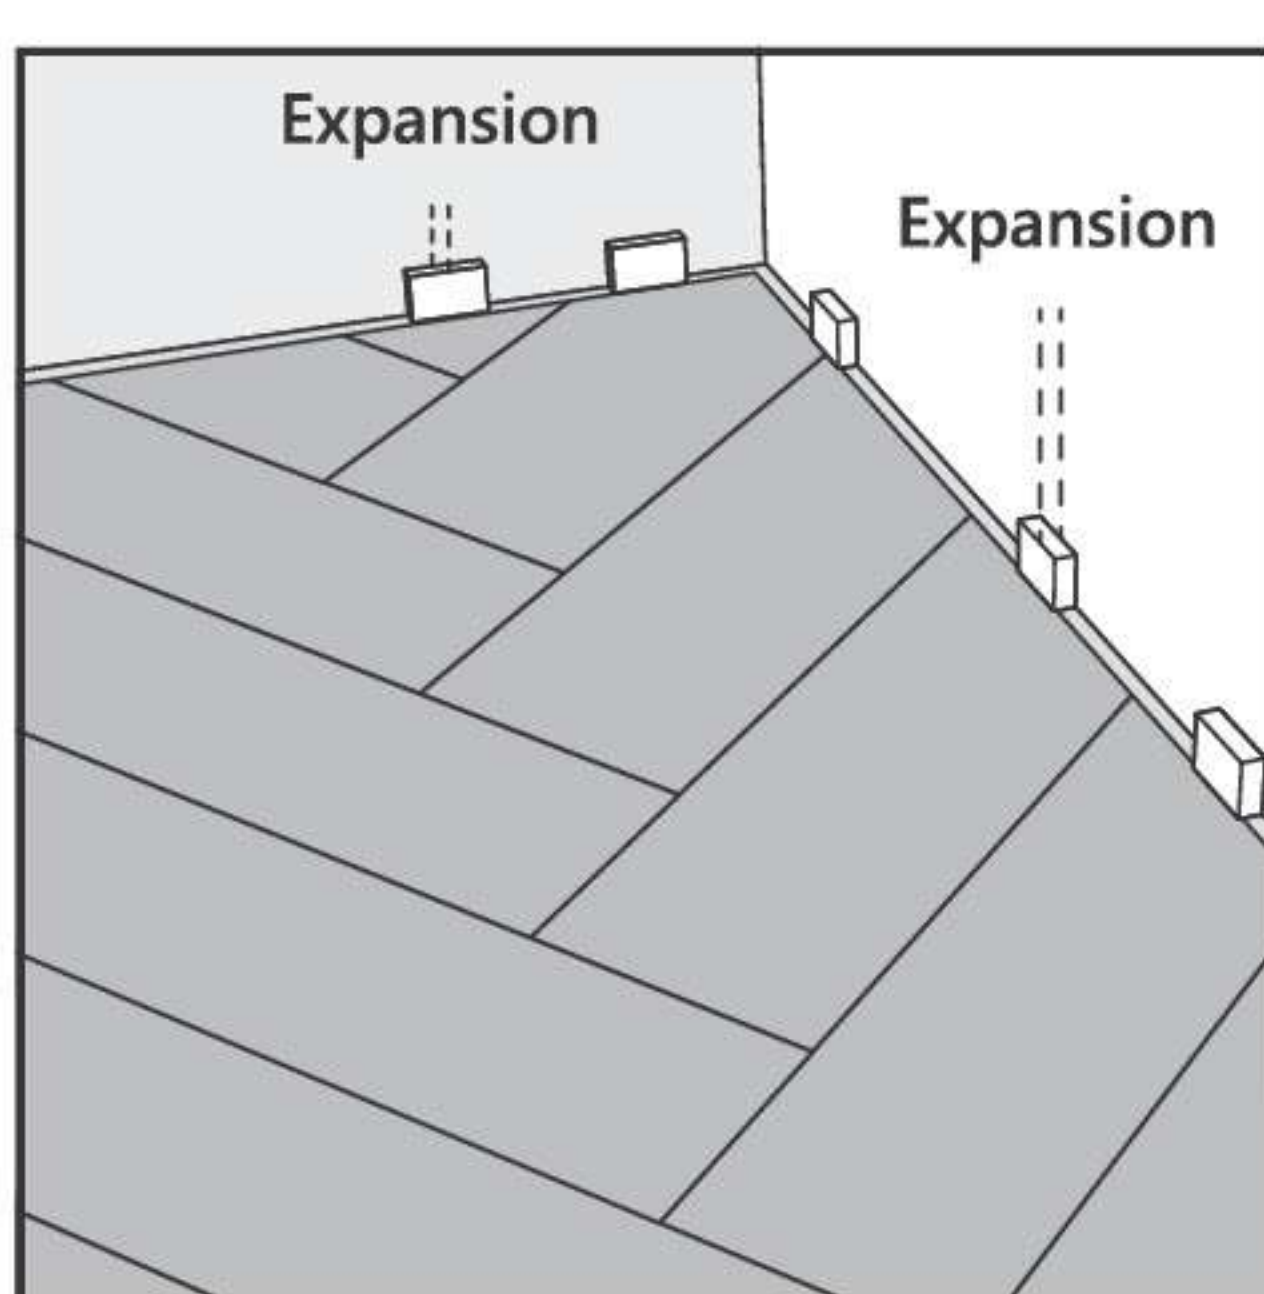


The floor must be able to expand and contract with changes in the indoor climate. For expansion joint guidelines, check the supplier's instructions.

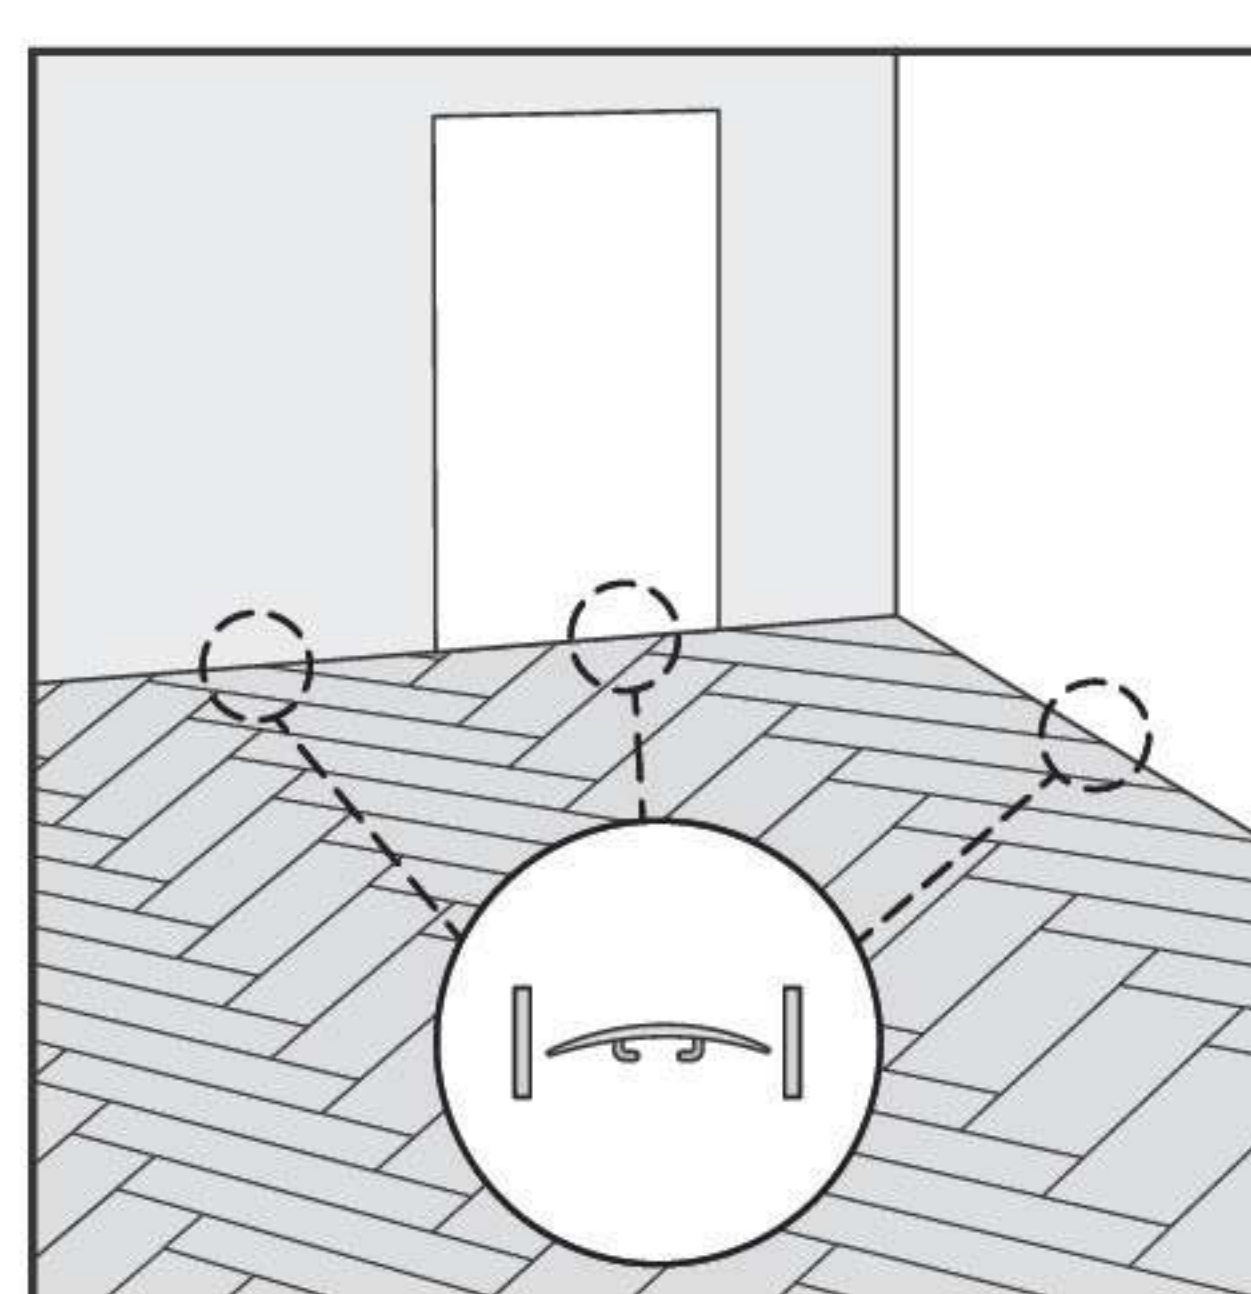


Provide expansion joints between different rooms or in large rooms. Check the supplier's guidelines for details.

FINISHING

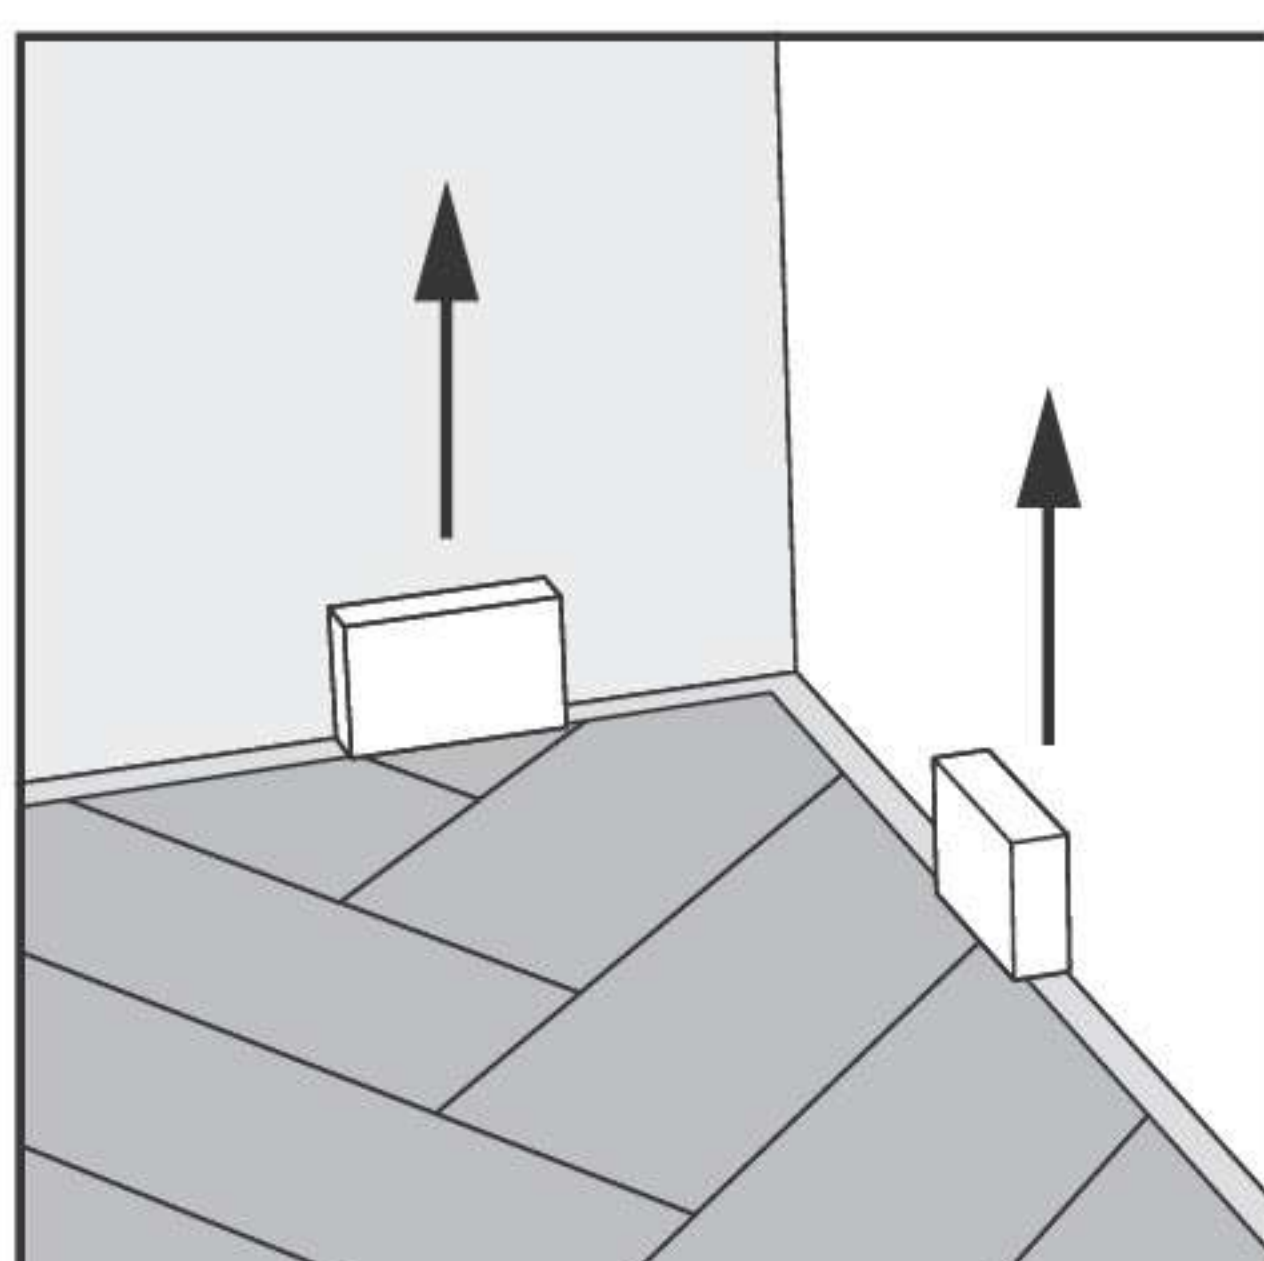

After the floor and expansion profiles are completely installed, remove all spacers from the room(s).

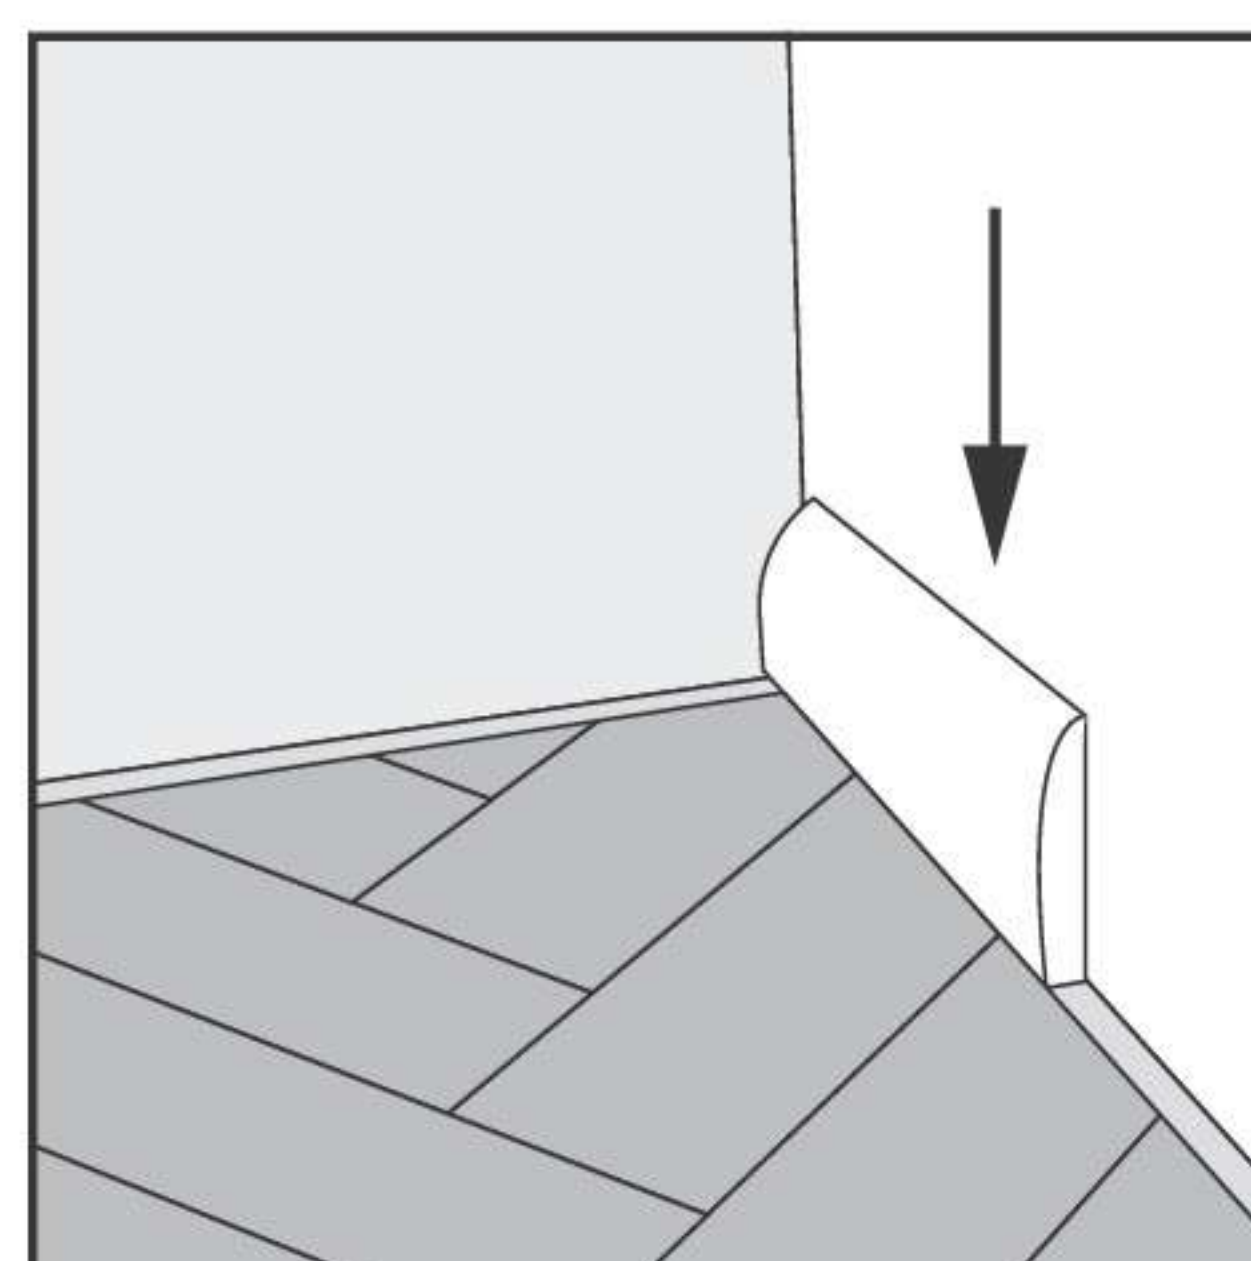

Install skirting on the walls over the expansion gaps to complete the room.

Installation guidelines angle-angle / angle-tap

ROWS INSTALLATION




Preparation Tools




ROOM PREPARATION

- Pencil and notepad
- Tape measure / Folding rule
- Steel square / Bevel tool
- Level
- Vacuum

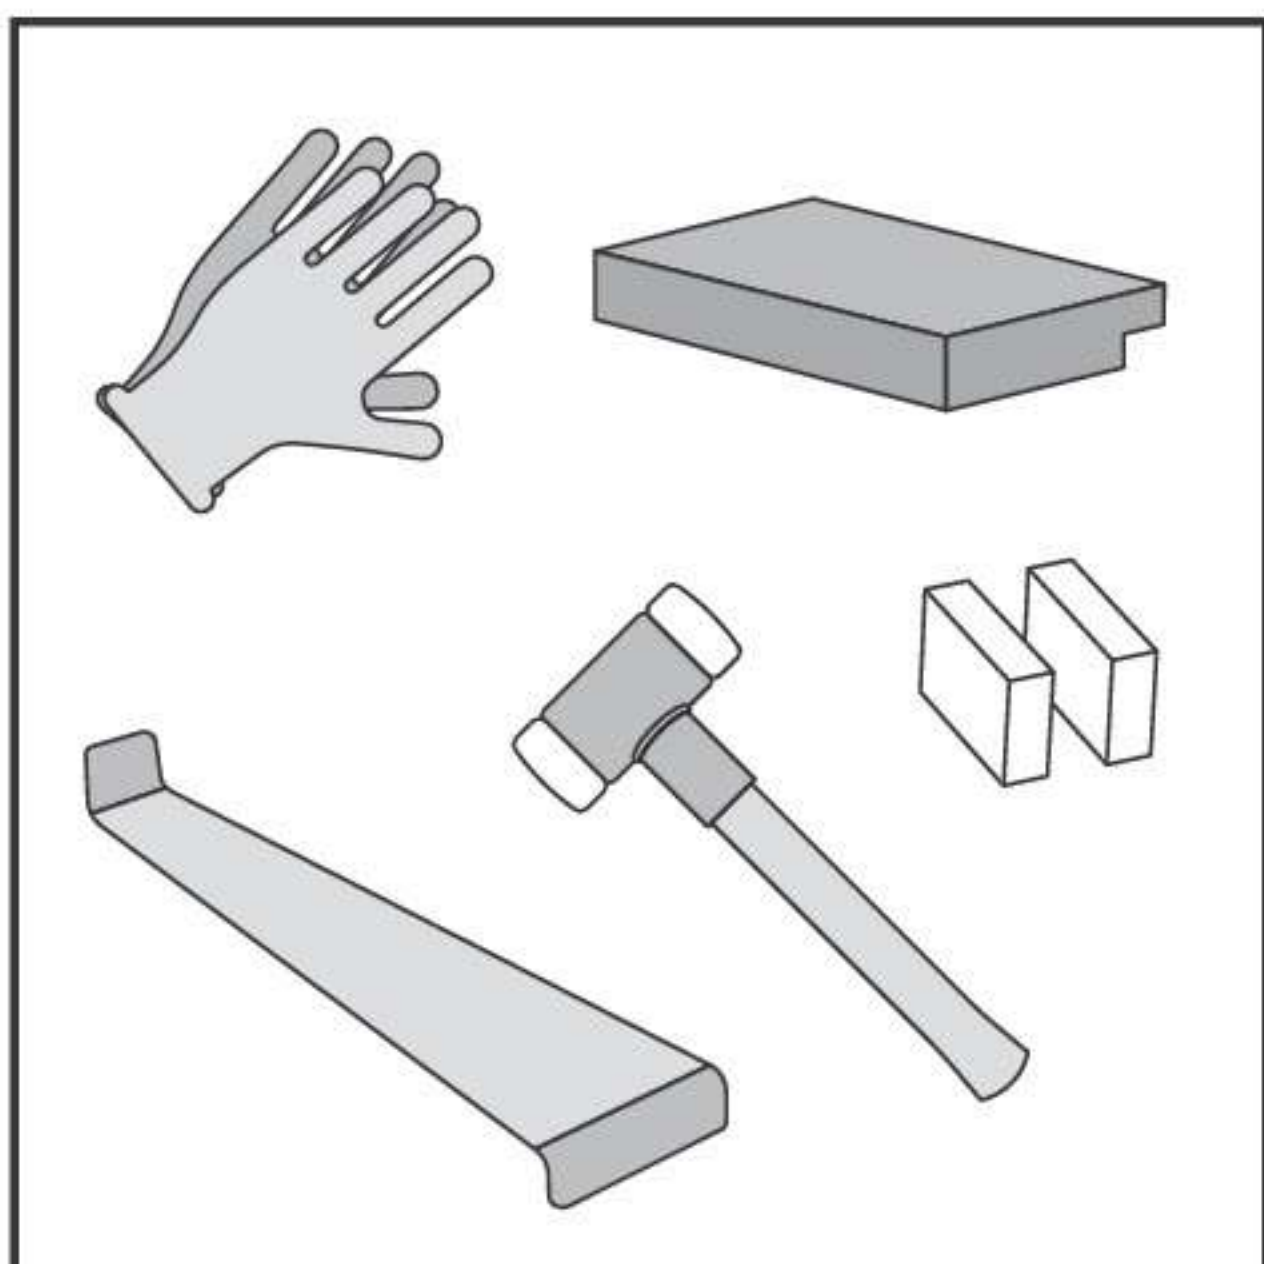


DURING INSTALLATION

- Hard mallet
- Tapping block for locking systems
- Pull bar
- Spacers
- Gloves

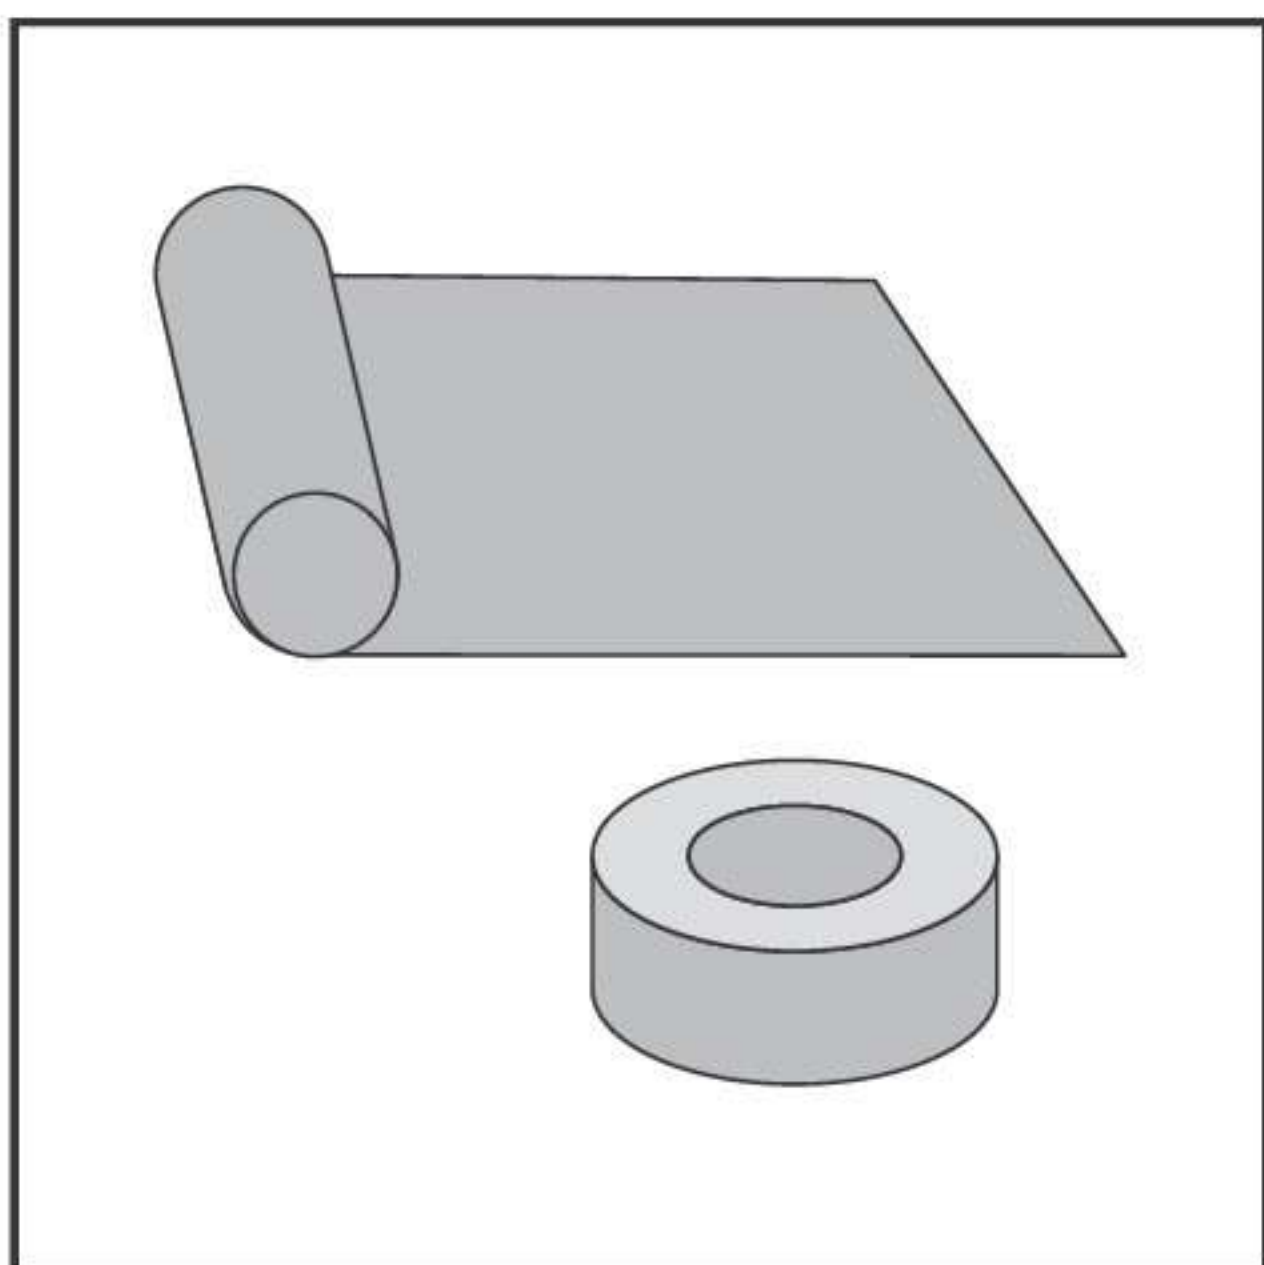


If the panels do not have a pad pre-attached:

- Underlay
- Tape (to fix your underlay)

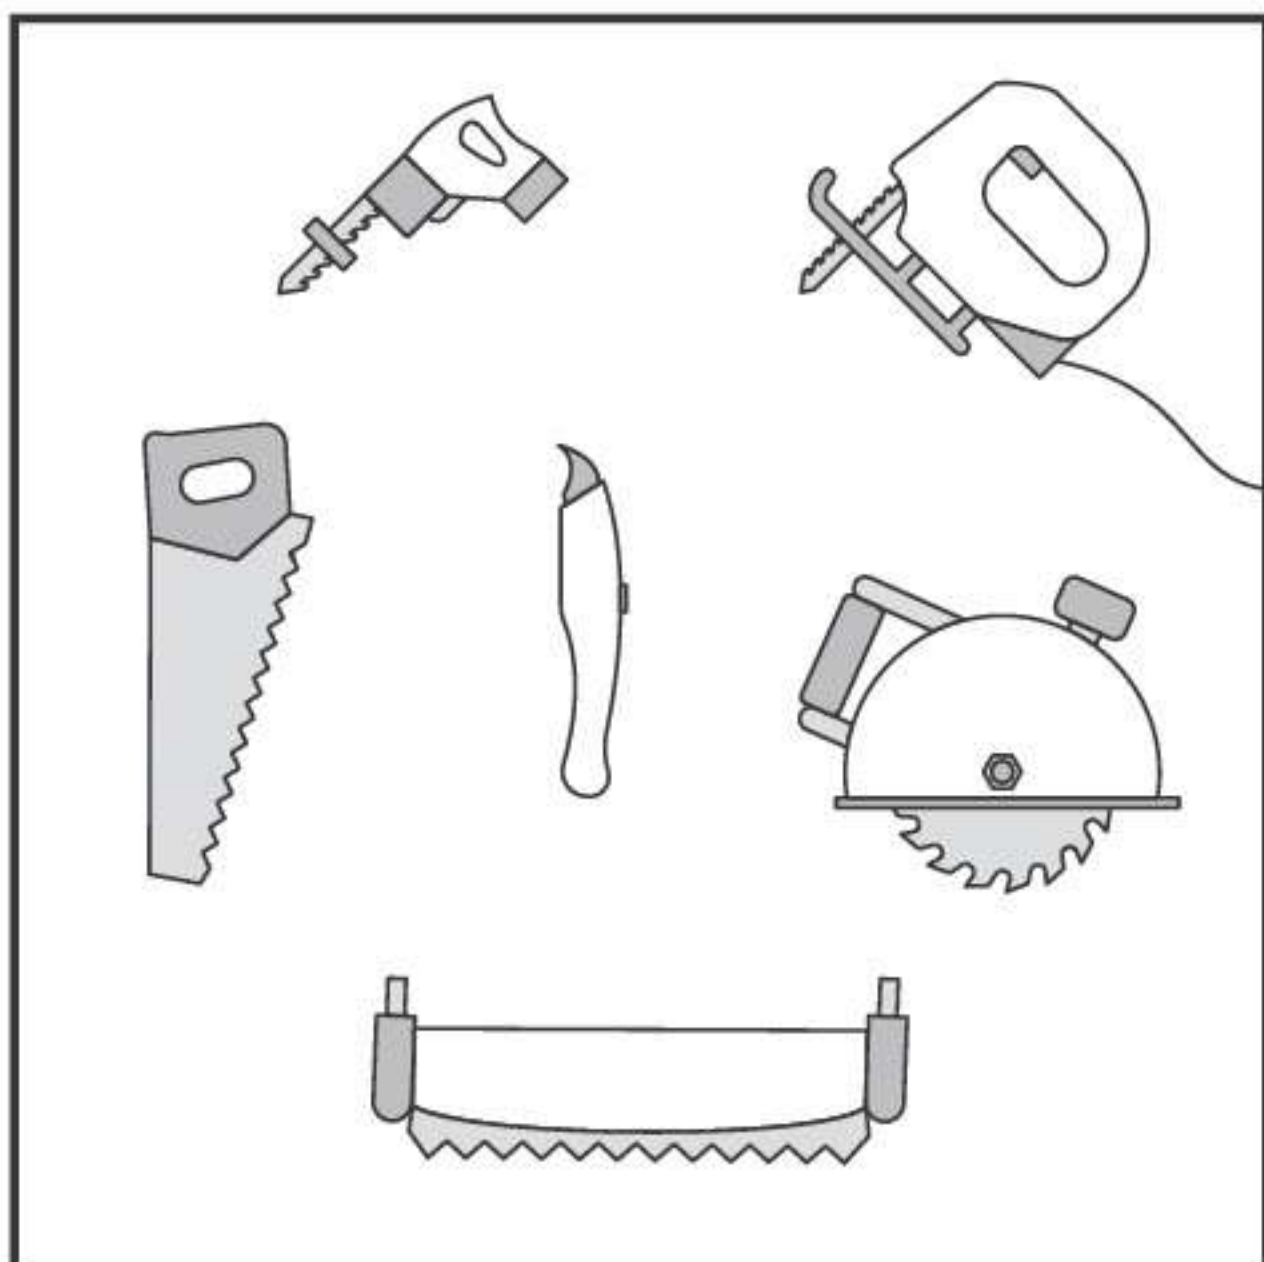

CUTTING THE PANELS

- Handsaw / jigsaw / crosscut saw / plunger saw / table saw
- Concave cutter knife

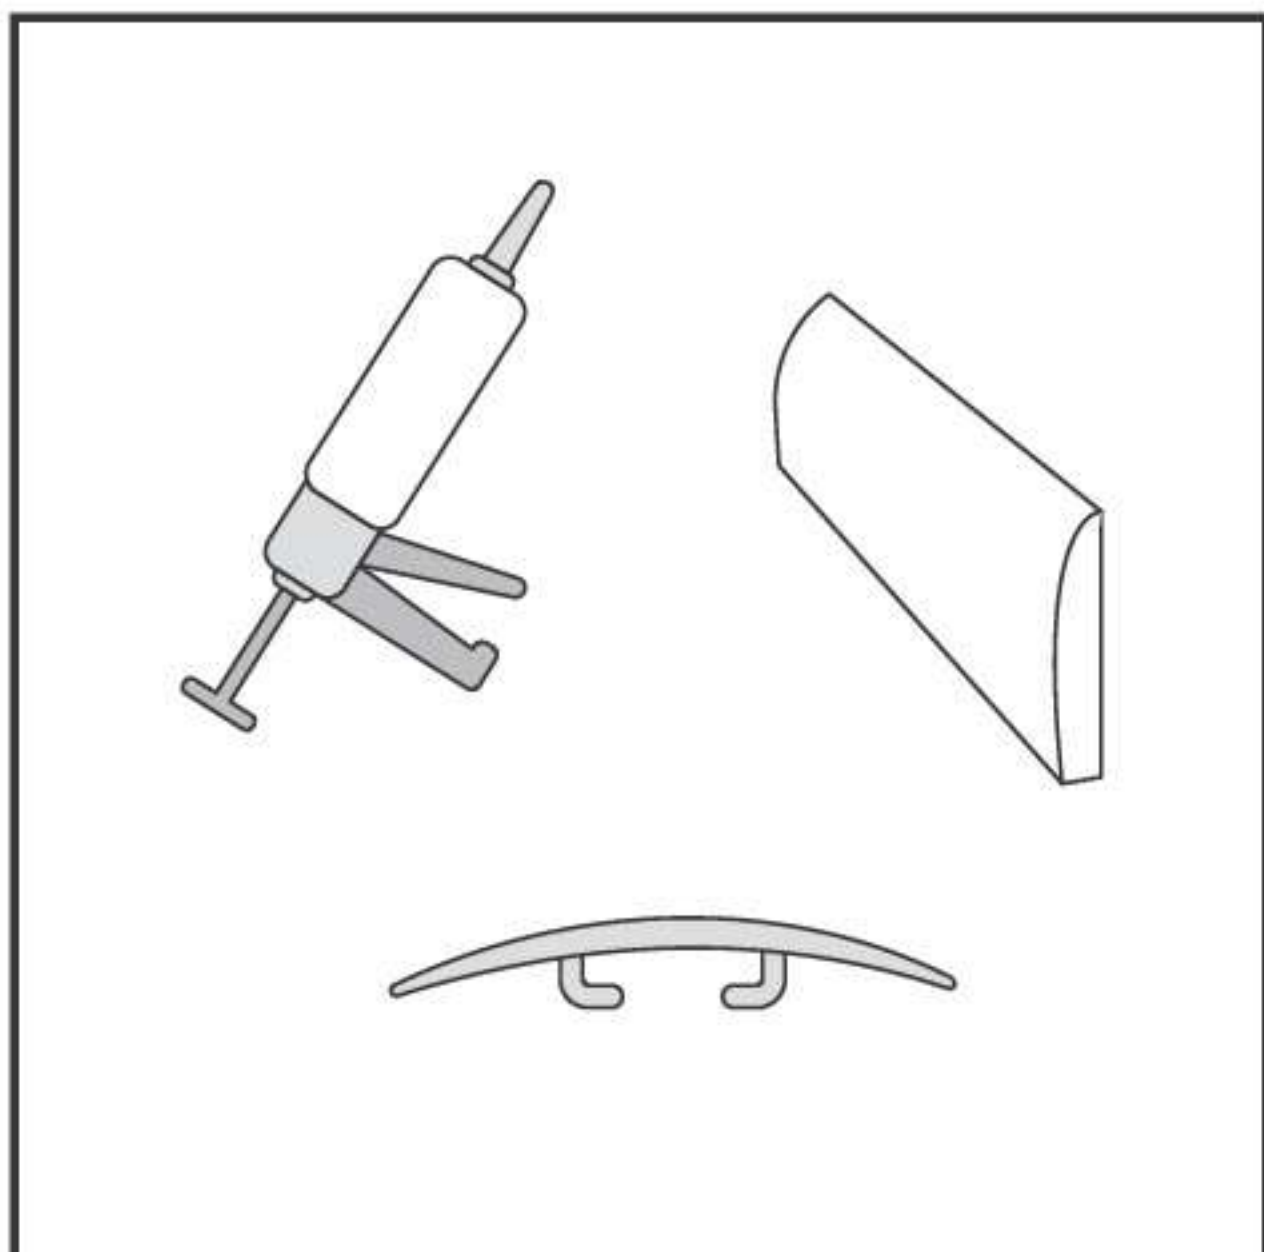

FINISHING THE ROOM

- Skirting
- Silicon kit
- Expansion / adapter / end profiles



Preparation The room

WATCH THE
INSTALLATION
VIDEO





CLEAN SLATE

- Remove skirtings
- Remove all soft flooring (e.g. carpet)
- Make sure the sub-floor is dry and free of any grease, chemical residue or glue
- Ensure a level and dry surface, smooth out bumps or irregularities
- Vacuum thoroughly to remove all debris and dust

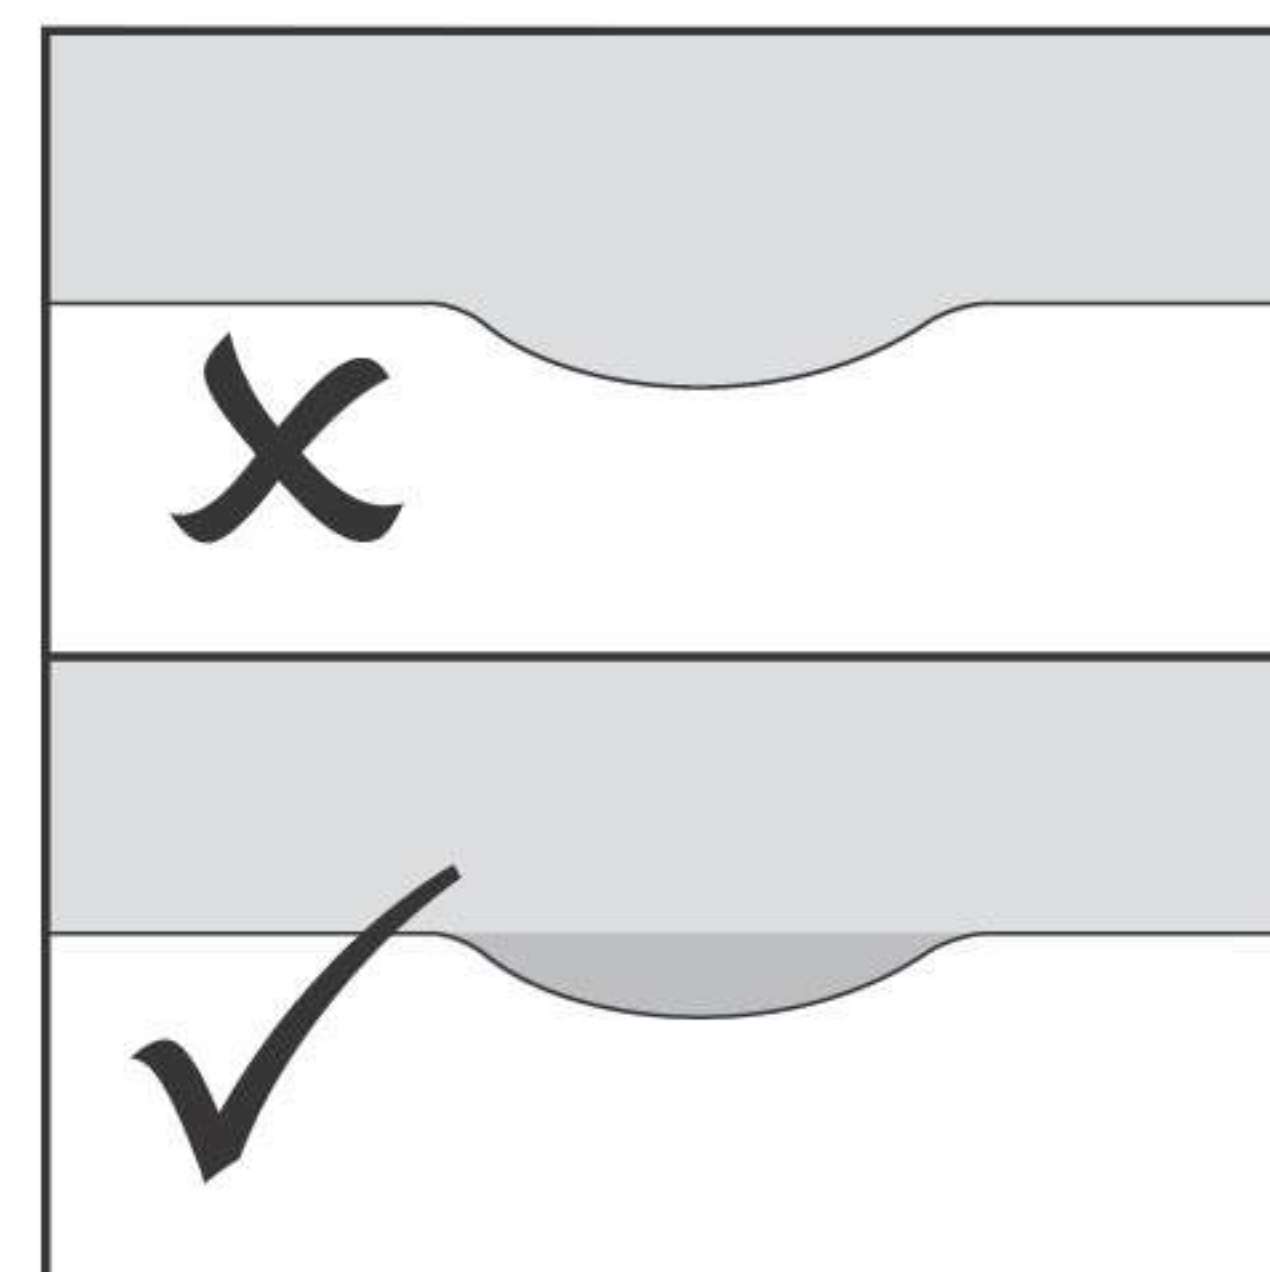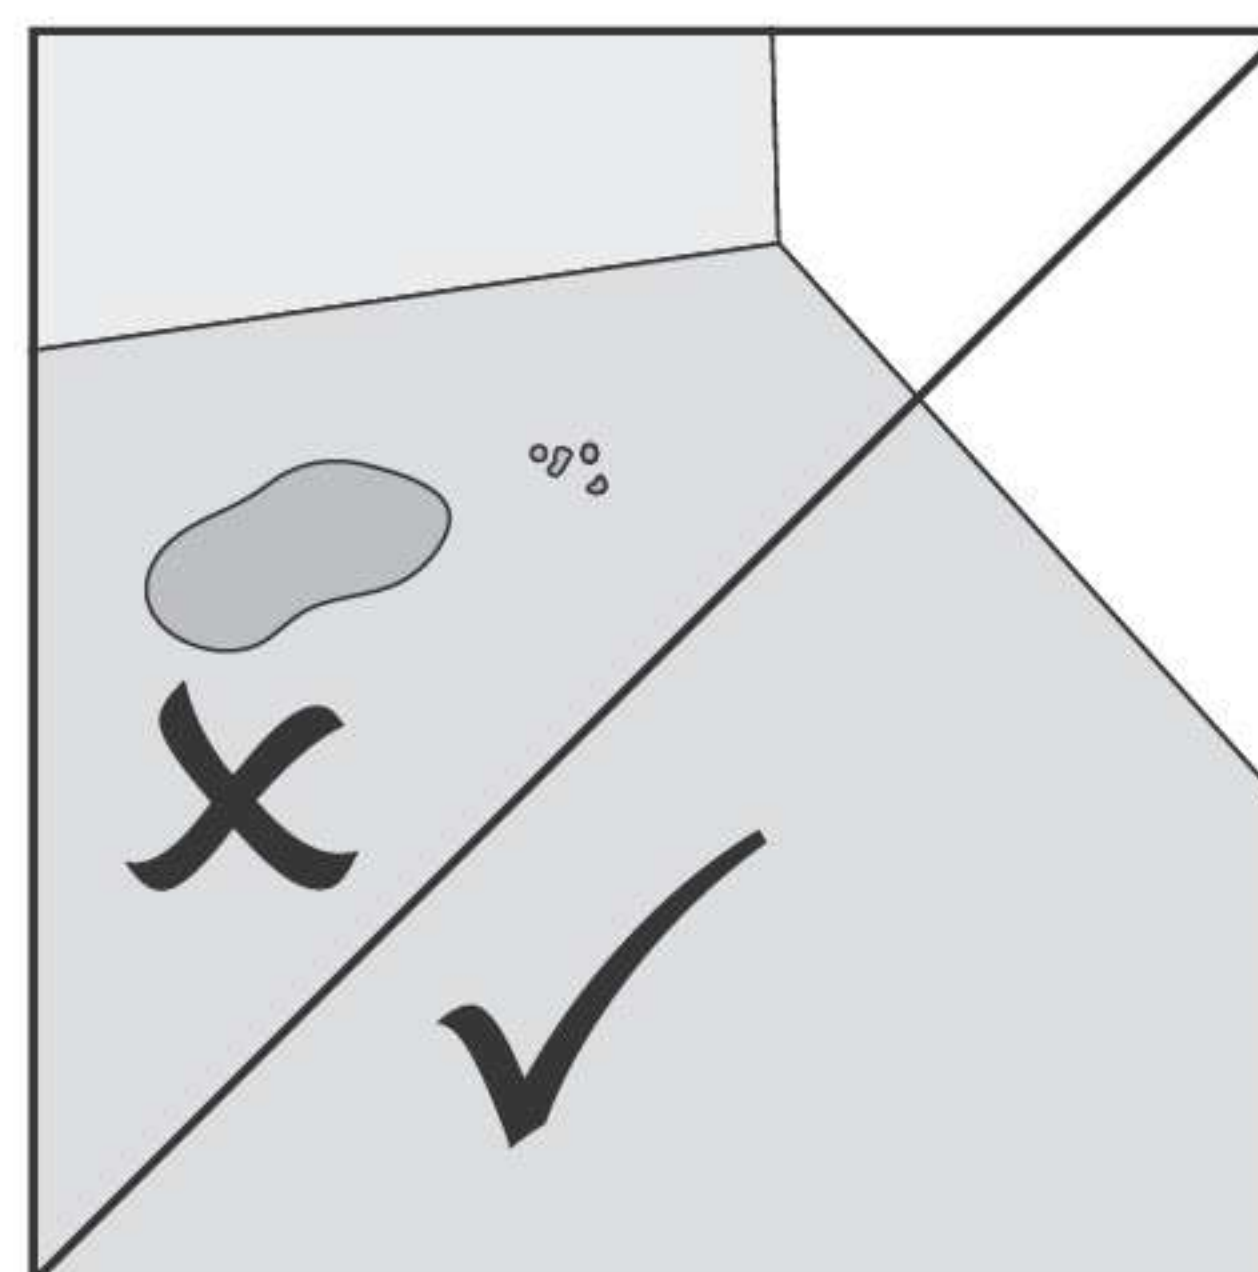

CALCULATE SURFACE AREA



- Width x Length + 5-10% cutting waste
- Make accurate measurements to ensure a smooth installation
- Take notes to avoid mistakes
- Plan the flooring along the longest wall or in the direction of the light for the most pleasing visual appeal.

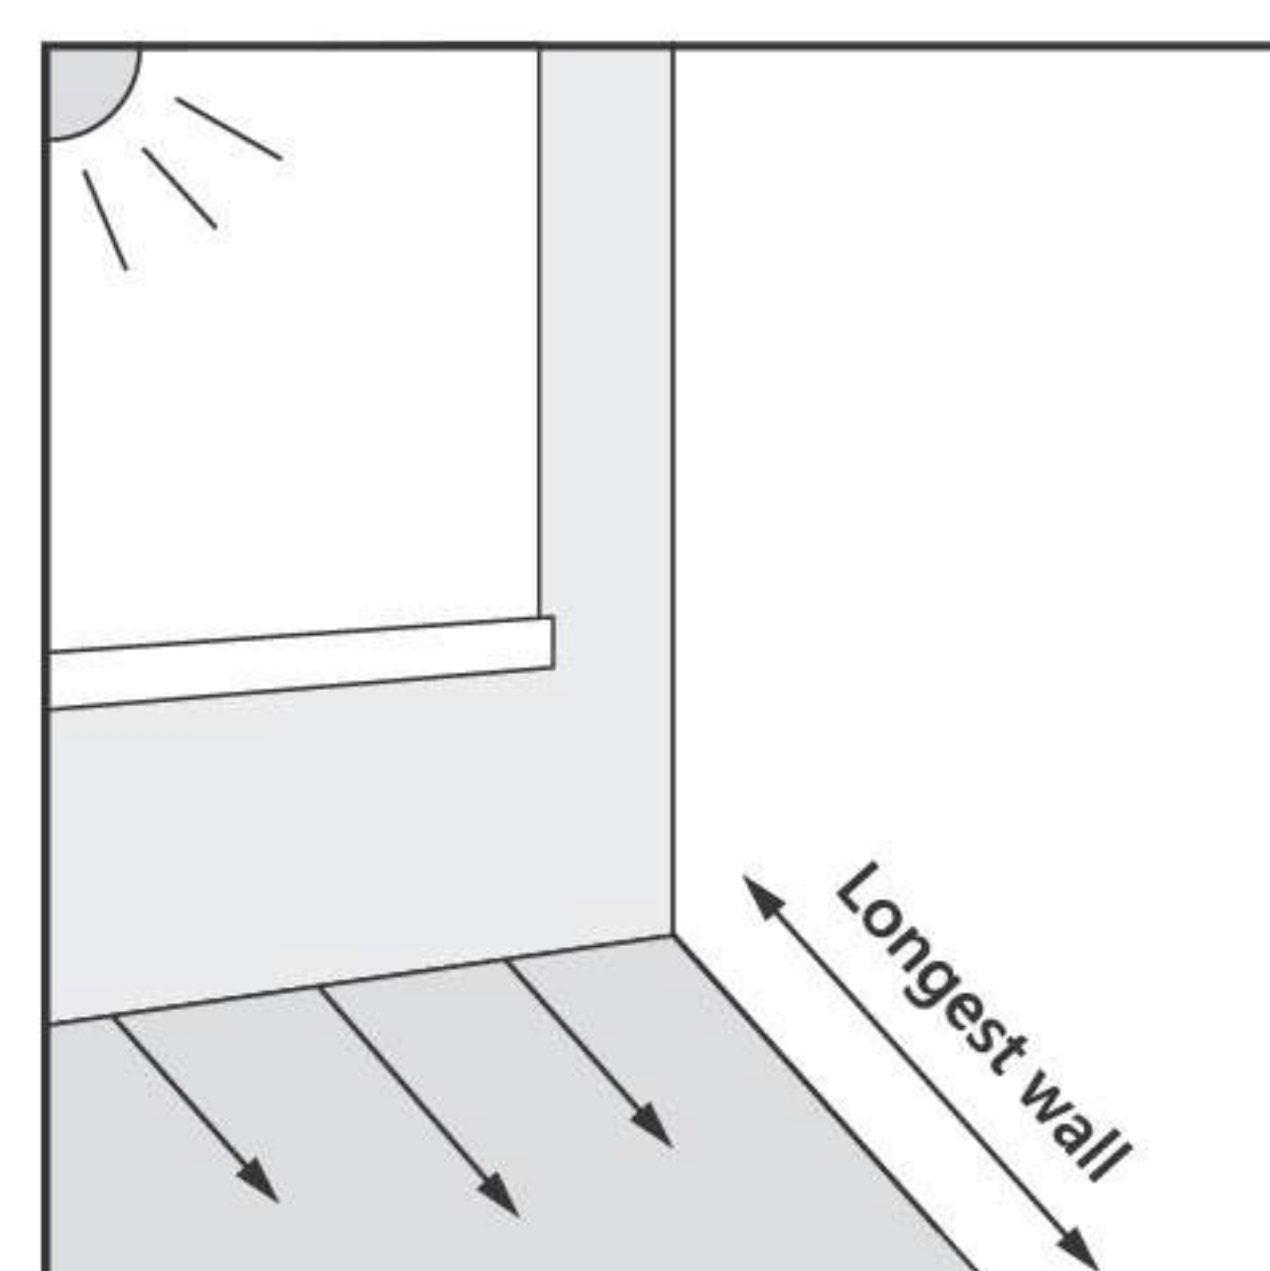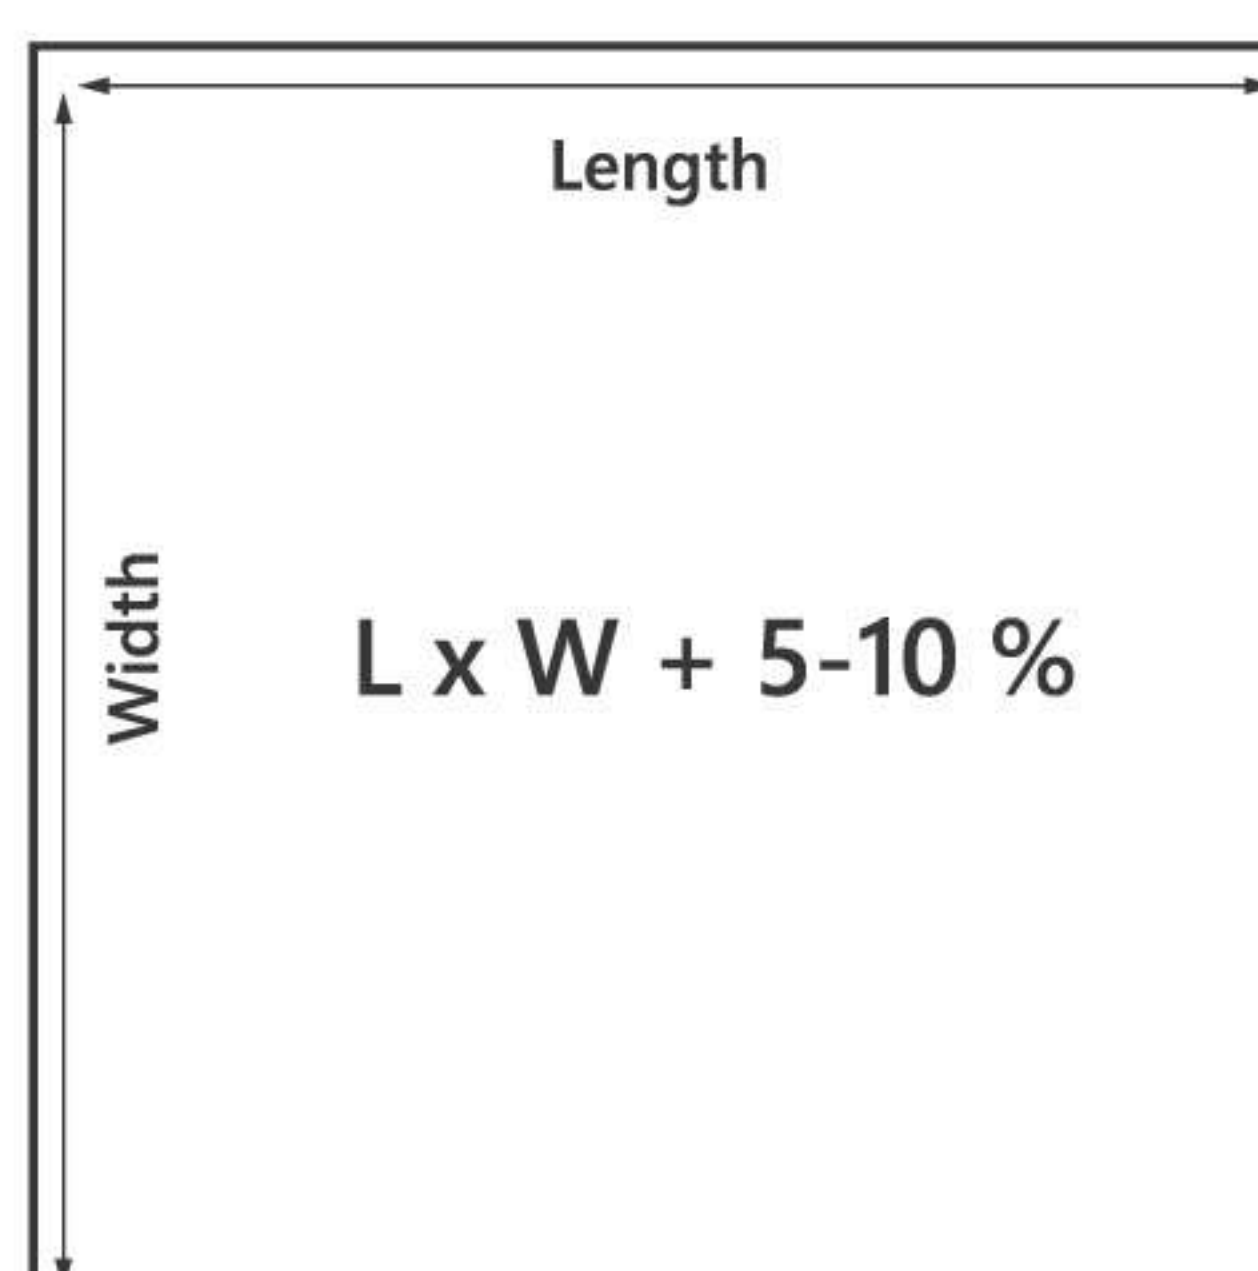

CALCULATE THE AMOUNT OF ROWS



- Divide the room width by the board width

$$\frac{\text{Room width}}{\text{Board width}}$$
- Distribute the remaining space evenly between the start and end rows. Ensure that each piece is at least 5 cm wide.

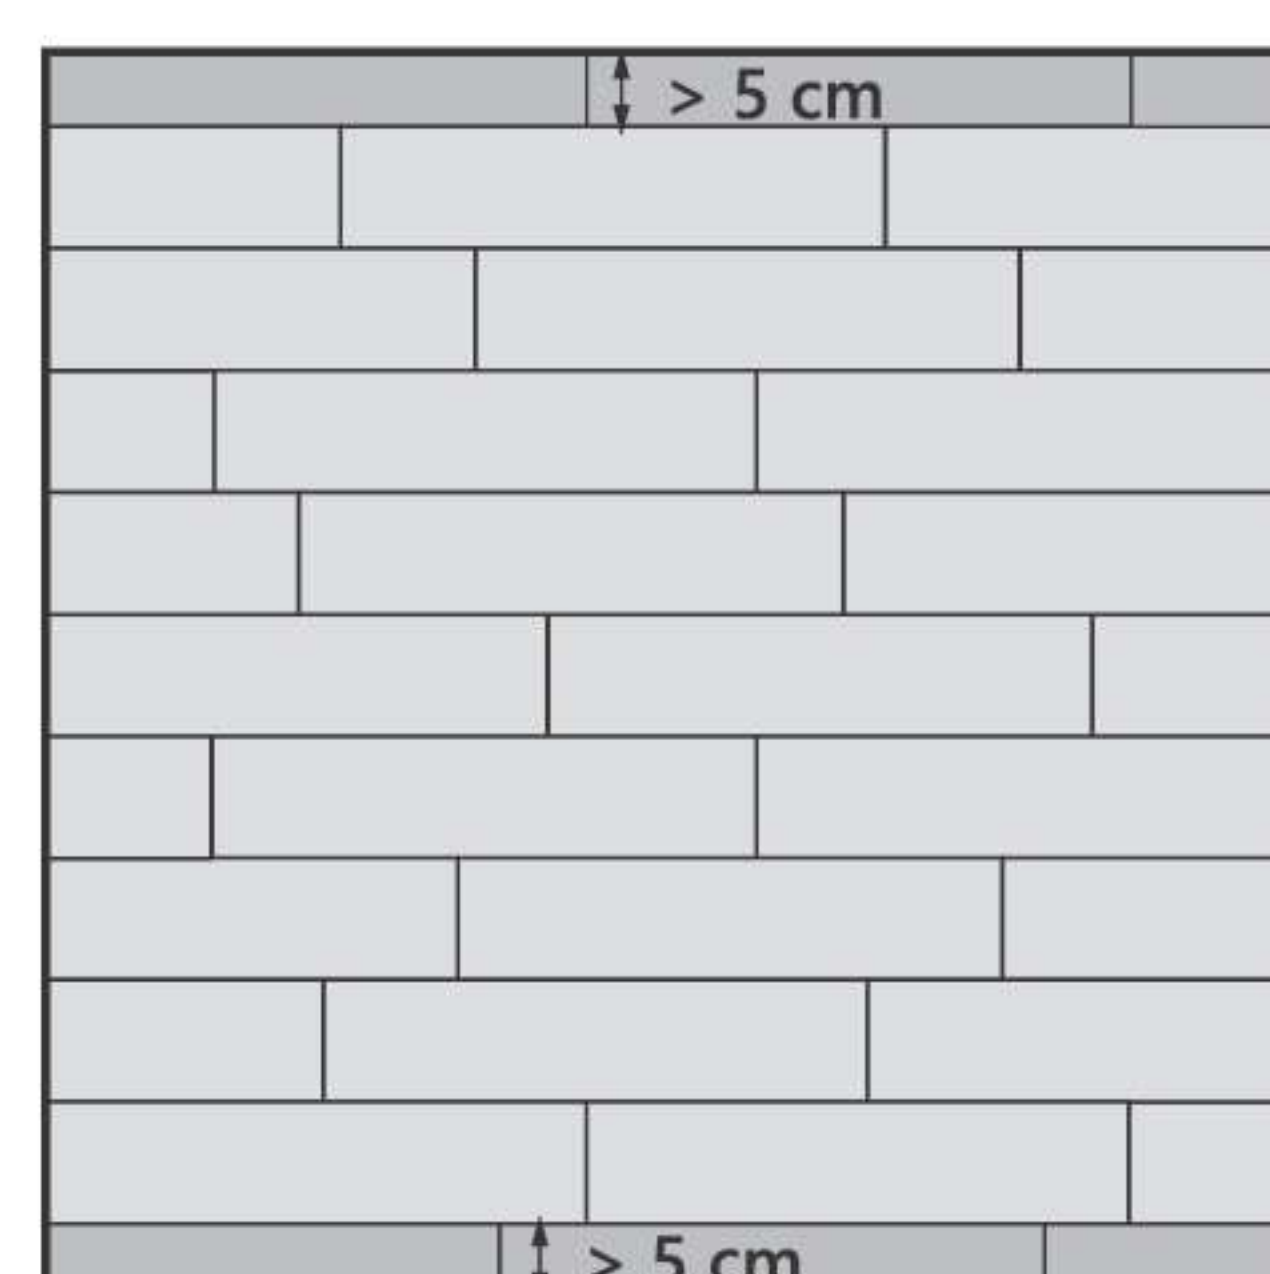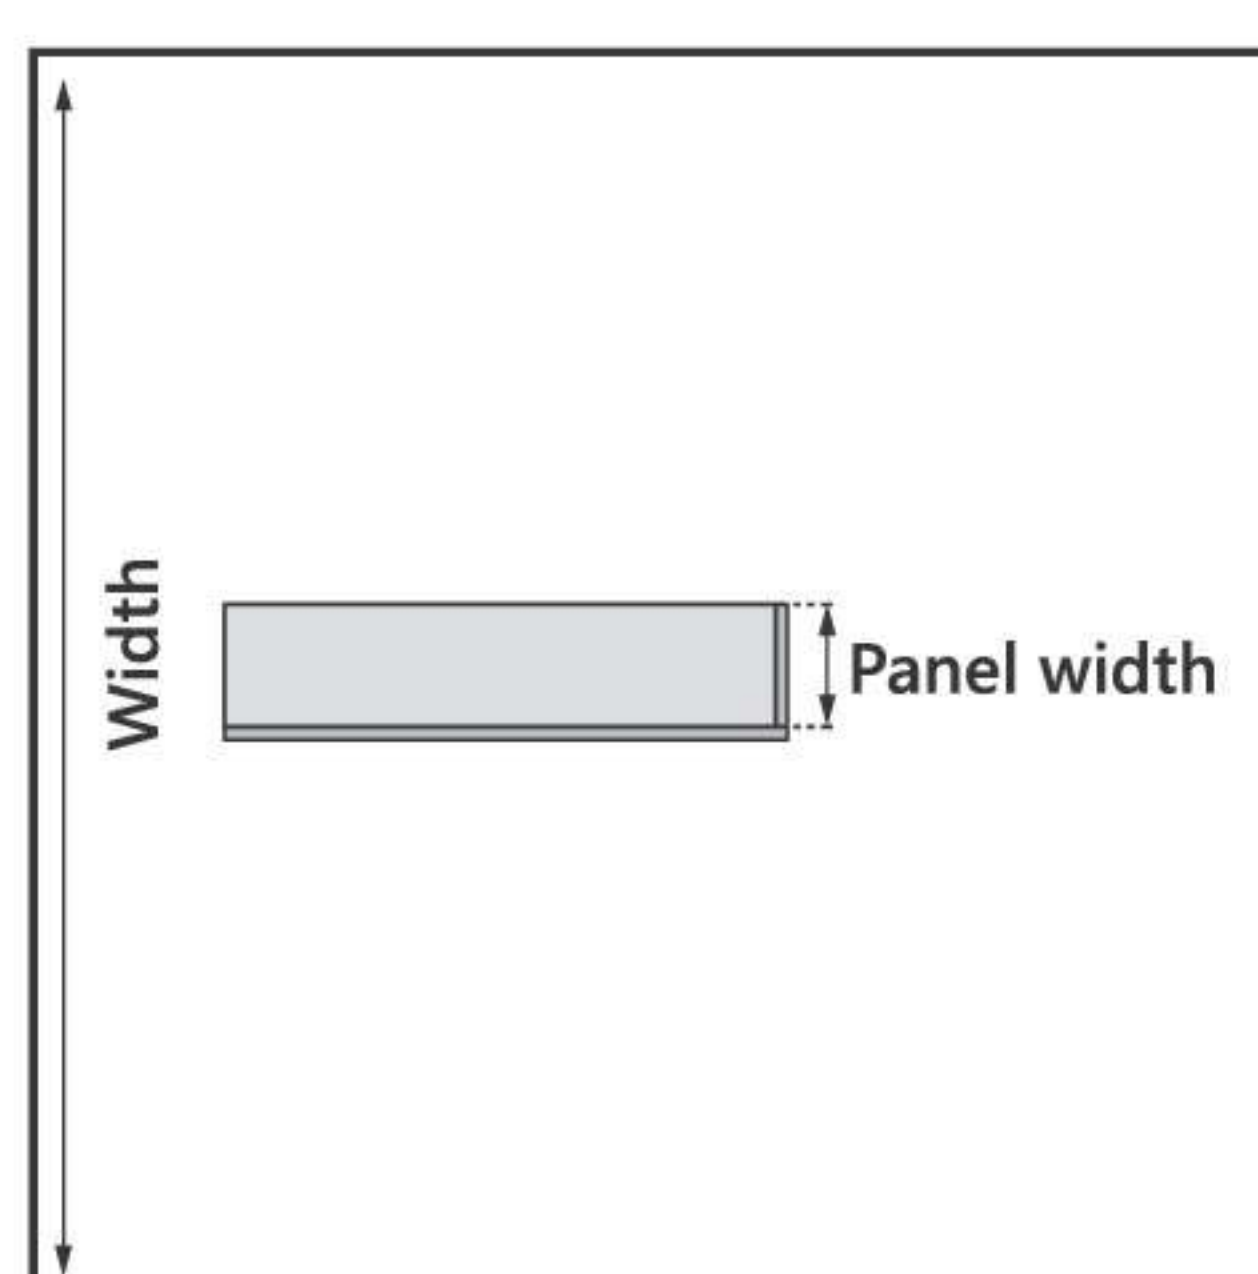

PREPARING THE PANELS


- Acclimatize the panels in the middle of the room for 48 hours in the box
- Make sure to follow the instructions on the box before beginning the installation
- Shuffle panels from different boxes to ensure an even distribution of color and pattern
- Inspect the panels for damages
- Use an underlay if there is no pad attached

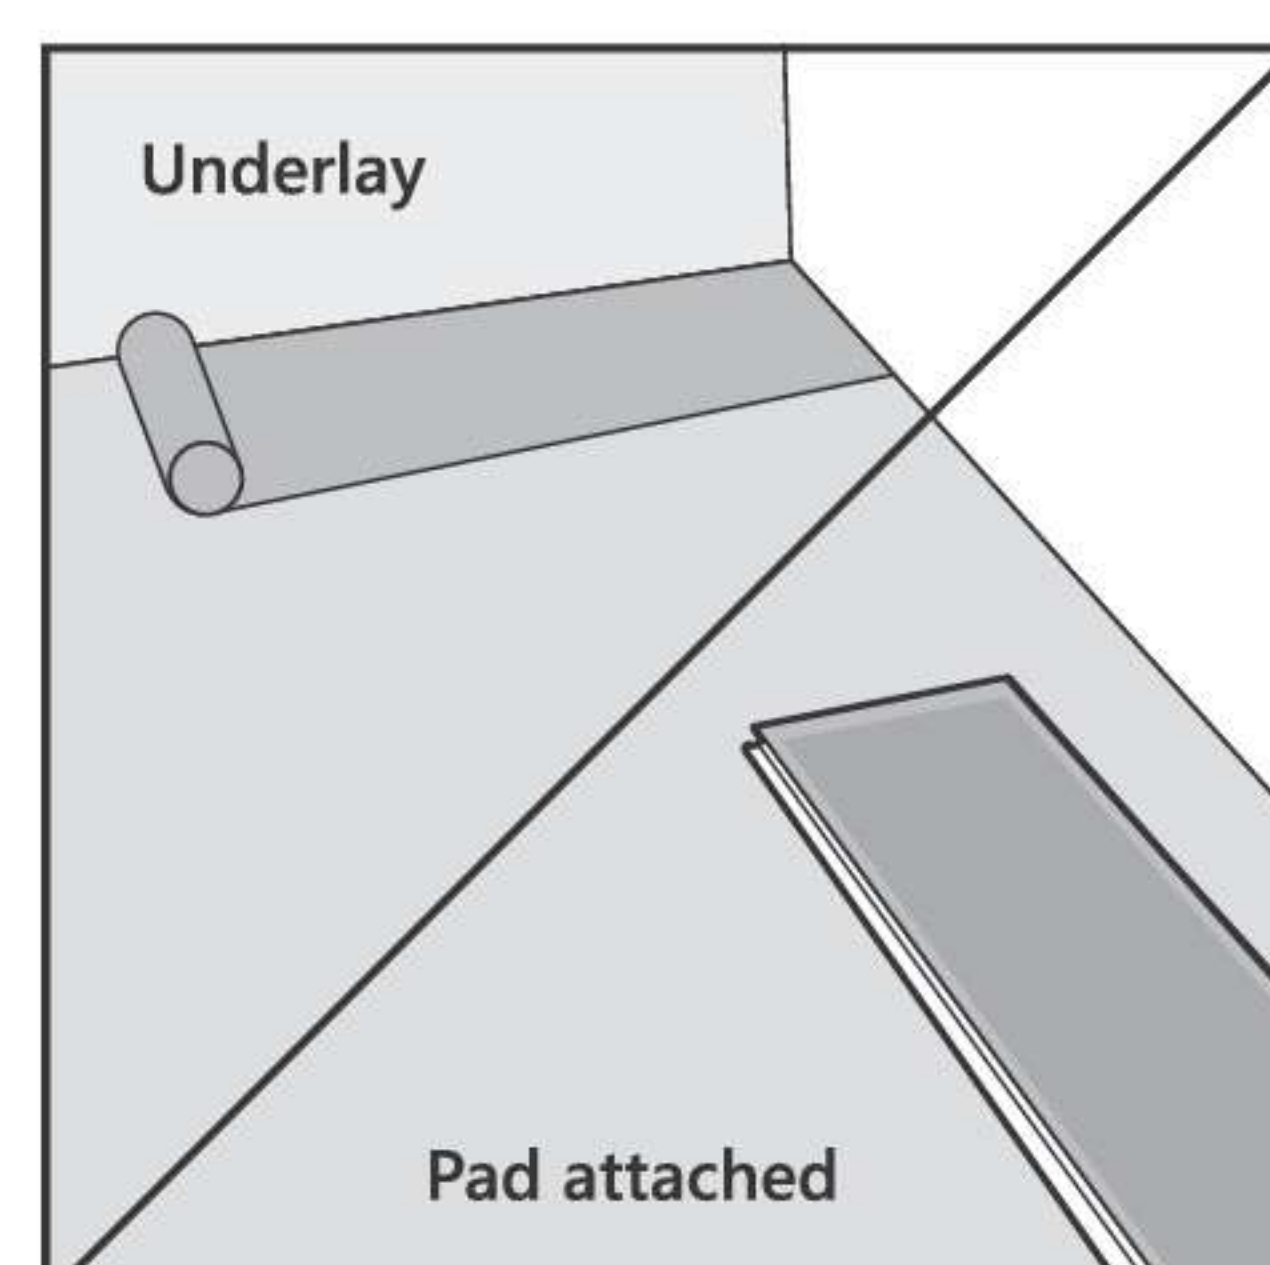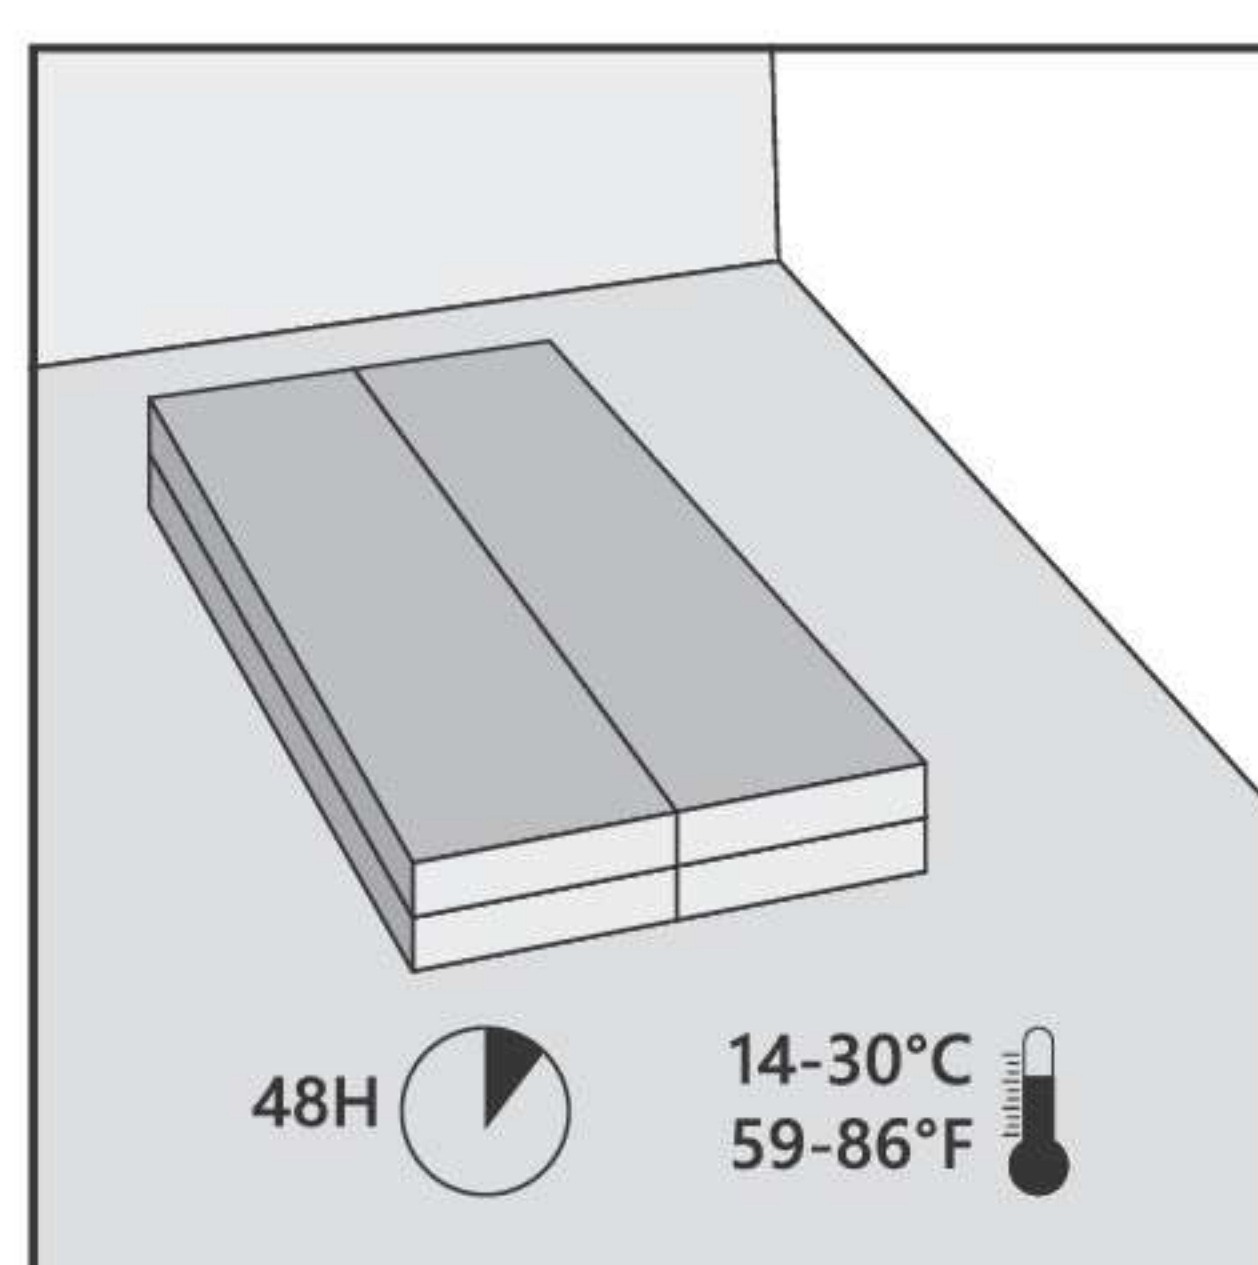


Installation Locking

Angle-angle installation is recommended for most of the room, with edge panels finished by tapping. The tongue-and-groove method is the most commonly used and easiest to install.

INSTALLATION METHOD A: ANGLE

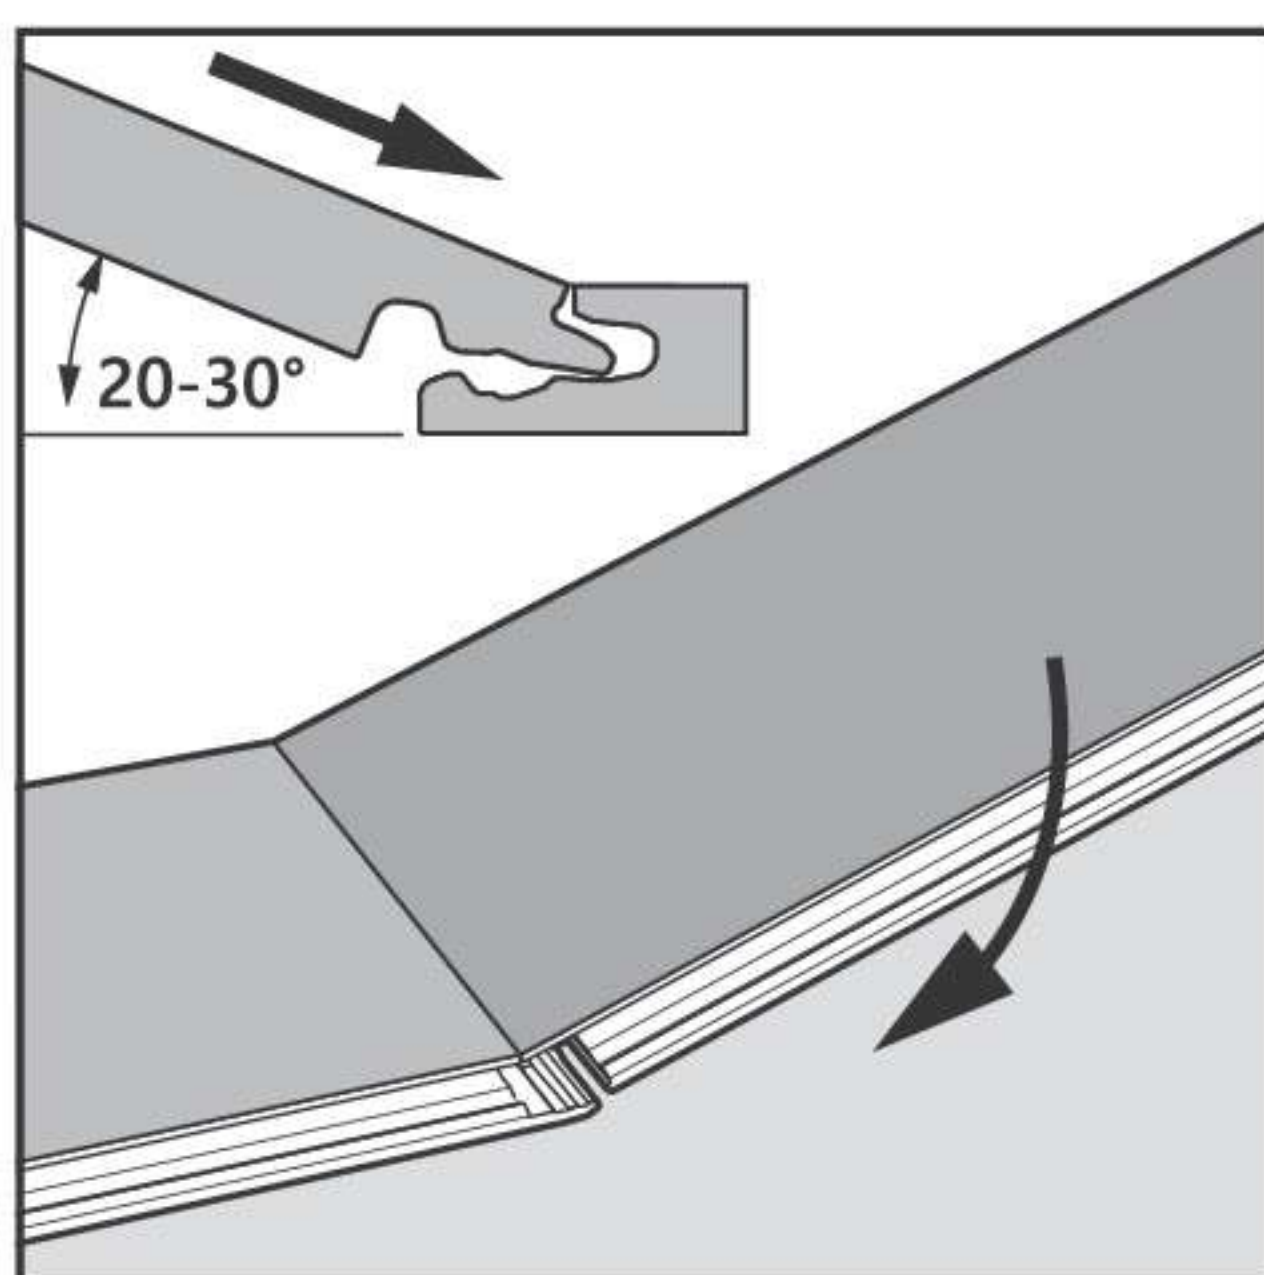


Start on the short side. Position the panel at an angle of 20-30° to the panel that is already installed, and angle down.

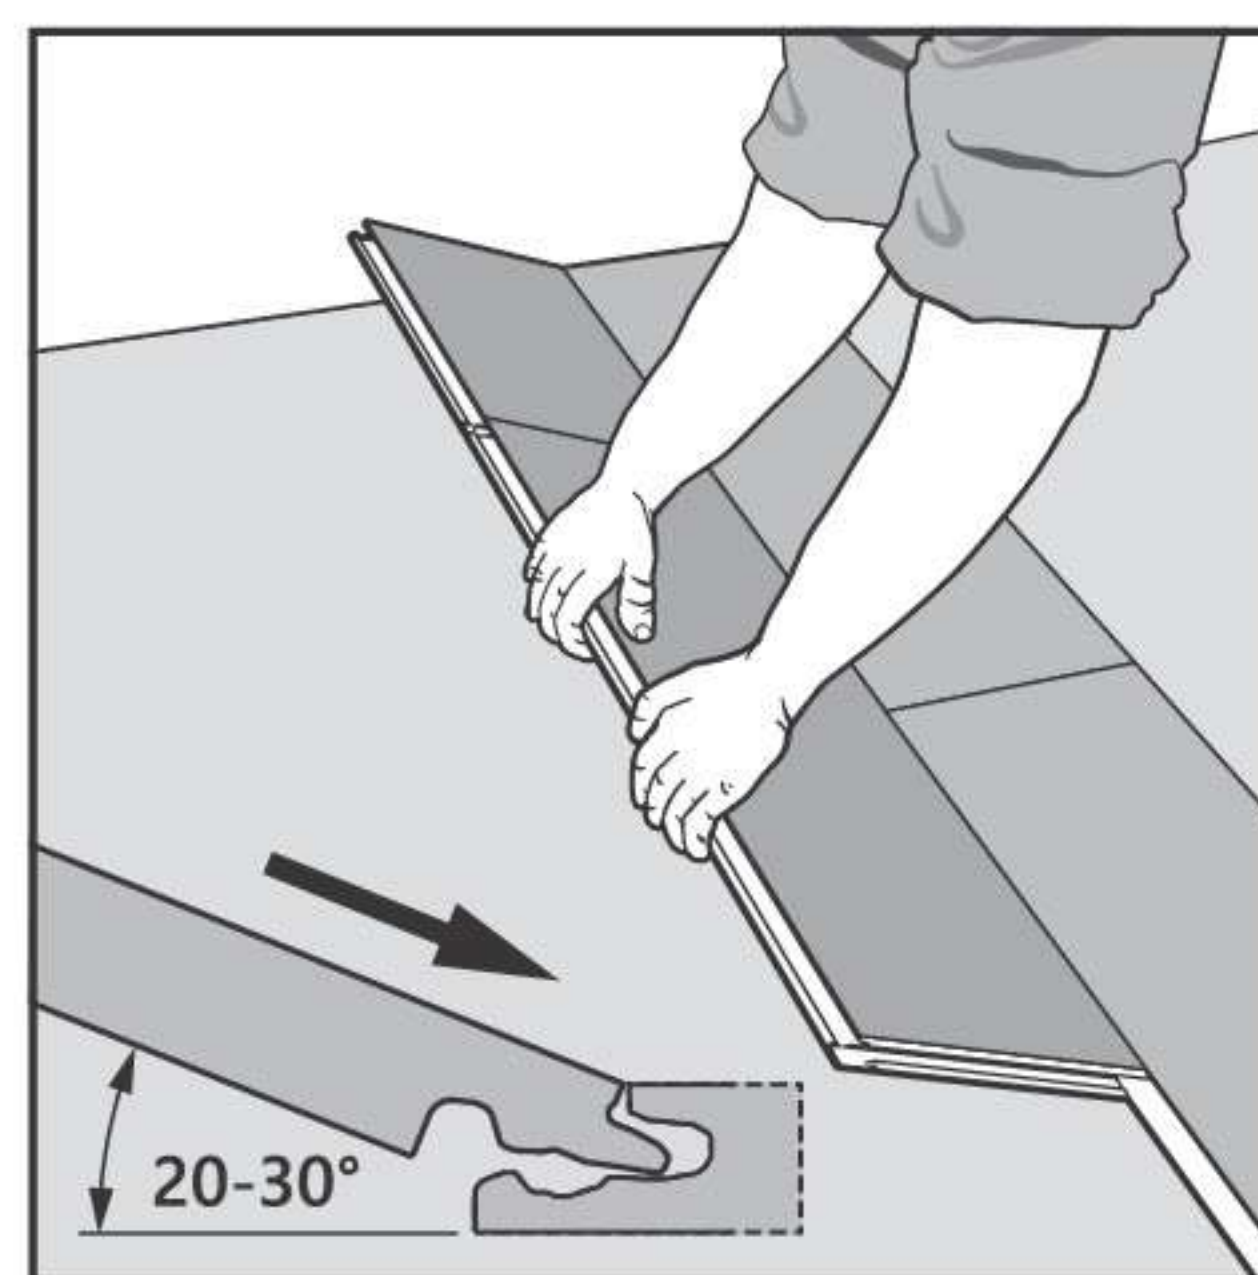


Place your hands close to the joint and move the panel up to an angle of 20-30°. Pull the panel towards the installed panels and angle down.

INSTALLATION METHOD B: TAP

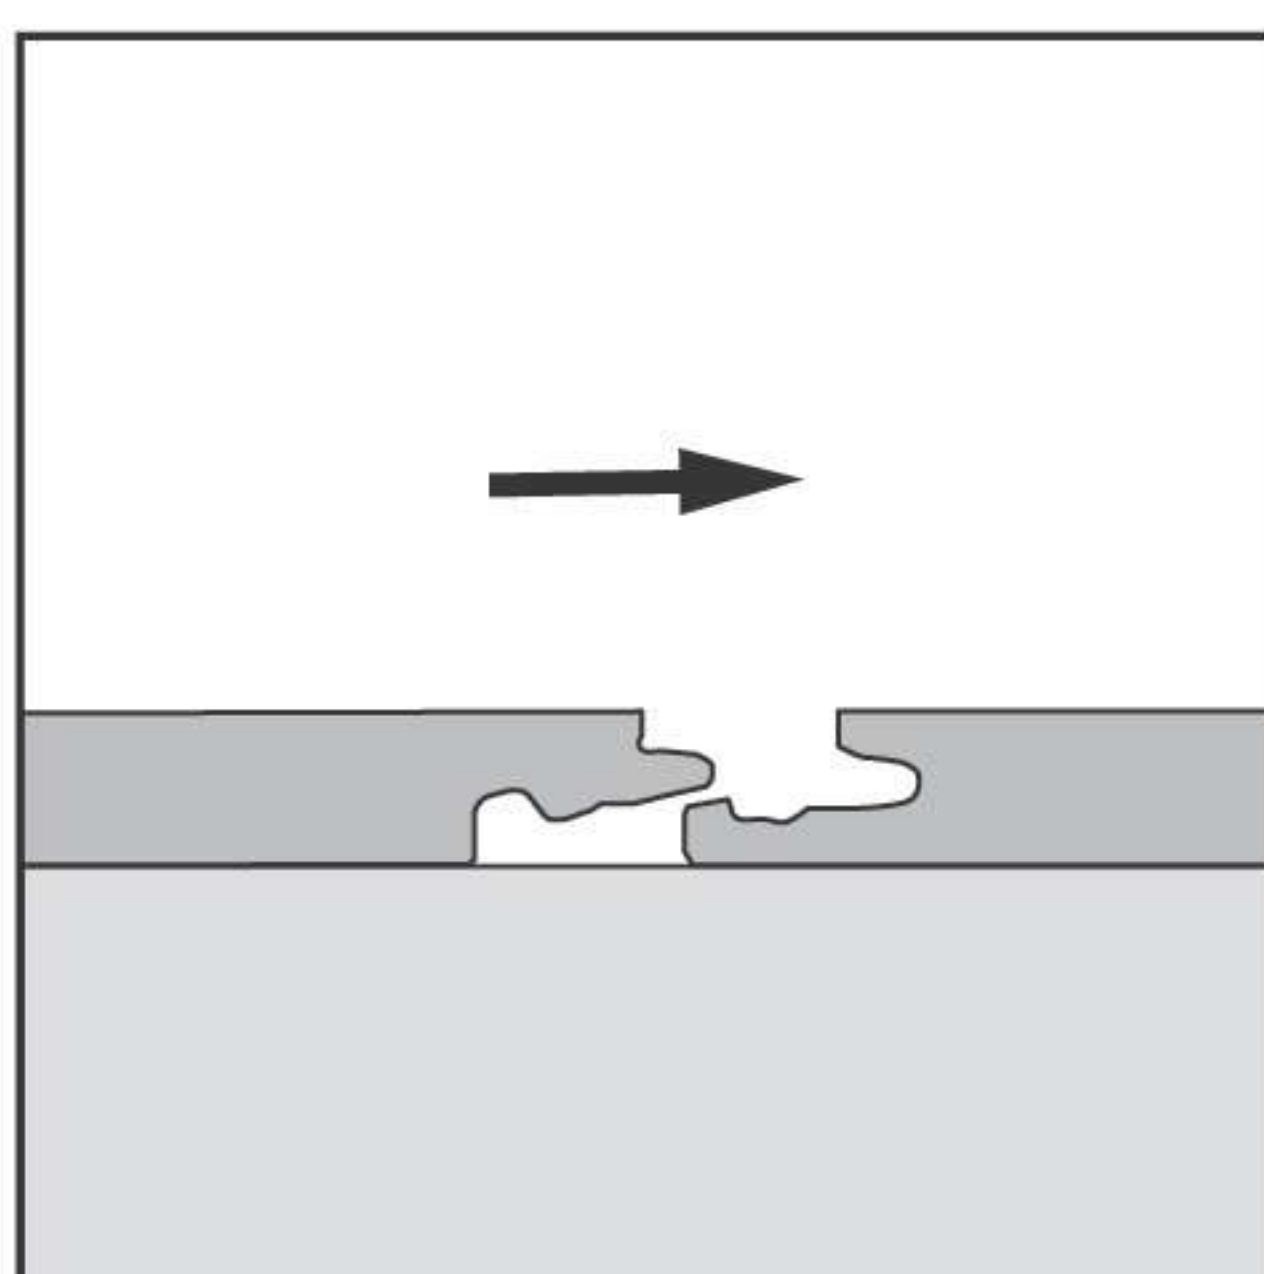


For hard to reach panels, use the tapping method. If possible, angle in one of the sides. Angle down and position the click systems as close as possible.

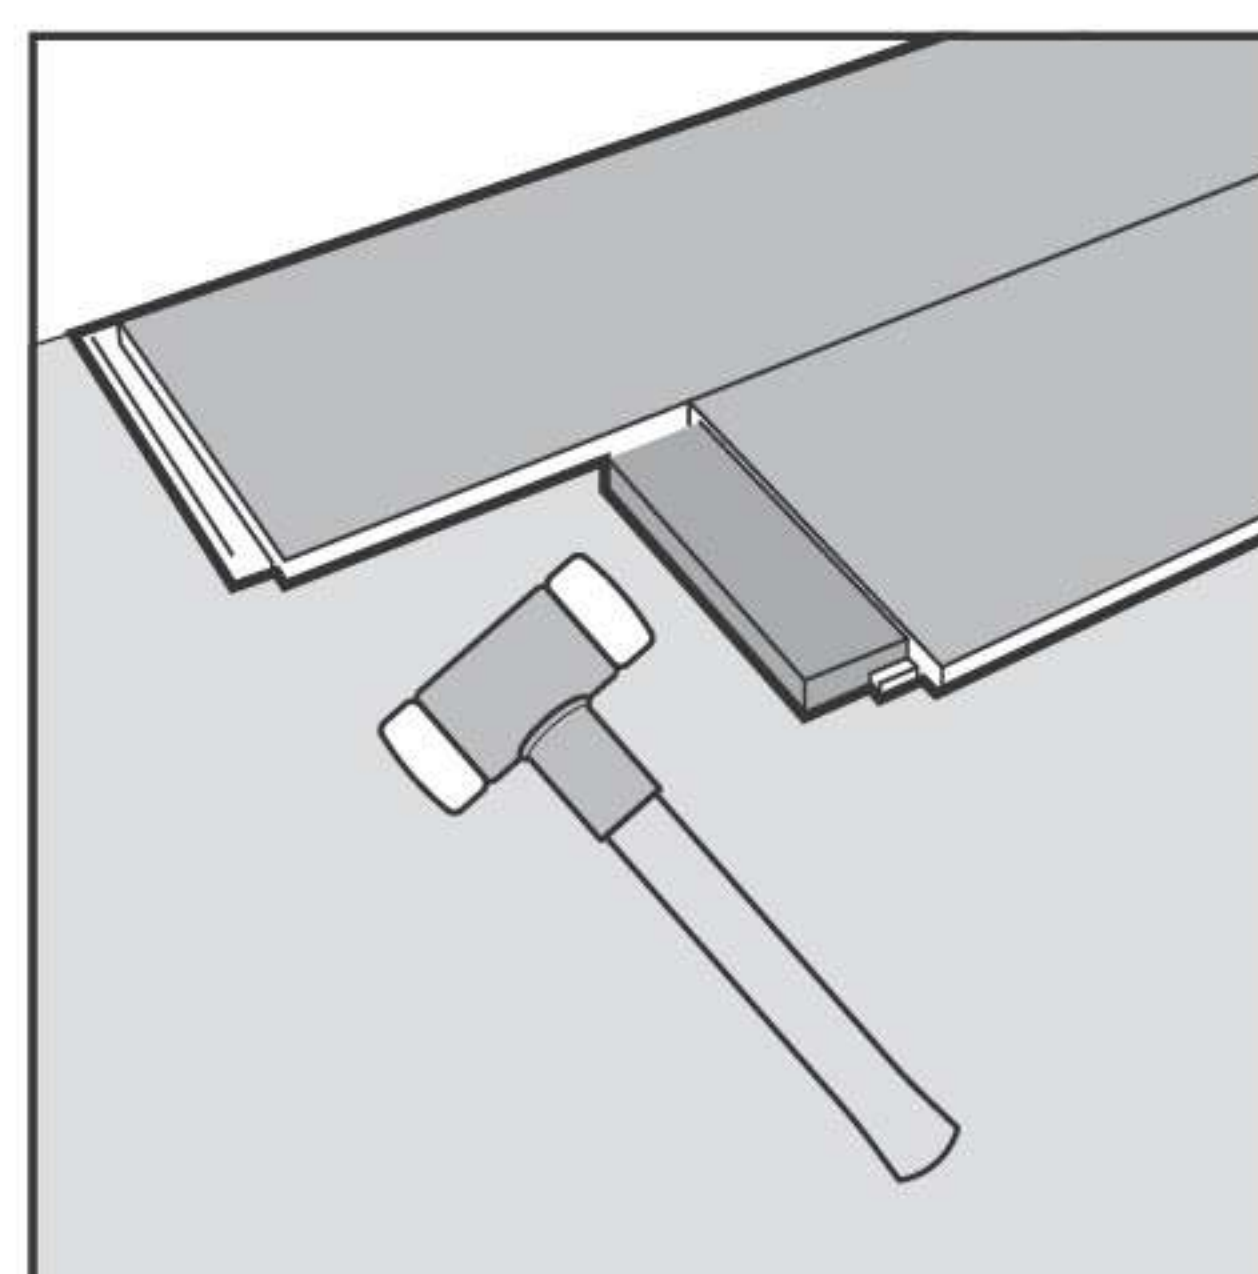


Use a tapping block and position it against the locking system. Gently tap the block with a hammer to gradually connect the panels in a few taps.

FOR HARD TO REACH AREAS

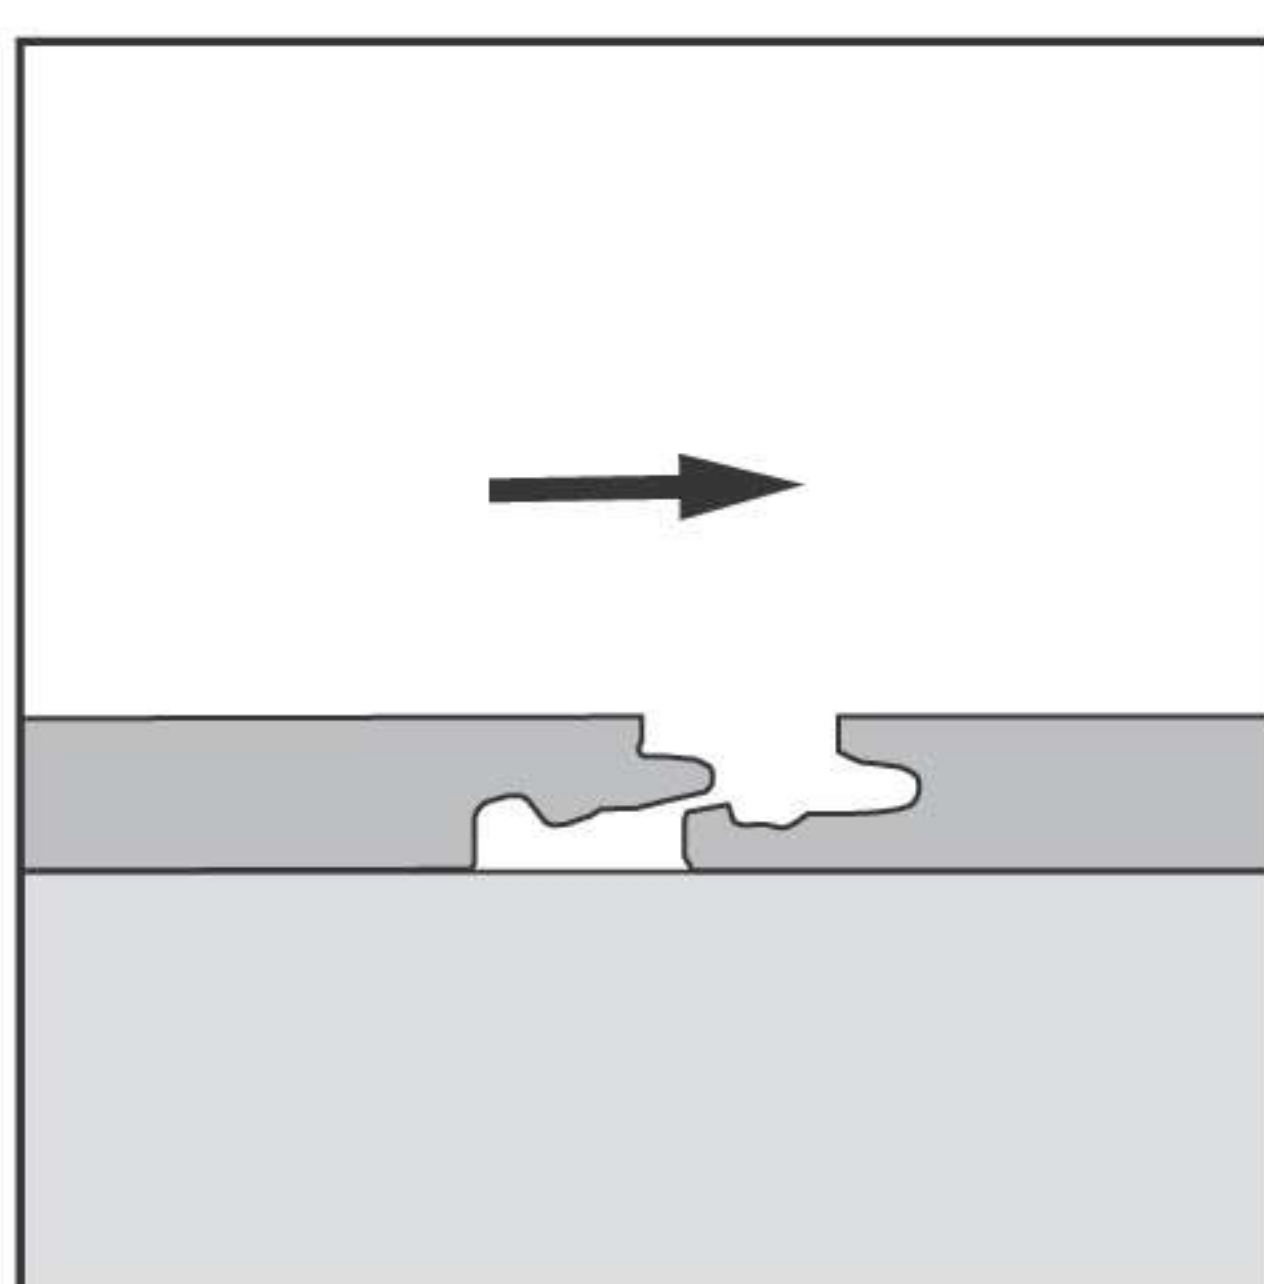


For areas where it is not possible to use angling or a tapping block, such as the end panels against the wall, use the pull bar with the tapping method.

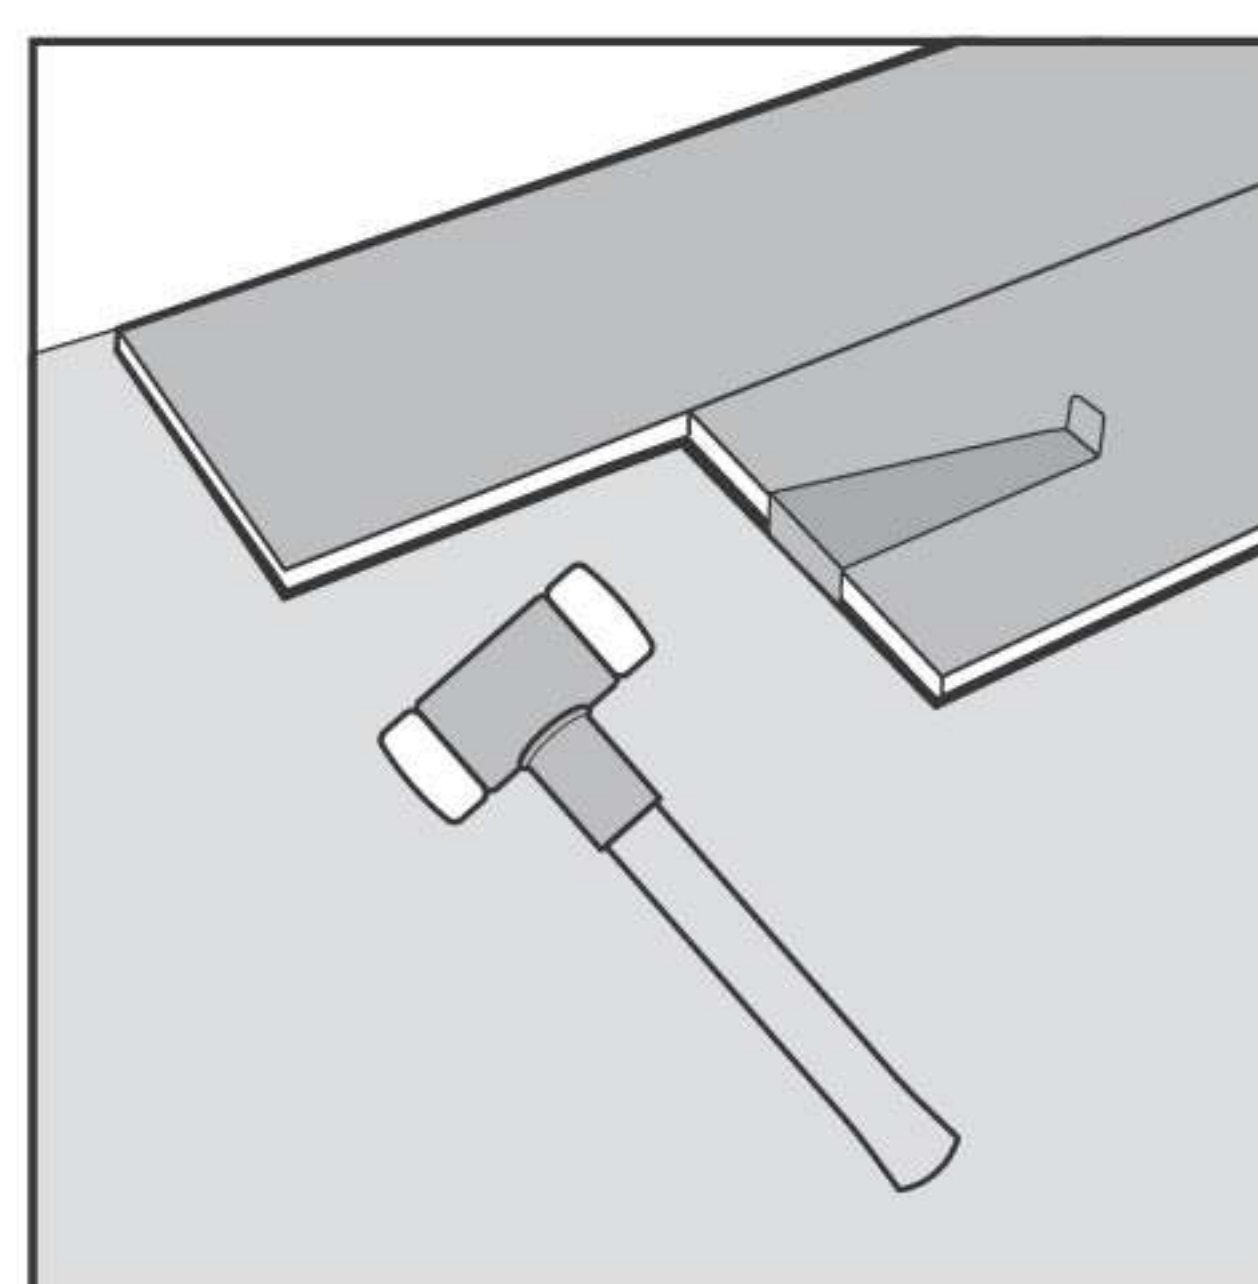


Use a pull bar and position it against the locking system. Gently tap the pull bar with a hammer to gradually connect the panels in a few taps.

DE-INSTALLING THE PANELS

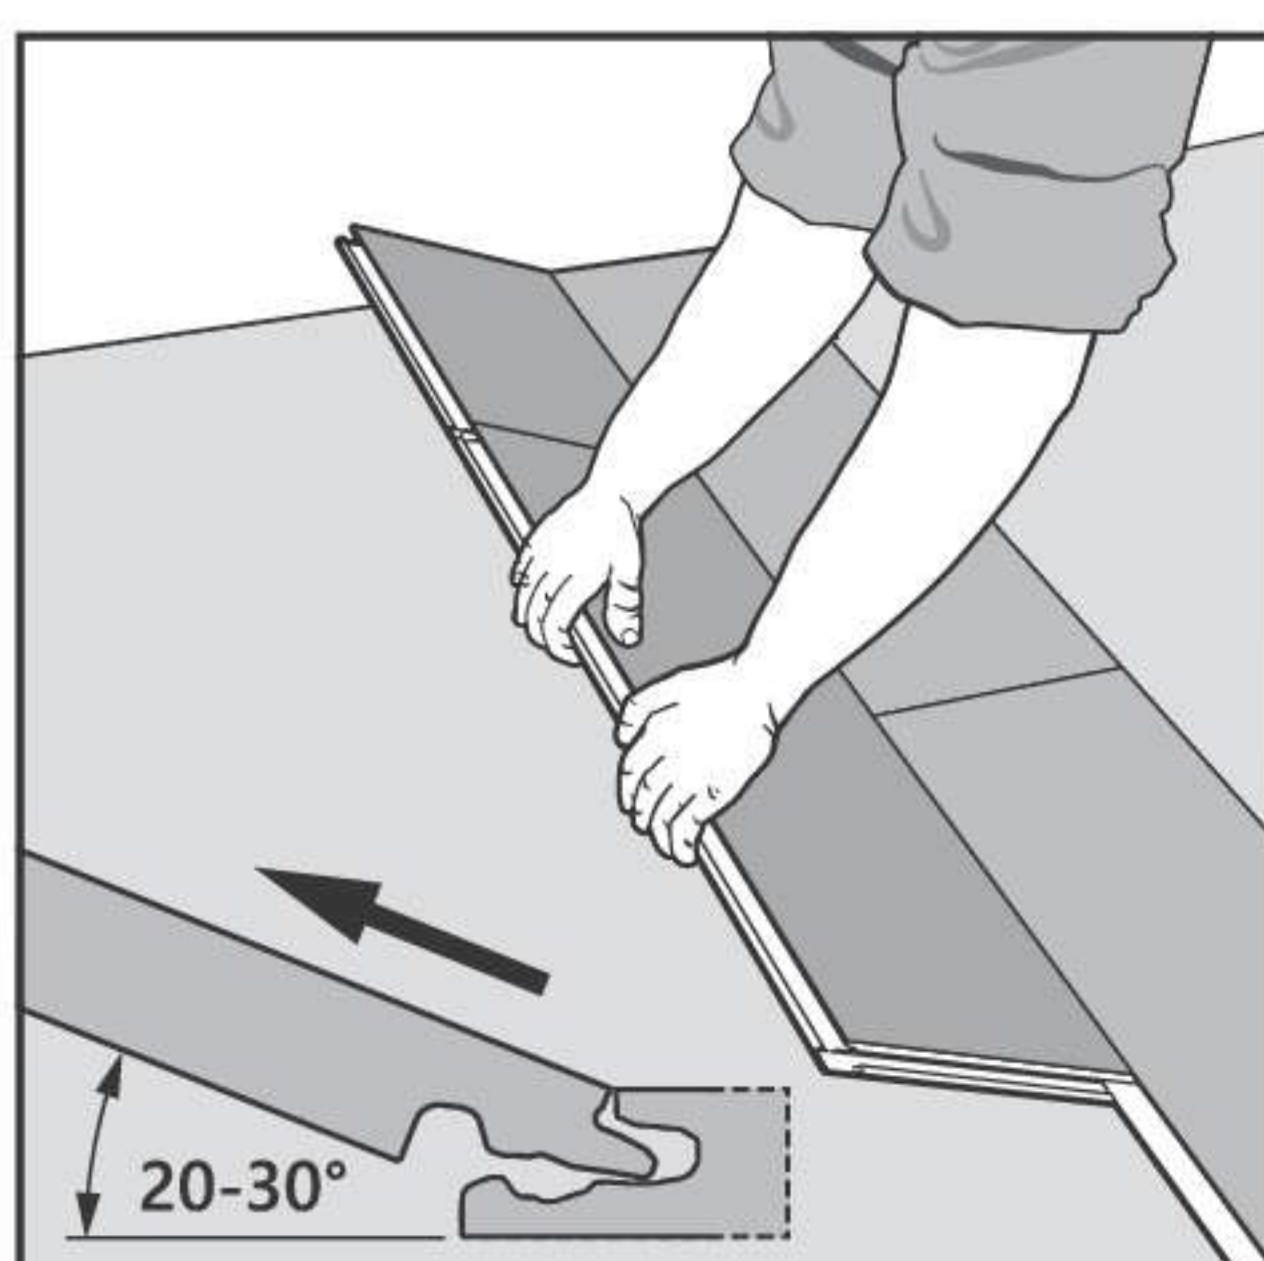

Start by angling out the complete row on the long side of the panel by lifting up to about 20-30°.

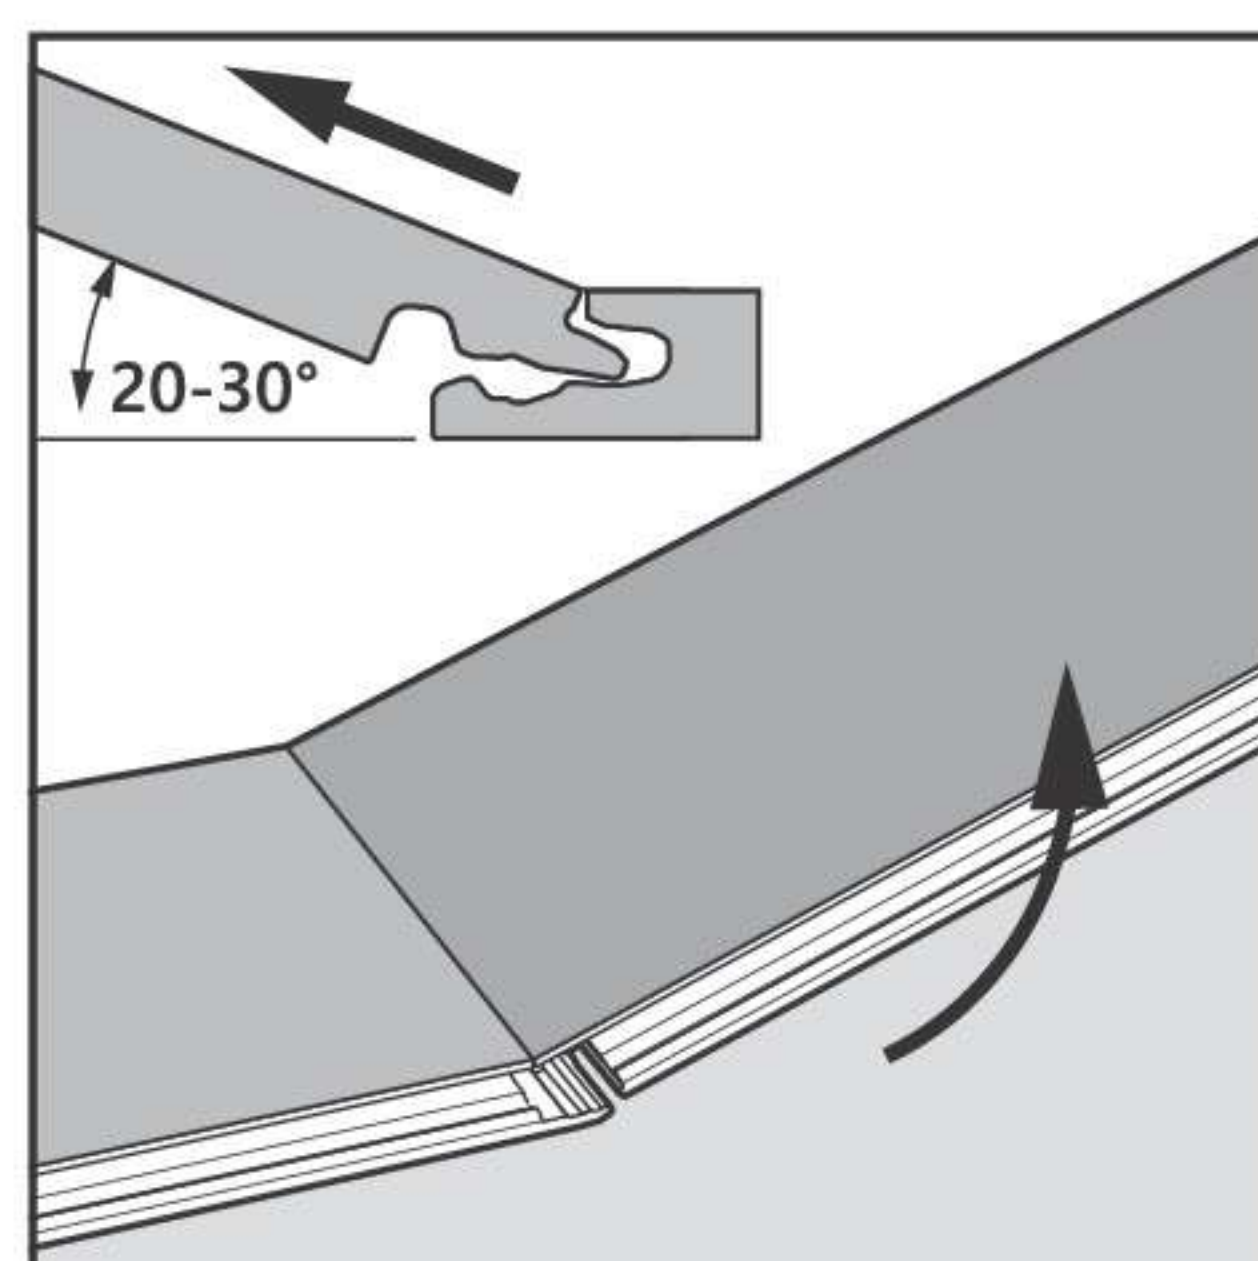


Angle up the end of the panel to angle out the short side.

Installation Pattern


WATCH THE
INSTALLATION
VIDEO



DIRECTION OF THE ROWS

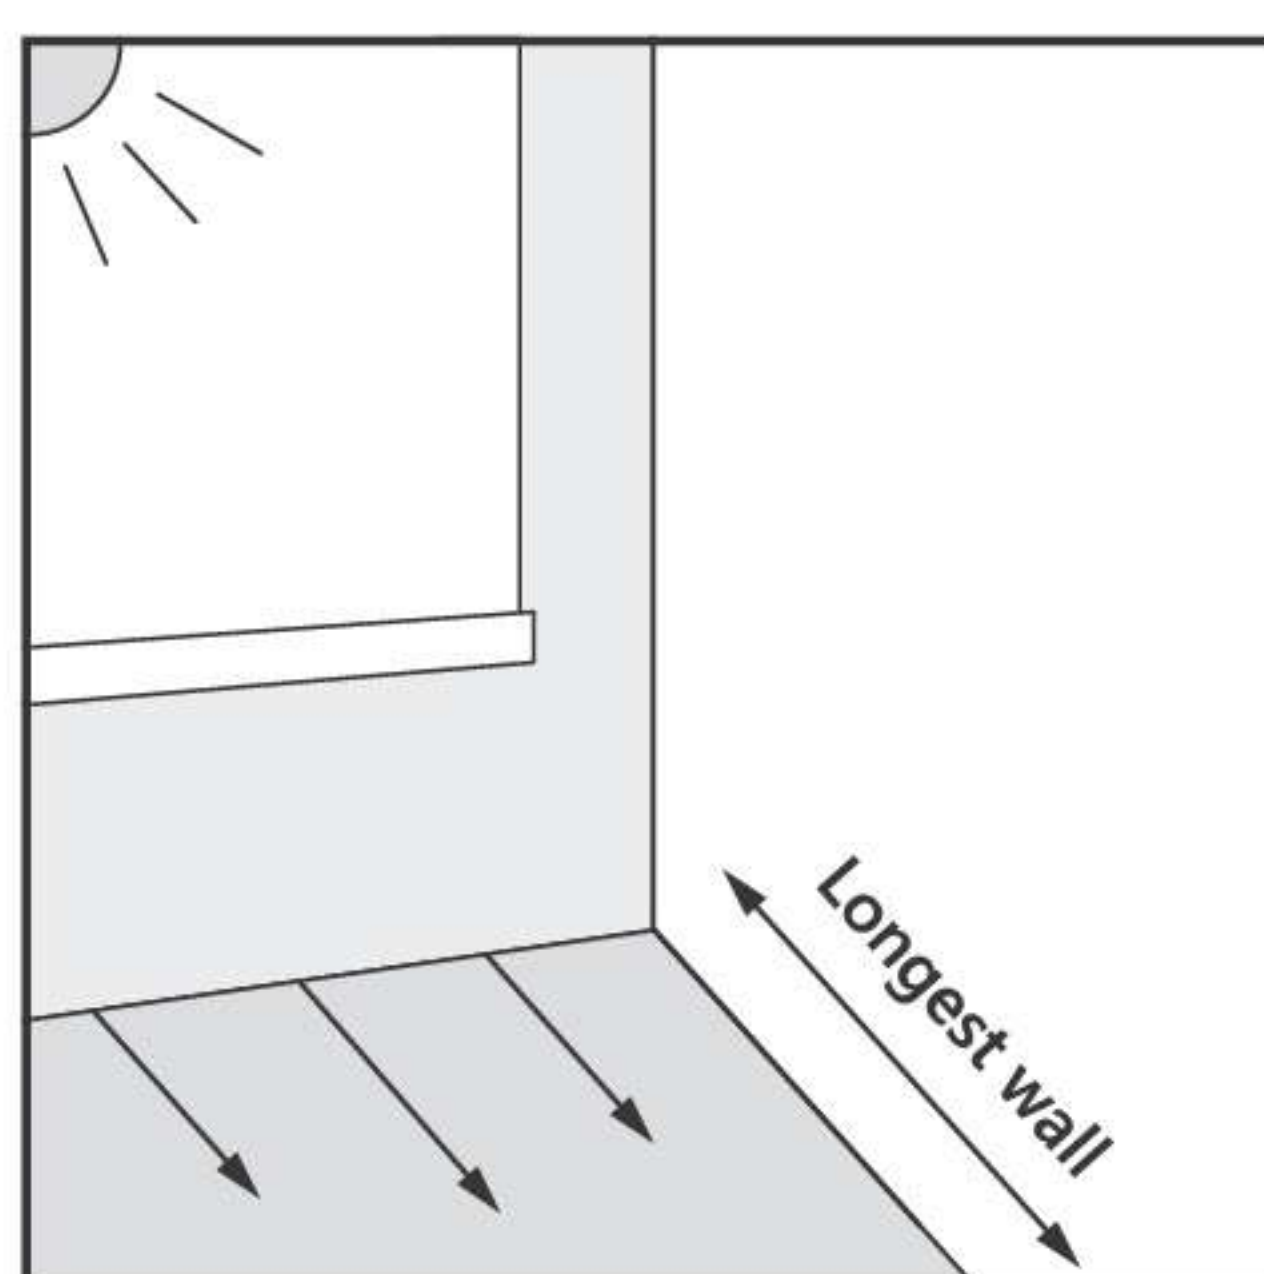


Plan the floor along the longest wall or light direction for the most pleasing visual appeal.

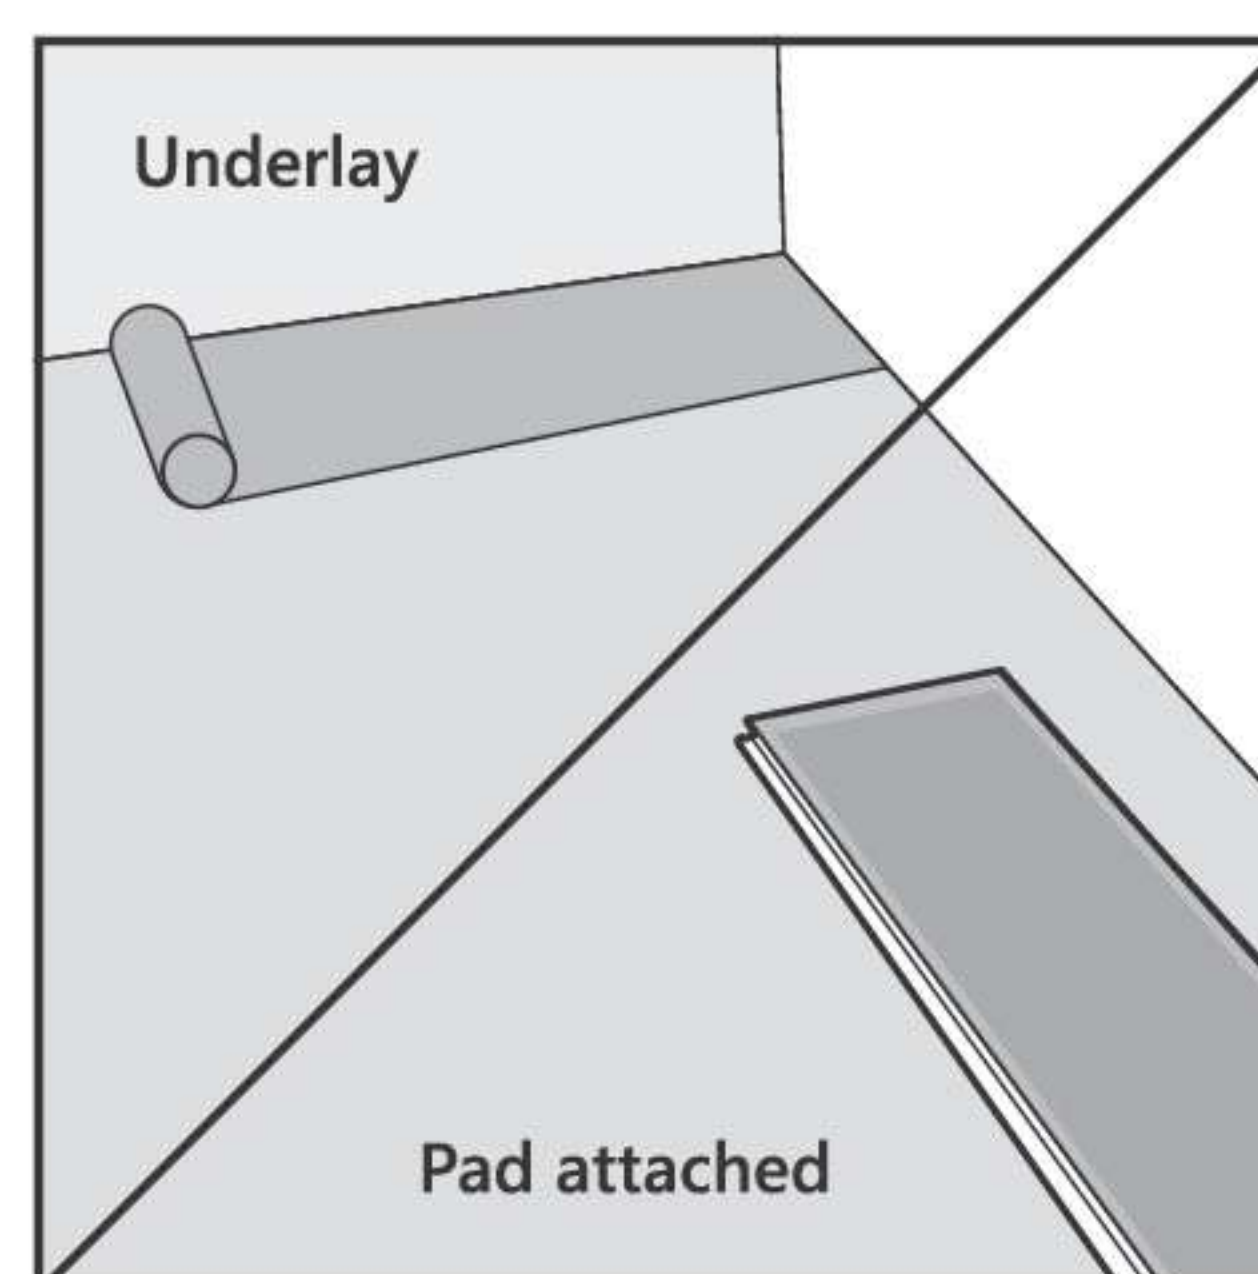


If there is no pad attached to the panels, roll out the underlay in the same direction of the floor.

STAGGERING

140

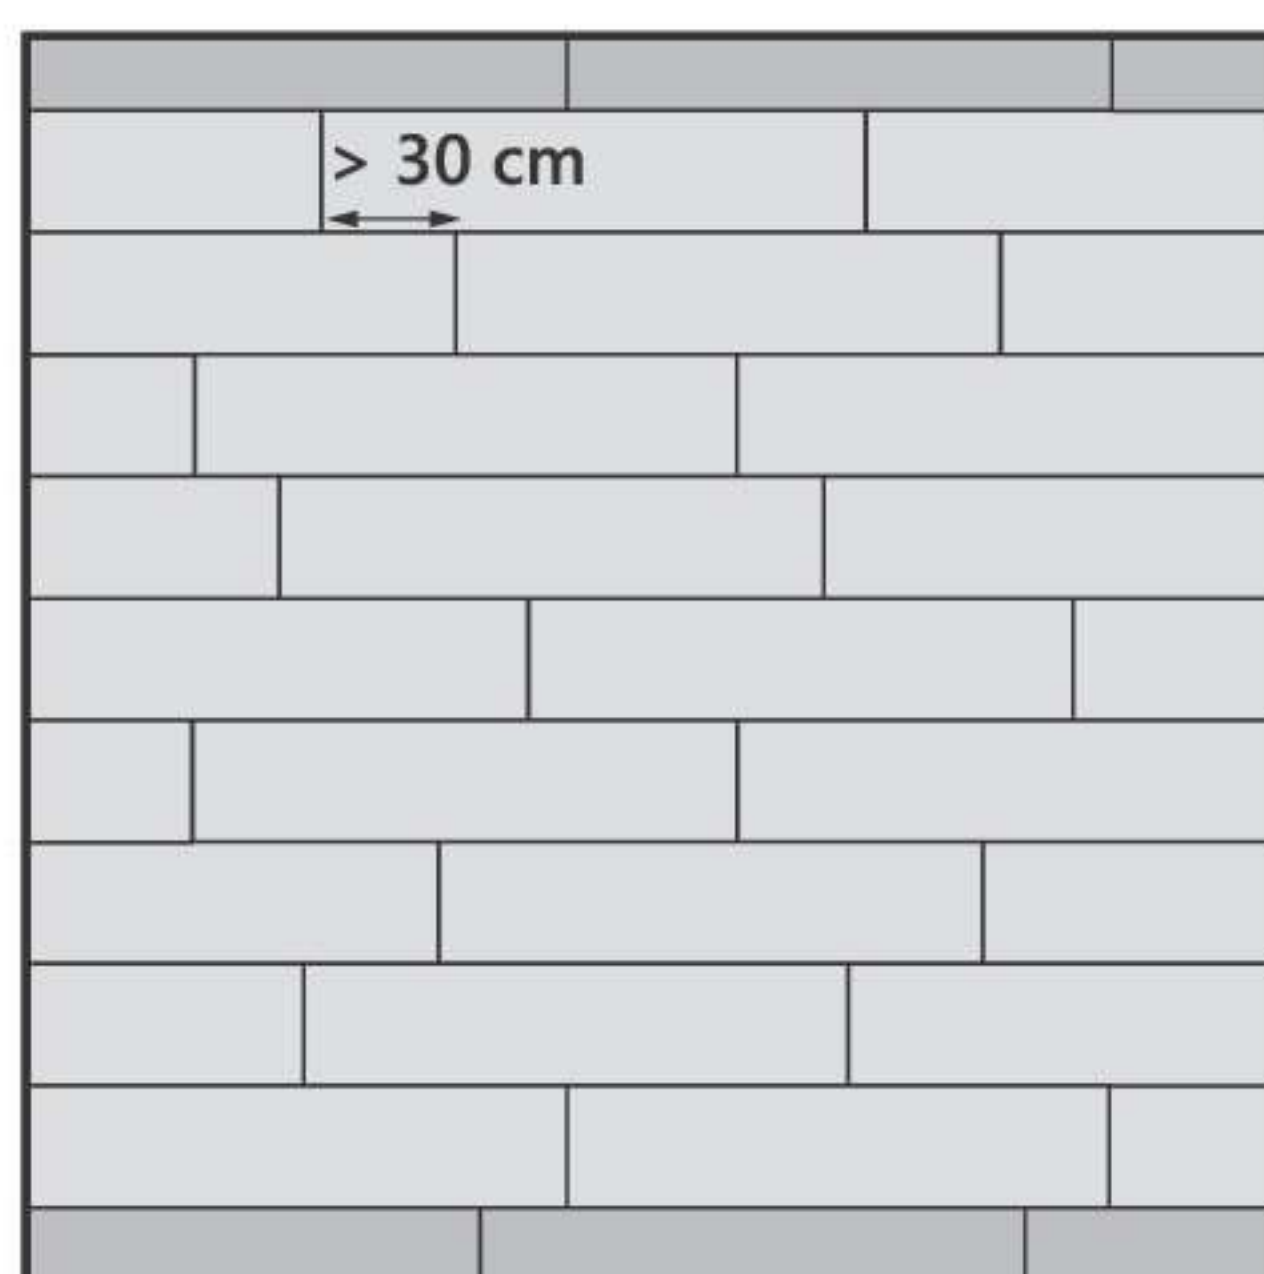


Make sure the panels always stagger for at least 30 cm.

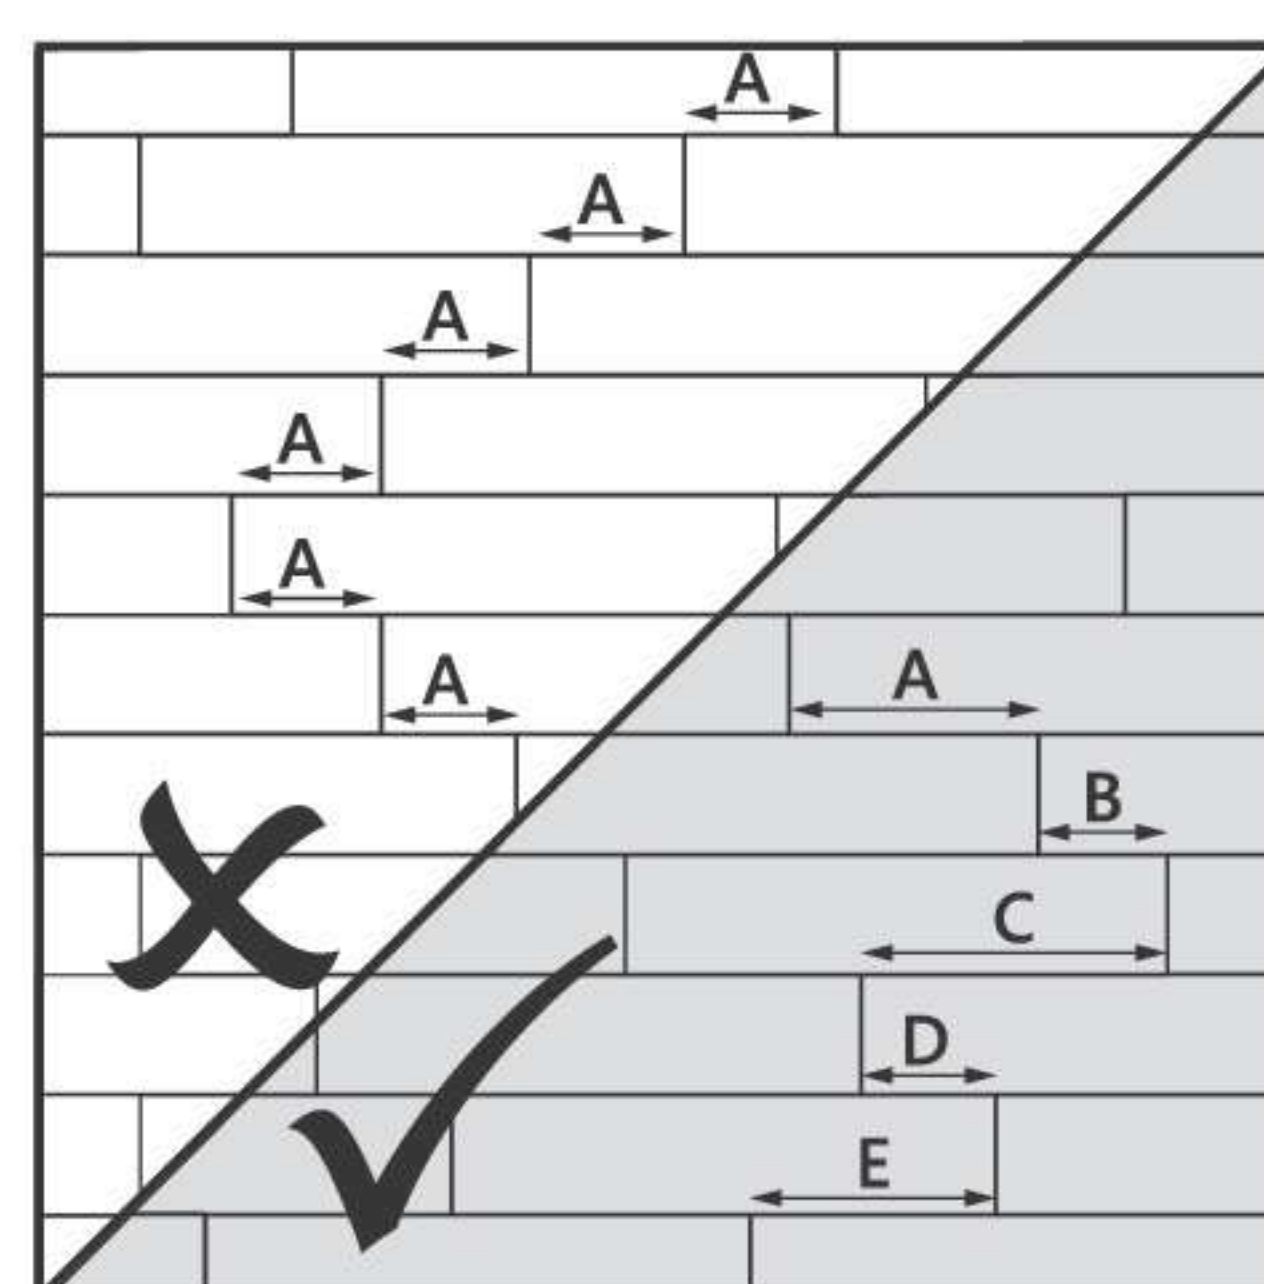


Stagger the panels randomly to avoid a staircase pattern and ensure a strong click connection.

START POSITION

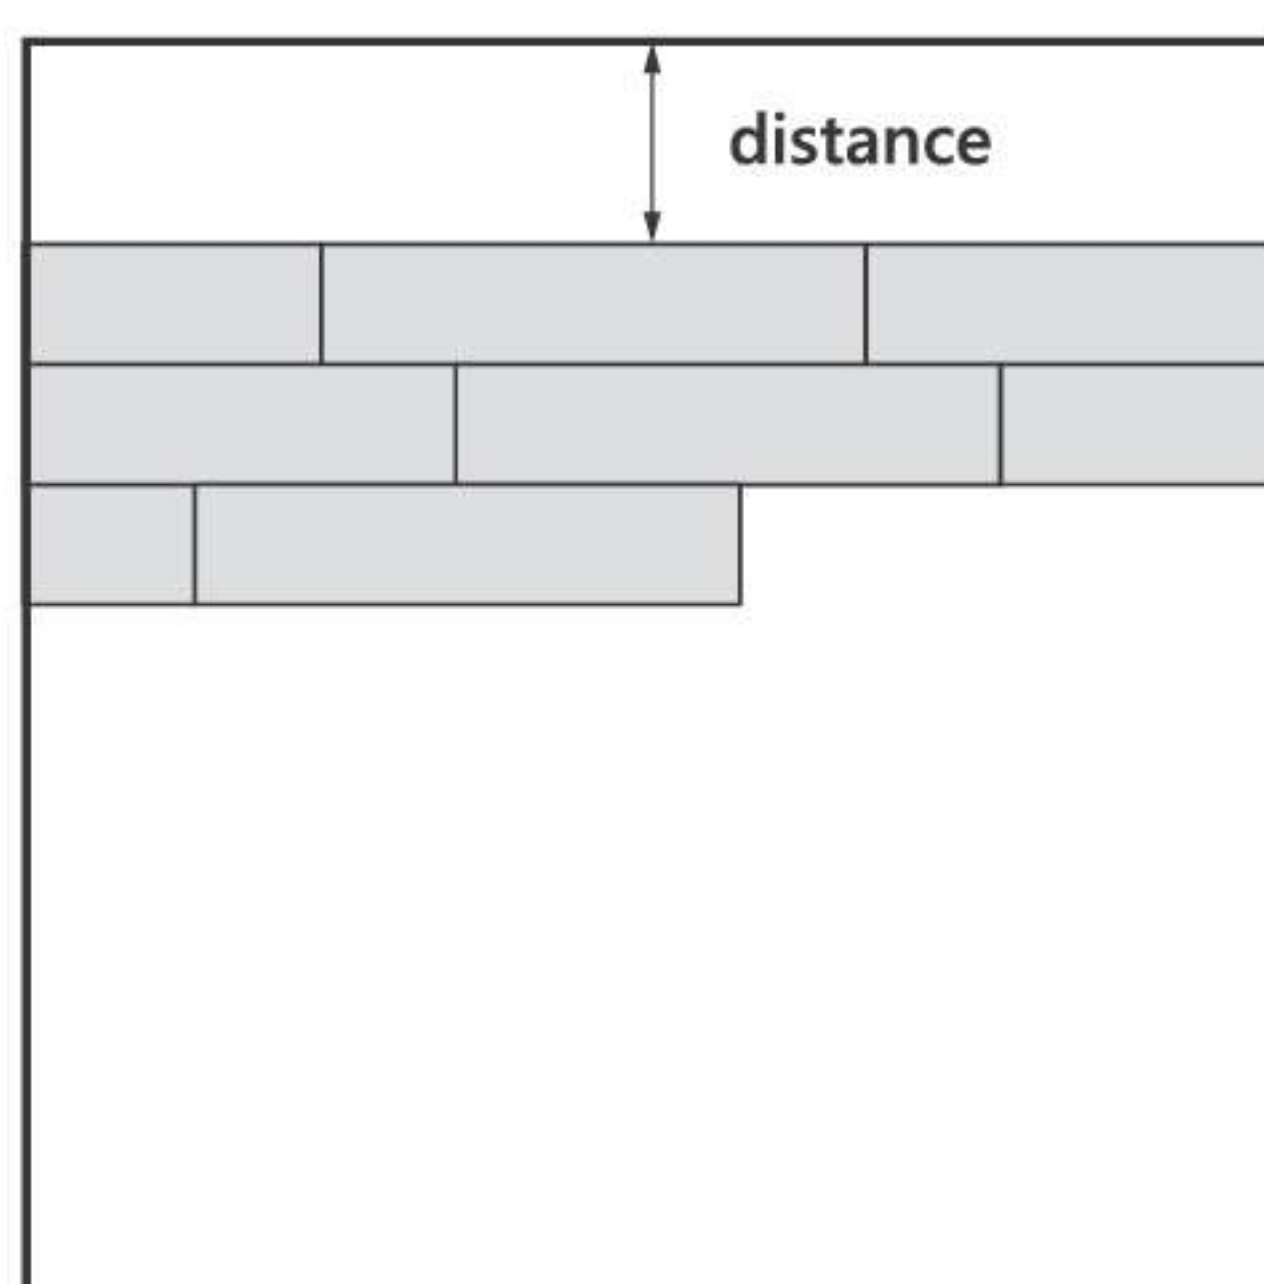

Option 1


Start by laying the first row at a little distance from the wall.

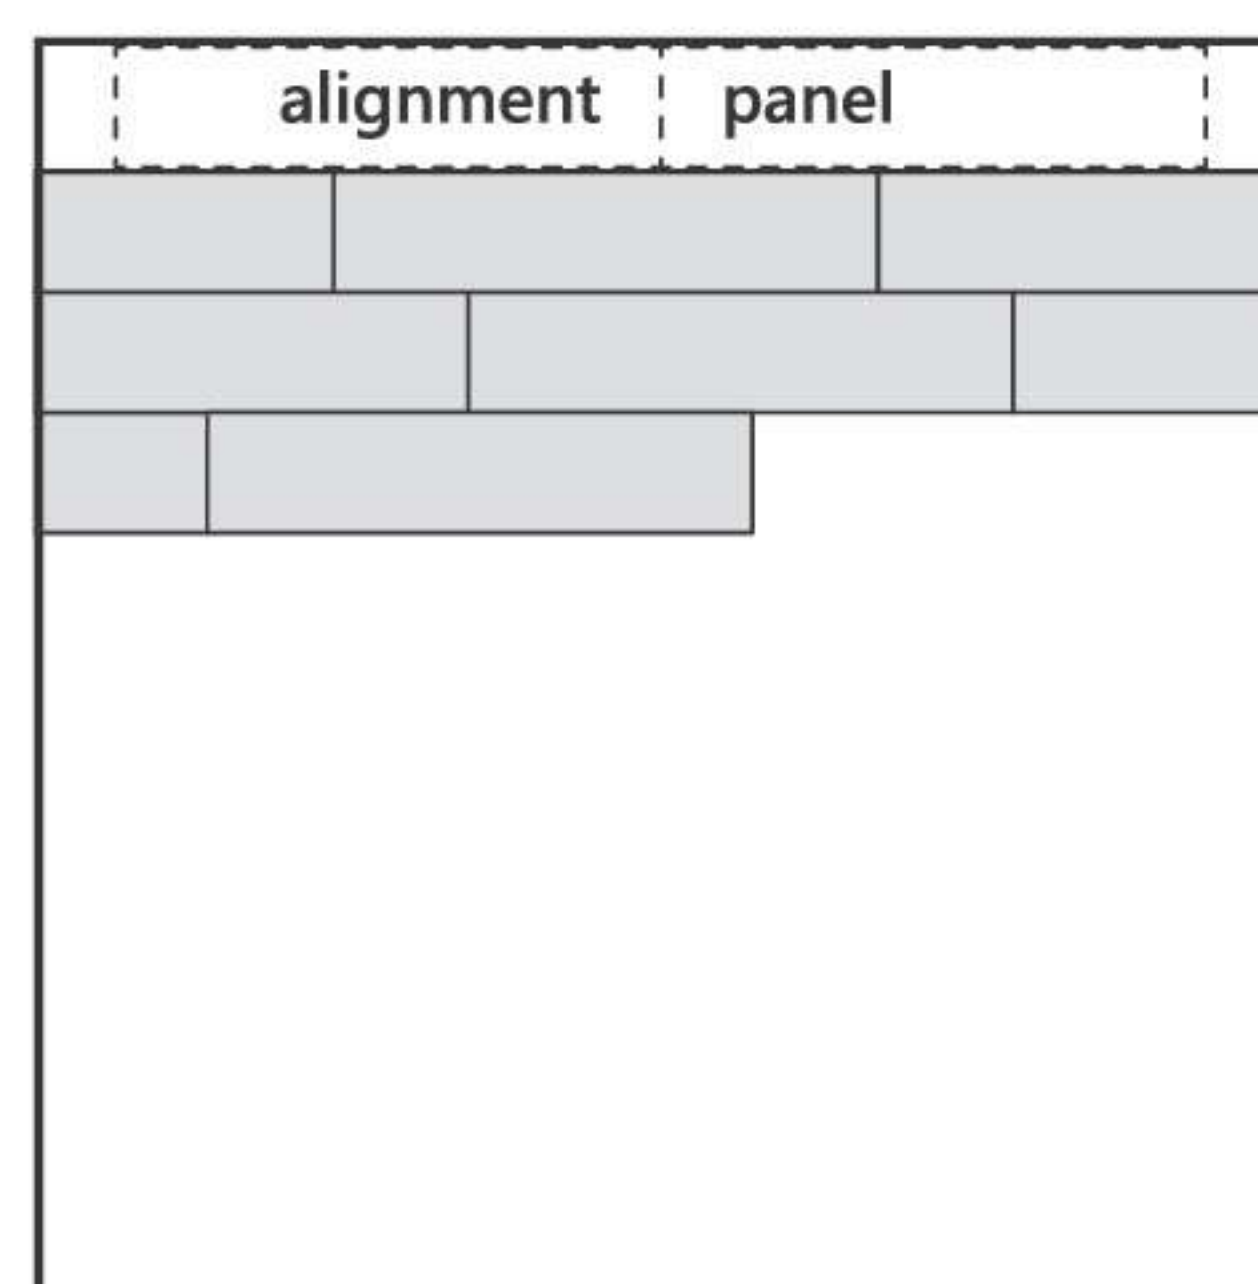


Option 2

Use a few floor panels as a tool to align the first row.

FIRST PANELS

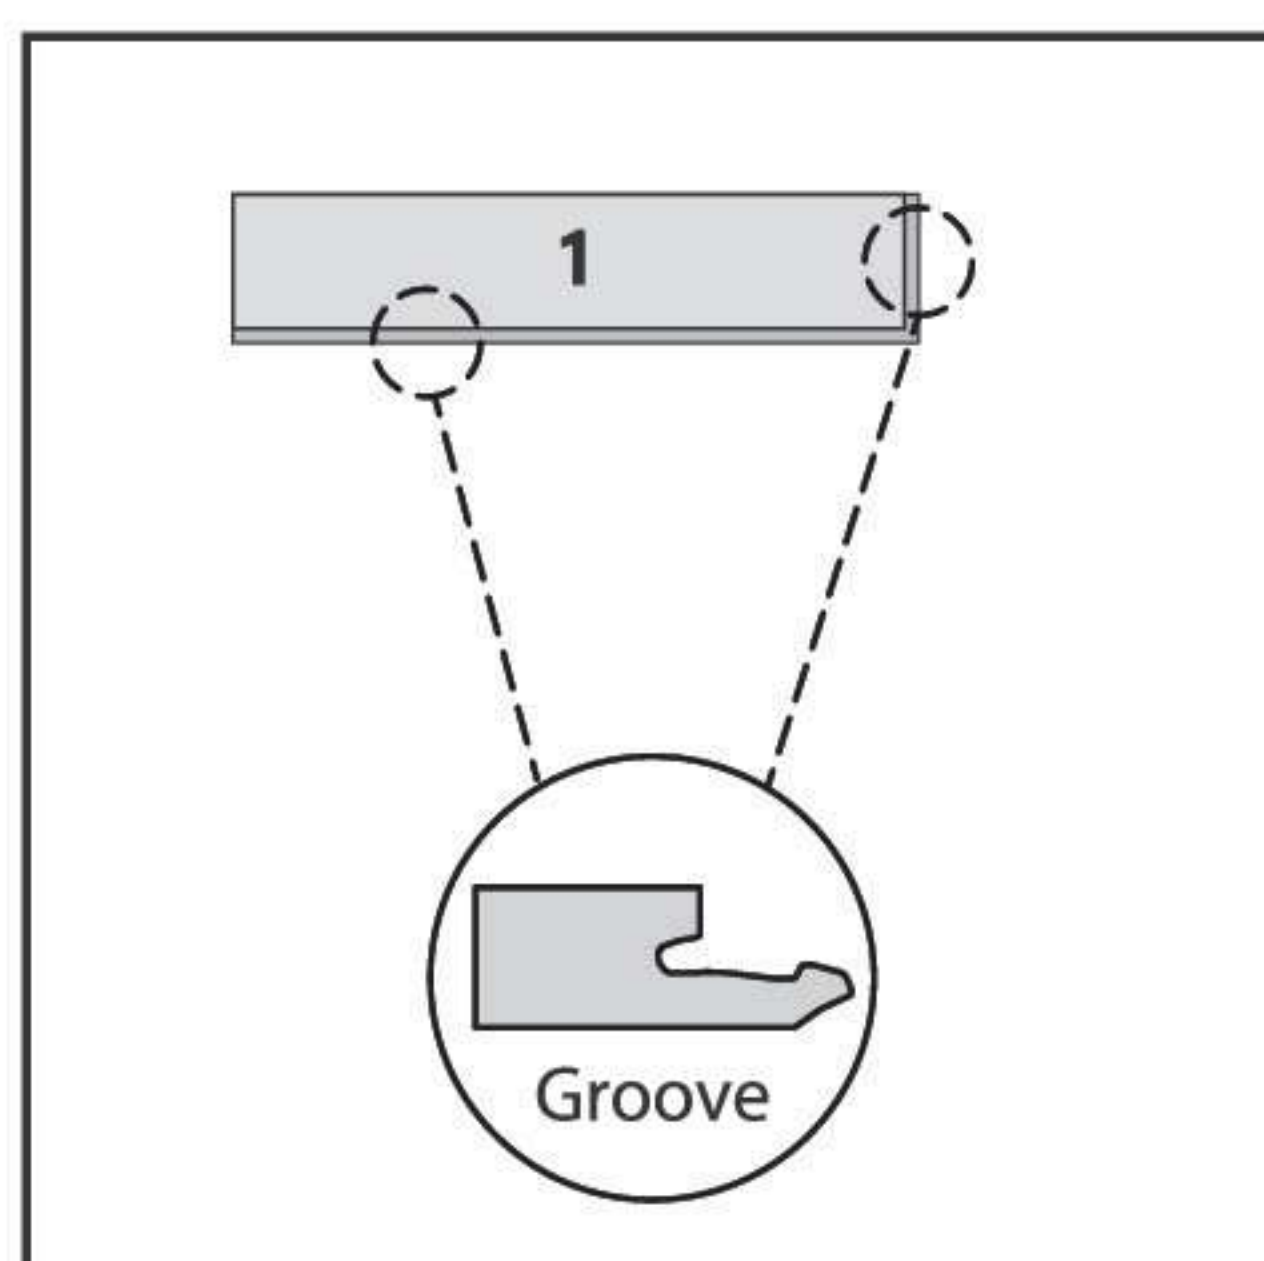

Start by positioning the first panel with the groove sides pointing away from the start walls.

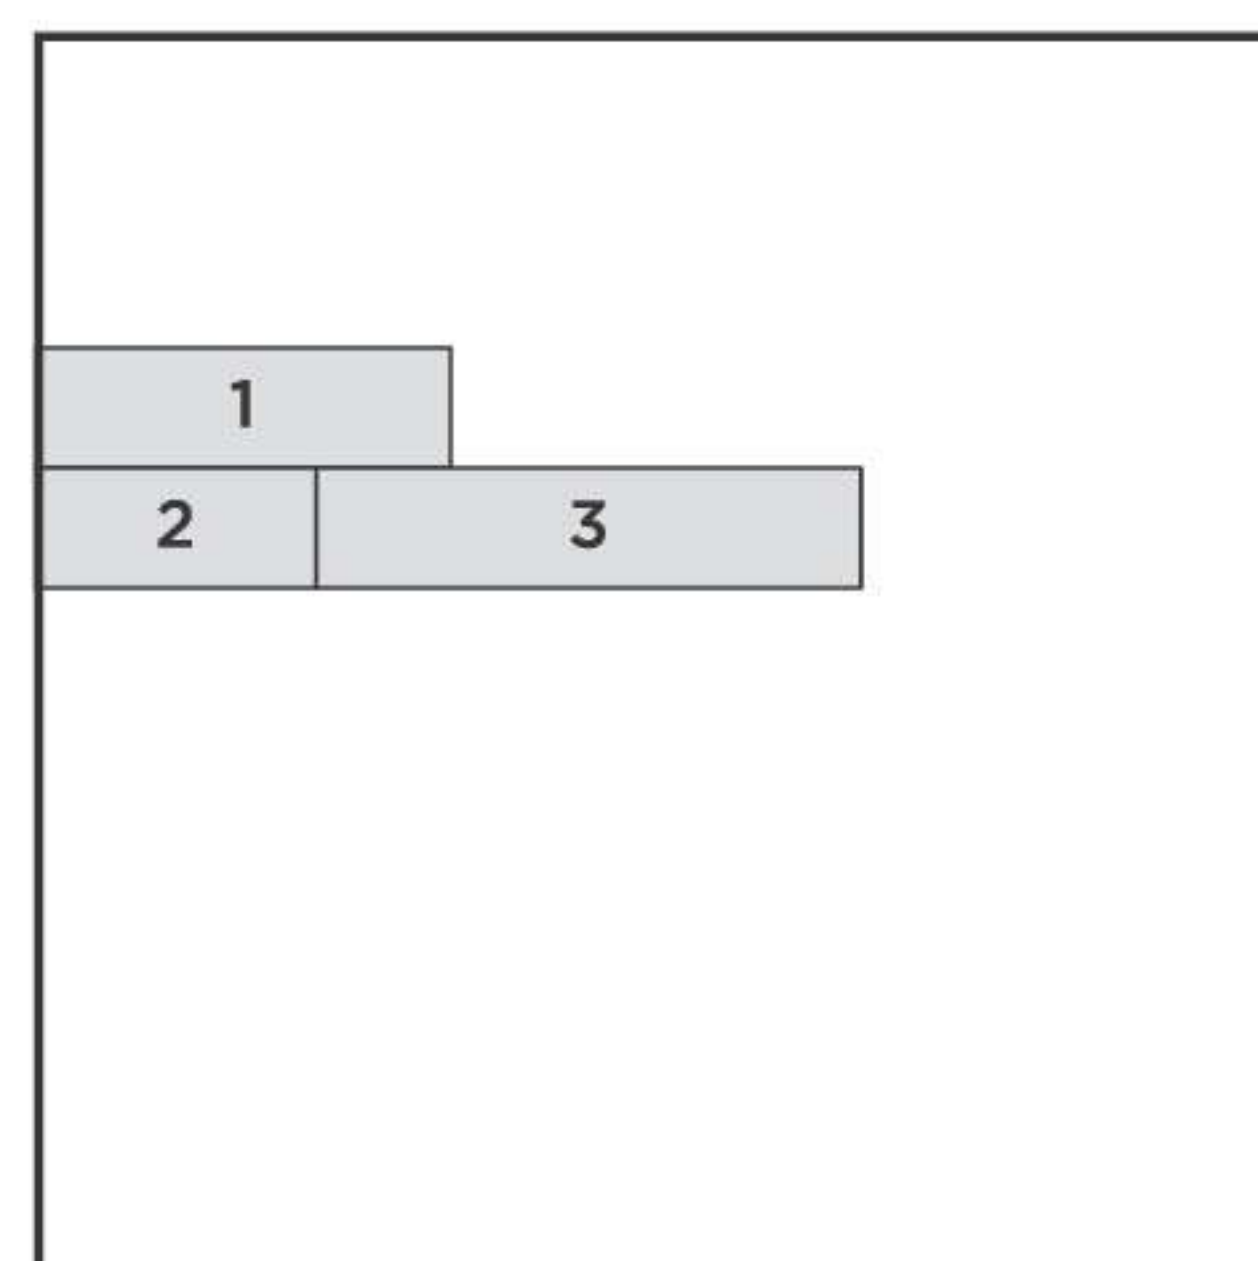


The first panel will serve as a base to install panels two and three.


Installation

First rows

Check all panels before and during installation for damage or visible defects.

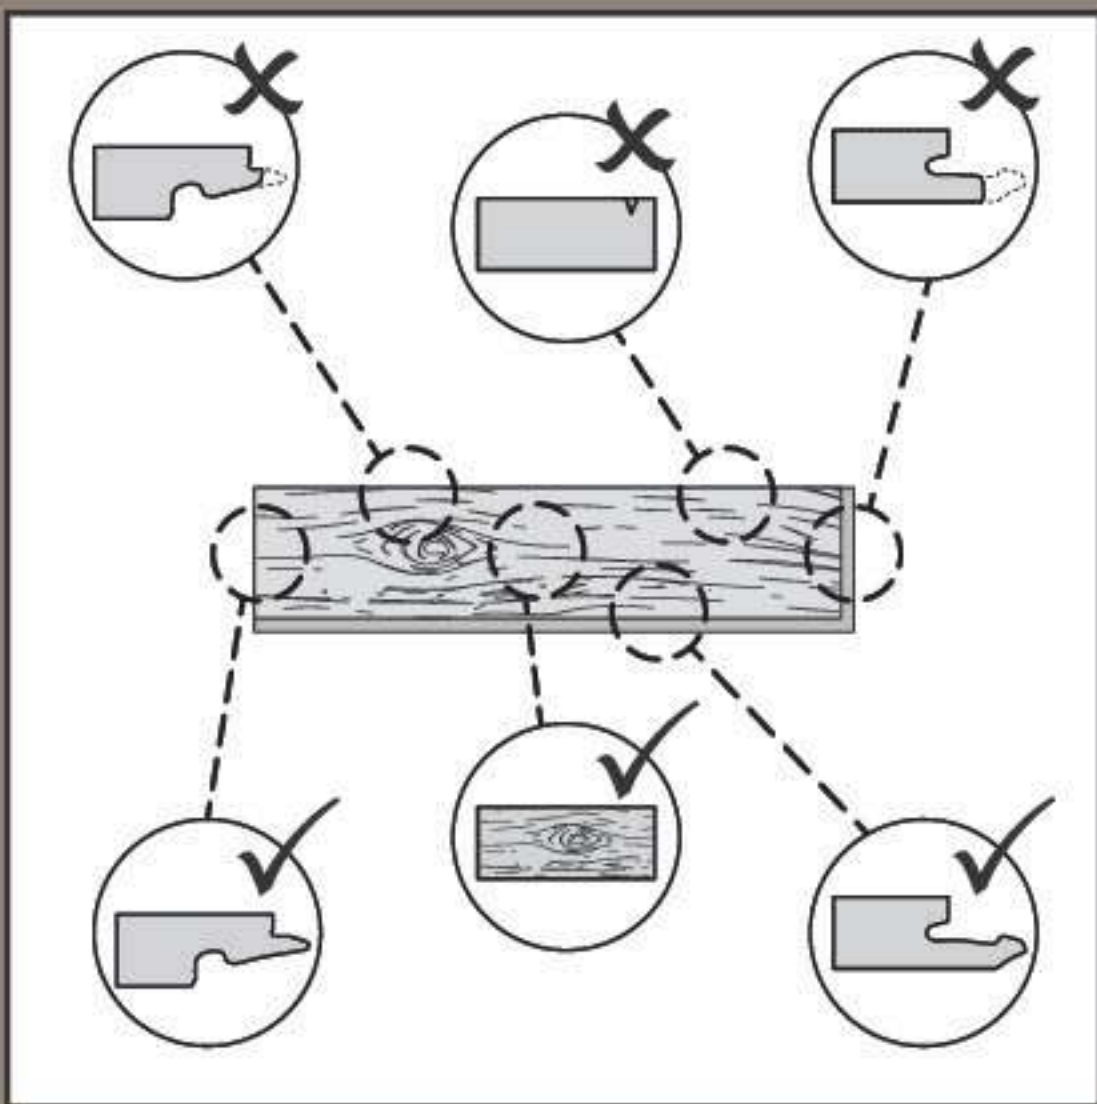


UNDERLAY

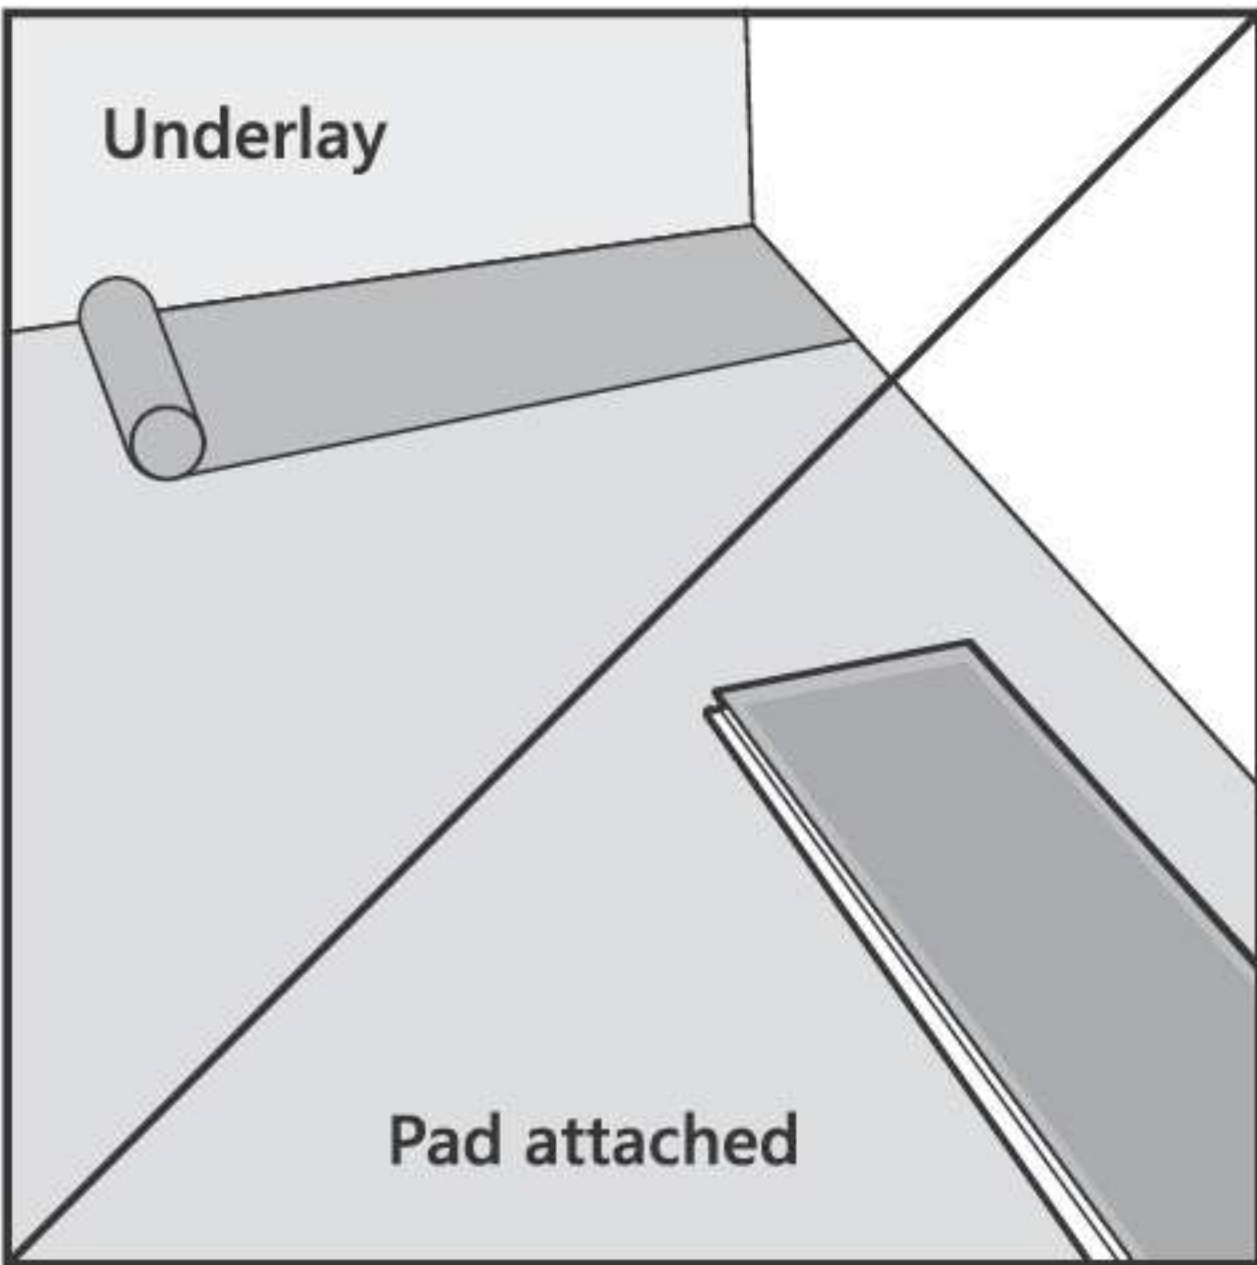


Check to see if there is a pad attached to the back of the panels.

If a pad is attached, an underlay is not needed.

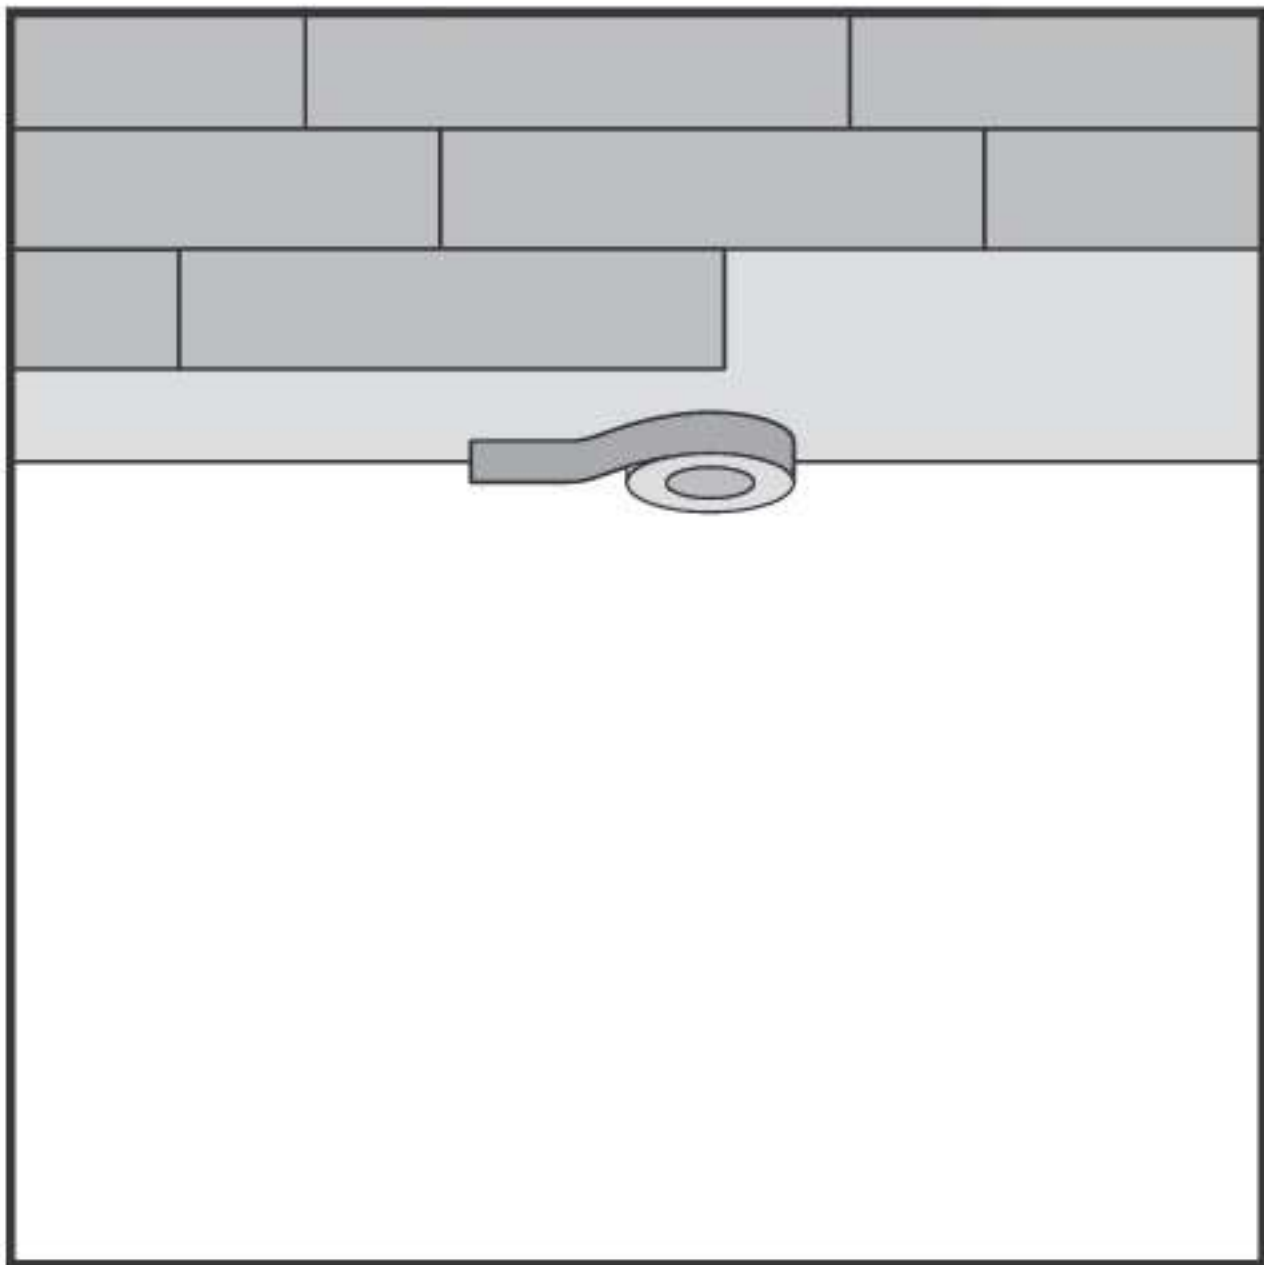


Lay the underlay parallel to the floor direction during installation. Start each new row of underlay upon reaching that point in the floor installation.

ANGLE IN THE SECOND PANEL

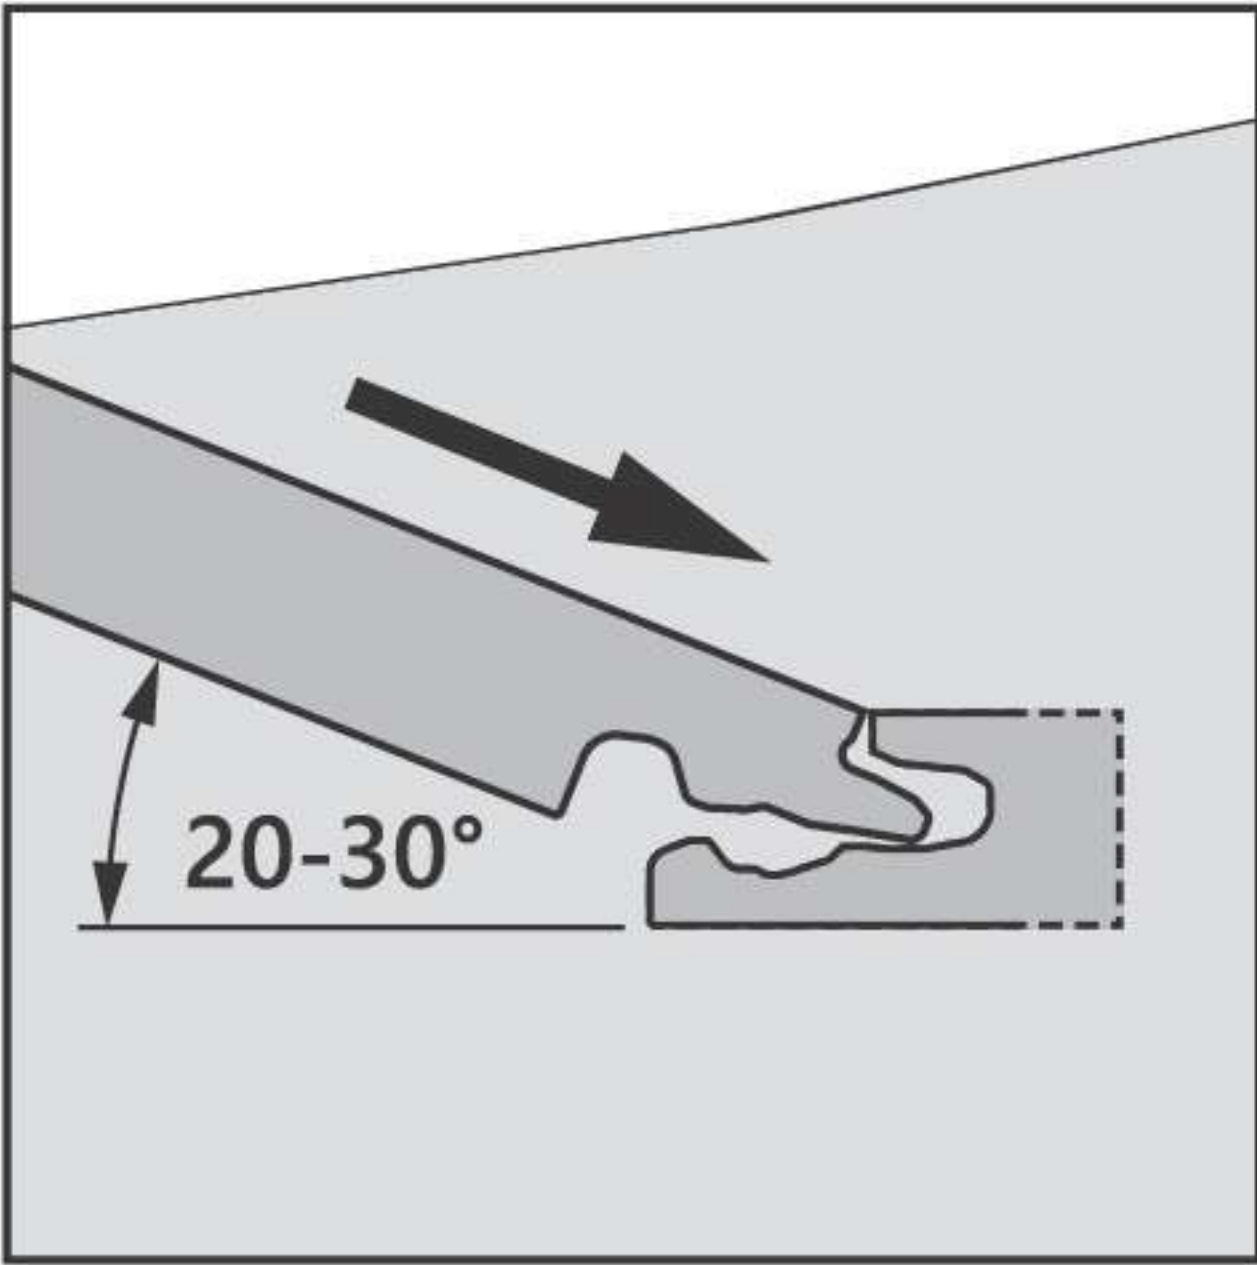


Place the tongue of the long side of panel 2 into the groove of the long side of panel 1 at 20-30° and angle down.

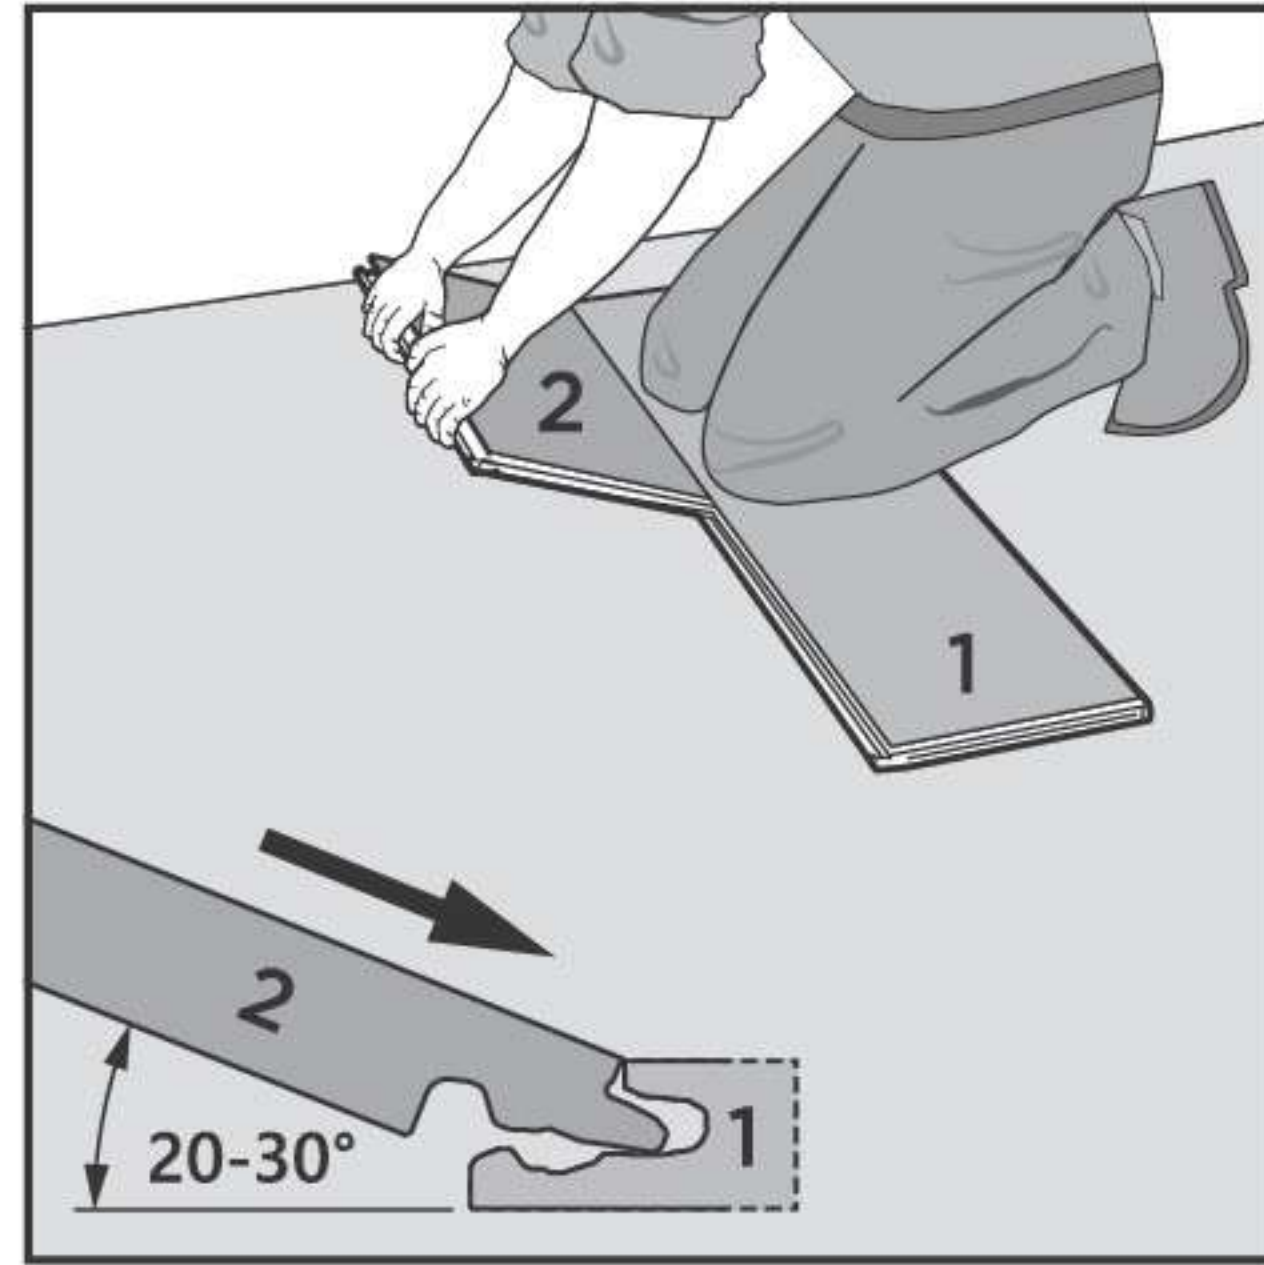


Sit with your knees on the panels to secure them during installation and keep them in place.

ANGLE IN THE THIRD PANEL

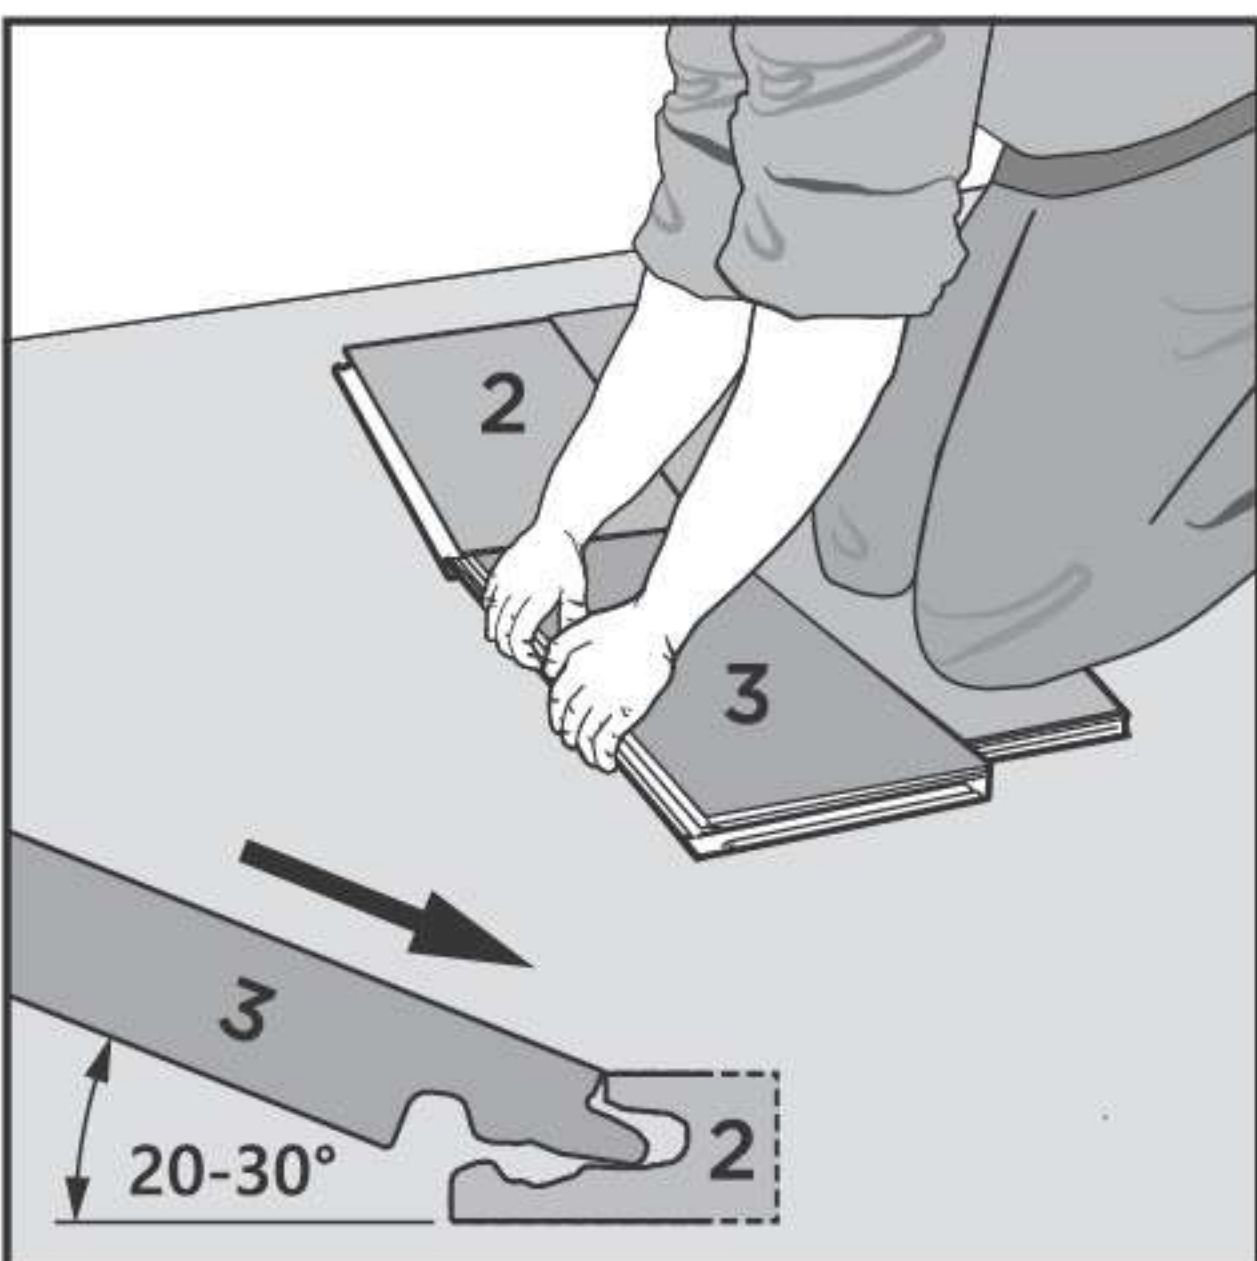


Angle in the short side of panel 3 into the short side of panel 2 at 20-30° and angle down.

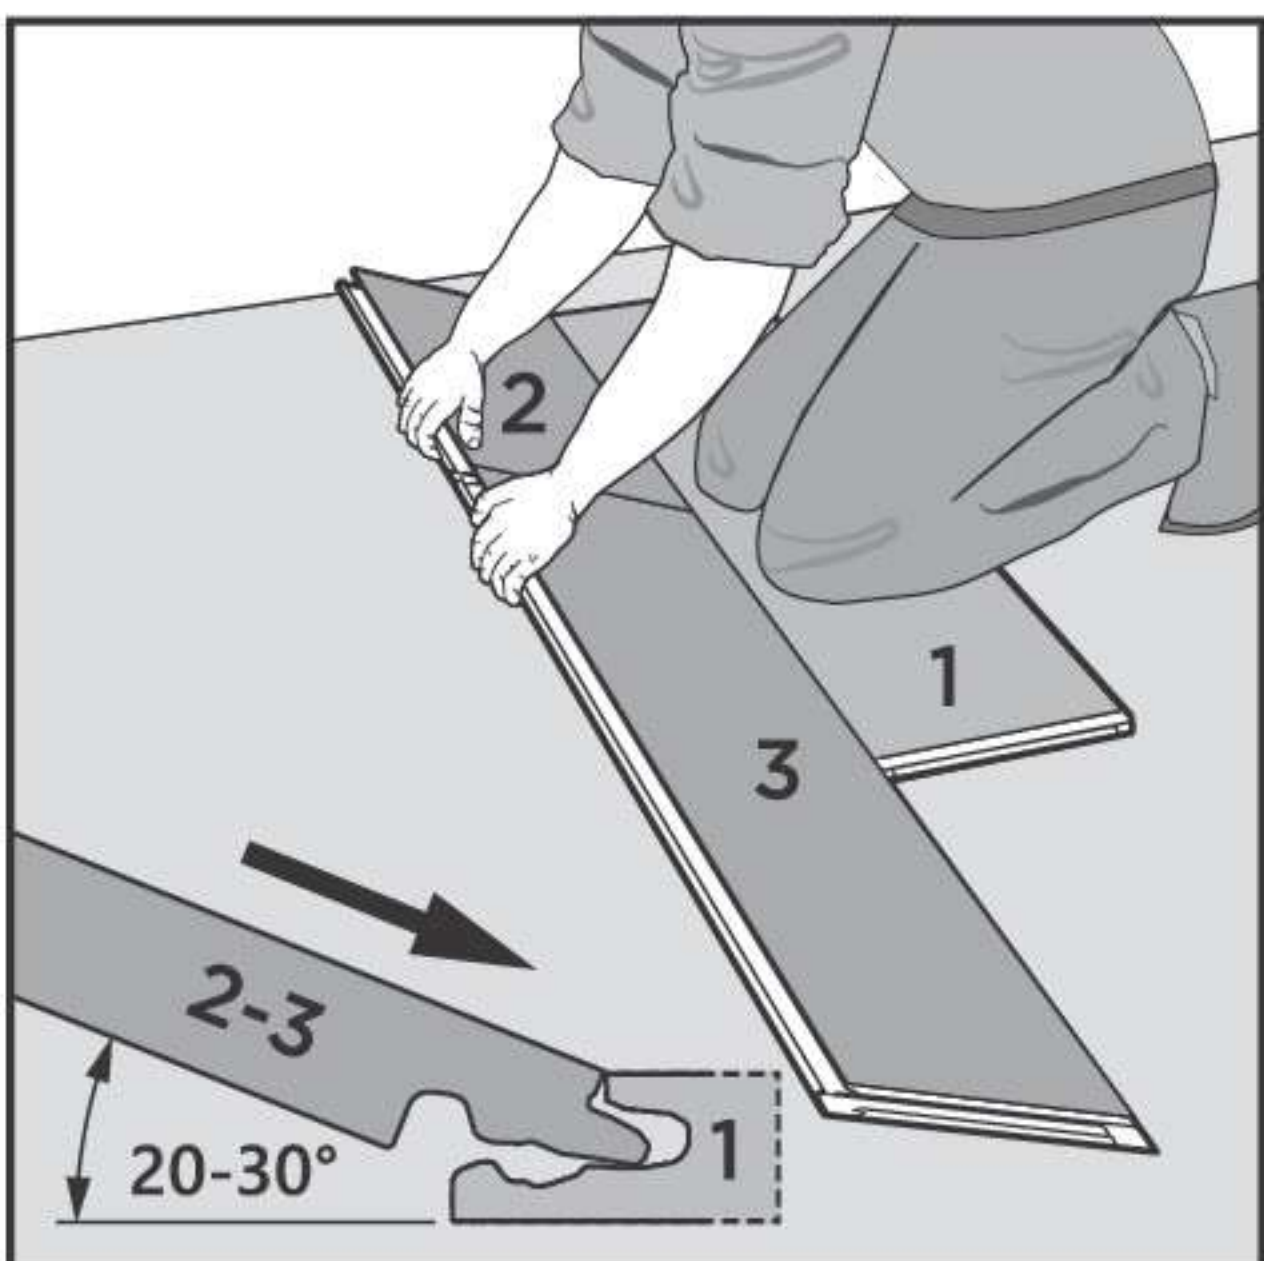


Place your hands close to the joint and slide panel 3 towards panel 1. Angle the row of panel 2 and 3 up to an angle of 20-30°. Angle down to completely connect the panels.

MIND THE GAP

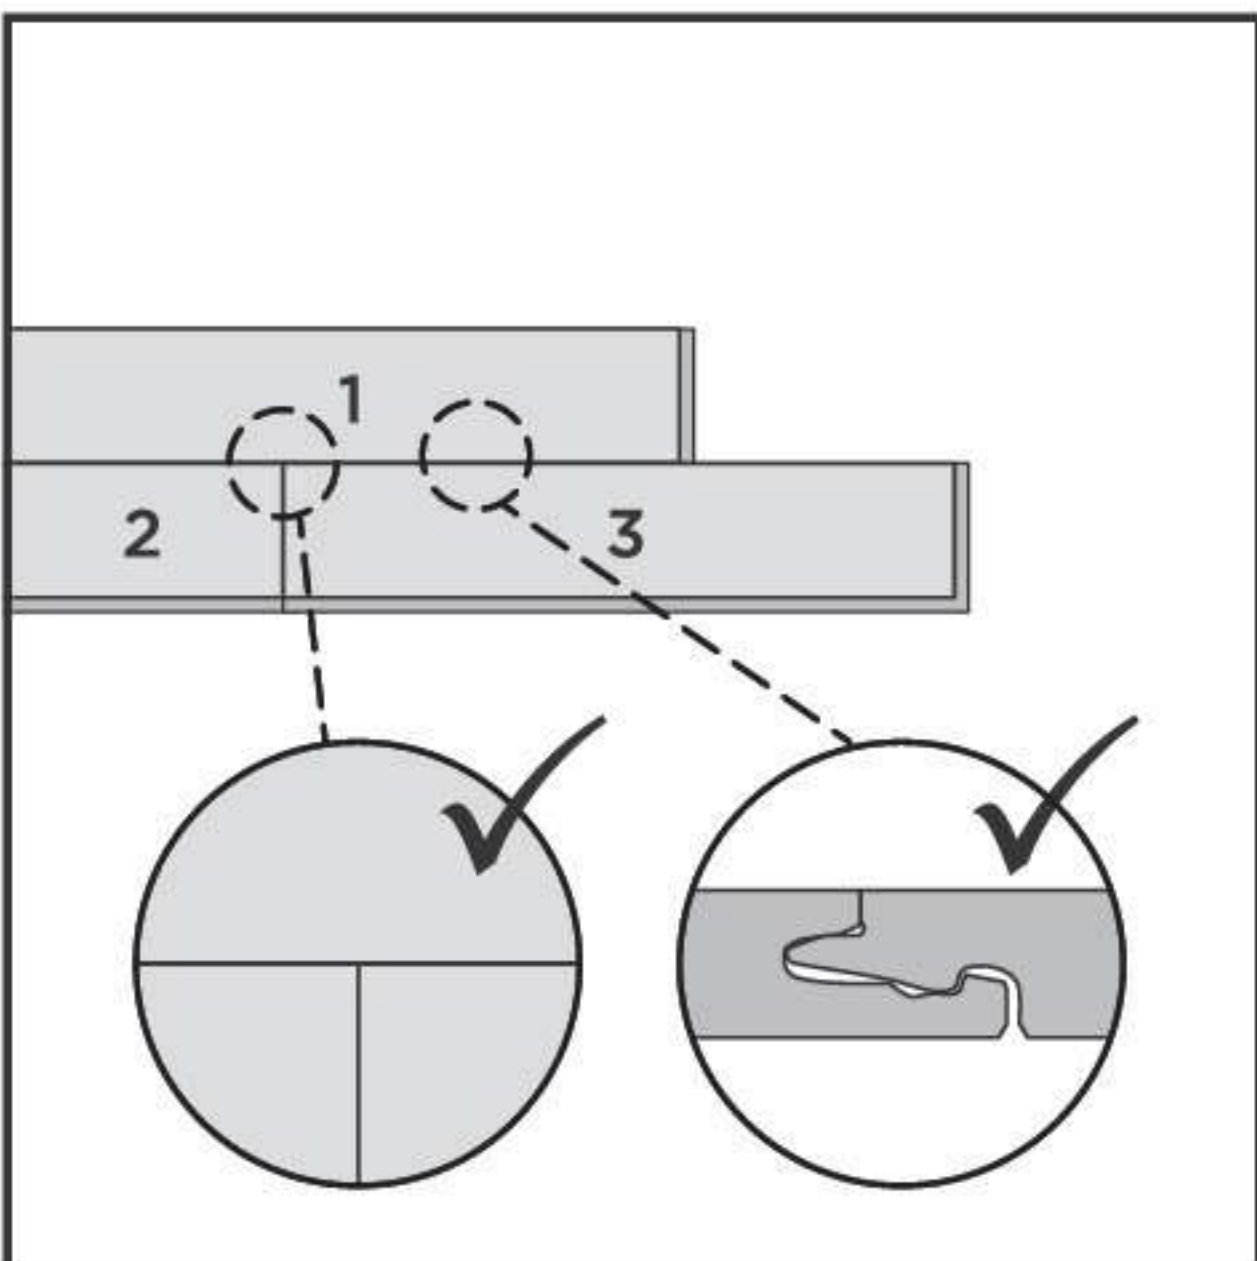

After installing a panel, check if all joints are fully connected and there are no gaps or height differences.

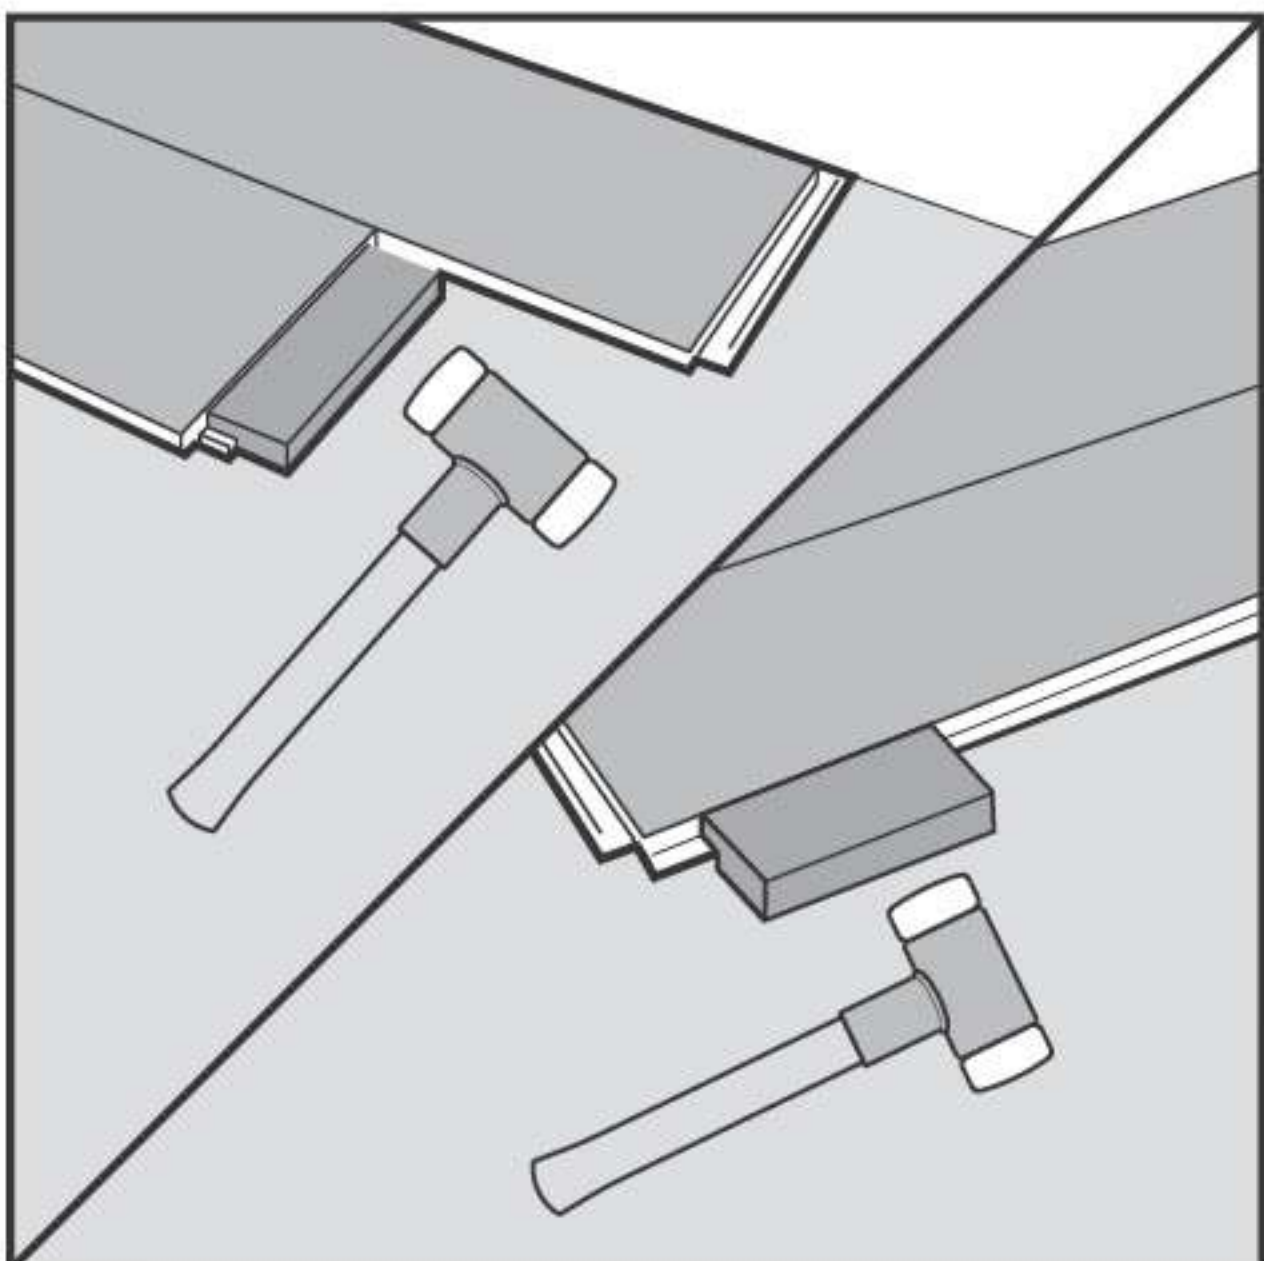


To ensure all gaps are closed, gently tap the tapping block with a hammer to completely close the joints.

Installation Continue


WATCH THE
INSTALLATION
VIDEO



INSTALL ROW 1-3

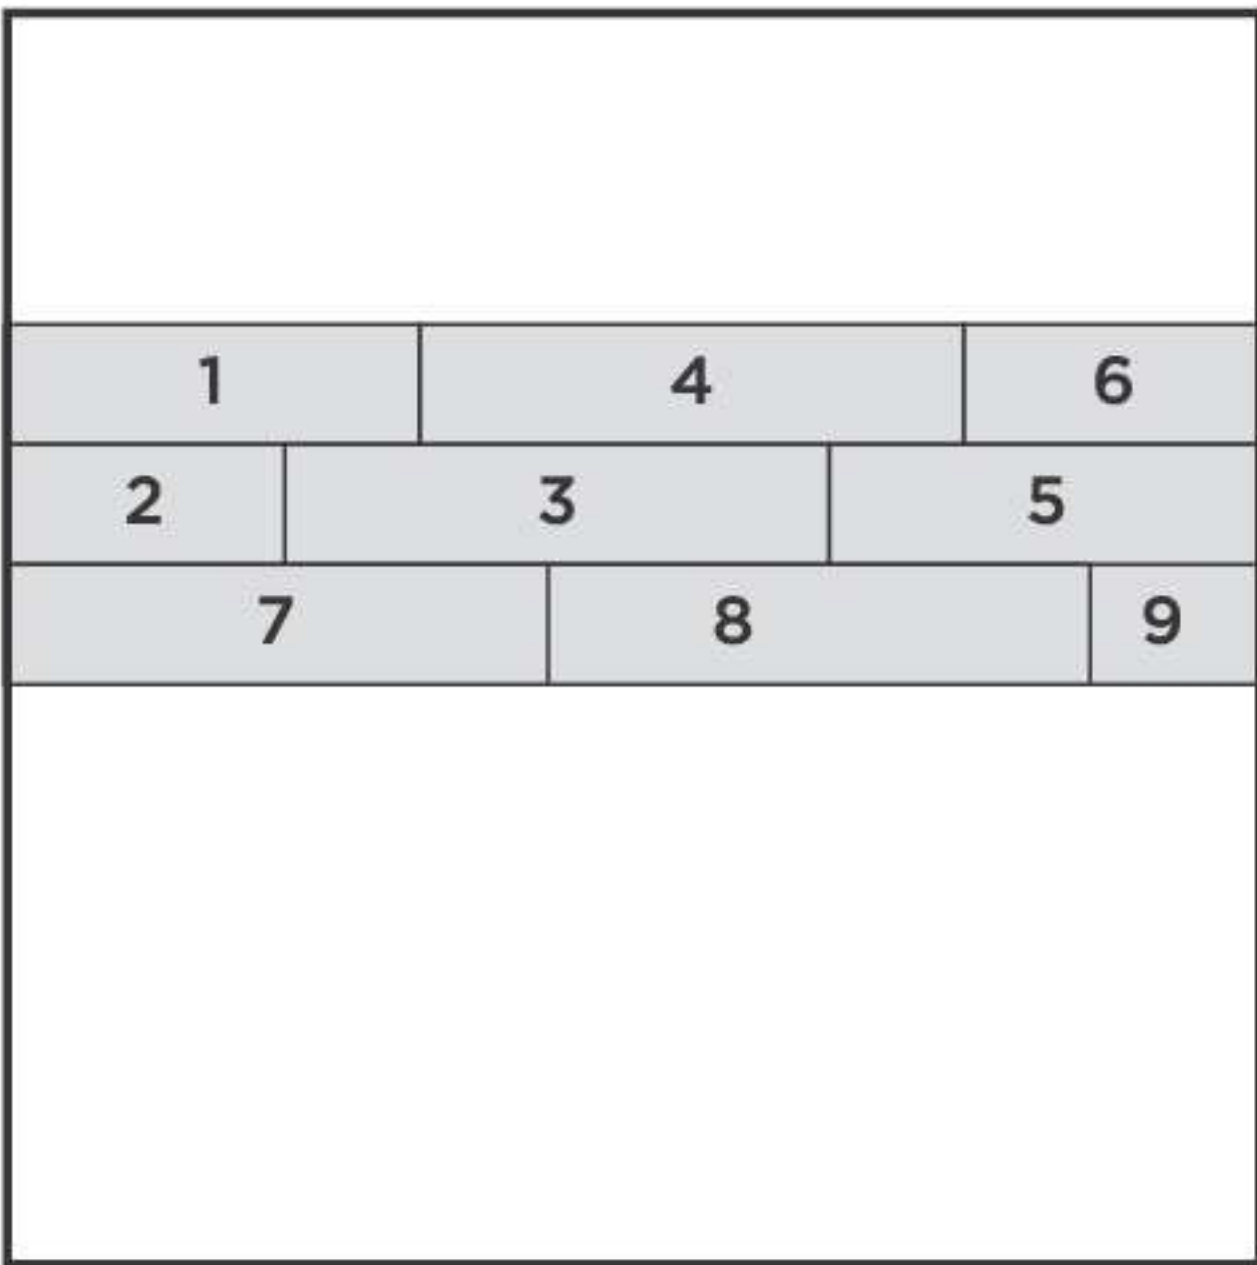


Continue installing the rest of the panels for the first three rows in the order of the drawing.

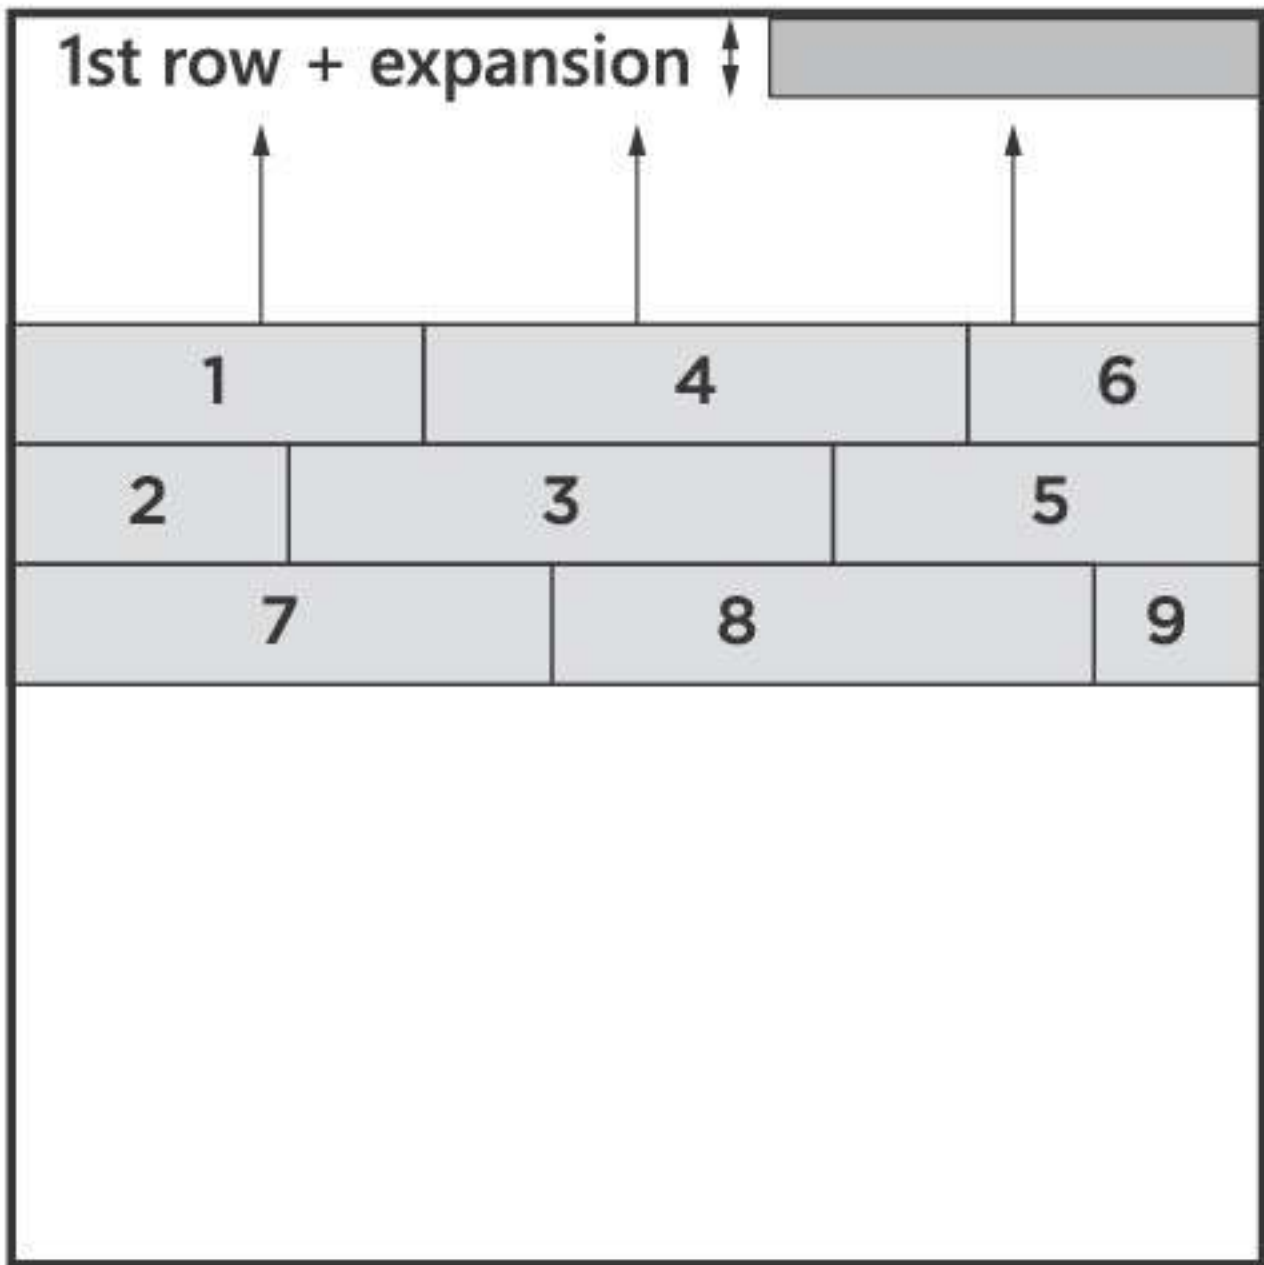


Move the rows closer to the wall, leaving a distance equal to the width of the start row plus the expansion gaps. Ensure the start row is at least 5 cm wide.

EDGE PIECES

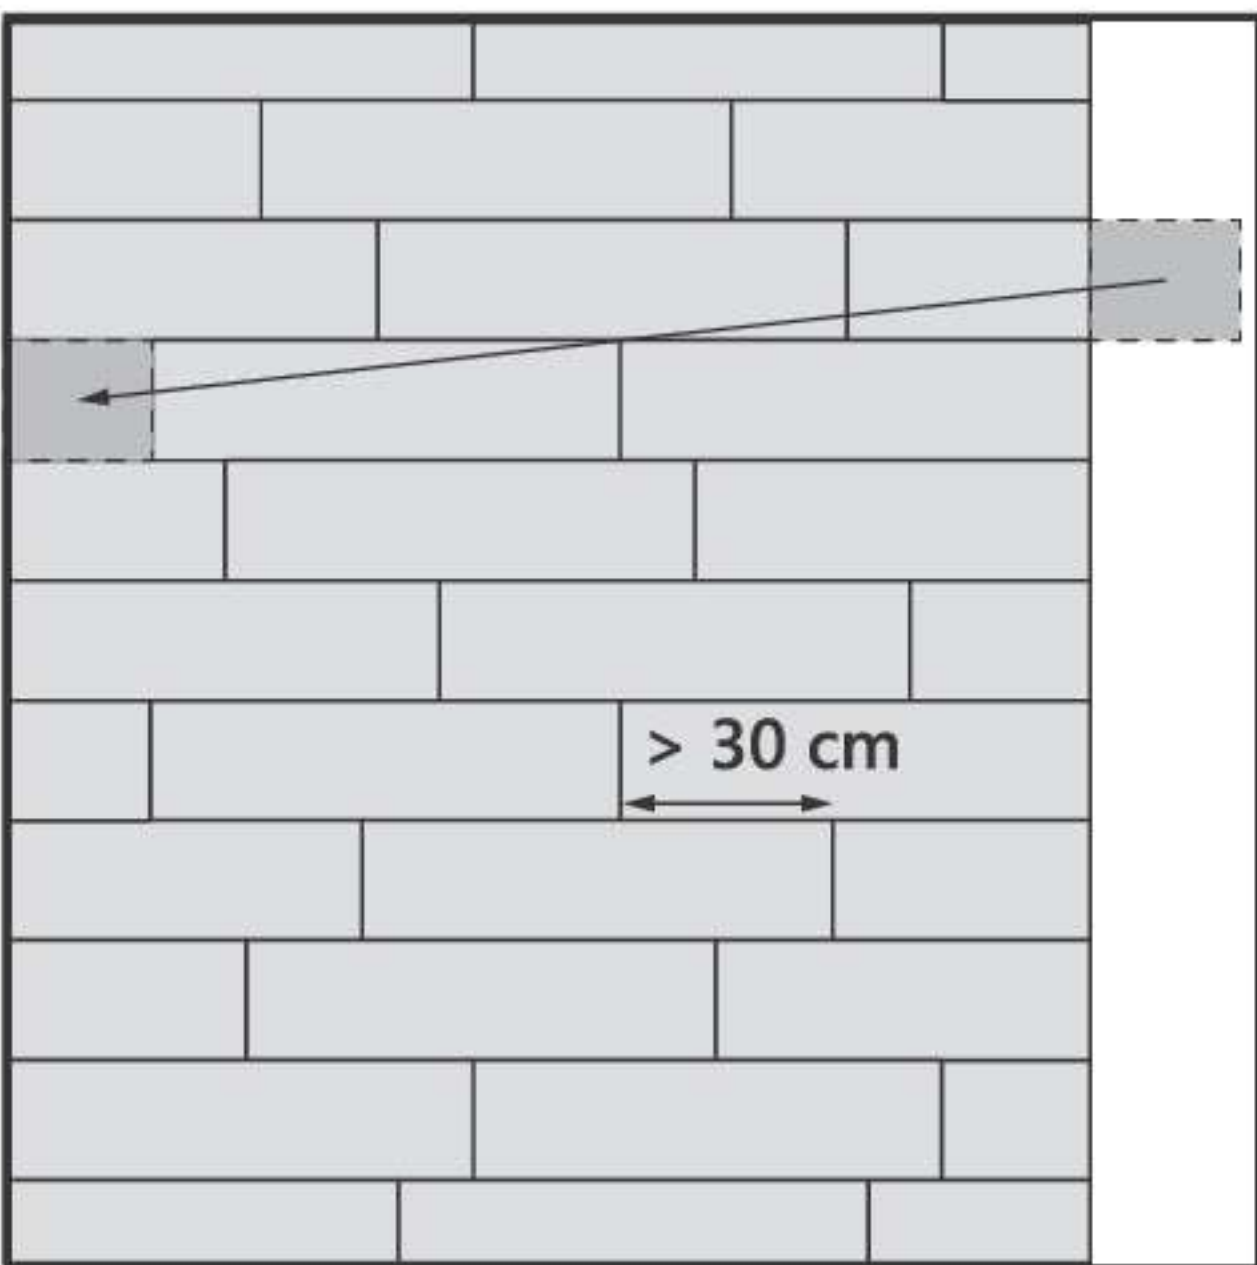


Tip: use the leftover of the sawed off panel to start the new row. Stagger the panels randomly and use an overlap of at least 30 cm to ensure a strong connection.

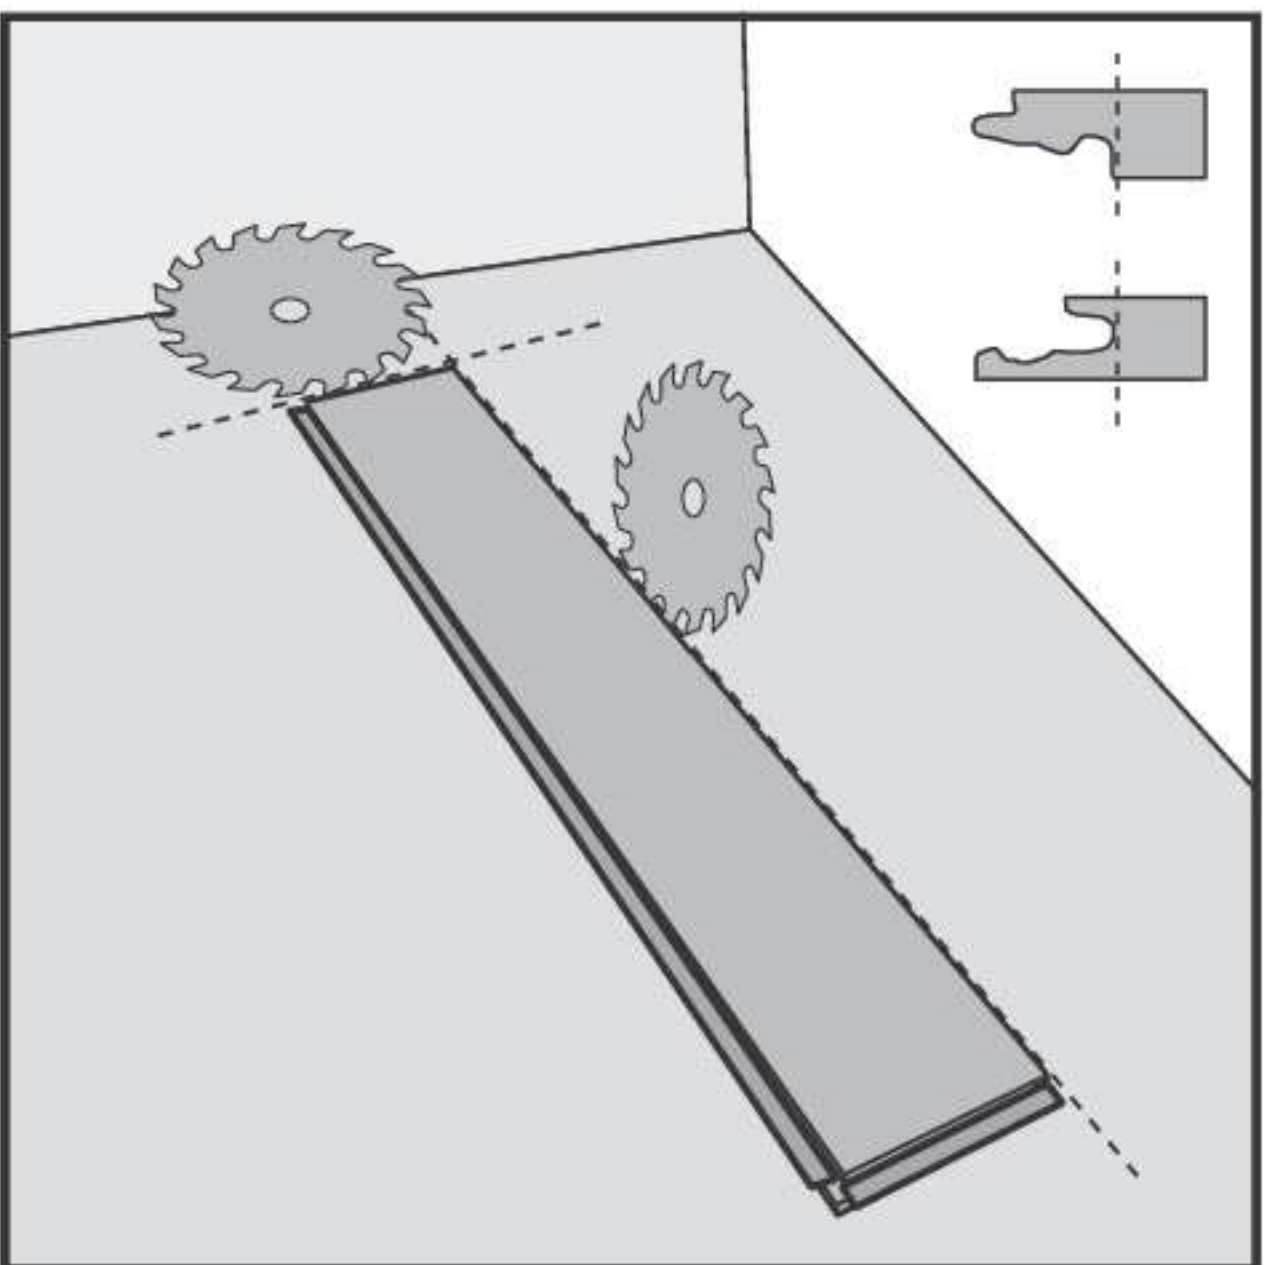


Remove the click profile on every side directly next to the wall to ensure the required expansion gap.

MOVE THE ROWS TO THE STARTER WALL

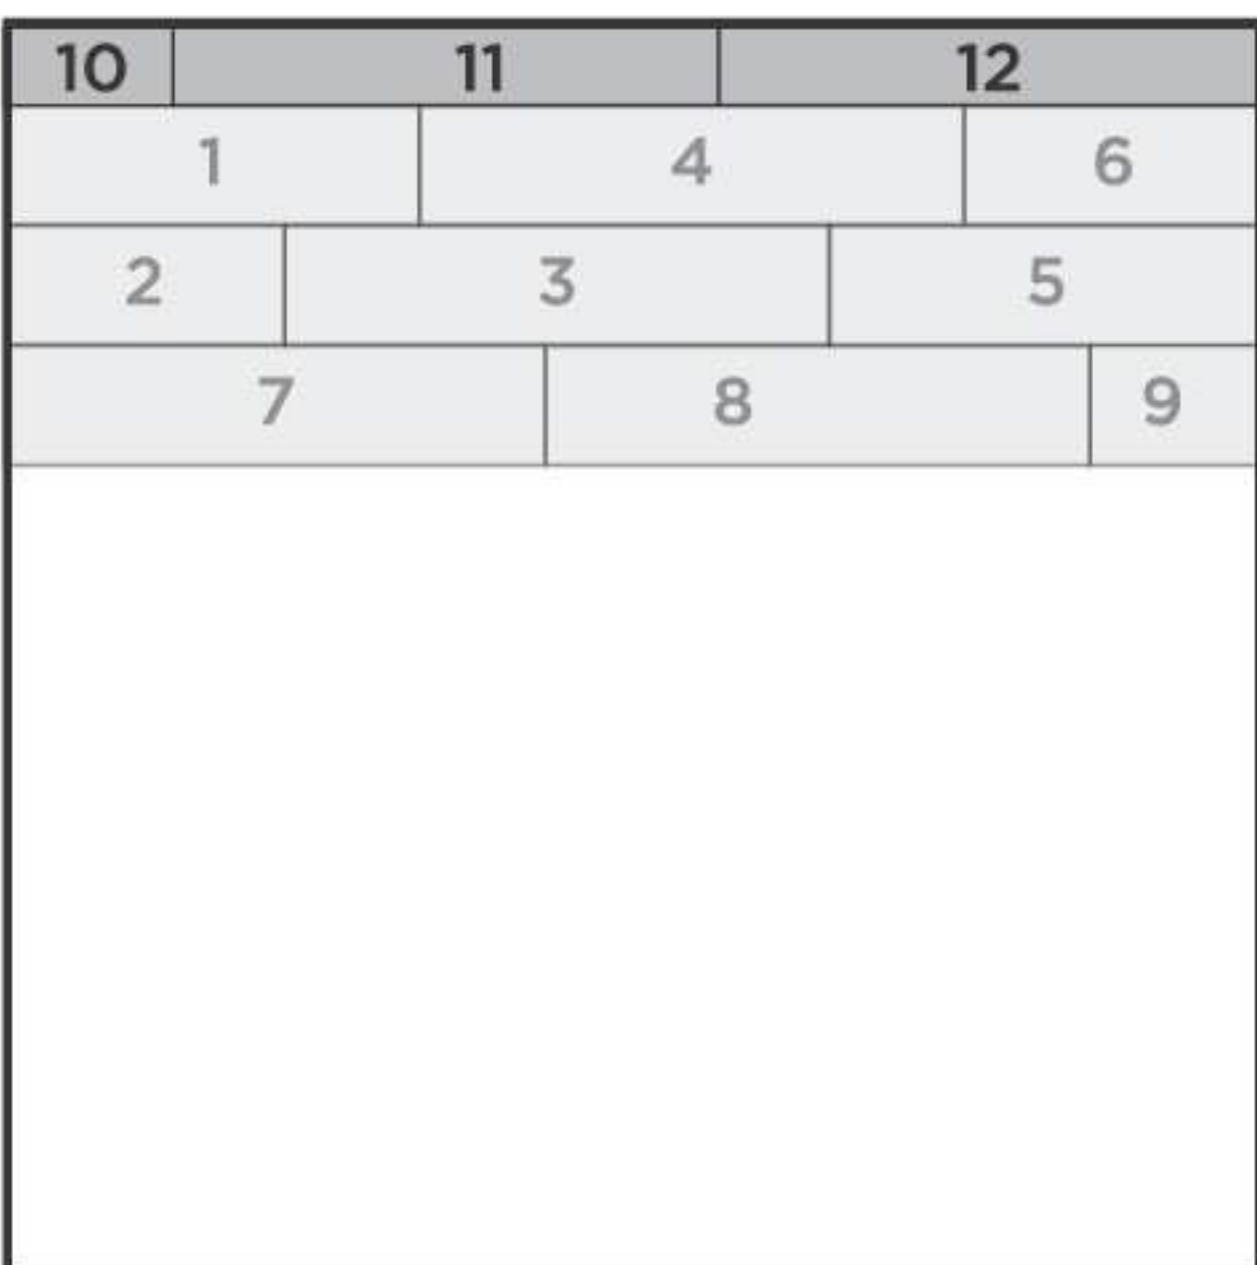


Install the start row by angling in the panels. Use the pull bar and hammer if necessary.

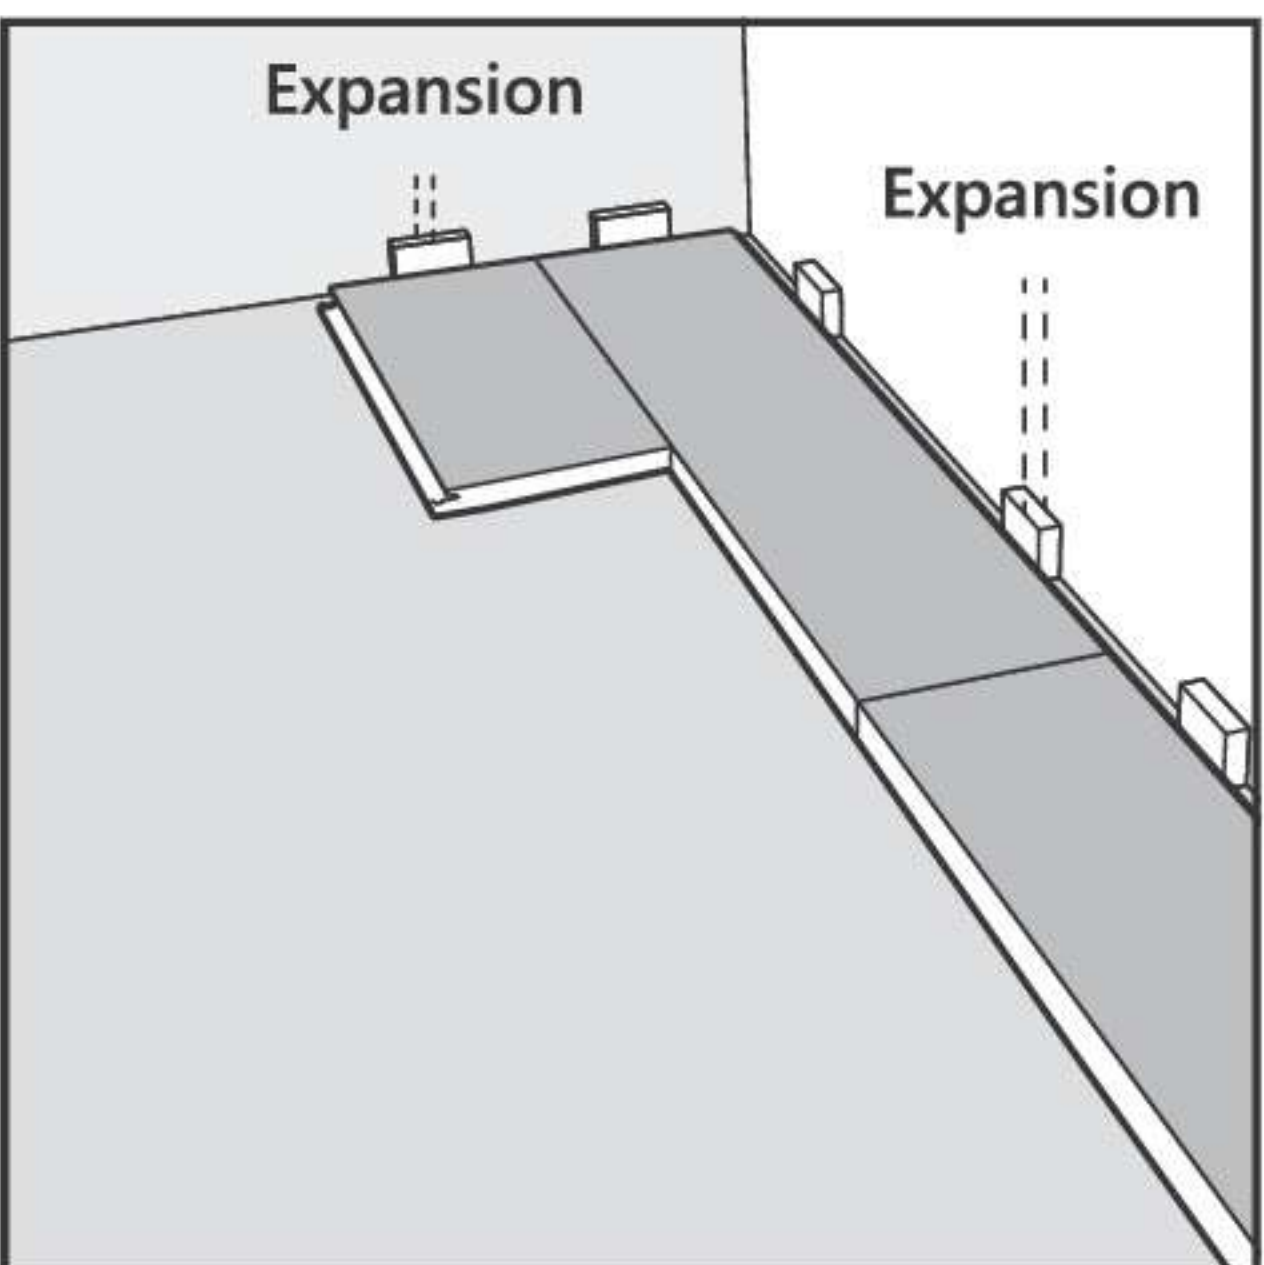


Place the spacers to ensure the correct expansion gap. For the correct expansion gaps, check the supplier installation guidelines.

CONTINUE THE INSTALLATION

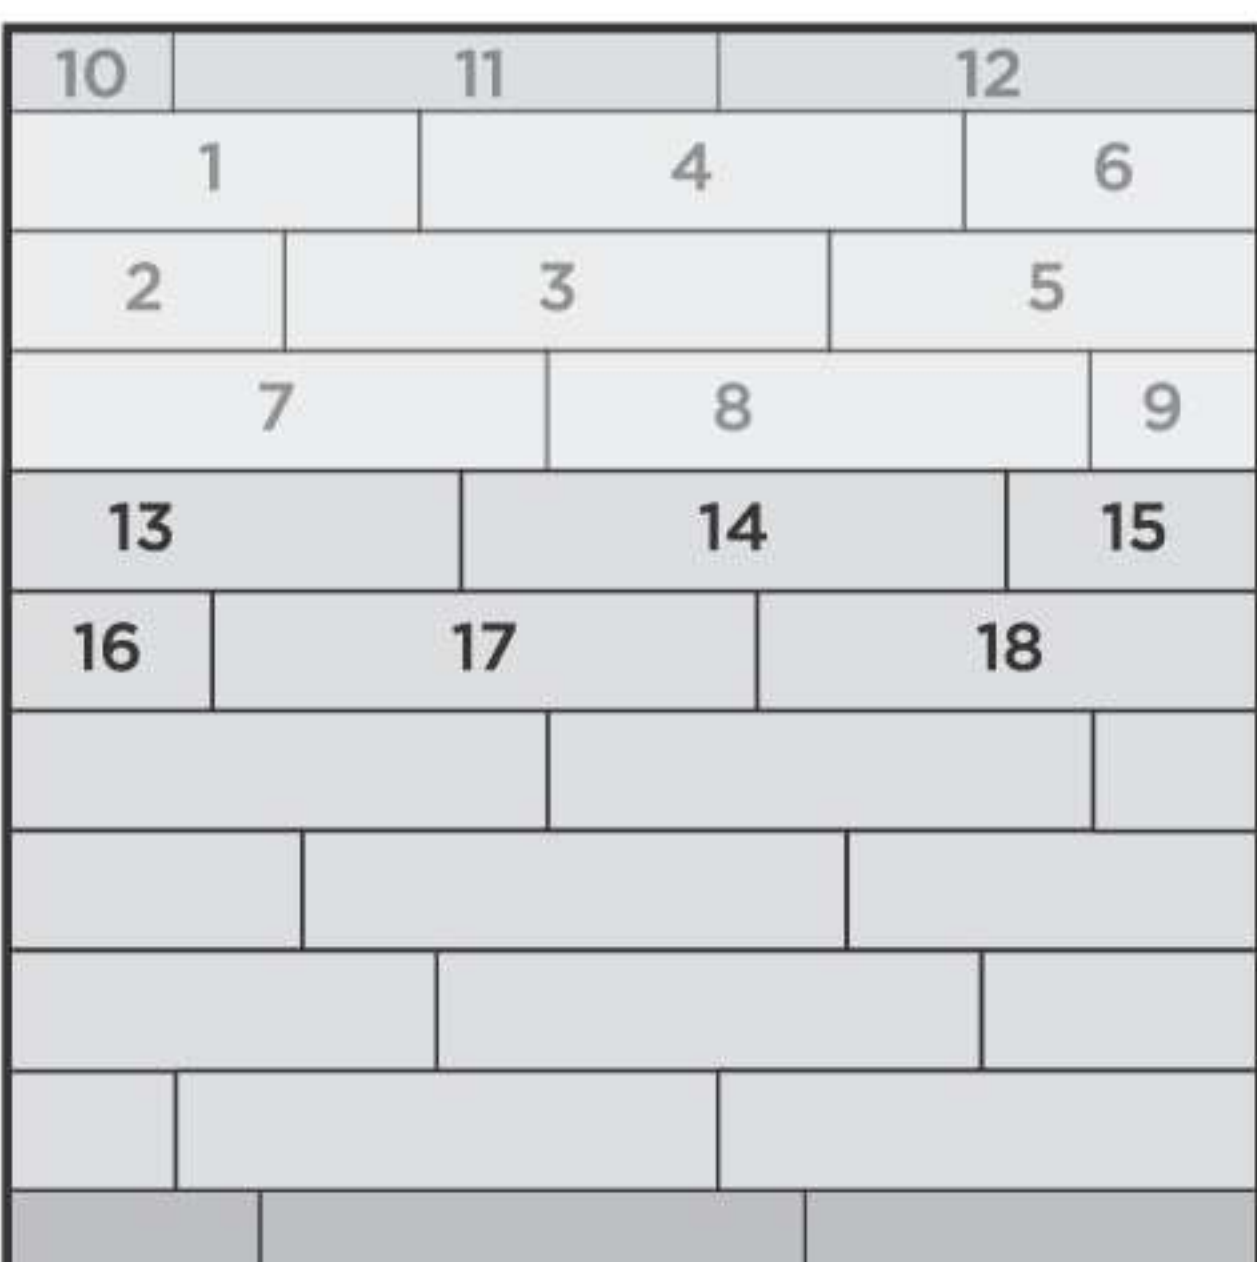

Continue installing the rest of the panels row by row in the order of the drawing.

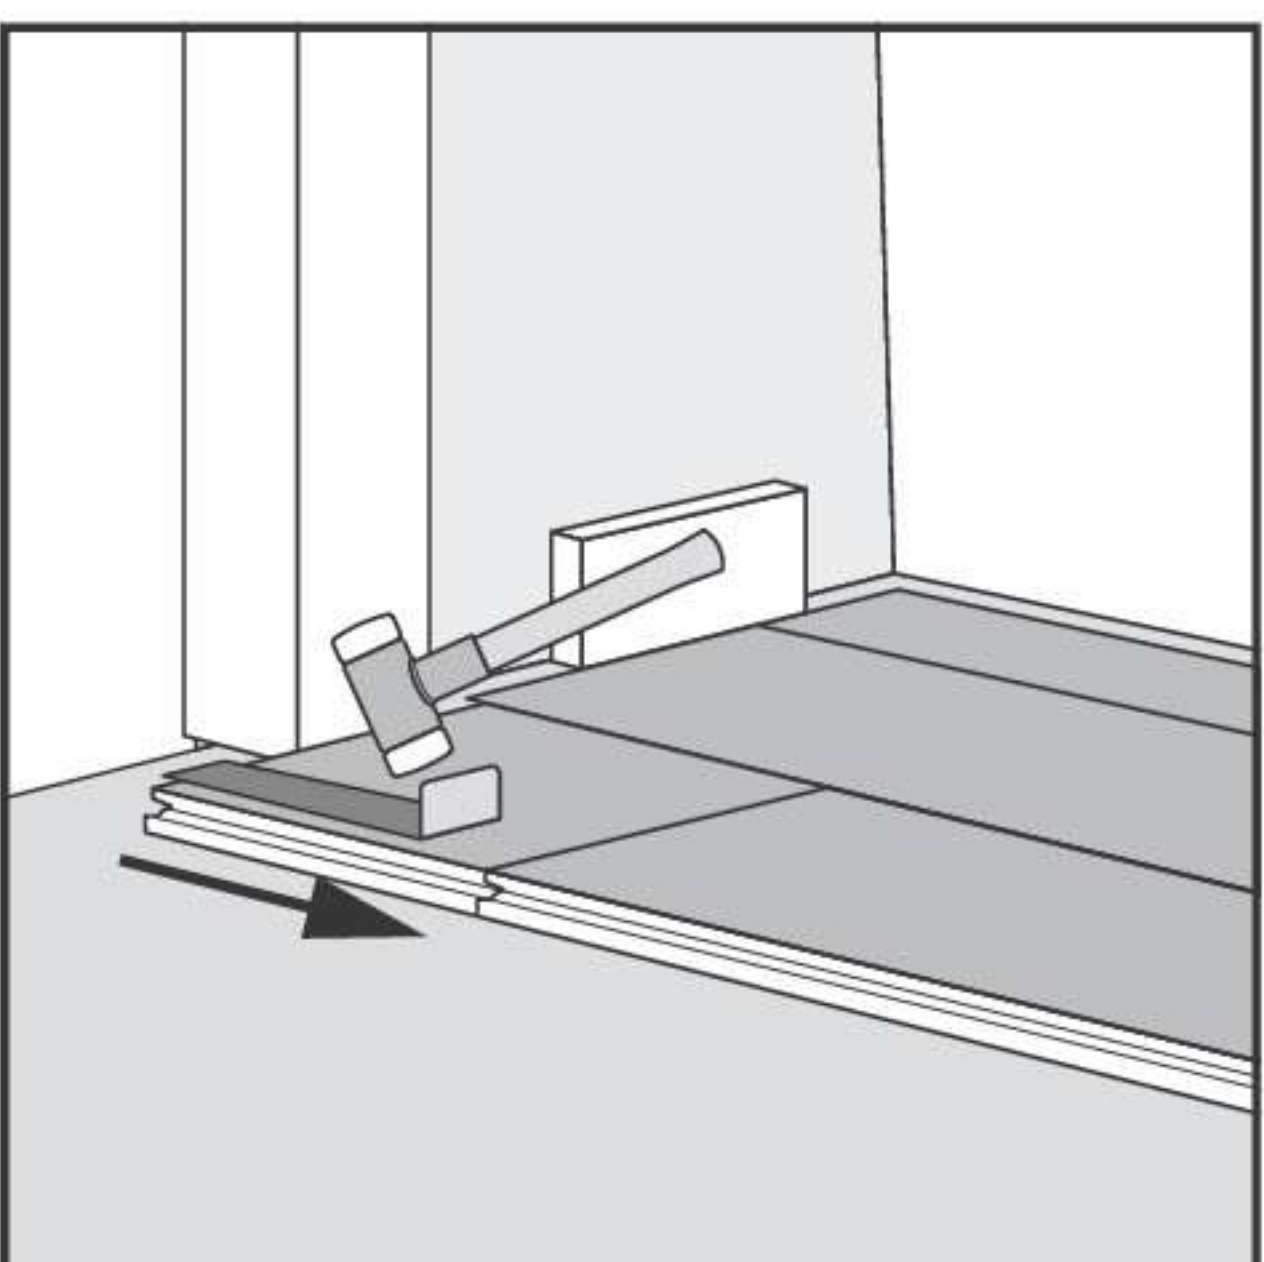


For edge pieces close to the wall, use the pull bar and hammer to completely secure the locking system. Gradually connect the panels in a few taps.

Installation Correct size


WATCH THE
INSTALLATION
VIDEO



EDGE PANELS

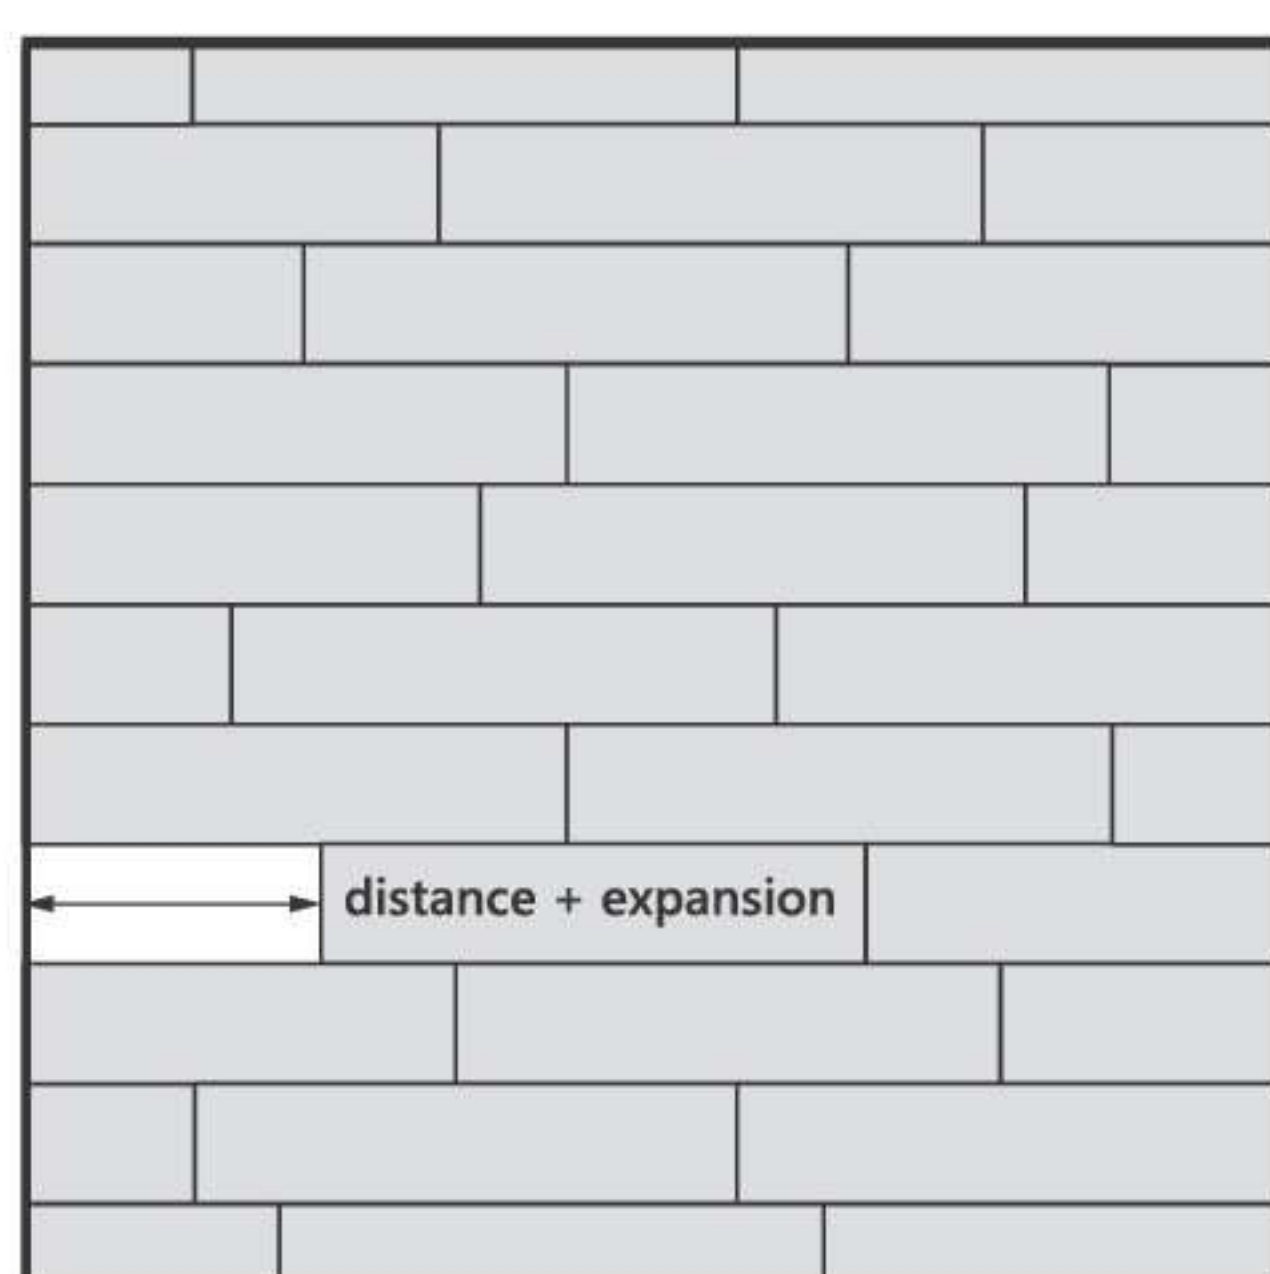


- Measure the size for the edge piece
- Keep the expansion gaps into account and add them to the distance from the wall

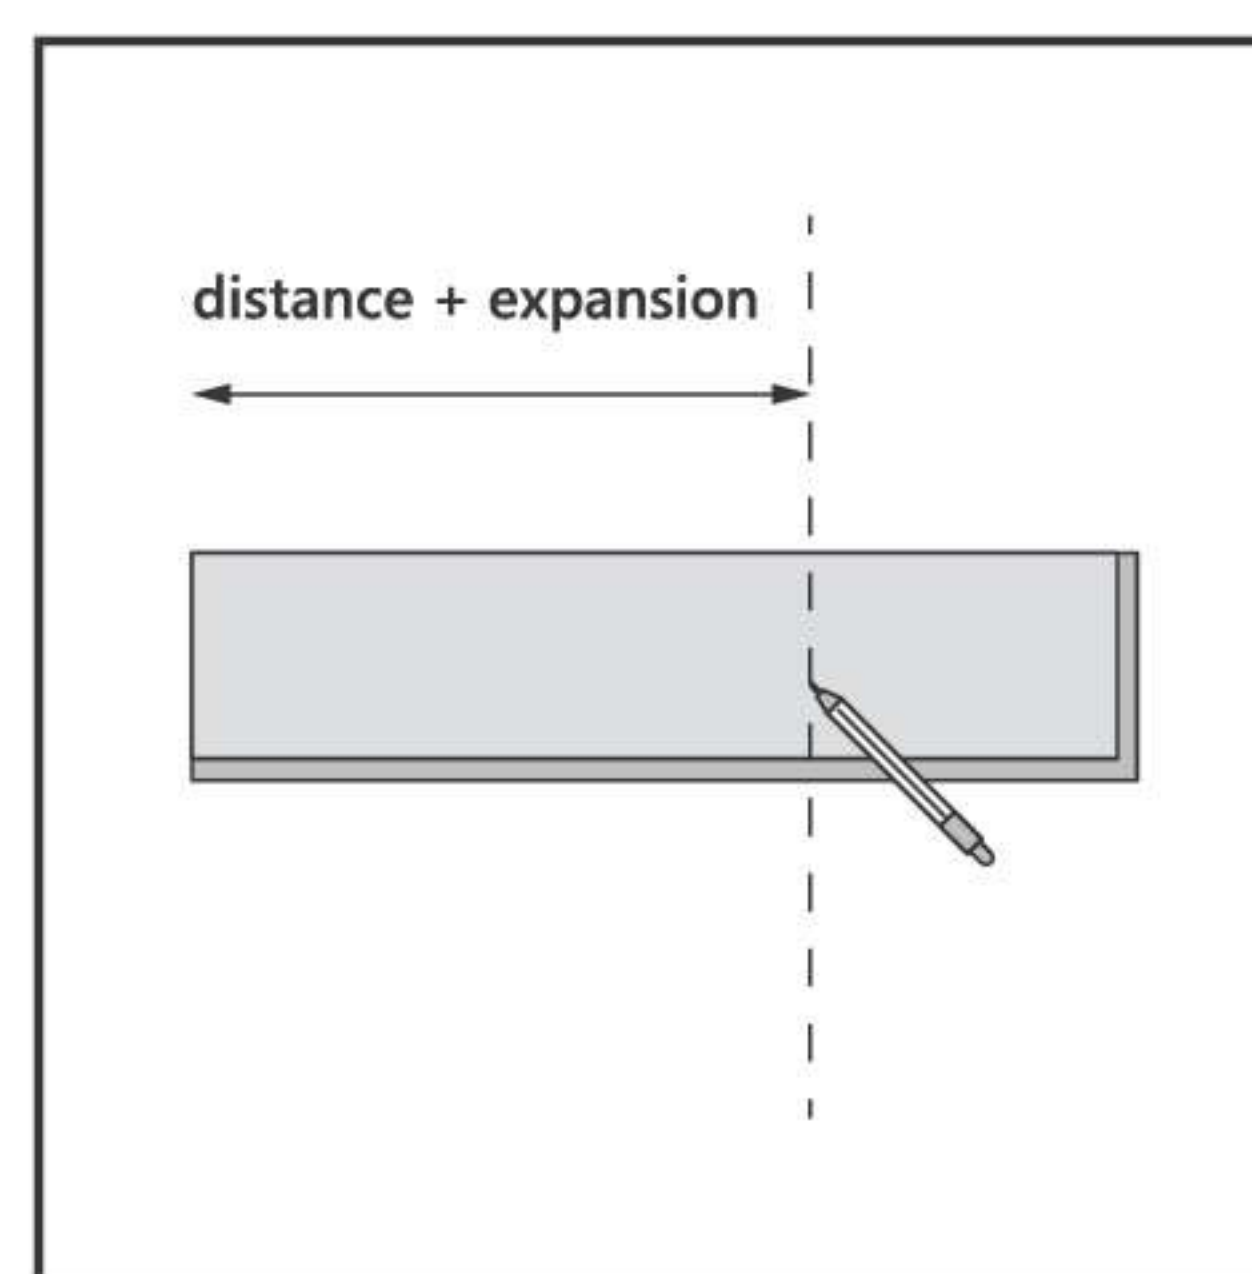


- Pencil the cutting line on your panel
- Use a ruler or another floor panel to ensure a straight line

VINYL

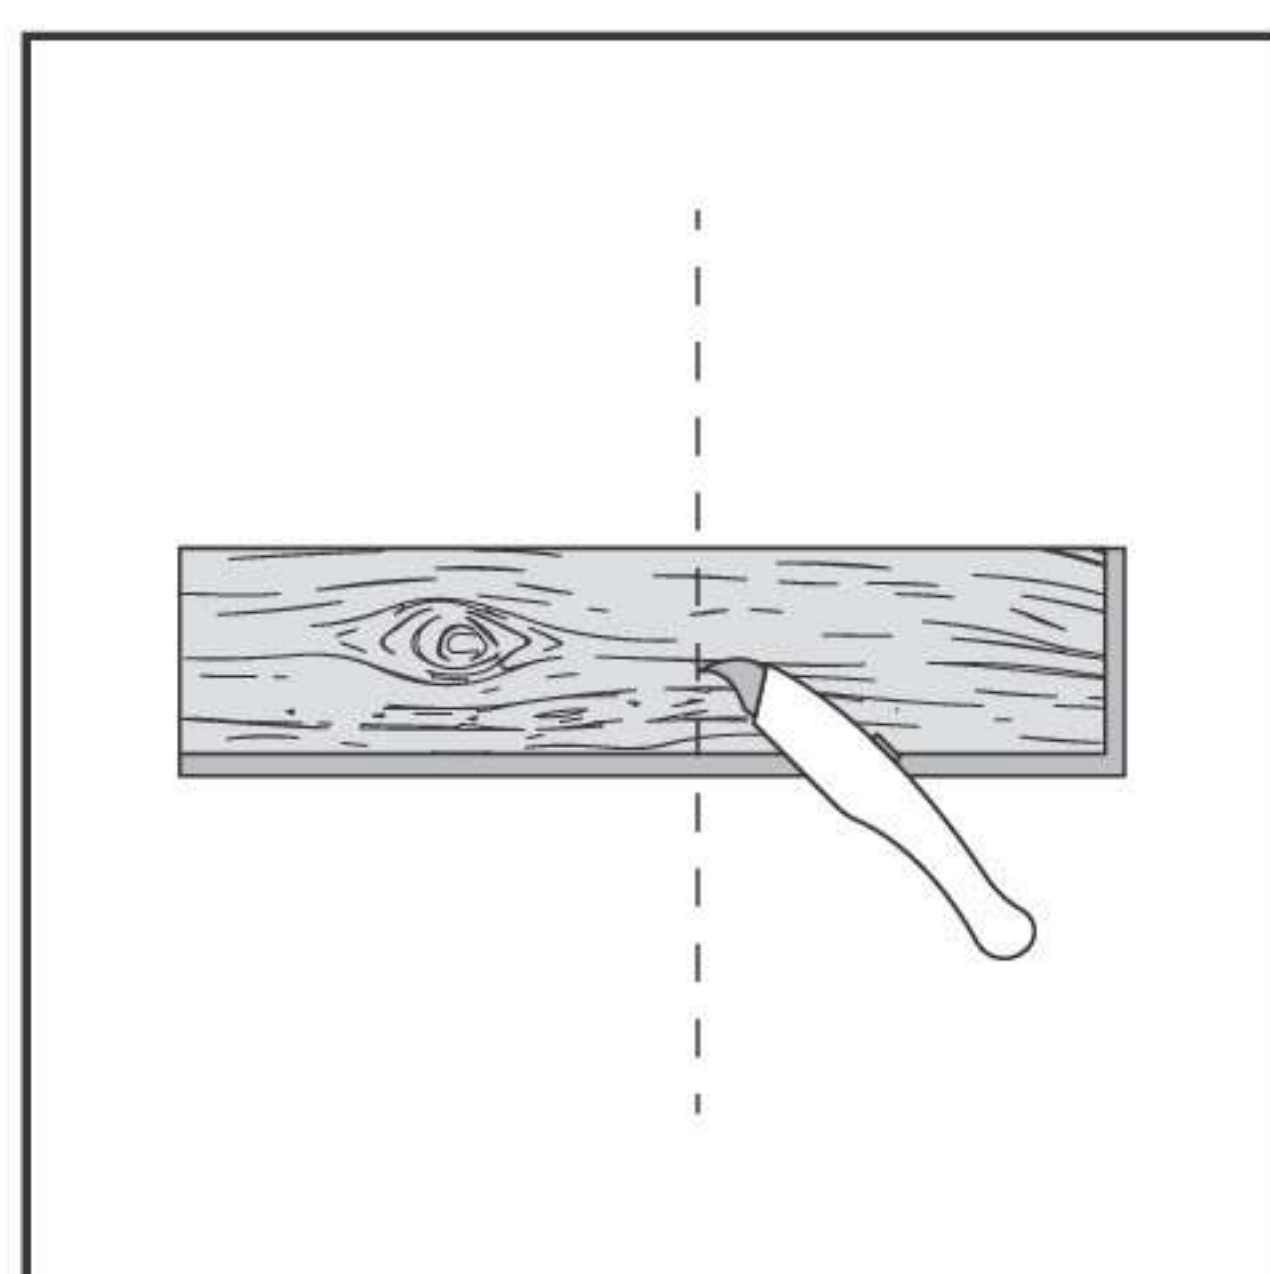


For straight cuts

- Cut the panel with a sharp concave cutter knife
- Always cut with the design facing upwards

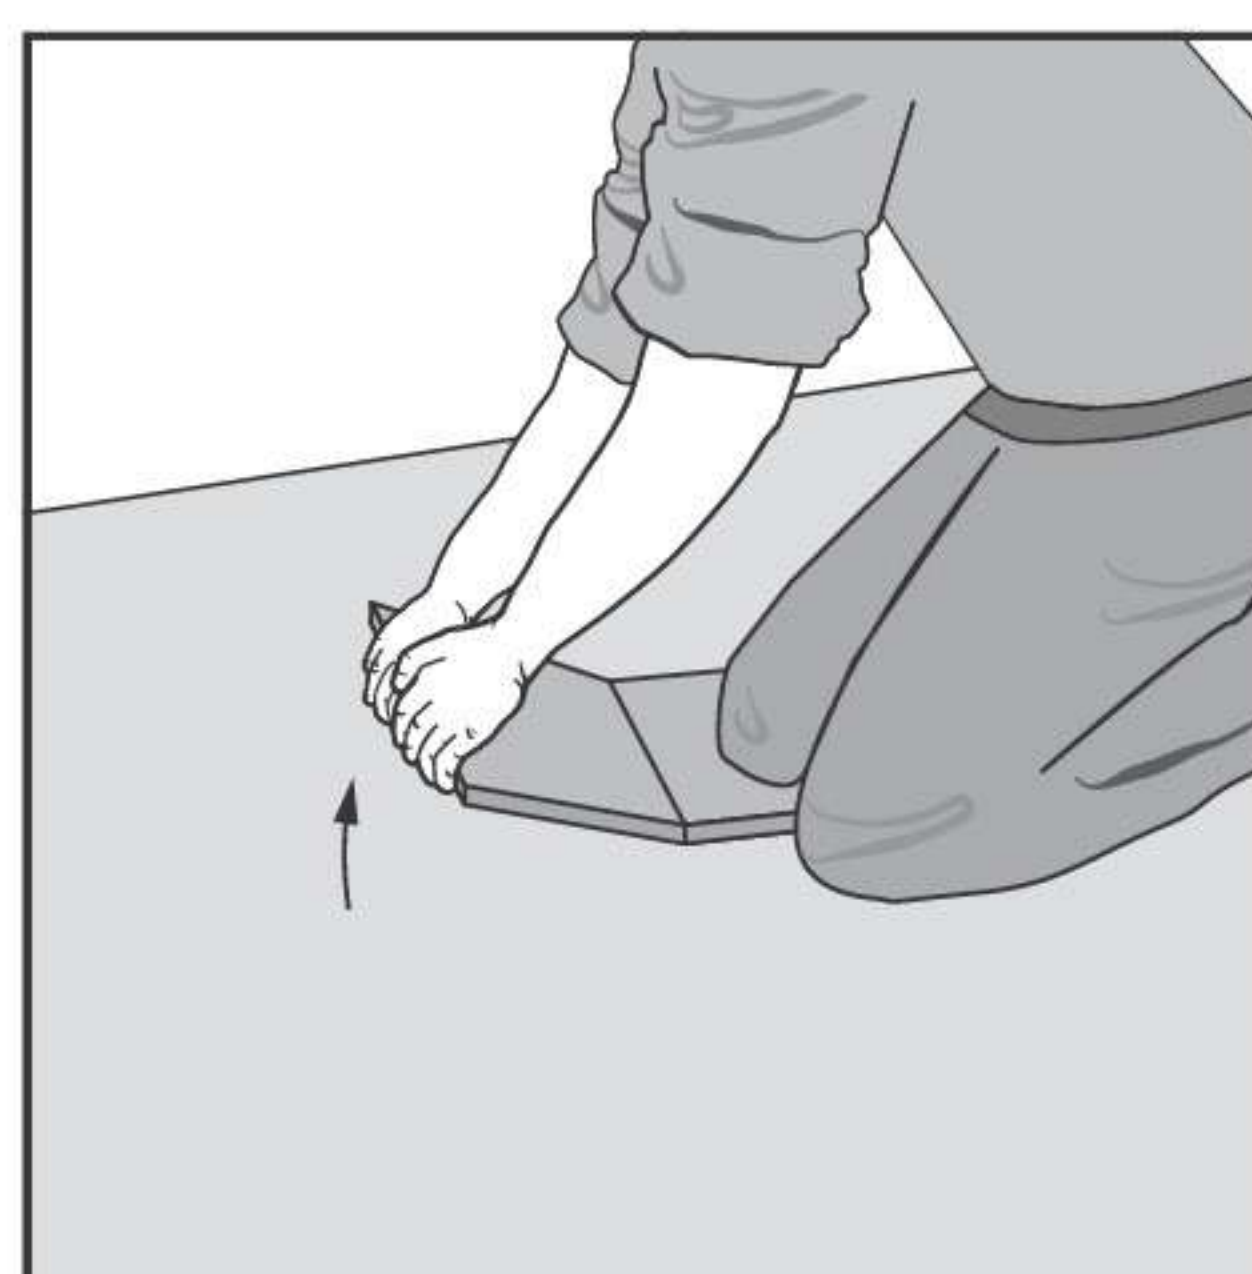


- Lay the panel with the design facing downwards
- Snap the plank in two
- Use your knees to hold the panel

143

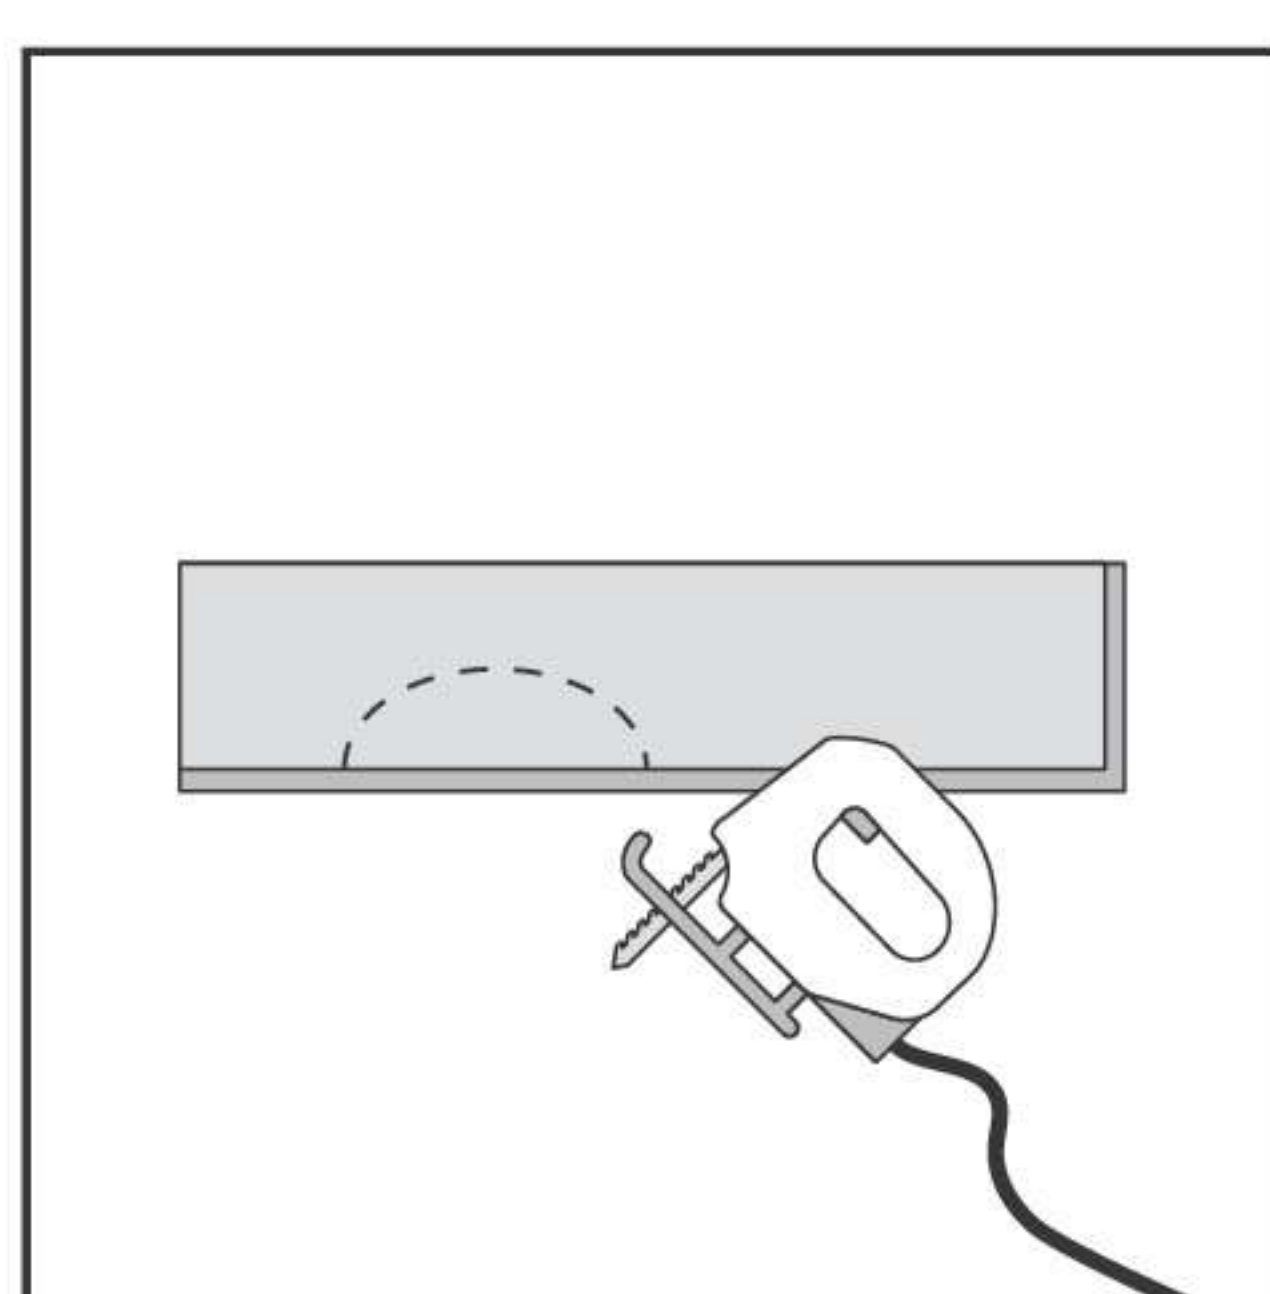

For other shapes


Use a saw to cut the panel to size

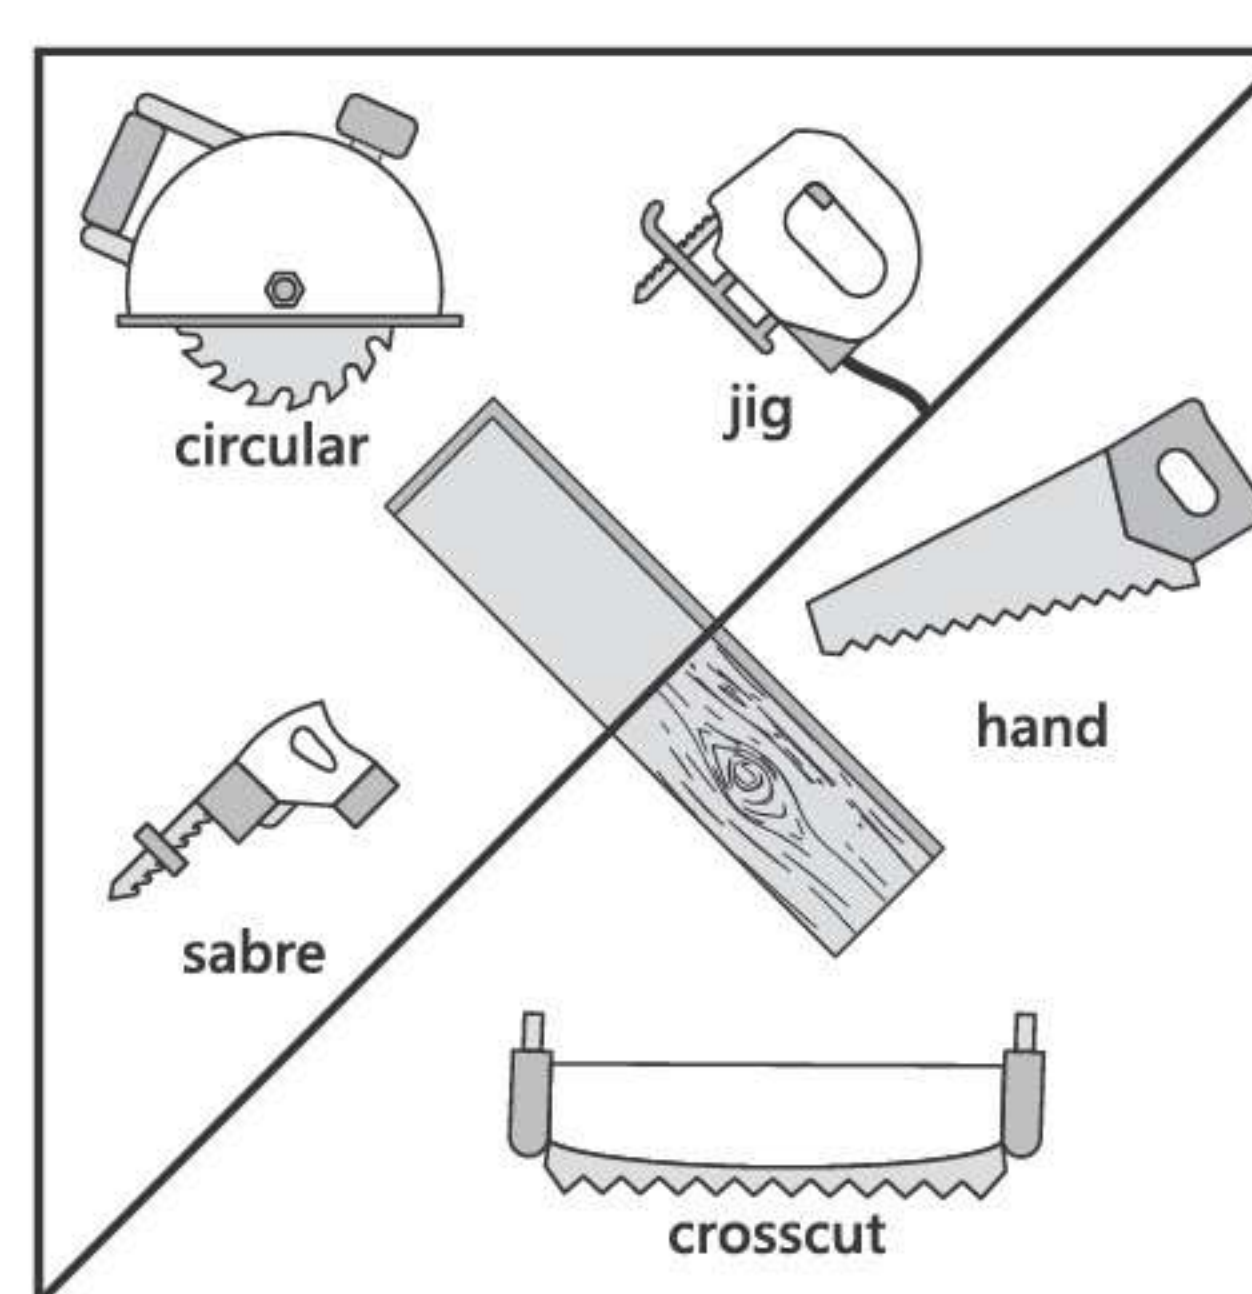

Design facing down:
jigsaw, saber saw or circular handsaw


Design facing up:
handsaw or crosscut saw

LAMINATE

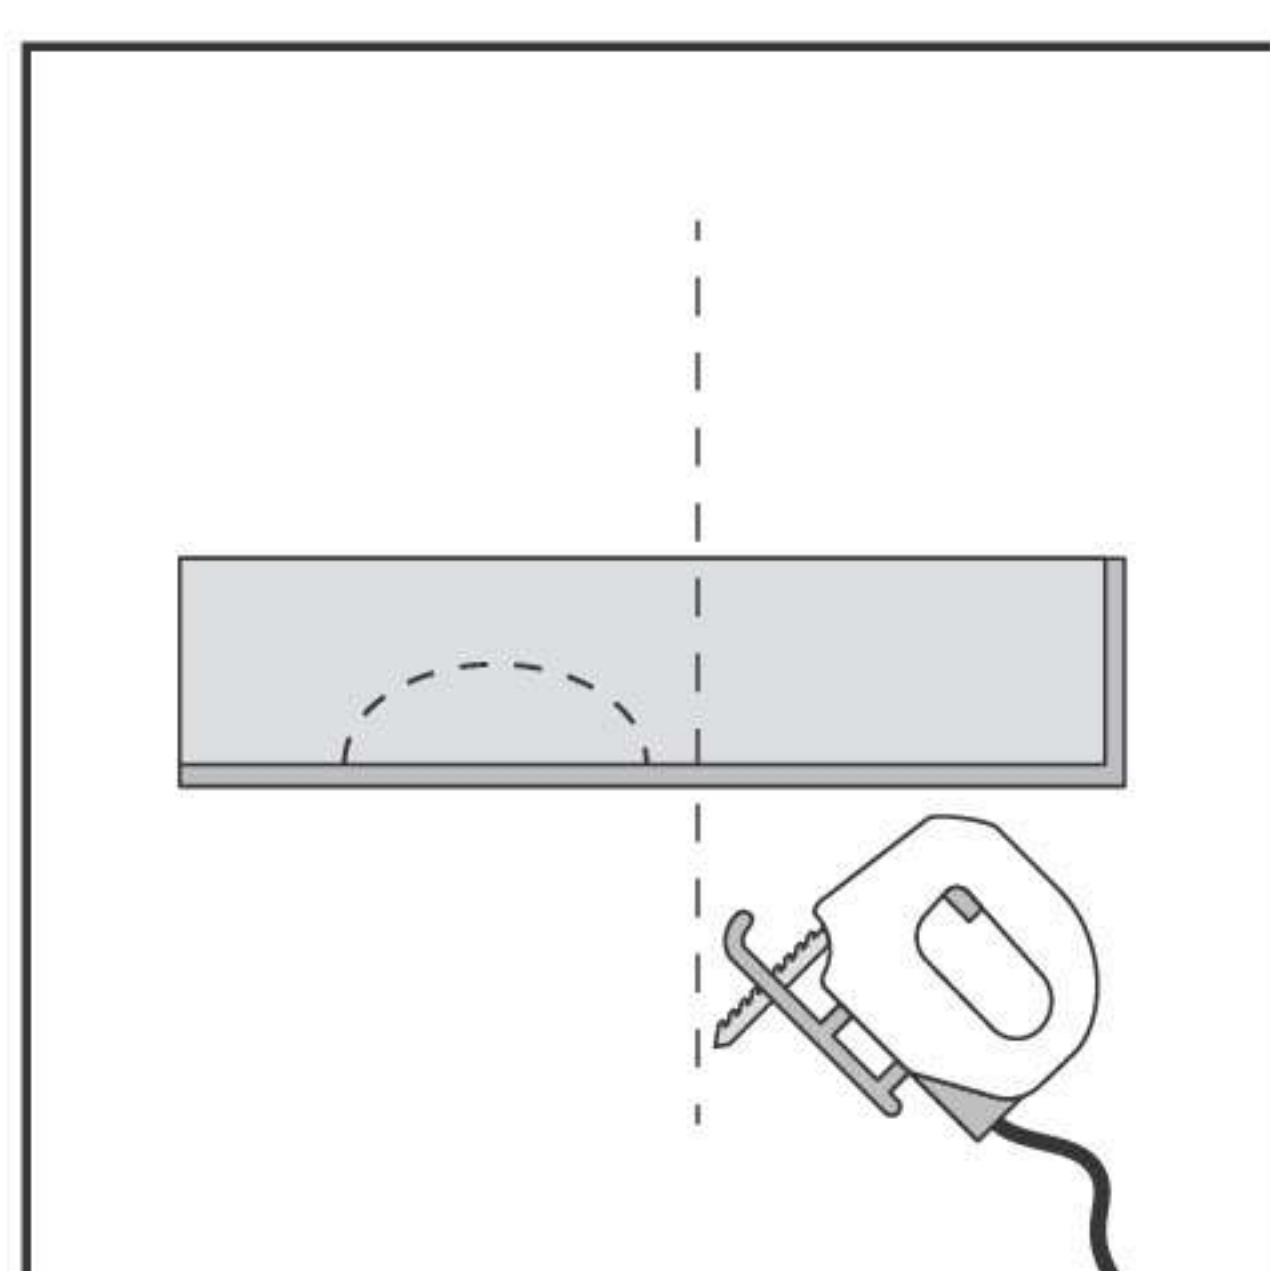

For all cuts

Use a saw to cut the panel to size

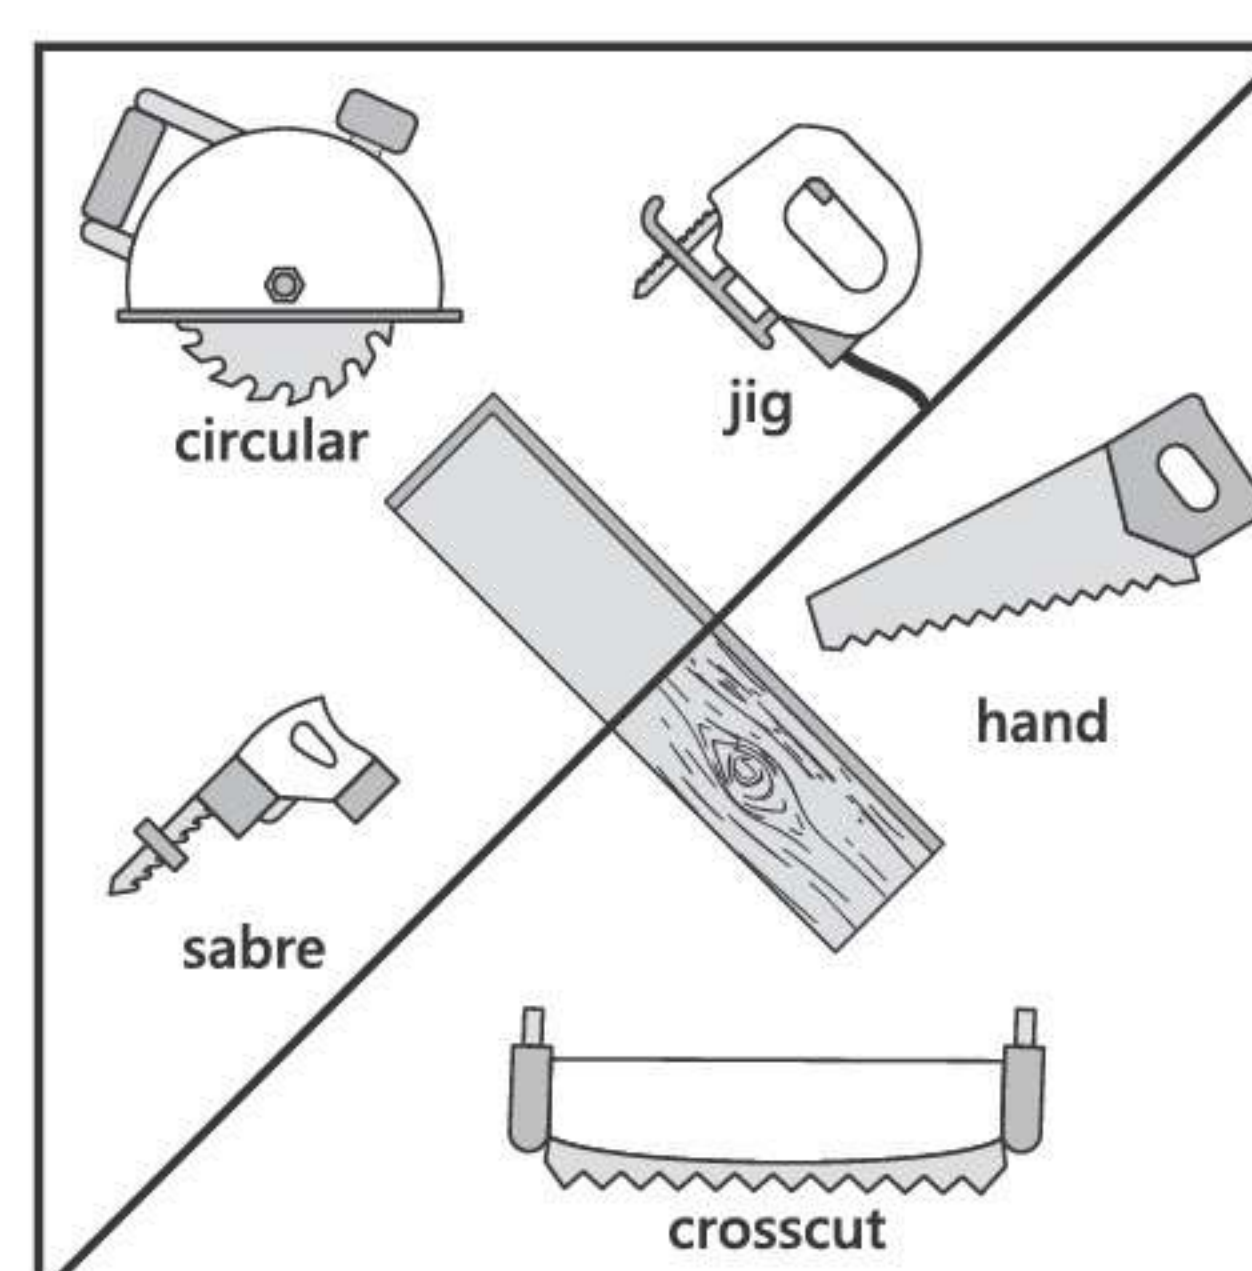


Design facing down:
jigsaw, saber saw or circular handsaw


Design facing up:
handsaw or crosscut saw

Installation Finishing


Undercut the door-frames or moldings to enable the expansion of the panels.

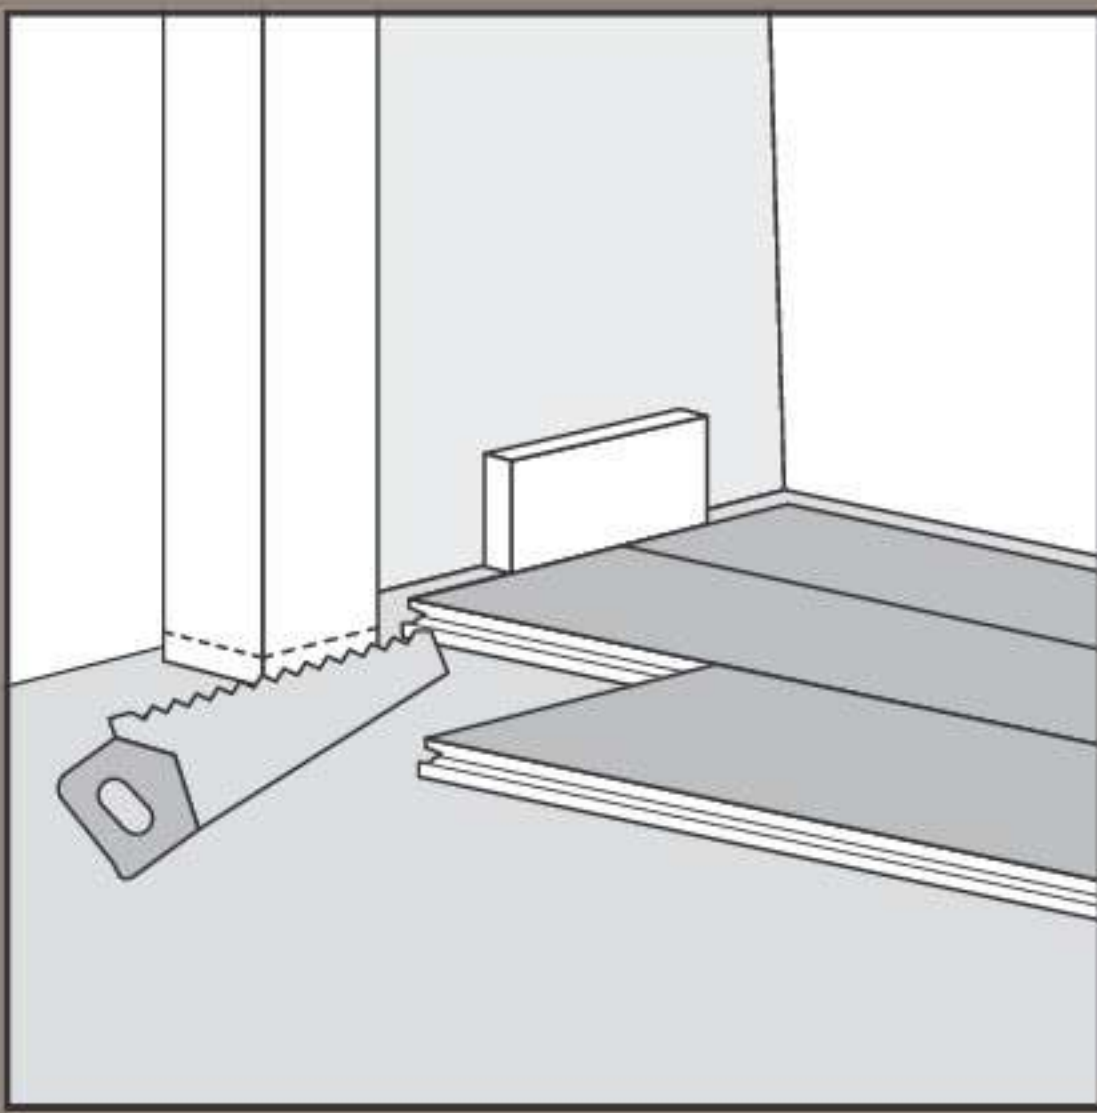

UNDER DOOR-FRAMES

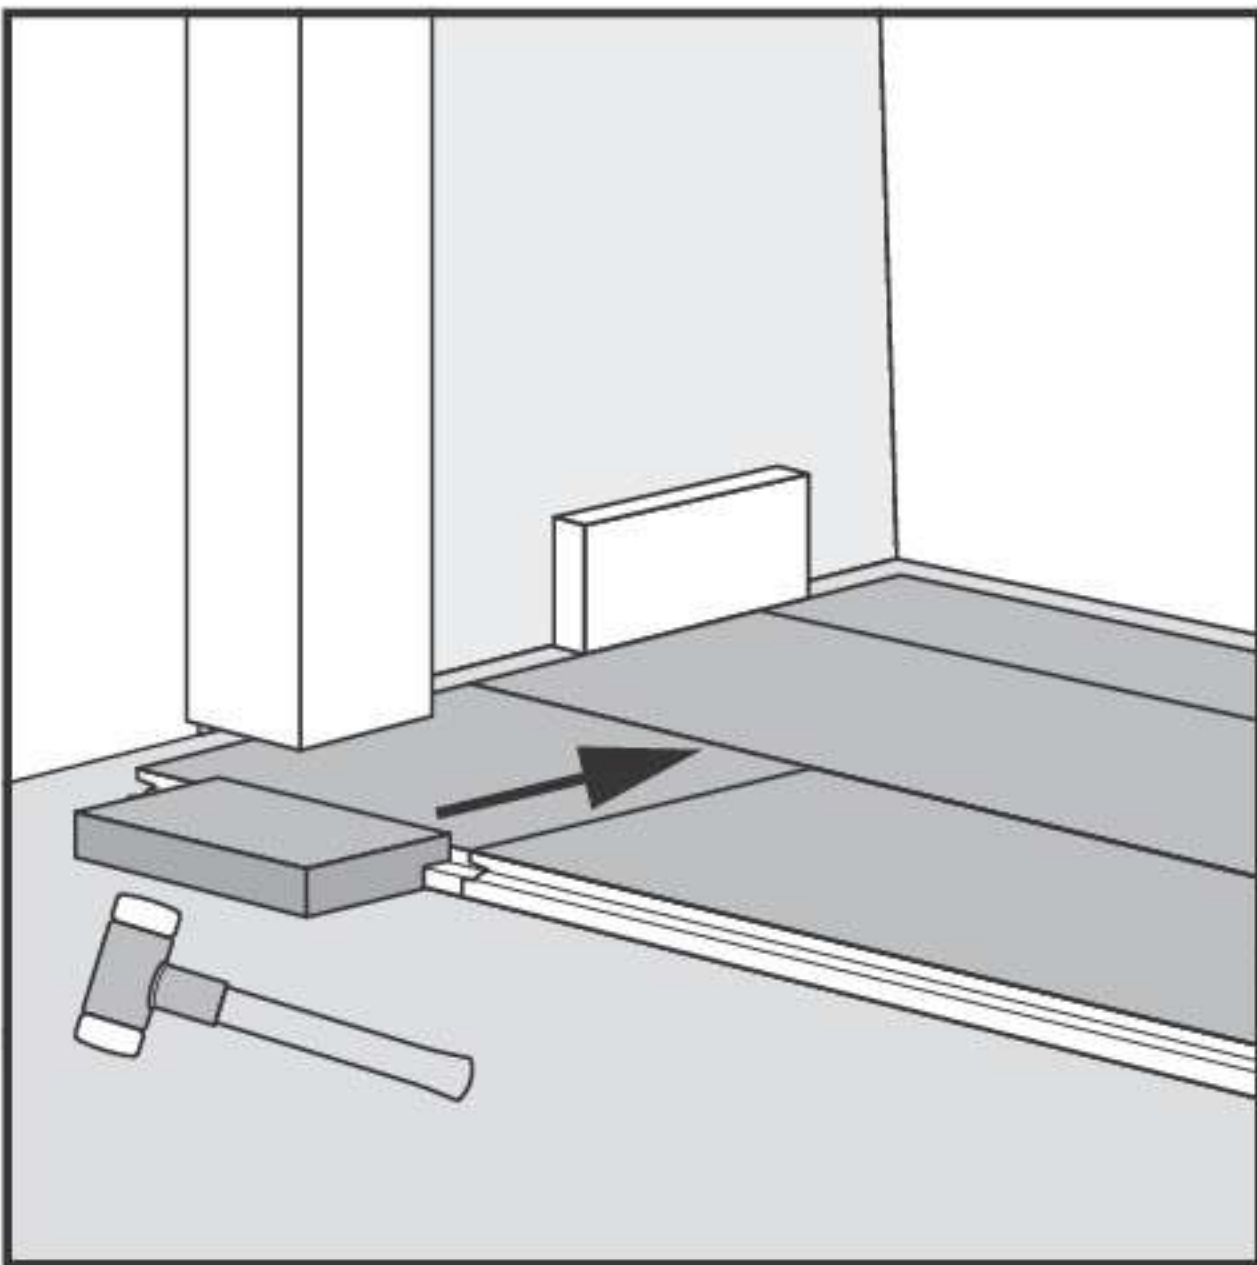


Install the panel on the long side with a tapping block or pull bar. Gently tap with a hammer to gradually connect the panels in a few taps.

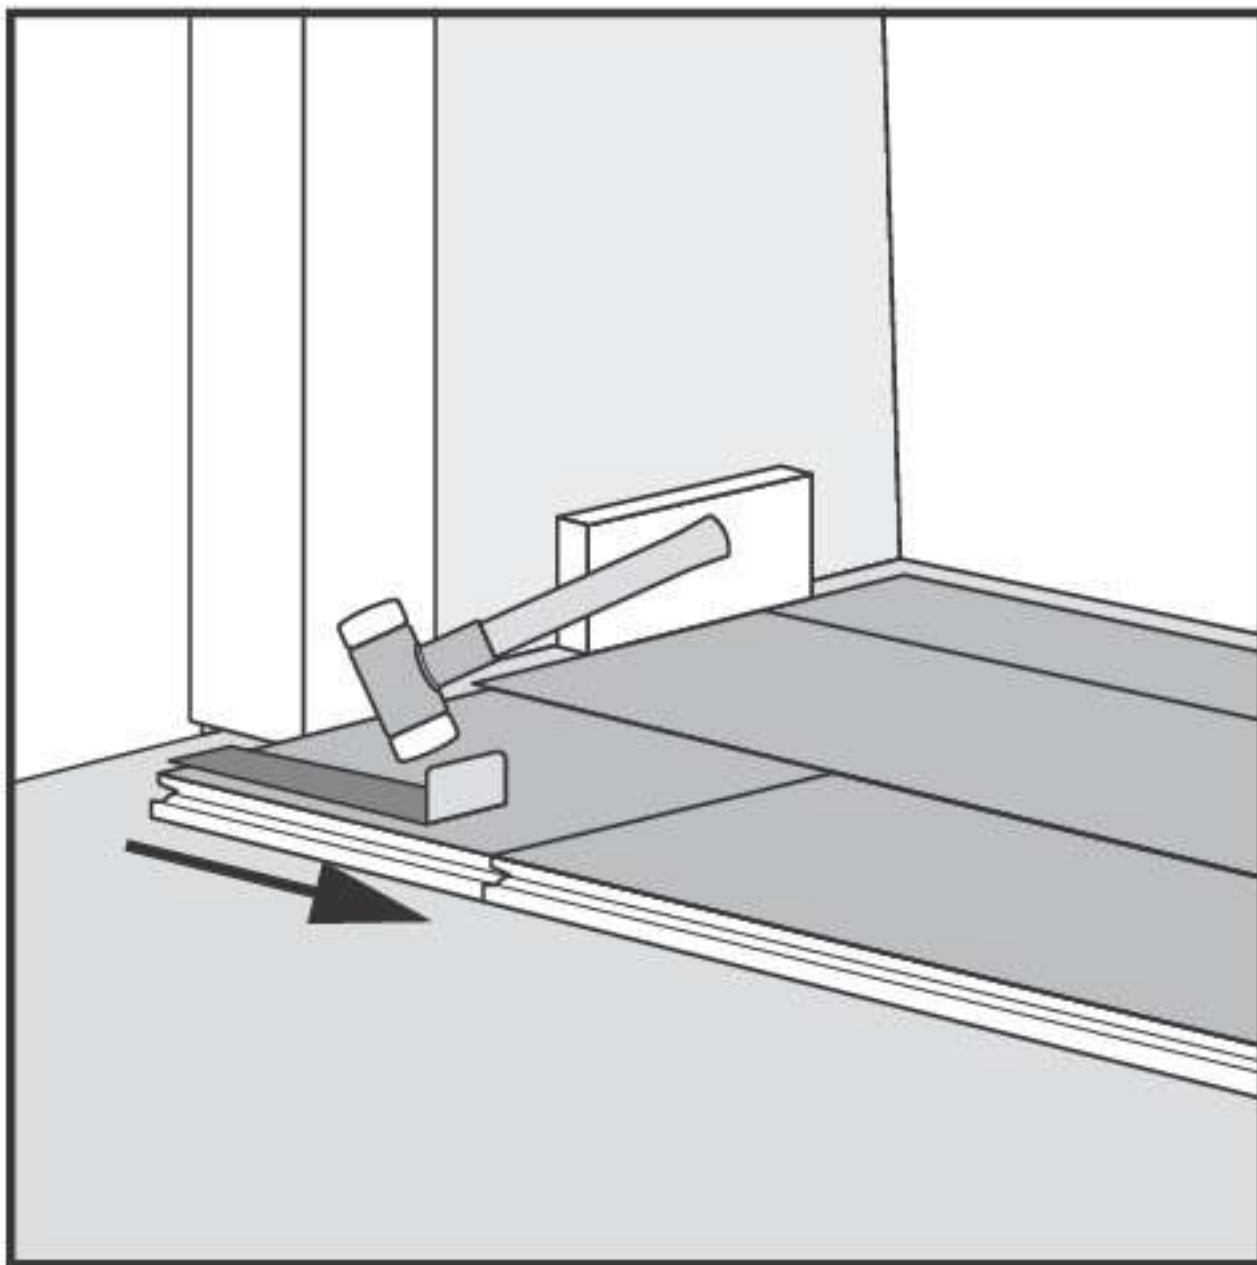


Slide the panel towards the already installed panels and gradually lock the short side of the panel with a tapping block or pull bar and hammer in a few taps.

PIPES

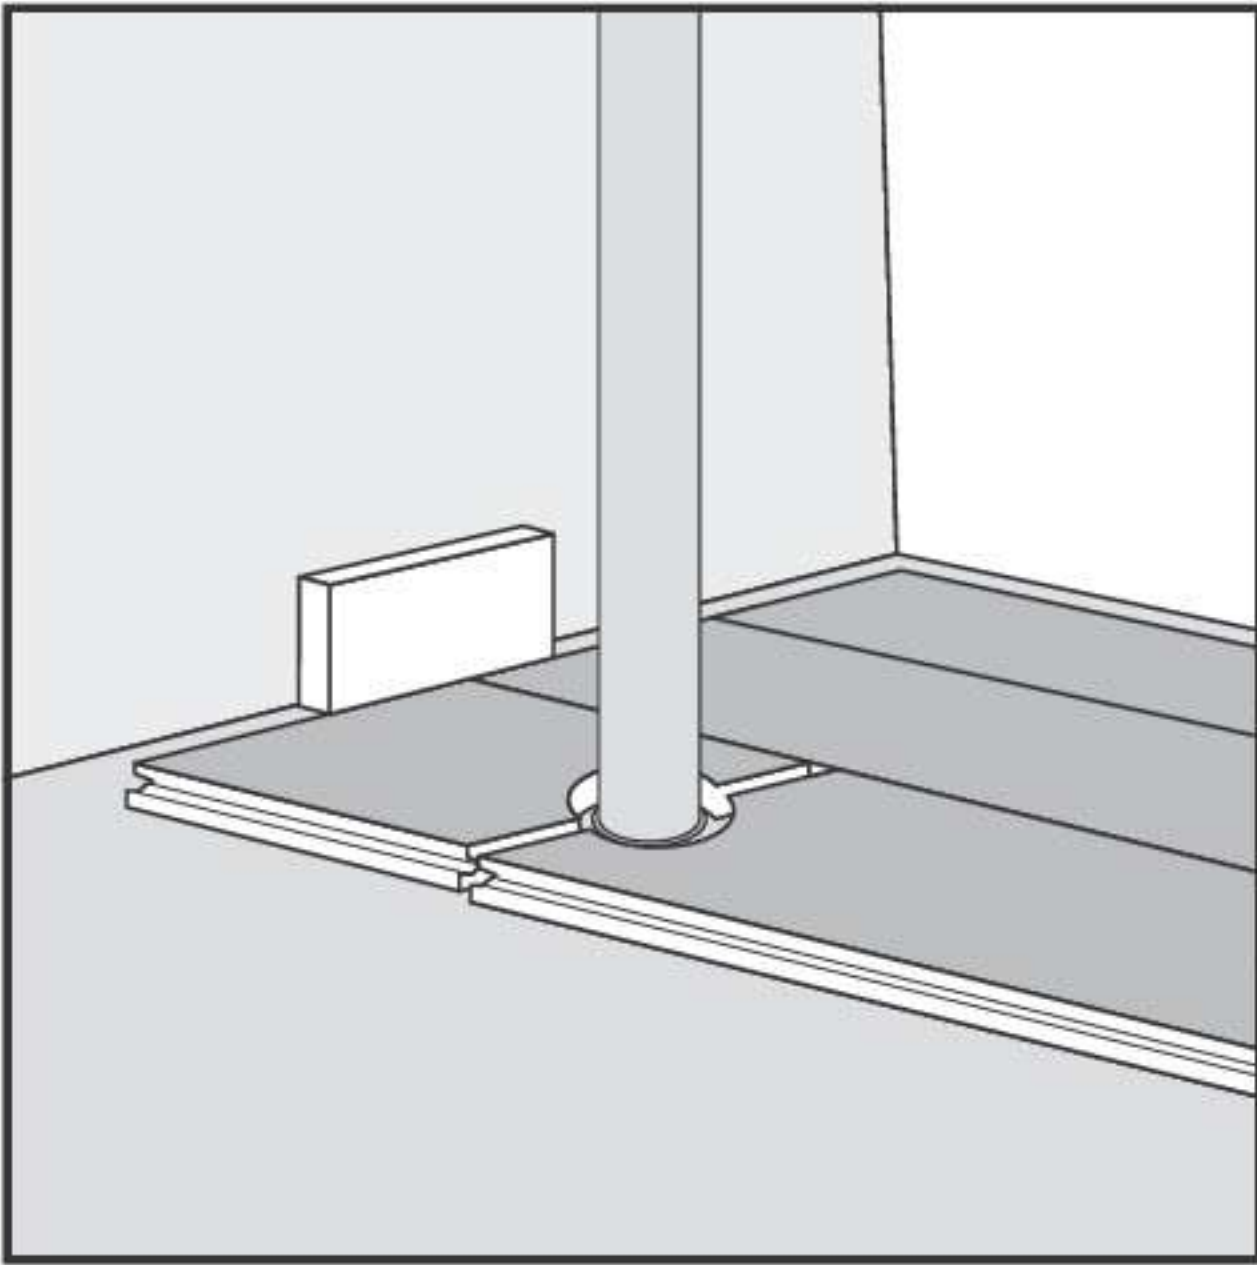


In rows where the flooring meets a pipe, ensure the pipe aligns exactly with the short sides of two panels.

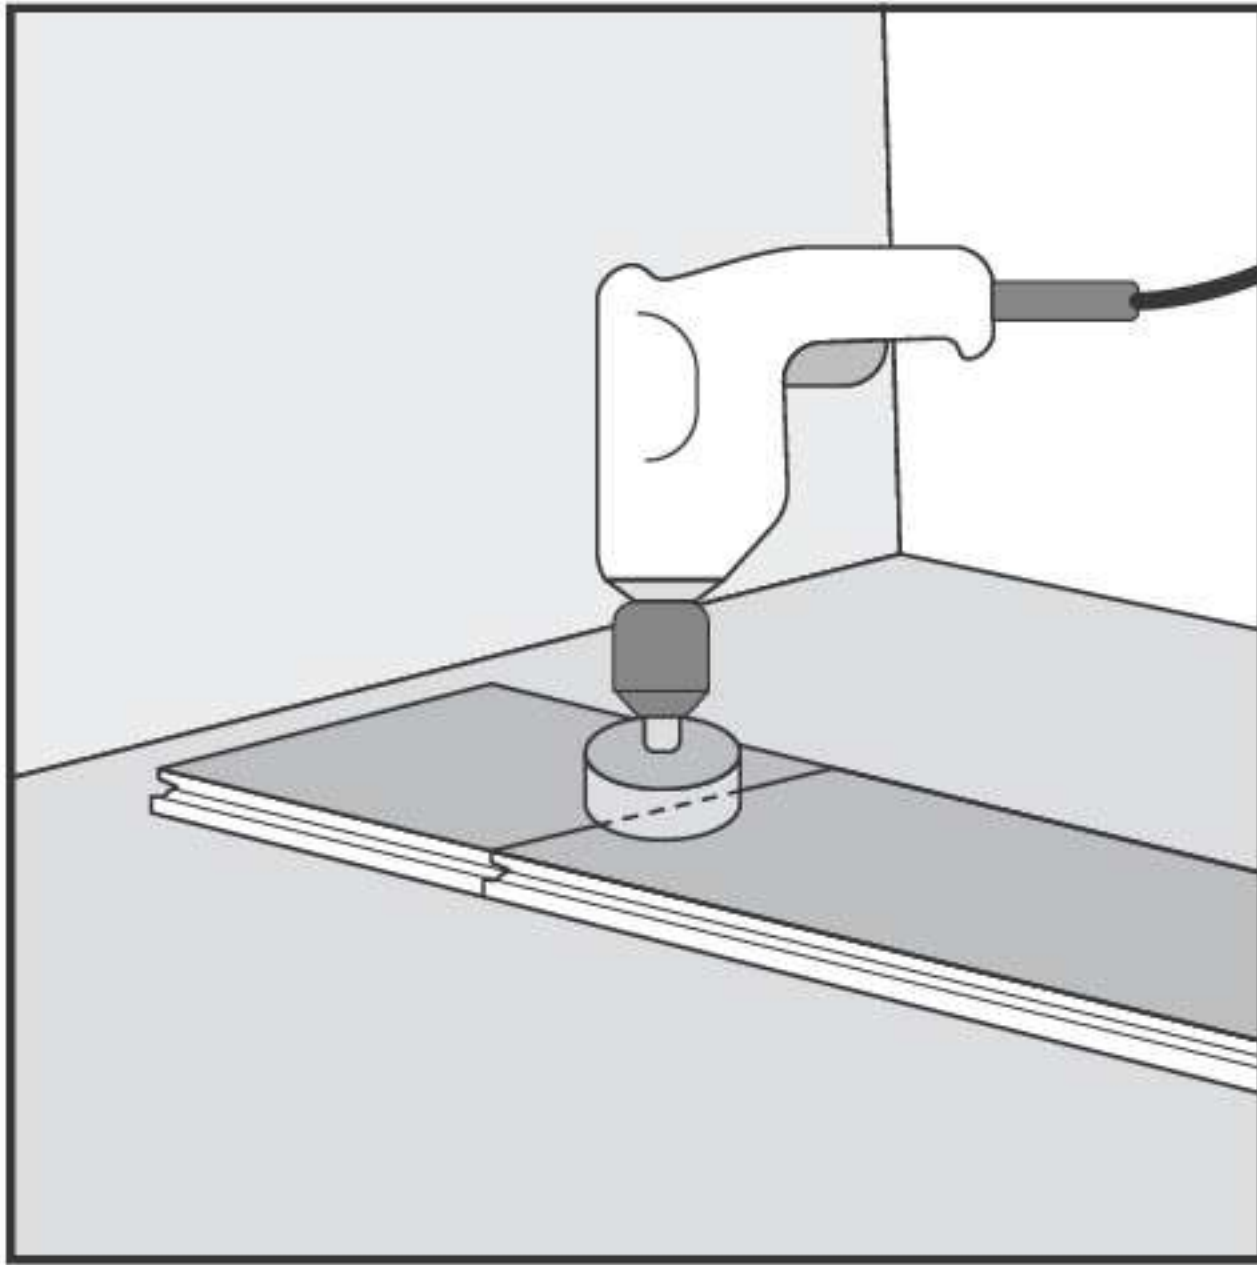


Click the panels together on the short side. Drill a hole centered on the joint between the two panels of the same diameter as the pipe plus 20 mm (3/4").

ROOM FOR EXPANSION

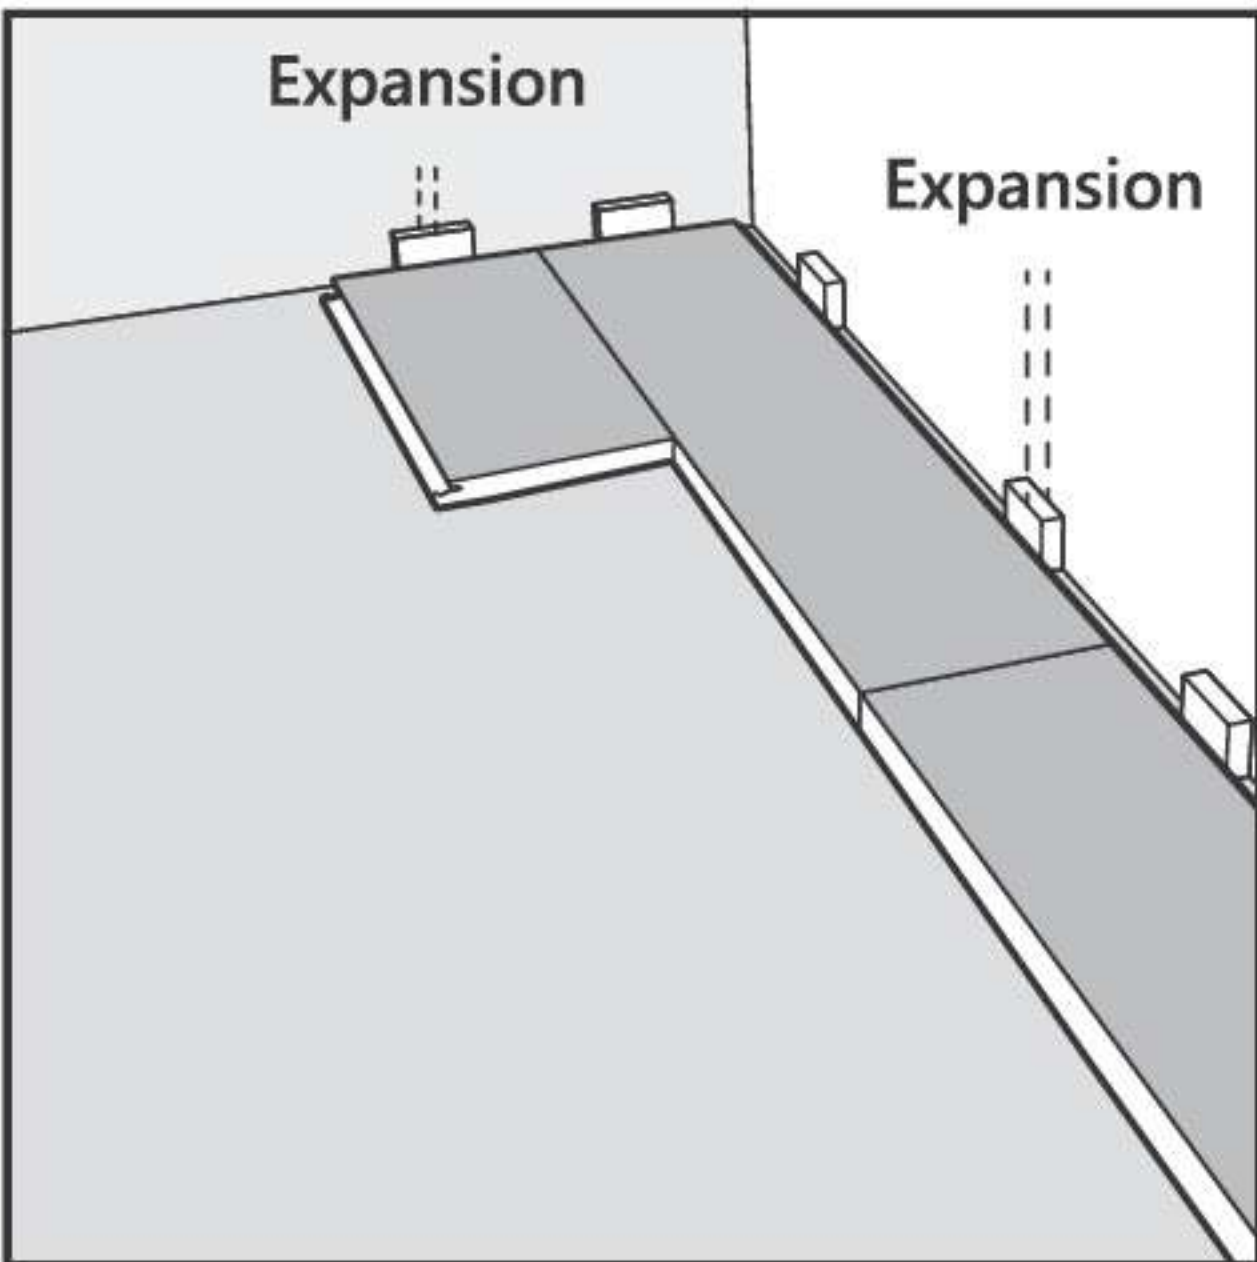


The floor must be able to expand and contract with changes in the indoor climate. For expansion joint guidelines, check the supplier's instructions.

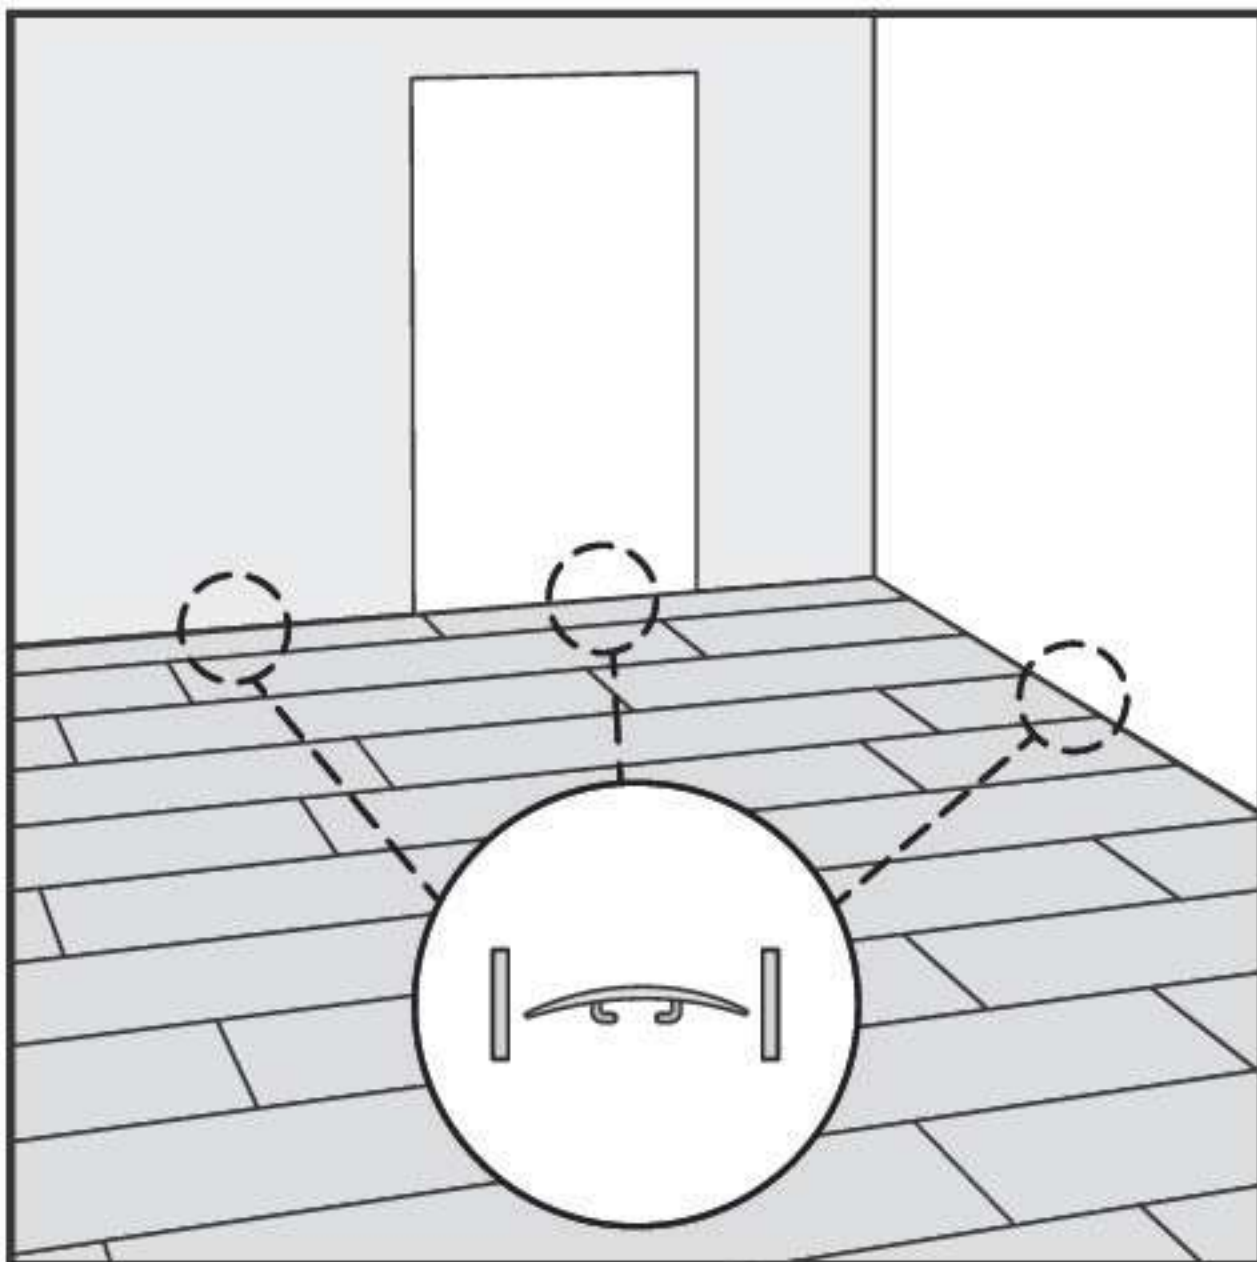


Provide expansion joints between different rooms or in large rooms. Check the supplier's guidelines for details.

FINISHING

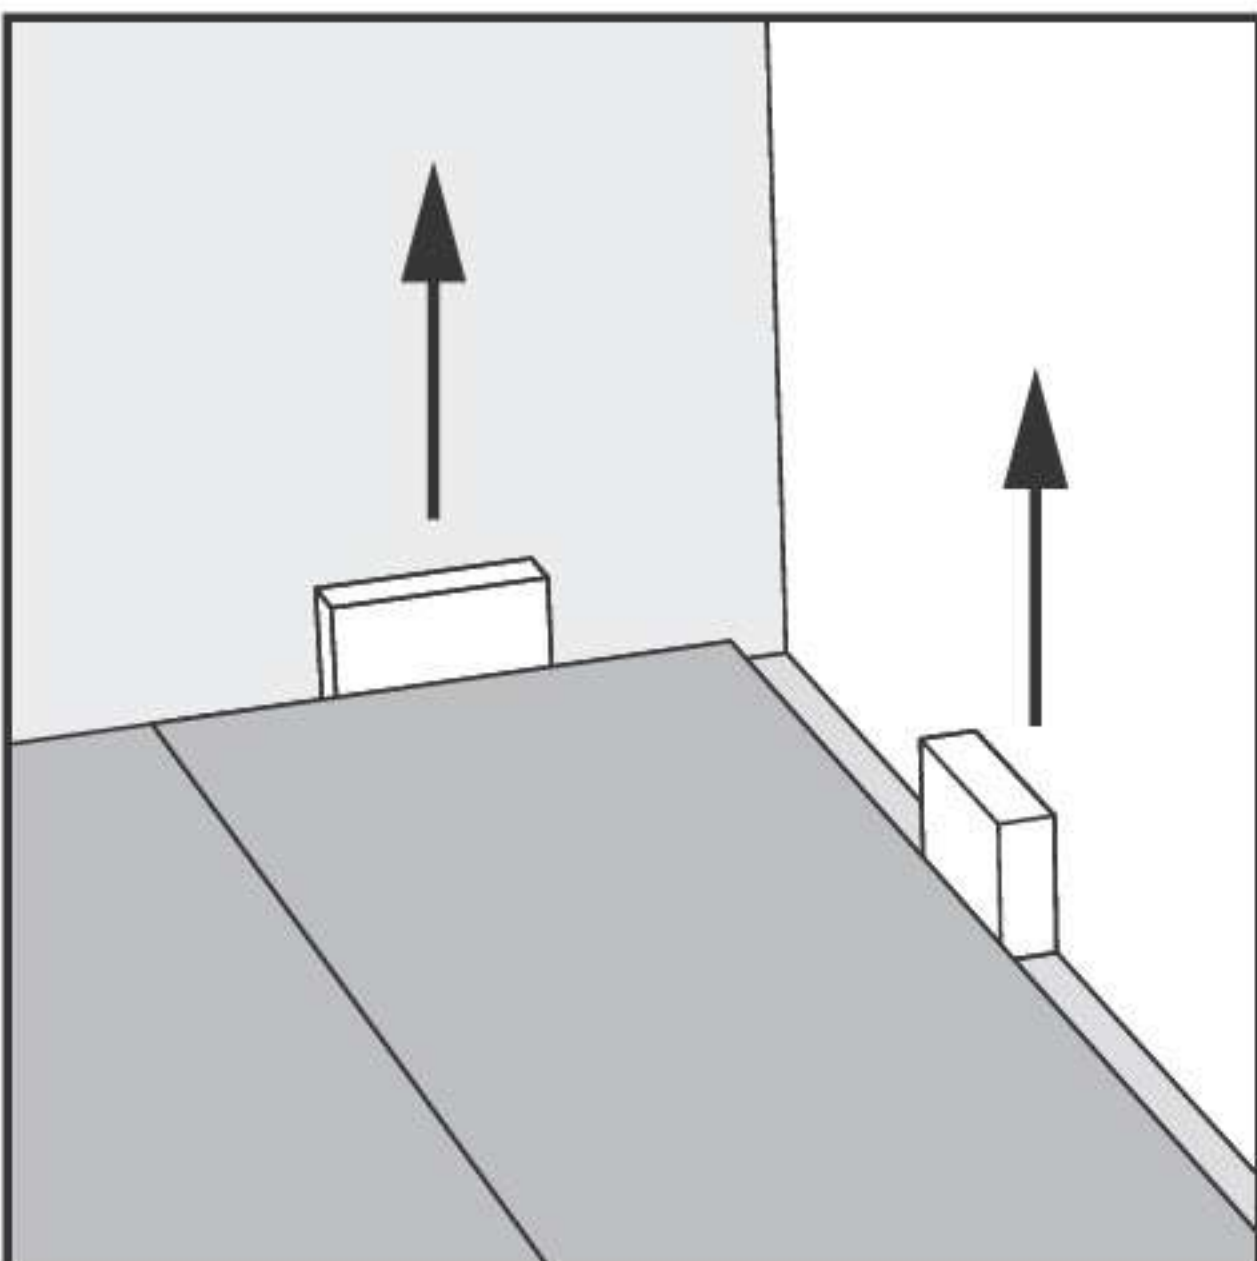


After the floor and expansion profiles are completely installed, remove all spacers from the room(s).

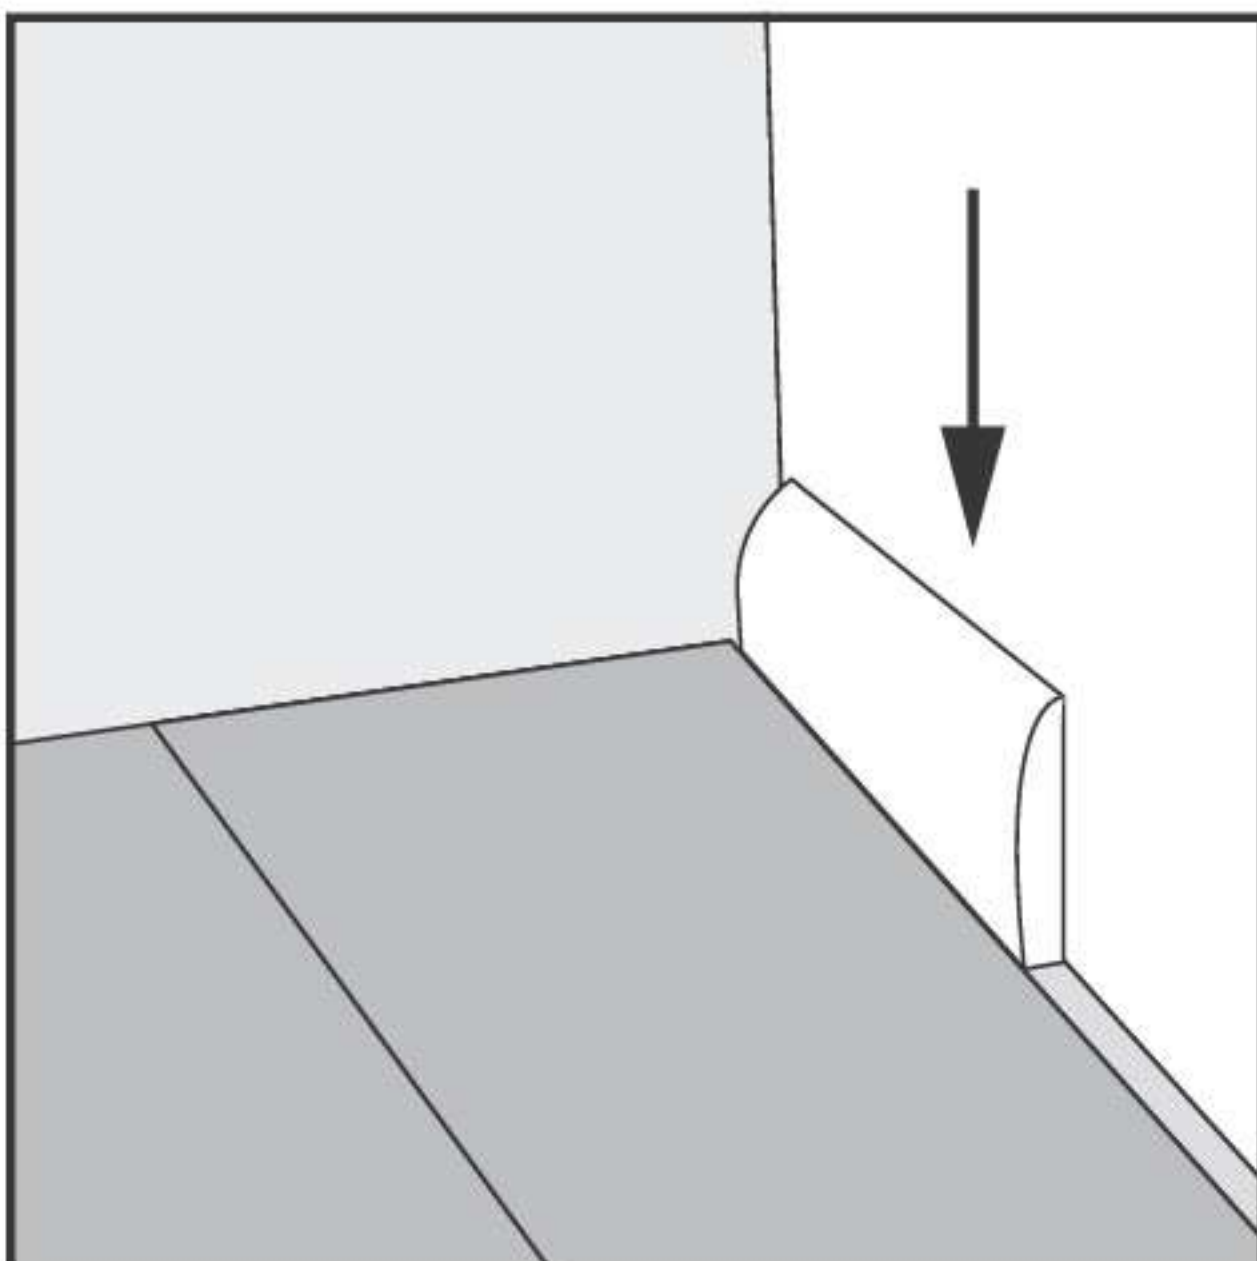


Install skirting on the walls over the expansion gaps to complete the room.

Plank Series variations

RANDOM

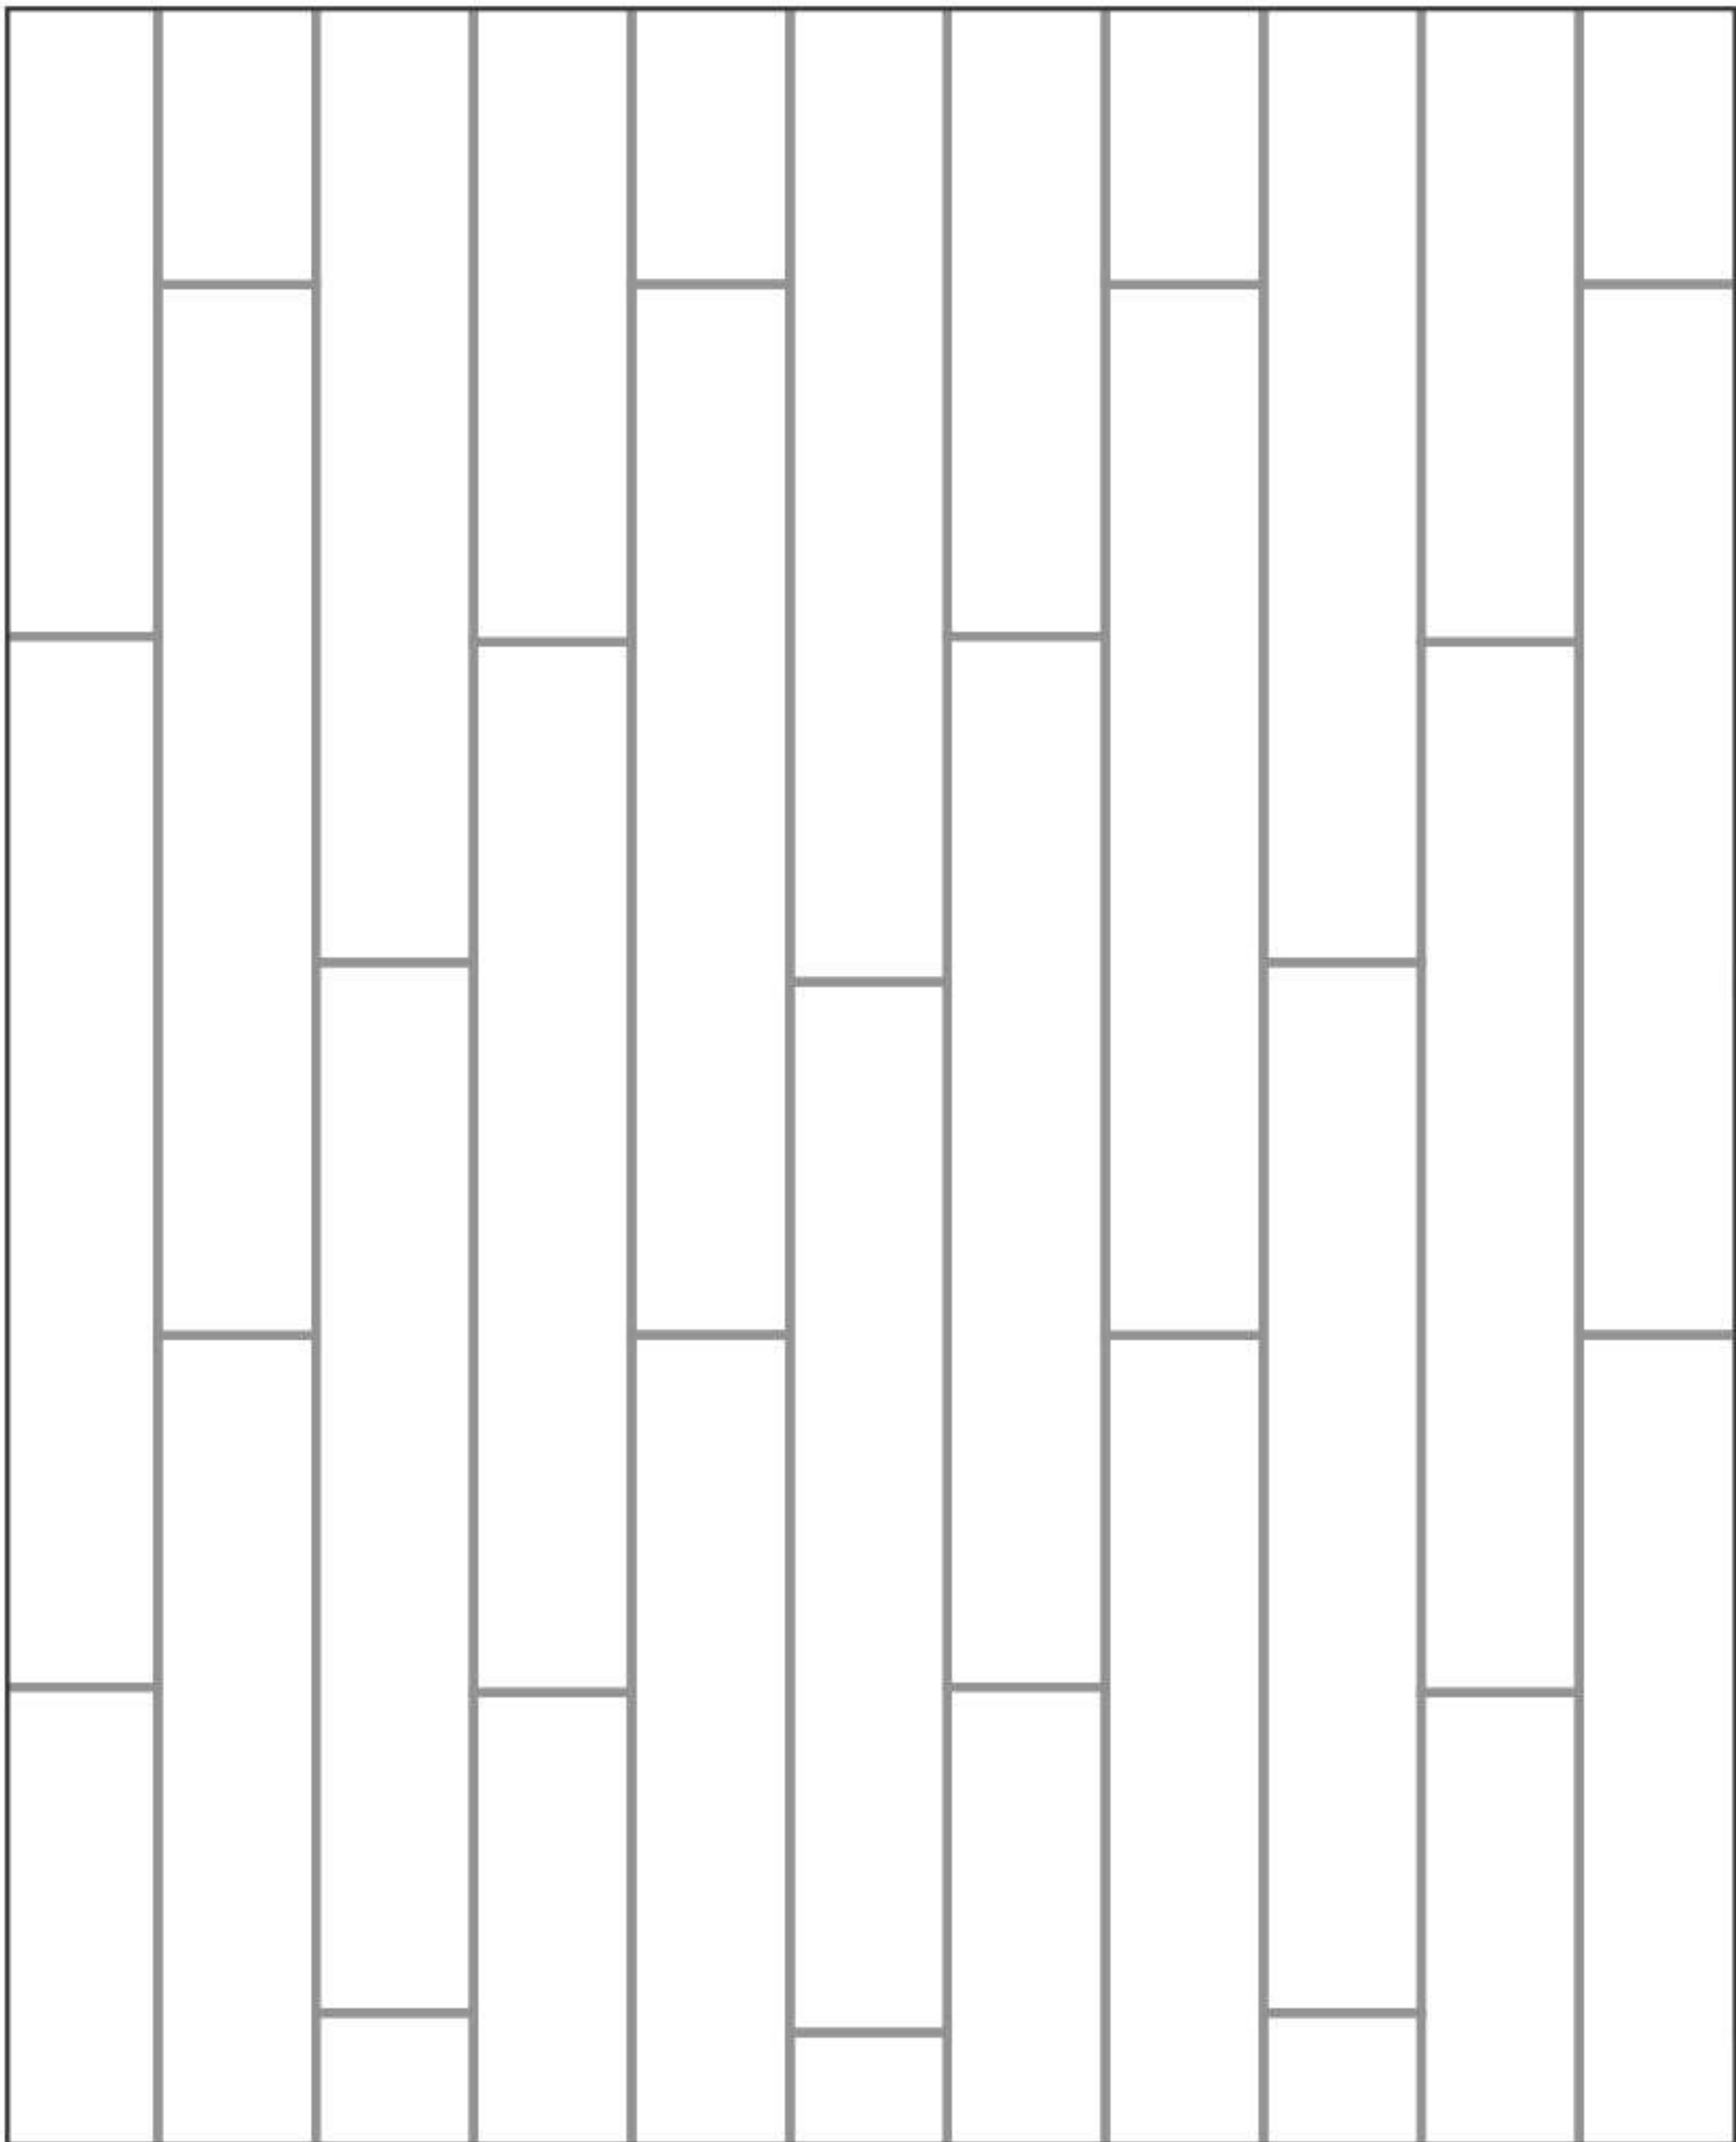


BRICK

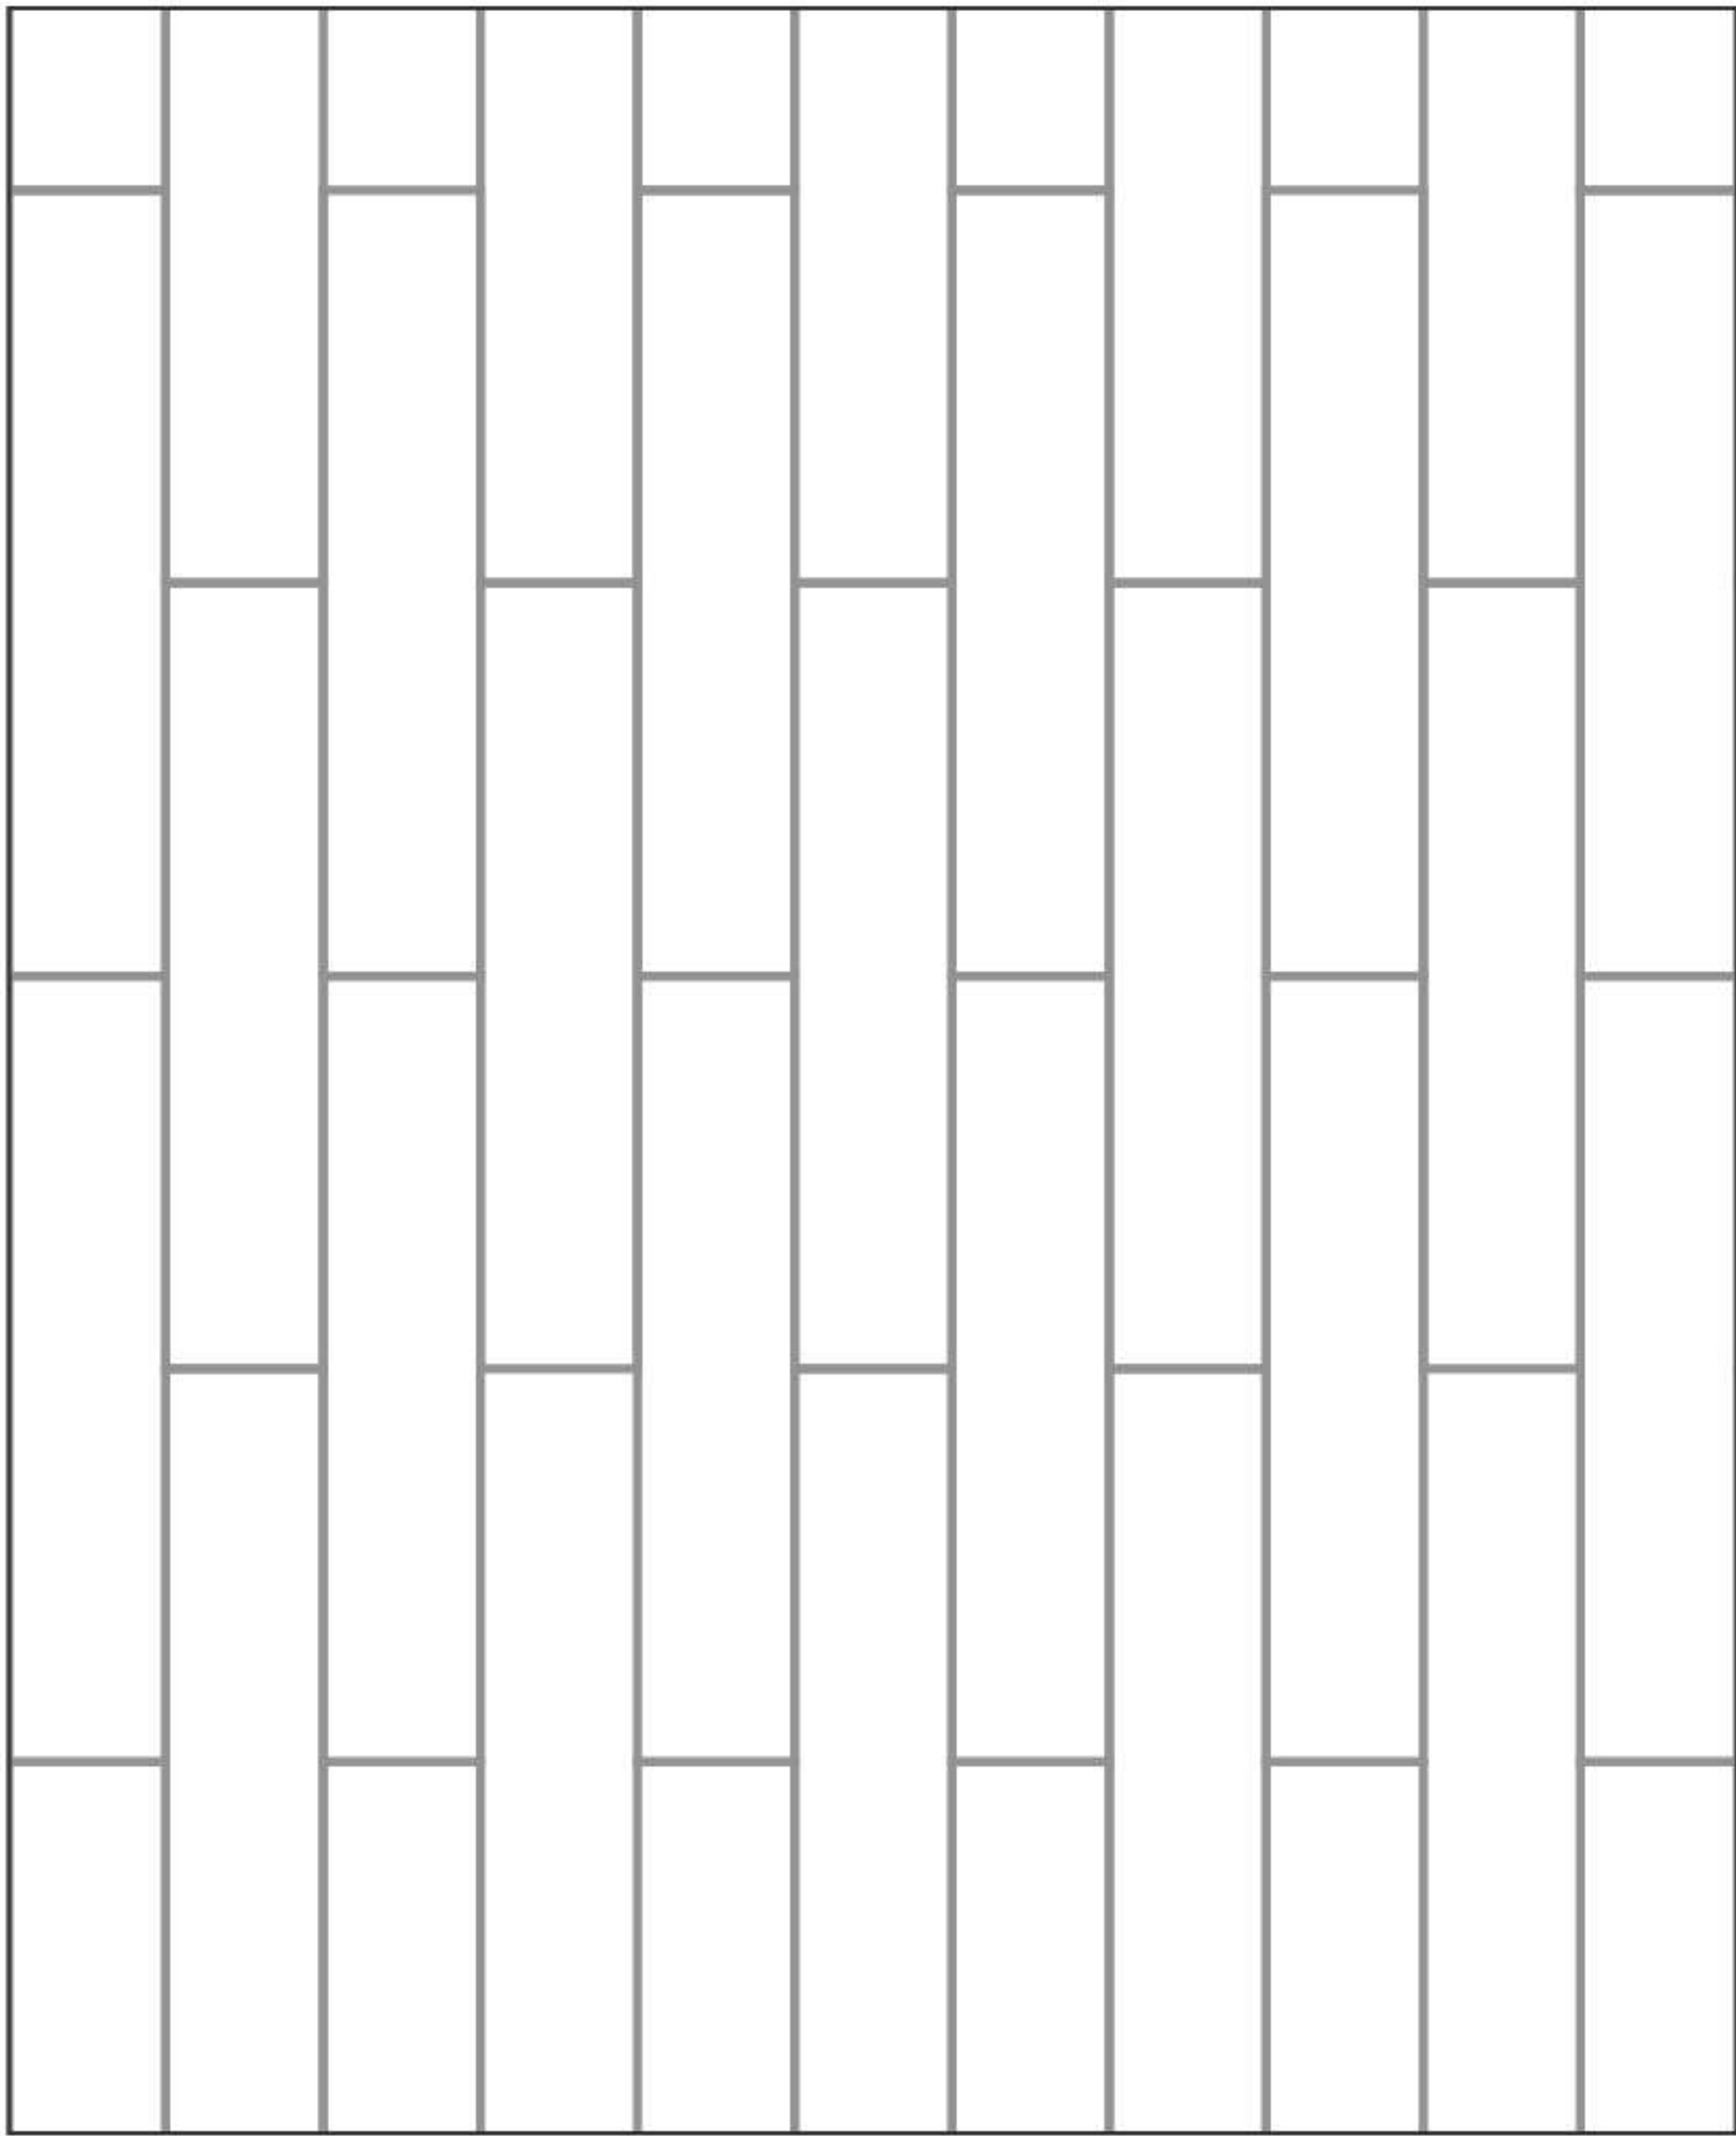


Herringbone Series variations


SINGLE

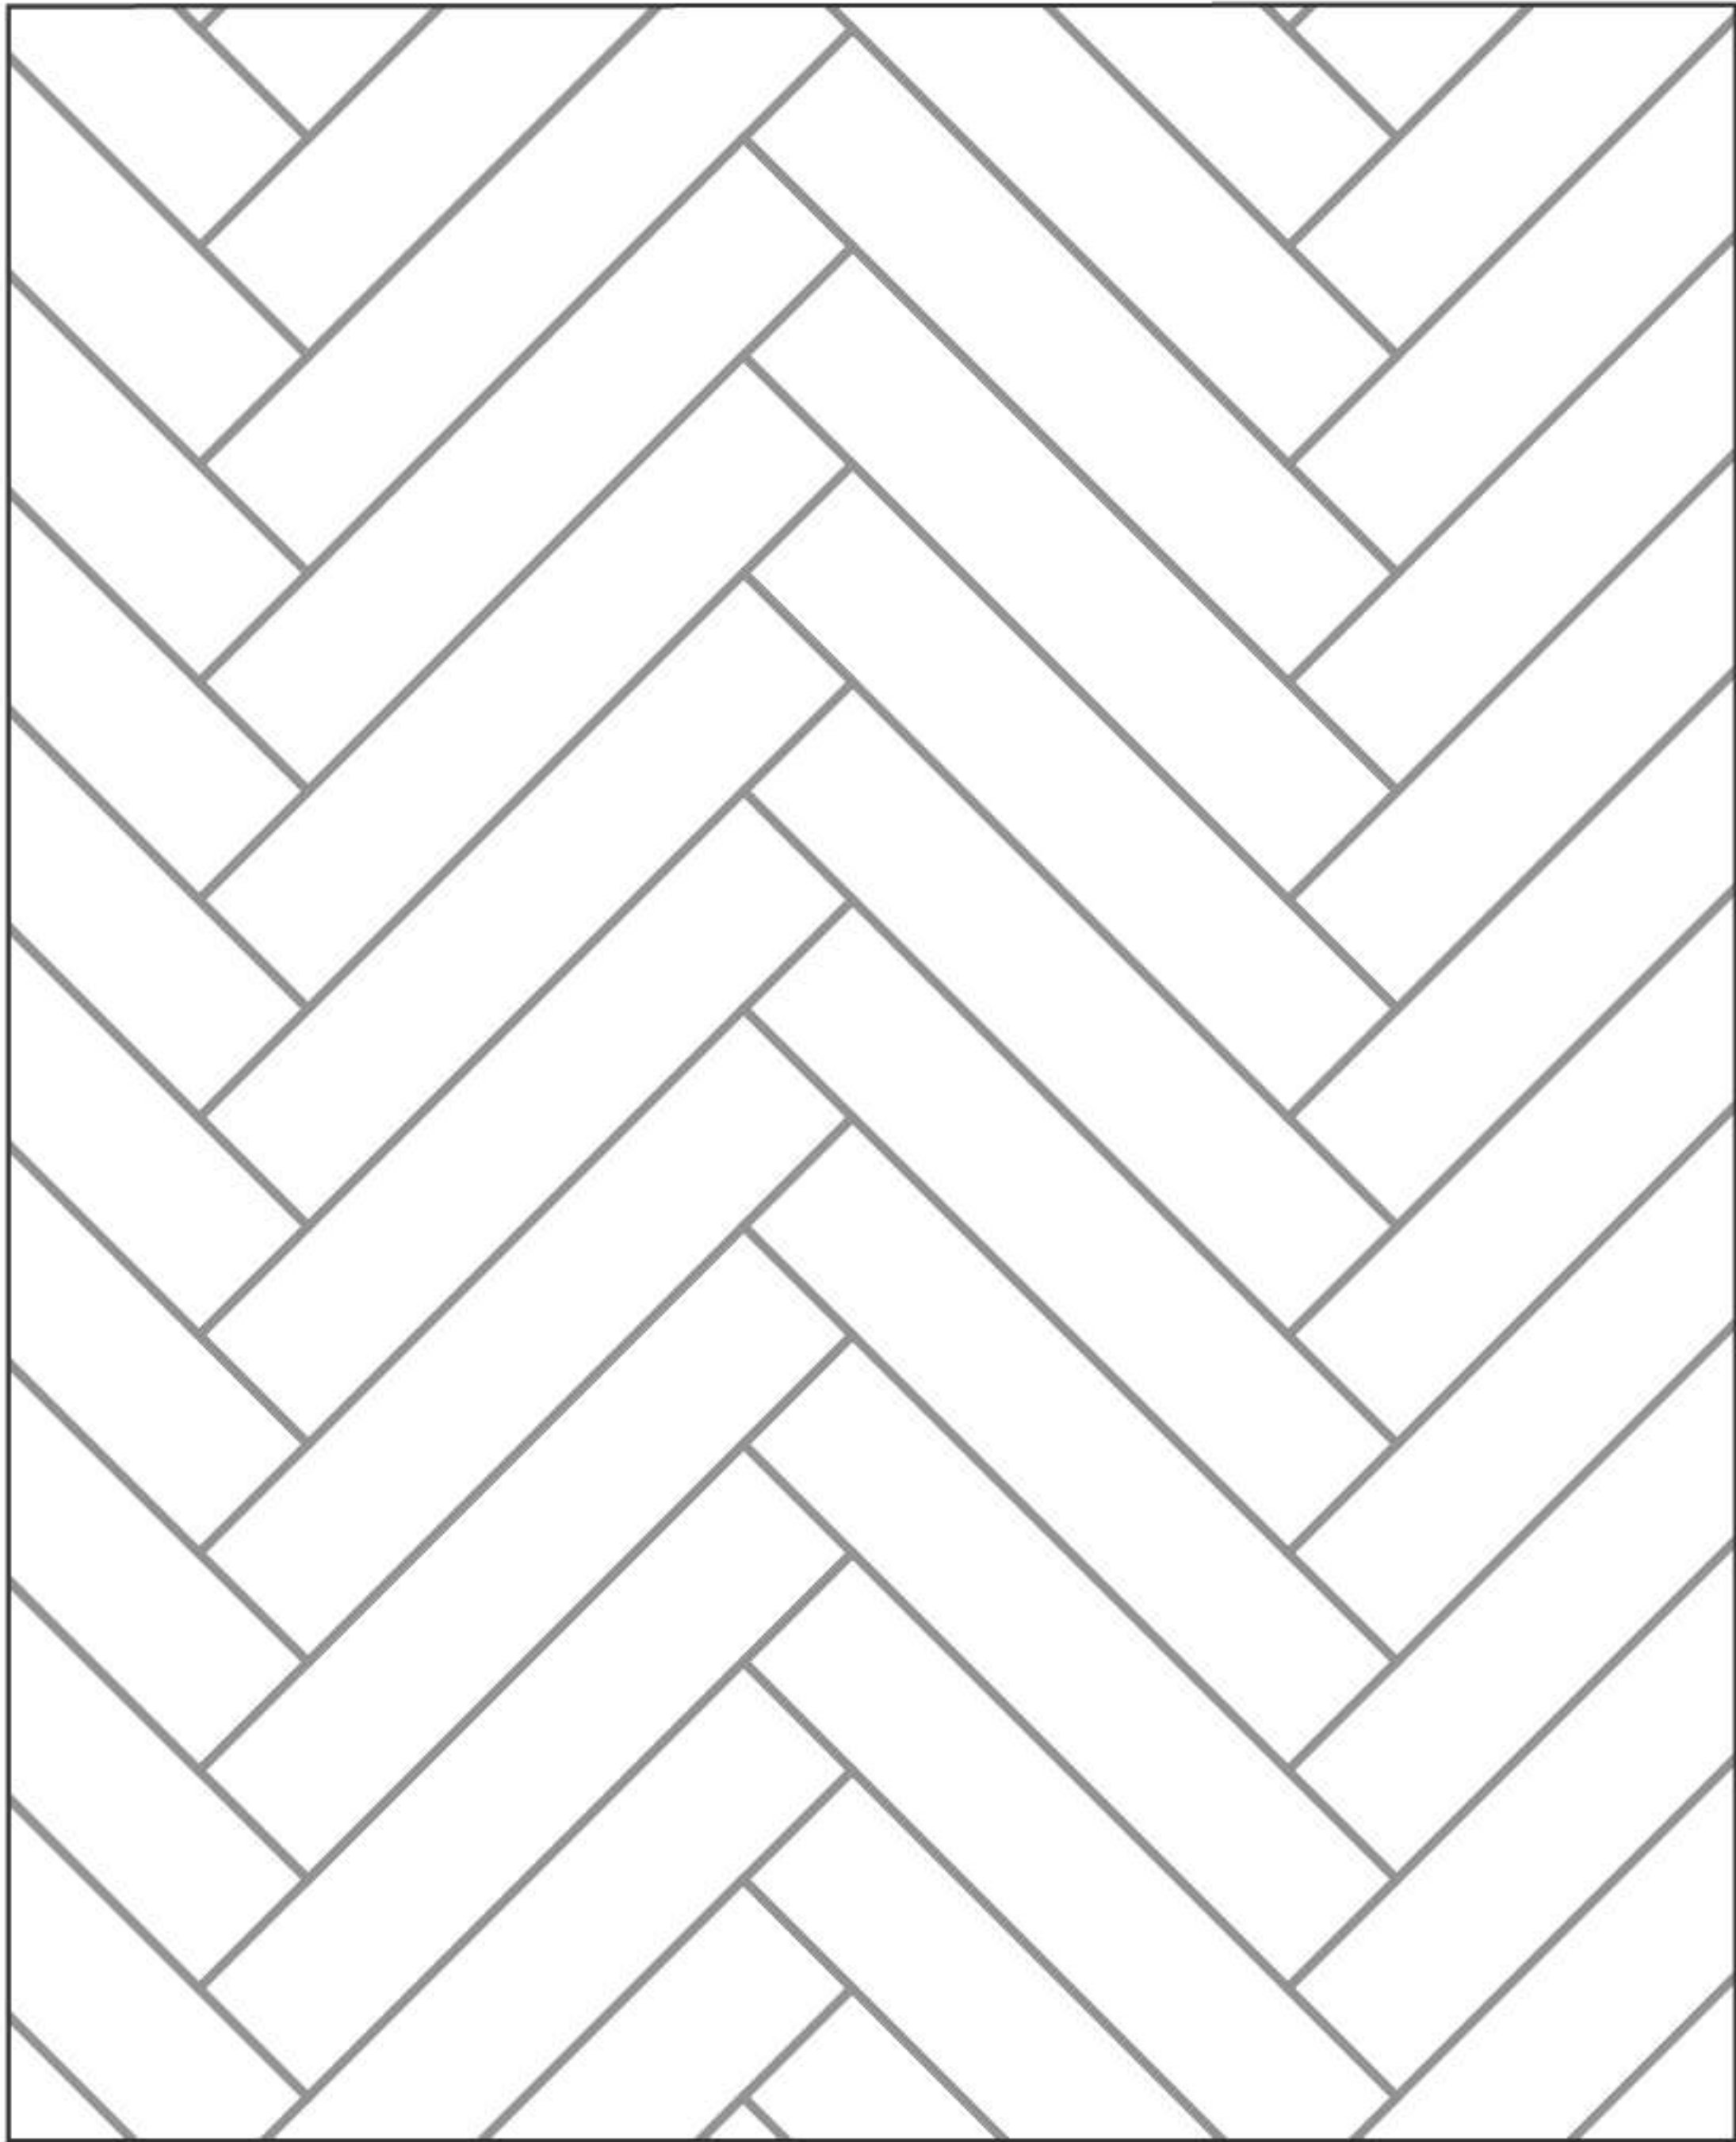


CORNER

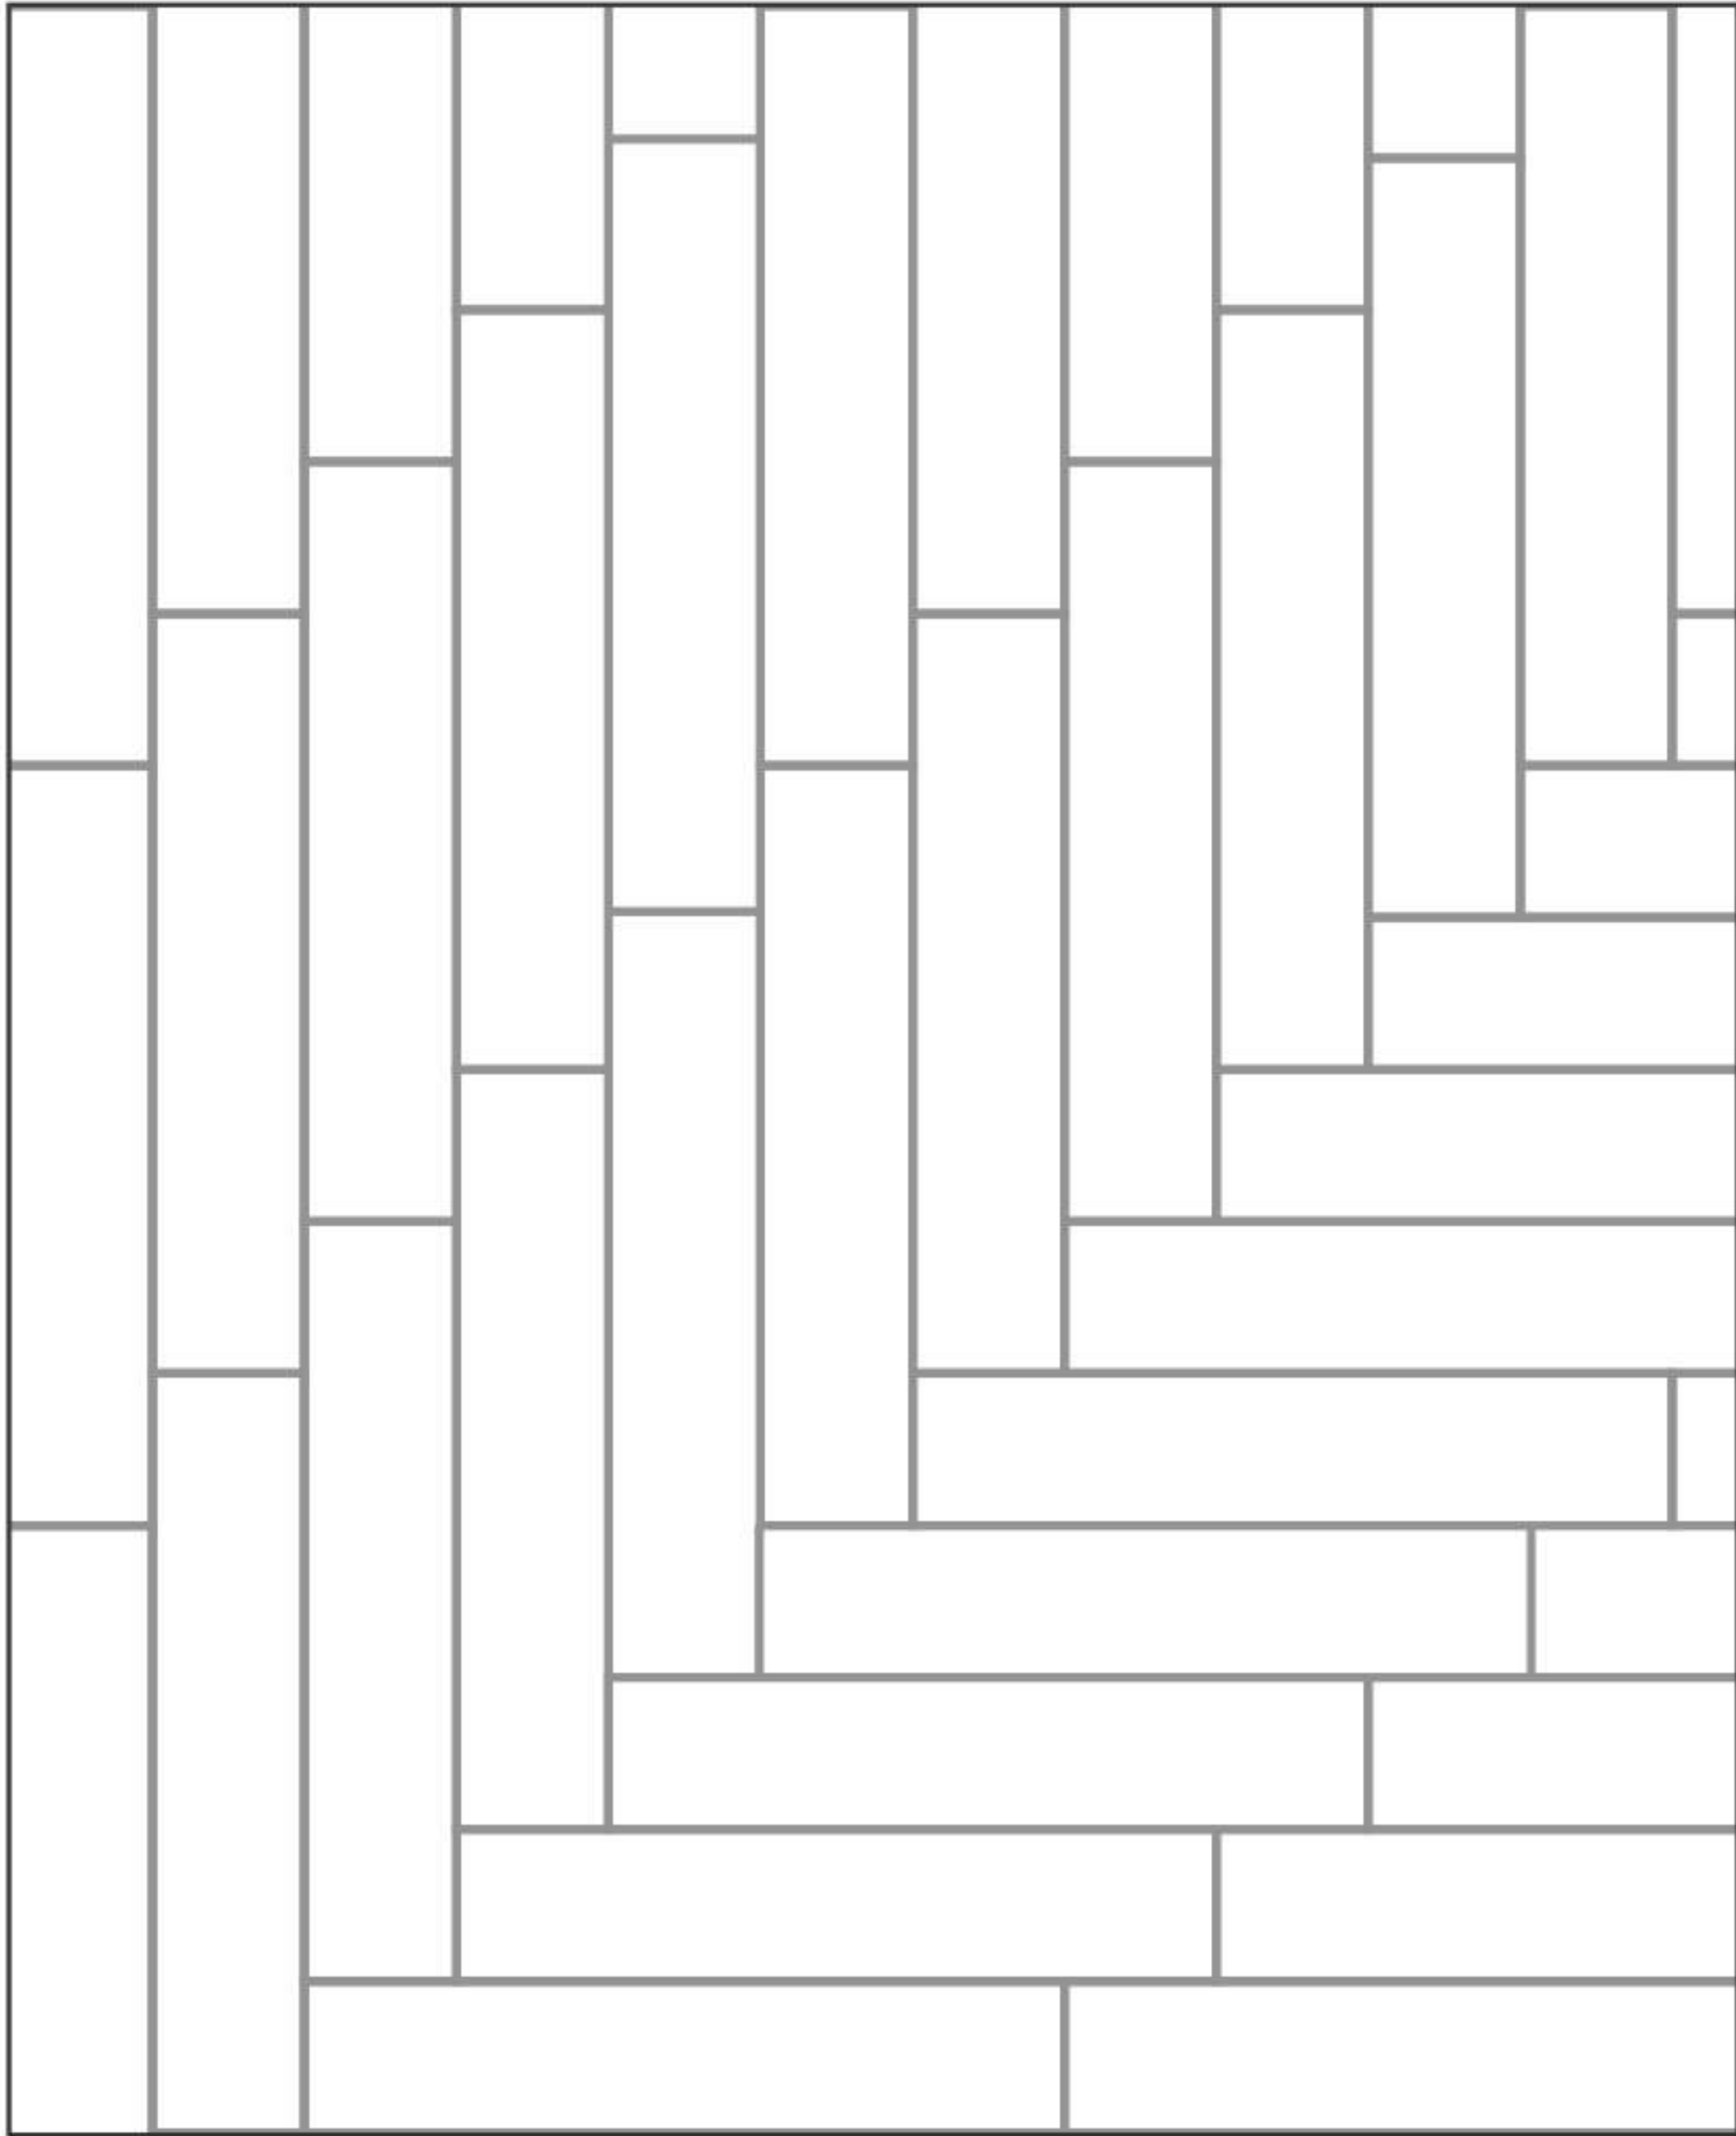


DOUBLE

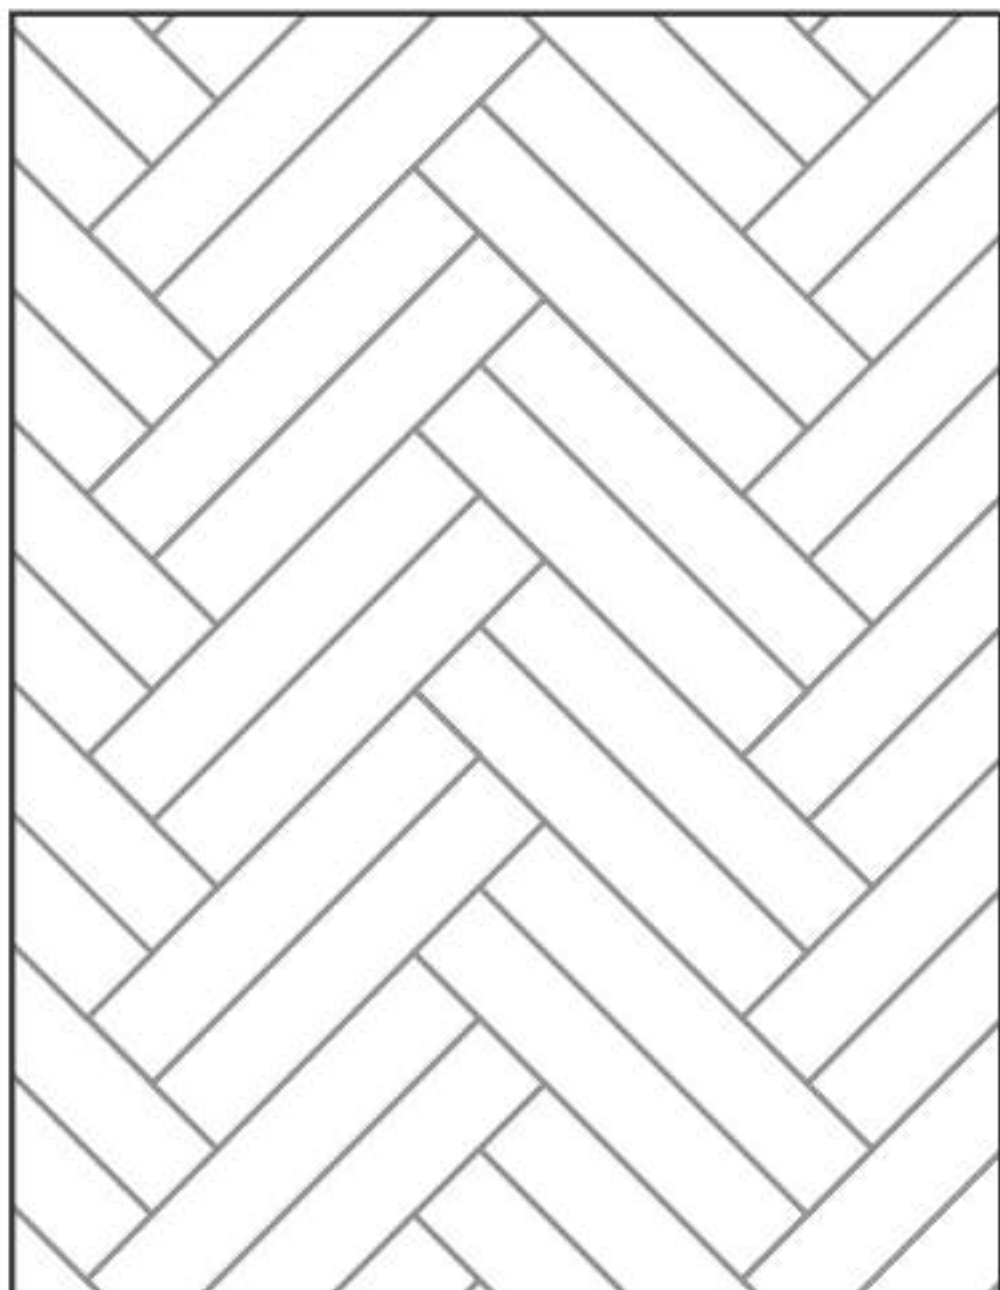

TRIPLE

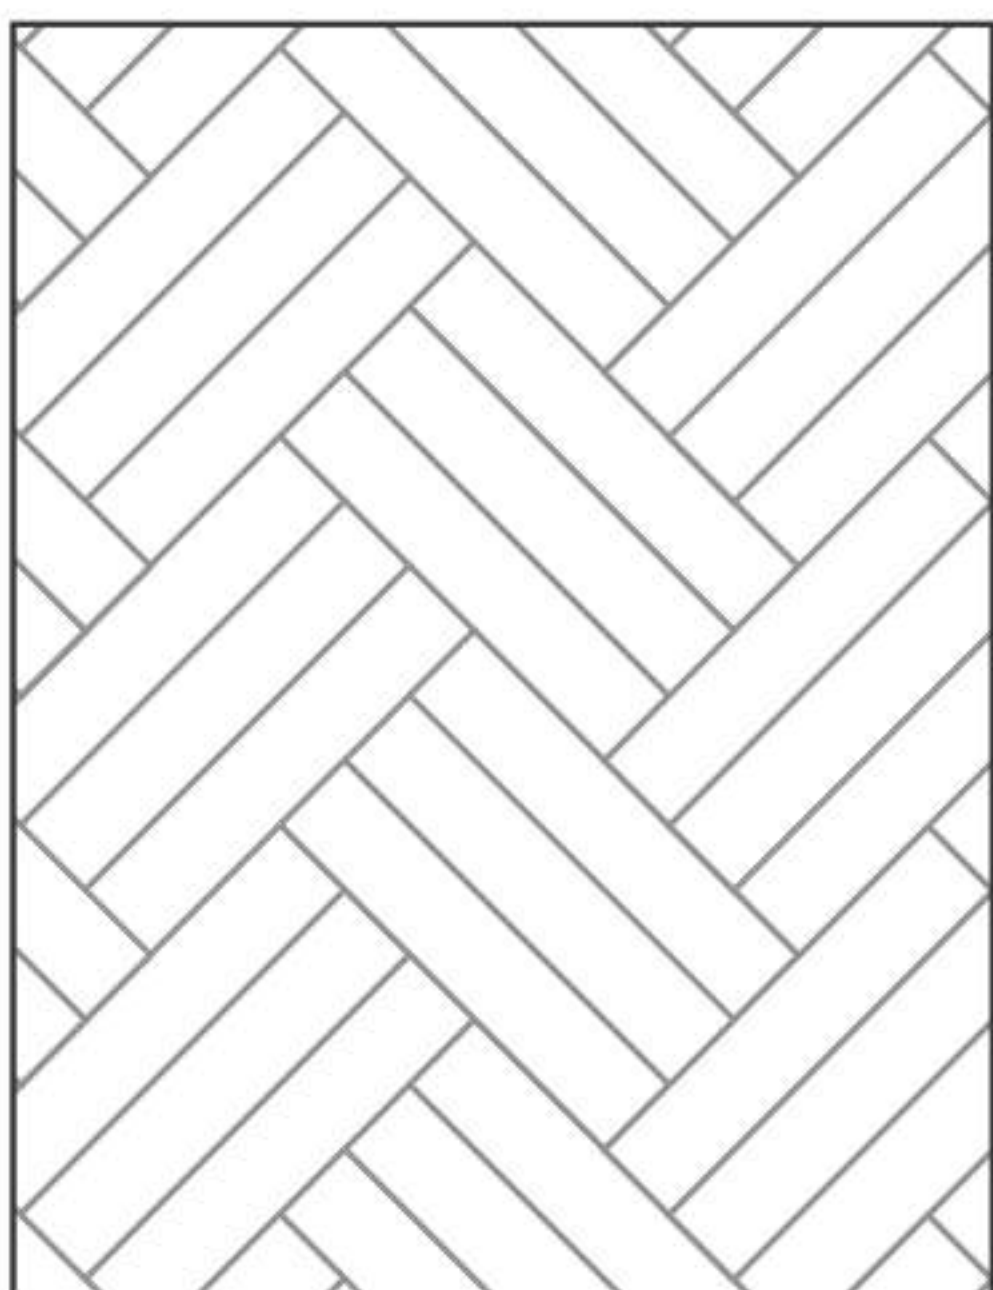

SQUARE

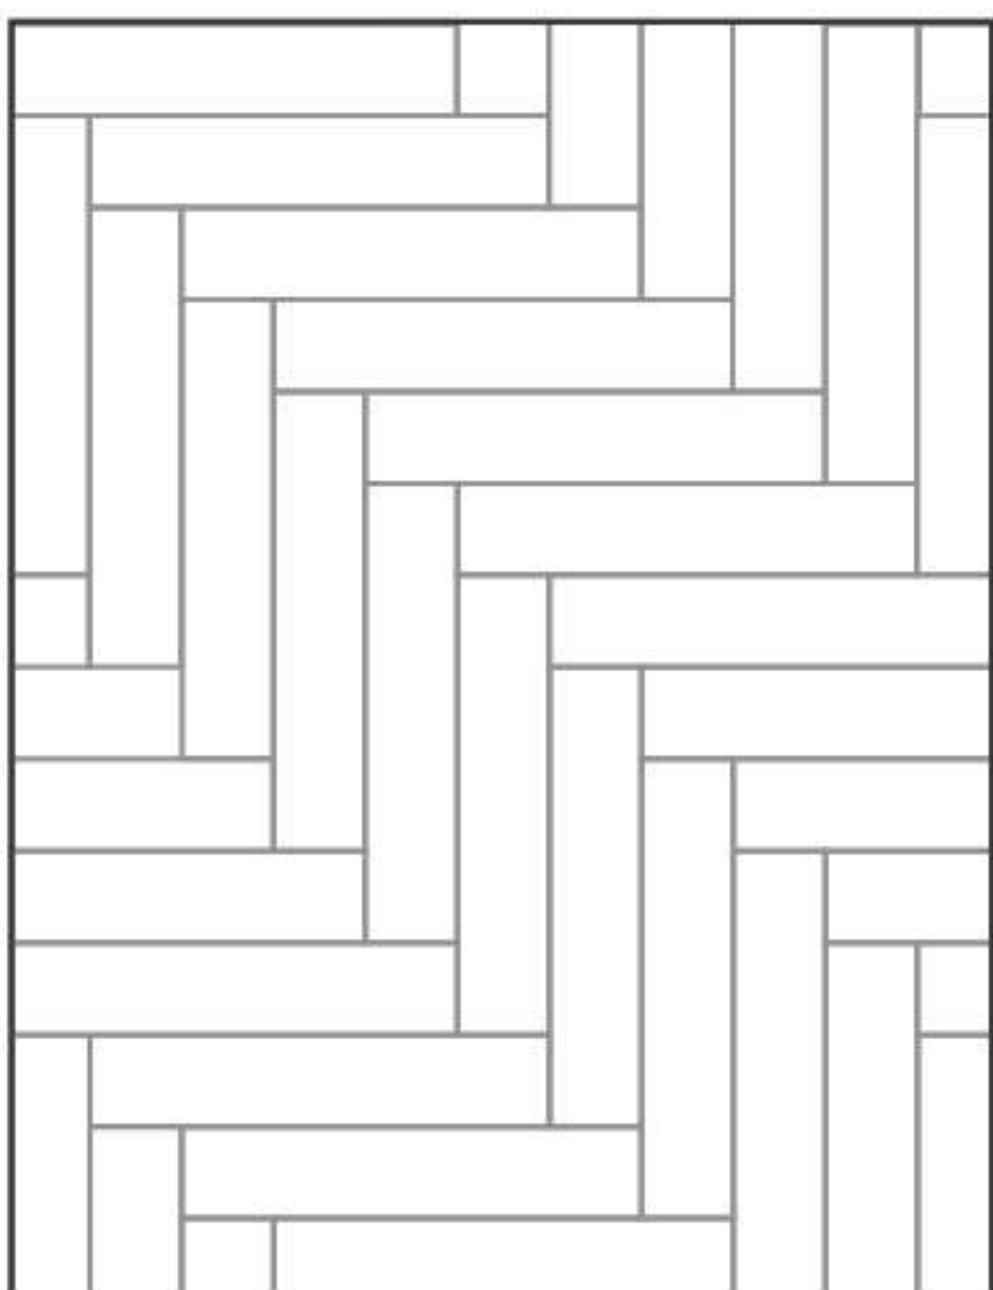

MOSAIC

